

US EPA ARCHIVE DOCUMENT

USER'S GUIDE FOR ESTIMATING DIRECT CARBON DIOXIDE EMISSIONS FROM FOSSIL FUEL COMBUSTION USING THE STATE INVENTORY TOOL

JANUARY 2017



Prepared by:
ICF

Prepared for:
State Climate and Energy Program,
U.S. Environmental Protection Agency

This section of the User's Guide provides instruction on using the CO₂ from Fossil Fuel Combustion (CO₂FFC) module of the State Inventory Tool (SIT), and describes the methodology used for estimating greenhouse gas emissions from fossil fuel combustion at the state level.

TABLE OF CONTENTS

1.1	Getting Started.....	2
1.2	Module Overview	3
1.2.1	Data Requirements	4
1.2.2	Tool Layout	6
1.3	Methodology	7
1.4	Uncertainty	16
1.5	References.....	16

1.1 GETTING STARTED

The Carbon Dioxide from Fossil Fuel Combustion (CO₂FFC) module was developed using Microsoft® Excel 2000. While the module will operate with older versions of Excel, it functions best with Excel 2000 or later. If you are using Excel 2007, instructions for opening the module will vary as outlined in the Excel basics below. Before you use the CO₂FFC module, make sure your computer meets the system requirements. In order to install and run the CO₂FFC module, you must have:

- IBM-PC compatible computer with the Windows 95 operating system or later;
- Microsoft® Excel 1997 or later, with calculation set to automatic and macros enabled;
- Hard drive with at least 20MB free; and
- Monitor display setting of 800 x 600 or greater.

Microsoft Excel Settings

Excel 2003 and Earlier: For the SIT modules to function properly, Excel must be set to automatic calculation. To check this setting, launch Microsoft Excel before opening the CO₂FFC module. Go to the Tools menu and select “Options...” Click on the “Calculations” tab and make sure that the radio button next to “Automatic” is selected, and then click on “OK” to close the window. The security settings (discussed next) can also be adjusted at this time.

Excel 2007: For the SIT modules to function properly, Excel must be set to automatic calculation. Go to the Formulas ribbon and select “Calculation Options.” Make sure that the box next to the “Automatic” option is checked from the pop-up menu.

Microsoft Excel Security

Excel 2003 and Earlier: Since the SIT employs macros, you must have Excel security set to medium (recommended) or low (not recommended). To change this setting, launch Microsoft Excel before opening the CO₂FFC module. Once in Excel, go to the Tools menu, click on the Macro sub-menu, and then select “Security” (see Figure 1). The Security pop-up box will appear. Click on the “Security Level” tab and select medium. When set to high, macros are automatically disabled; when set to medium, Excel will give you the choice to enable macros; when set to low, macros are always enabled.

When Excel security is set to medium, users are asked upon opening the module whether to enable macros. Macros must be enabled in order for the CO₂FFC module to work. Once they are enabled, the module will open to the control worksheet. A message box will appear welcoming the user to the module. Clicking on the “x” in the upper-right-hand corner of the message box will close it.

Excel 2007: If Excel’s security settings are set at the default level a Security Warning appears above the formula box in Excel when the CO₂FFC module is initially opened. The Security Warning lets the user know that some active content from the spreadsheet has been disabled, meaning that Excel has prevented the macros in the spreadsheet from functioning. Since SIT needs macros in order to function properly, the user must click the “Options” button in the security message and then select, “Enable this content” in the pop-up box. Enabling the macro content for the SIT in this way only enables macros temporarily

in Excel but does not change the macro security settings. Once macros are enabled, a message box will appear welcoming the user to module. Click on the “x” in the upper right-hand corner to close the message box.

If the Security Warning does not appear when the module is first opened, it may be necessary to change the security settings for macros. To change the setting, first exit out of the CO₂FFC module and re-launch Microsoft Excel before opening the CO₂FFC module. Next, click on the Microsoft Excel icon in the top left of the screen. Scroll to the bottom of the menu and select the “Excel Options” button to the right of the main menu. When the Excel Options box appears, select “Trust Center” in left hand menu of the box. Next, click the gray “Trust Center Settings” button. When the Trust Center options box appears, click “Macro Settings” in the left hand menu and select “Disable all macros with notification.” Once the security level has been adjusted, open the Stationary Combustion module and enable macros in the manner described in the preceding paragraph.

Viewing and Printing Data and Results

The CO₂FFC module contains some features to allow users to adjust the screen view and the appearance of the worksheets when they are printed. Once a module has been opened, you can adjust the zoom by going to the Module Options Menu, and either typing in a zoom percentage or selecting one from the drop down menu. In addition, data may not all appear on a single screen within each worksheet; if not, you may need to scroll up or down to view additional information.

You may also adjust the print margins of the worksheets to ensure that desired portions of the CO₂FFC module are printed. To do so, go to the File menu, and then select “Print Preview.” Click on “Page Break Preview” and drag the blue lines to the desired positions (see Figure 2). To print this view, go to the File menu, and click “Print.” To return to the normal view, go to the File menu, click “Print Preview,” and then click “Normal View.”

Figure 1. Changing Security Settings


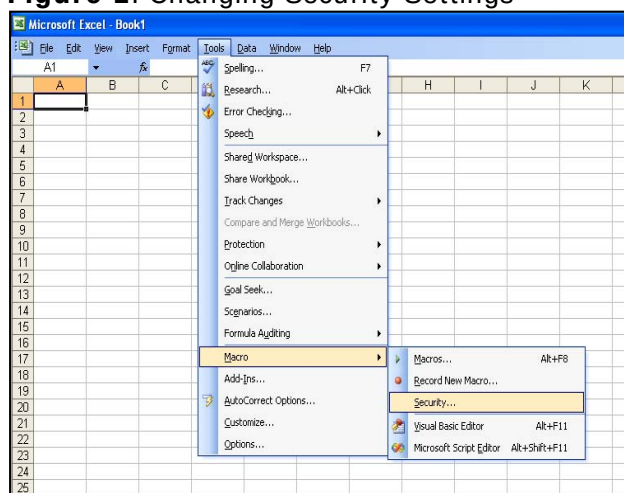


Figure 2. Adjusting Print Margins

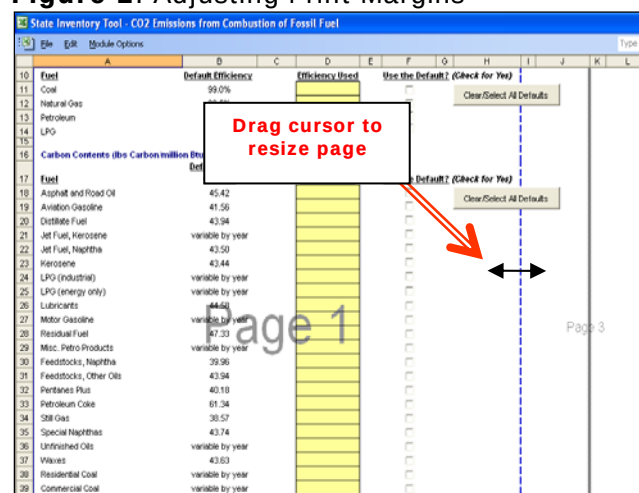

1.2 MODULE OVERVIEW

This User's Guide accompanies and explains the CO₂FFC module of the SIT. The SIT was developed in conjunction with EPA's Emissions Inventory Improvement Program (EIIP).

Prior to the development of the SIT, EPA developed the States Workbook for estimating greenhouse gas emissions. In 1998, EPA revisited the States Workbook and expanded it to follow the format of EIIP guidance documents for criteria air pollutants. The result was a comprehensive, stepwise approach to estimating greenhouse gas emissions at the state level. This detailed methodology was appreciated by states with the capacity to devote considerable time and resources to the development of emission inventories. For other states, the EIIP guidance was overwhelming and impractical for them to follow from scratch. EPA recognized the resource constraints facing the states and developed the SIT. The ten modules of the SIT corresponded to the EIIP chapters and attempted to automate the steps states would need to take in developing their own emission estimates in a manner that was consistent with prevailing national and state guidelines.

Since most state inventories developed today rely heavily on the tools, User's Guides have been developed for each of the SIT modules. These User's Guides contain the most up-to-date methodologies that are, for the most part, consistent with the Inventory of U.S. Greenhouse Gas Emissions and Sinks. Volume VIII of the EIIP guidance is a historical document that was last updated in August 2004, and while these documents can be a valuable reference, they contain outdated emissions factors and in some cases outdated methodologies. States can refer to Volume VIII of the EIIP guidance documents if they are interested in obtaining additional information not found in the SIT or the companion User's Guide.

The CO₂FFC module calculates carbon dioxide (CO₂) emissions from the fuel types shown in Table 1 by end-use sector. While the module provides default data for fuel types (depending on availability), users are encouraged to use state-specific data, where available. If using outside data sources, or for a more thorough understanding of the tool, please refer to the following discussion for data requirements and methodology.

1.2.1 Data Requirements

To calculate CO₂ emissions from fossil fuel combustion,¹ the following data are required:

- Fossil fuel energy and non-energy consumption by fuel type and sector (non-energy consumption applies only to the industrial sector);
- Carbon content coefficients;
- Carbon stored in products; and
- Percentage of carbon oxidized during combustion.

Because the carbon content of fossil fuels varies by fuel type, it is necessary to compile consumption data for each type of fuel (the recommended list of fuels is provided in Table 1).

¹ For this discussion, CO₂ emissions from fossil fuel combustion include all of the carbon in fuels that is either immediately oxidized or oxidized within a short time period (i.e., less than 20 years). It thus includes carbon in the form of gases, like carbon monoxide. It also includes short-lived products that will be burned after use or decompose quickly.

Energy consumption statistics should be collected on an energy basis—preferably in British thermal units (Btu). Statistics providing energy consumption data in other units, such as barrels or tons, may be used, but require conversion to Btu by using the heat content of the specific fuel. If the conversion to energy units is necessary, the heat contents that were used should be documented (default heat contents are provided in the CO₂FFC module). Please note that even data given in Btu may be preceded by a prefix indicating order of magnitude (i.e. thousand, million, billion). For a better understanding of the quantity prefixes used with Btu, refer to Box 1.

Box 1: Energy Units

A British thermal unit (Btu) is the quantity of heat required to raise the temperature of one pound of water one degree Fahrenheit at or near 39.2° Fahrenheit.

Btu	British thermal unit	1 Btu
MBtu	Thousand Btu	1x10 ³ Btu
MMBtu	Million Btu	1x10 ⁶ Btu
BBtu	Billion Btu	1x10 ⁹ Btu
TBtu	Trillion Btu	1x10 ¹² Btu
QBtu	Quadrillion Btu	1x10 ¹⁵ Btu

Box 2: Caution When Using Non-Default Fuel Consumption Data

If you decide to use fuel consumption data that is different from the default, please be aware of the following possible data problems:

In some cases (e.g., the default EIA's State Energy Consumption, Price, and Expenditure Estimates (EIA/SEDS) data) fuel consumption statistics can include data that is at odds with the methodology used in the CO₂FFC module. For example, SEDS motor gasoline consumption includes ethanol that is blended into gasoline. Ethanol is not a fossil fuel, and thus the default data in the CO₂FFC module has been adjusted to remove the portion of blended gasoline known to be ethanol. If you use external data sources, be sure to determine whether ethanol or other biofuels (e.g., biodiesel) are included in total consumption for any particular fuel type. If so, you must subtract the biofuel portion before entering the data into the CO₂FFC module. State ethanol data can be obtained from FHWA (2016) the Federal Highway Administration's annual Highway Statistics report and are taken into account with default data provided in the CO₂FFC module.

Users should also be aware of double counting. For example, EIA's SEDS data for industrial coal consumption includes coal used to make synthetic natural gas, which is accounted for in both industrial coal and natural gas consumption data. This double-counting issue has been corrected for in the default dataset contained in the CO₂FFC module; similar adjustments may need to be made to outside data sources. State-specific natural gas data can be obtained from Table 12 of EIA's Historical Natural Gas Annual EIA (EIA 2001) and Table 8 of EIA's Natural Gas Annual EIA (EIA 2015) (and is also provided in the CO₂FFC module).


Table 1. Fuel Types Consumed by Sector

Residential	Commercial	Industrial	Transportation	Electric Utilities	International Bunker Fuels
Coal	Coal	Coking Coal Other Coal	Coal	Coal	
Natural Gas	Natural Gas	Natural Gas	Natural Gas	Natural Gas	
Petroleum: Distillate Fuel Kerosene LPG	Petroleum: Distillate Fuel Kerosene LPG Motor Gasoline Residual Fuel	Petroleum: Distillate Fuel Kerosene LPG Motor Gasoline Residual Fuel Lubricants Asphalt/Road Oil Crude Oil Feedstocks Misc. Petroleum Products Petroleum Coke Pentanes Plus Still Gas Special Naphthas Unfinished Oils Waxes Aviation Gasoline Blending Components Motor Gasoline Blending Components	Petroleum: Distillate Fuel LPG Motor Gasoline Residual Fuel Lubricants Aviation Gasoline Jet Fuel, Kerosene Jet Fuel, Naphtha	Petroleum: Distillate Fuel Residual Fuel Petroleum Coke	Petroleum: Jet Fuel, Kerosene Distillate Fuel Residual Fuel
Other	Other	Other	Other	Other	

Source: U.S. EPA 2016.

1.2.2 Tool Layout

Since there are multiple steps to complete within the CO₂FFC module, it is important to have an understanding of the module's overall design. The layout of the CO₂FFC module and the purpose of its worksheets are presented in Figure 3.

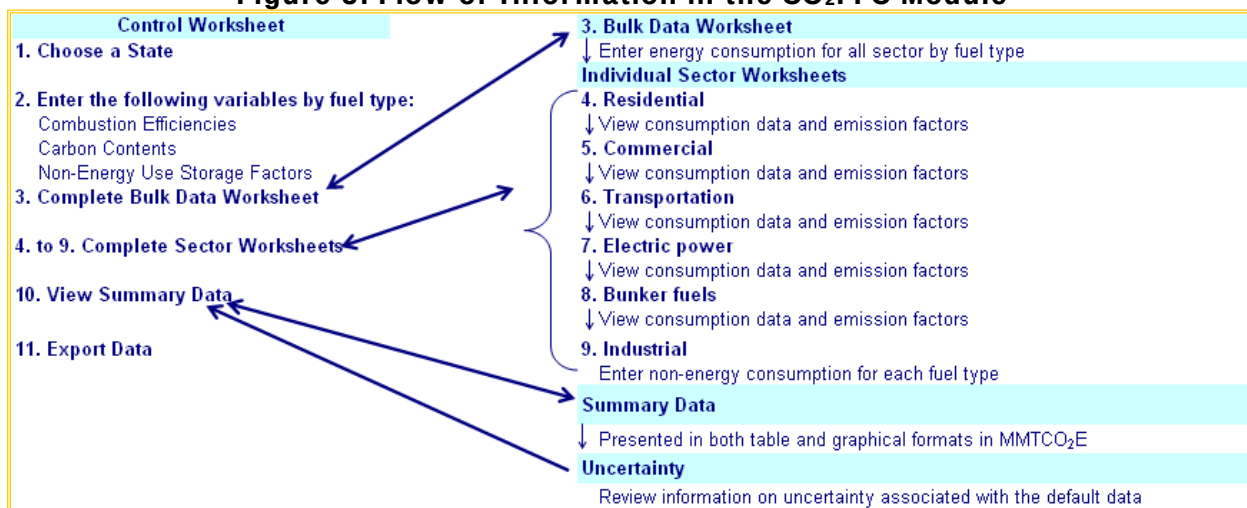Figure 3. Flow of Information in the CO₂FFC Module*

* These worksheets are the primary worksheets used in the CO₂FFC module; subsequent worksheets are used to populate the default data and are provided for informational purposes only.

1.3 METHODOLOGY

This section provides a guide to using the CO₂FFC module of the SIT to estimate CO₂ emissions from sectors that consume fossil fuels. Within the CO₂FFC module, these sectors are residential, commercial, industrial, transportation, electric power, and bunker fuels.

Since the methodology is similar in all sectors, a general methodology is discussed and specific examples for each sector are provided.

The CO₂FFC module automatically calculates emissions after you enter energy consumption data (and the factors on the control worksheet). The tool provides default energy consumption data, which comes from the EIA's State Energy Consumption, Price, and Expenditure Estimates (SEDS) EIA (2016).² However, other more state-specific data may be used if available (see Box 3 for suggestions on where to find data).

Box 3: State Energy Data Sources

In-state sources, such as state energy commissions or public utility commissions, should be consulted first. Otherwise, default data provided by the CO₂FFC module may be used. Fossil fuel statistics should be provided on an energy basis (e.g., in Btu).

The CO₂FFC module follows the general methodology outlined in the EIIP guidance, however because of the automation of the calculations within the tool, the order of steps discussed in this User's Guide do not follow the order of steps discussed within the EIIP guidance document. This User's Guide provides an overview of the estimation methodology used in the CO₂FFC module by walking through the following eleven steps: (1) select a state; (2) fill in the variables used throughout the module; (3) complete the bulk data energy consumption worksheet; (4) complete the residential sector worksheet; (5) complete the commercial sector worksheet; (6) complete the transportation sector worksheet; (7) complete the electric power sector worksheet; (8) complete the bunker fuels sector worksheet; (9) complete the industrial sector worksheet; (10) review summary information; and (11) export data.

² These data are available on the Internet at http://www.eia.doe.gov/emeu/states/_seds.html.

The general equation use to calculate CO₂ emissions from fossil fuel combustion is shown in Equation 1. The equation used for fuels in the industrial end-use sector is similar, but includes the non-energy use of fuels, as shown in Equation 2.

Equation 1. General Emission Equation

$$\text{Emissions (MMTCO}_2\text{E)} = \text{Consumption (BBtu)} \times \text{Emission Factor (lbs C/BBtu)} \times 0.0005 \text{ short ton/lbs} \times \text{Combustion Efficiency (\% as a decimal)} \times 0.9072 \text{ (Ratio of Short Tons to Metric Tons)} \div 1,000,000 \times (44/12) \text{ (to yield MMTCO}_2\text{E)}$$

Equation 2. Emission Equation for the Industrial Sector*

$$\text{Emissions (MMTCO}_2\text{E)} = (\text{Total Consumption (BBtu)} - [\text{Non-Energy Consumption (BBtu)} \times \text{Storage Factor (\%)}] \times \text{Emission Factor (lbs C/BBtu)} \times \text{Combustion Efficiency (\% as a decimal)}) \times 0.9072 \text{ (Ratio of Short Tons to Metric Tons)} \div 1,000,000 \times (44/12) \text{ (to yield MMTCO}_2\text{E)}$$

* This equation also applies to lubricants consumed in the transportation end-use sector.

Step (1) Select a State

To begin, select the state you are interested in evaluating. By selecting a state, the rest of the tool will automatically reset to reflect the appropriate state default data and assumptions for use in subsequent steps of the tool.

Step (2) Fill in the Variables Used Throughout the Module

Step 2 requires users to select appropriate factors for several key variables necessary for estimating CO₂ emissions from fossil fuel combustion. This can be done by selecting the default data provided or entering user-specified, fuel-specific data for combustion efficiencies, carbon contents, and non-energy use storage factors that will be used throughout the tool. To select the default data, select the “Clear/Select All Defaults” button for each group of variables (combustion efficiency, carbon content, and non-energy use storage factors) or check the default box directly to the right of individual yellow input cells. Note that users may select a default value and later override it if better data becomes available. To enter state-specific data from other sources, enter values directly into the yellow input cells. If the user-specific inputs do not match the default data in the control worksheet (i.e., the default value is overwritten), the text will appear red. See Figure 4 for locations of the “Clear/Select All Defaults” buttons, individual default check boxes, and yellow input cells. Information for combustion efficiencies, carbon contents, and non-energy use storage factors are discussed individually below.

Figure 4. Control Worksheet for the CO₂FFC Module

State Inventory Tool - CO₂ Emissions from Combustion of Fossil Fuel

1. Choose a State: Select a State...

2. Fill In the Variables that are used throughout the Worksheet. Either Type in the value/percentage or Click the Default Box.

Combustion Efficiencies

Fuel	Default Efficiency	Efficiency Used	Use the Default? (Check for Yes)
Coal	99.0%		☐
Natural Gas	99.5%		☐
Petroleum	99.0%		☐
LPG	99.5%		☐

Carbon Contents (lbs Carbon/million Btu)

Fuel	Default Carbon Content	Carbon Content Used	Use the Default? (Check for Yes)
Asphalt and Road Oil	45.42		☐
Aviation Gasoline	41.56		☐
Distillate Fuel	43.94		☐
Jet Fuel, Kerosene	variable by year		☐
Jet Fuel, Naphtha	43.50		☐
Kerosene	43.44		☐
LPG (industrial)	variable by year		☐
LPG (energy only)	variable by year		☐
Lubricants	44.58		☐
Motor Gasoline	variable by year		☐
Residual Fuel	47.33		☐
Misc. Petro Products	variable by year		☐
Feedstocks, Naphtha	39.96		☐
Feedstocks, Other Oils	43.94		☐
Pentanes Plus	40.18		☐
Petroleum Coke	61.34		☐
Still Gas	38.57		☐
Special Naphthas	43.74		☐
Unfinished Oils	variable by year		☐
Waxes	43.63		☐
Residential Coal	variable by year		☐
Commercial Coal	variable by year		☐

Navigation:

Combustion Efficiencies

The first type of required data in the control worksheet is combustion efficiency (percent carbon oxidized). This percent is applied if the carbon is not completely oxidized during the combustion of fossil fuels. The fraction oxidized was assumed to be 100 percent for petroleum, coal, natural gas, and LPG based on guidance from IPCC (2006). If values other than module defaults are available for state-level combustion, they should be used and documented. Combustion efficiencies are used throughout the module and are pulled into each sector's worksheet. Figure 5 presents an example of the combustion efficiency used in the commercial sector worksheet. If the user-specific inputs do not match the default data in the control worksheet (i.e., the default value is overwritten), the text will appear red.

Figure 5. Example of Combustion Efficiency Data Applied in the Commercial Worksheet

State Inventory Tool - CO₂ Emissions from Combustion of Fossil Fuel

File Edit Module Options

4. Commercial Consumption and CO₂ Emissions in Colorado

Click here for possible data sources.

Click here for the bulk data worksheet.

CO₂ emissions from fossil fuel combustion in the commercial sector are calculated by multiplying energy consumption (in the commercial sector) by carbon content coefficients for each fuel. These quantities are then multiplied by fuel-specific percentages of carbon oxidized during combustion ("combustion efficiency"). The resulting fuel emissions, in pounds of carbon, are then converted to short tons of carbon and million metric tons of carbon equivalent (MMTCE), then to million metric tons of carbon dioxide equivalent (MMTCO₂E), and summed. Note that default emission factors are available through 2006. To facilitate emission calculations for later years, the tool utilizes 2006 emission factors as proxies for emission factors in subsequent years (2009 through 2020). Emission factors for 2009 and beyond will be updated as soon as new data become available. For further detail on this method, refer to CO₂FFC Chapter in the User's Guide. Click on the orange "Click here for the bulk data worksheet." button to return to the energy consumption data entry worksheet.

Go to the Control Sheet

Go to the Transportation Sheet

Clear All Data

Combustion Efficiency Data

Fuel Type	Consumption (Billion Btu)	Emission Factor (lb-C/Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
Coal	992	57.93	100.0%	28,721	0.026	0.096
Distillate Fuel	2,576	44.43	100.0%	62,246	0.052	0.297
Kerosene	55	43.97	100.0%	1,205	0.001	0.003
LPG	1,000	37.18	100.0%	20,445	0.019	0.068
Motor Gasoline	1,386	42.83	100.0%	29,669	0.027	0.099
Residual Fuel	-	45.11	100.0%	-	0.000	0.000
Natural Gas	66,489	31.87	100.0%	1,058,494	0.961	3.524
Other	-	-	100.0%	-	0.000	0.000

Fuel Type	Consumption (Billion Btu)	Emission Factor (lb-C/Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
Coal	1,043	57.93	100.0%	23,116	0.020	0.070
Distillate Fuel	2,772	44.43	100.0%	61,591	0.056	0.205
Kerosene	60	43.97	100.0%	1,323	0.001	0.004
LPG	1,228	37.18	100.0%	22,774	0.021	0.076
Motor Gasoline	1,755	42.86	100.0%	37,604	0.034	0.125
Residual Fuel	-	45.11	100.0%	-	0.000	0.000
Natural Gas	70,965	31.87	100.0%	1,100,627	1.025	3.762
Other	-	-	100.0%	-	0.000	0.000

Fuel Type	Consumption (Billion Btu)	Emission Factor (lb-C/Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
Coal	1,004	57.93	100.0%	23,887	0.022	0.086
Distillate Fuel	4,016	44.43	100.0%	89,221	0.081	0.297
Kerosene	38	43.97	100.0%	837	0.001	0.003
LPG	1,097	37.18	100.0%	20,376	0.018	0.068
Motor Gasoline	840	42.98	100.0%	18,060	0.016	0.060
Residual Fuel	1	45.11	100.0%	34	0.000	0.000

Carbon Contents

The second type of data required for the control worksheet is the carbon content data, which is also pulled into the individual sector worksheets (depending on whether the fuel type is represented in the sector). The carbon content coefficients used in the CO₂FFC module are from the EPA's *Inventory of GHG Emissions* (EPA 2016). States are encouraged to use more detailed data if it is available and well documented. If the user-specific inputs do not match the default data in the control worksheet (i.e., the default value is overwritten), the text will appear red.

Carbon content represents the maximum amount of carbon emitted per unit of energy released, assuming 100 percent combustion efficiency. Coal has the highest carbon content of the major fuel types, petroleum has roughly 75 percent of carbon per energy as compared to coal, and natural gas has about 55 percent. However, carbon contents also vary within the major fuel types, as noted below:

- Carbon emissions per ton of coal vary considerably depending on the coal's composition of carbon, hydrogen, sulfur, ash, oxygen, and nitrogen. While variability of carbon emissions on a mass basis can be considerable, carbon emissions per unit of energy (e.g., per Btu) vary less.

- The carbon/energy ratio of different petroleum fractions generally correlates with API (American Petroleum Institute) gravity (Marland and Rotty 1984).³ Lighter fractions (e.g., gasoline) usually have less carbon per unit energy than heavier fractions (e.g., residual fuel oil).
- Natural gas is a mixture of several gases, and the carbon content depends on the relative proportions of methane, ethane, propane, other hydrocarbons, CO₂, and other gases, which vary from one gas production site to another.

Non-Energy Use Storage Factors

The third and final type of data requested in the control worksheet is the percent of carbon in each fuel that is stored from non-energy uses. Many fossil fuels have potential non-energy uses. For example, LPG is used for production of solvents and synthetic rubber; oil is used to produce asphalt, naphthas, and lubricants; and coal is used to produce coke, yielding crude light oil and crude tar as by-products that are used in the chemical industry.

However, not all non-energy uses of fossil fuels result in carbon storage. For example, the carbon from natural gas used in ammonia production is oxidized quickly; many products from the chemical and refining industries are burned or decompose within a few years; and the carbon in coke is oxidized when the coke is used. The CO₂FFC module provides national default values for storage factors, but state-level fractions may differ depending on the type of non-energy uses. Where state-specific estimates are available, their use is preferred, if adequate supporting documentation is available. If the user-specific inputs do not match the default data in the control worksheet (i.e., the default value is overwritten), the text will appear red. Data on the non-energy use storage factor is used in the industrial sector worksheet (Step 9).

Step (3) Complete the Bulk Energy Consumption Data Worksheet

The energy consumption data entered in the “Bulk Energy Consumption Data” (bulk data) worksheet feed into the calculation worksheets for each sector. Modifying the consumption data in this worksheet will change the consumption estimates on each sector calculation sheet. The default data will automatically be populated in the yellow cells by sector and fuel type for the selected state. On the bulk data worksheet, presented as an example in Figure 6, the yellow cells indicate where the required energy activity data are entered either manually or automatically from default data. Default data in the yellow cells on this worksheet can be overwritten with state-specific data. To revert to default data for all sectors and fuel types, click on the “Refresh Default Data” button at the top of the worksheet. Click on the “Proceed to Calculation Worksheet” to begin/continue estimating emissions, or click on the “Return to Control” button to return to the control worksheet.

³ Variations in petroleum are most often expressed in terms of specific gravity at 15 degrees Celsius. The API gravity, where $\text{API gravity} = 141.5/\text{specific gravity} - 131.5$, is an indication of the molecular size, carbon/hydrogen ratio, and hence carbon content of a crude oil.

Figure 6. Example of the Required Energy Consumption Data in the Bulk Data Worksheet

State Inventory Tool - CO₂FFC Module 12.10.2010v1.xls

Default Energy Consumption in Arkansas, billion btu (Bbtu)

The energy consumption data entered in the table below feeds into the calculation worksheets for each sector. Modifying the consumption data below will change the consumption estimates on each sector calculation sheet. To modify the inputs below:

1. Overwrite default data provided in the yellow cells with available state-specific data.
2. To revert back to default data for all sectors and fuel types, click on the "Refresh Default Data" button below.
3. Click on the "Proceed to Calculation Worksheets" to begin/continue estimating emissions.

[Go to the Control Sheet](#)

[Refresh Default Data](#) [Proceed to Calculation Worksheets](#)

Sector and Fuel	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999
Commercial Coal	4	9	42	16	7	-	-	1	1	1
Commercial Distillate Fuel	1,738	1,504	1,658	2,074	2,225	1,754	1,693	1,575	2,088	1,517
Commercial Kerosene	8	-	29	29	24	26	-	-	-	-
Commercial Lube Oil	468	468	468	468	468	468	468	468	468	468
Commercial Residual Fuel	745	745	745	745	745	745	745	745	745	745
Commercial Wood	321	321	321	321	321	321	321	321	321	321
Commercial Other	345	345	345	345	345	345	345	345	345	345
Electric Power Coal	206,863	209,095	213,578	192,682	213,561	229,550	251,704	239,806	247,654	259,094
Electric Power Distillate Fuel	818	742	553	732	711	547	568	584	1,043	974
Electric Power Natural Gas	32,657	28,456	27,691	21,790	25,574	33,377	34,795	25,425	41,357	41,062
Electric Power Petroleum Coke	-	-	-	-	-	-	-	-	-	-
Electric Power Residual Fuel	92	7	0	33	338	97	511	169	627	581
Electric Power Wood	-	-	-	-	-	-	-	-	-	-
Electric Power Other	-	-	-	-	-	-	-	-	-	-
Industrial Asphalt and Road Oil	3,288	3,540	7,793	9,642	7,072	8,266	6,470	6,716	5,702	6,787
Industrial Aviation Gasoline Blending Components	1	(0)	1	1	26	22	30	38	16	24
Industrial Coal	5,839	6,839	7,076	7,748	8,599	7,784	8,356	6,980	7,004	7,927
Industrial Coking Coal	-	-	-	-	-	-	-	-	-	-
Industrial Crude Oil	-	-	-	-	-	-	-	-	-	-
Industrial Distillate Fuel	-	-	-	18,487	18,380	23,541	19,764	23,285	22,228	20,553
Industrial Feedstocks, Naphtha less than 401 F	-	-	-	695	789	739	8,640	9,669	10,527	9,051
Industrial Feedstocks, Other Oils greater than 401 F	1,246	1,639	1,614	1,673	1,662	1,587	13,153	15,525	14,758	14,622
Industrial Kerosene	94	114	52	76	97	115	52	56	98	76
Industrial LPG	4,358	4,560	4,304	5,048	4,690	5,132	4,760	4,233	3,305	7,069
Industrial Lubricants	1,664	1,489	1,518	1,546	1,616	1,588	1,541	1,628	1,704	1,722
Industrial Misc. Petro Products	228	302	198	189	210	192	1,605	1,762	2,145	2,017

Required Energy Data

[Return to Control](#)

Navigation: Control / Default State Energy Data Table / Residential / Commercial / Transportation / Electric Power / Bunker Fuels / Industrial / Summary-MMTCO₂E / Summary-MMTCE / Uncertainty / FF

Step (4) through Step (7) View Emission Estimates on Individual Sector Worksheets (Excluding International Bunker Fuels and Industrial Sector)

With the exception of industrial sector, the worksheets for each sector have the same basic set-up. On the residential sector worksheet, presented as an example in Figure 7, the cells in the first column indicate where the required energy activity data were entered from the bulk data worksheet. This activity data are converted into CO₂ emissions using the factors entered on the control worksheet, the energy consumption data entered on the bulk data worksheet, and the formula presented in Equation 1. Click on the orange "Click here for the bulk data worksheet." button to return to the energy consumption data entry worksheet.

The activity data used to populate the energy consumption input cells is annual fuel consumption based on *primary fuel type* (e.g., coal, petroleum, and natural gas) and *secondary fuel type* (e.g., gasoline, residual oil, natural gas, etc.) by sector (e.g., residential, commercial, industrial, transportation, and electric utilities). A list of potential fuel types consumed in each sector is provided in Table 1 and is included in the CO₂FFC module.

The CO₂FFC module calculates emissions for each sector by multiplying consumption by the carbon content and the combustion efficiency to obtain the total carbon oxidized. Then, the total tons of carbon oxidized are converted into MMTCO₂E, by multiplying by the ratio of metric tons per short ton (0.9072) to obtain metric tons and dividing by 10⁶ and multiplying by 44/12 to express emissions in MMTCO₂E (Equation 1).

Figure 7. Example of the Required Energy Data Applied in the Residential Worksheet

State Inventory Tool - CO₂ Emissions from Combustion of Fossil Fuel

File Edit Module Options

3. Residential Consumption and CO₂ Emissions in Colorado

CO₂ emissions from fossil fuel combustion in the residential sector are calculated by multiplying energy consumption (in the residential sector) by carbon content coefficients for each fuel. These quantities are then multiplied by fuel-specific percentages of carbon oxidized during combustion ("combustion efficiency"). The resulting fuel emission values, in pounds of carbon, are then converted to short tons of carbon and million metric tons of carbon equivalent (MMTCE), then to million metric tons of carbon dioxide equivalent (MMTCO₂E), and summed. Note that default emission factors are available through 2008. To facilitate emission calculations for later years, the tool utilizes 2008 emission factors as proxies for emission factors in subsequent years (2009 through 2020). Emission factors for 2009 and beyond will be updated as soon as new data become available. For further detail on this method, refer to the CO₂FFC Chapter in the User's Guide. Click on the orange "Click here for the bulk data worksheet." button to return to the energy consumption data entry worksheet.

According to the methods developed by the International Panel on Climate Change, CO₂ emissions from the combustion of biogenic sources (e.g., fuel wood) are not counted in greenhouse gas inventories, provided that those sources are harvested on a sustainable basis. The carbon in wood fuel was originally removed from the atmosphere by photosynthesis, and under natural conditions, it would cycle back to the atmosphere eventually as CO₂ due to degradation processes. For processes with CO₂ emissions, if the emissions are from biogenic materials and the materials are grown on a sustainable basis, then those emissions are considered to close the loop in the natural carbon cycle.

Go to the Control Sheet
Go to the Commercial Sheet
Clear All Data

Residential Sector 1990

Fuel Type	Consumption (Billion Btu)	Emission Factor (lbs C/Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
Coal	243	57.33	100.0%	7,980	0.007	0.024
Distillate Fuel	80	44.43	100.0%	3,556	0.003	0.009
Kerosene	127	43.37	100.0%	2,793	0.002	0.008
LPG	6,136	37.18	100.0%	194,981	0.903	0.379
Natural Gas	92,391	31.87	100.0%	1,463,067	1.223	4.887
Other	-	-	-	-	0.000	0.000

Residential Sector 1991

Fuel Type	Consumption (Billion Btu)	Emission Factor (lbs C/Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
Coal	251	57.53	100.0%	8,341	0.006	0.021
Distillate Fuel	127	44.43	100.0%	3,556	0.003	0.009
Kerosene	127	43.37	100.0%	2,793	0.002	0.008
LPG	6,136	37.18	100.0%	194,981	0.903	0.379
Natural Gas	92,391	31.87	100.0%	1,463,067	1.223	4.887
Other	-	-	-	-	0.000	0.000

Residential Sector

Fuel Type	Consumption (Billion Btu)	Emission Factor (lbs C/Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
Coal	220	57.55	100.0%	6,341	0.006	0.021
Distillate Fuel	104	44.43	100.0%	2,304	0.002	0.008
Kerosene	219	43.37	100.0%	4,697	0.004	0.015
LPG	6,139	37.18	100.0%	195,671	0.903	0.379
Natural Gas	96,440	31.87	100.0%	1,536,776	1.294	5.102
Other	-	-	-	-	0.000	0.000

Click here to begin Default State Energy Data Table Residential Commercial Transportation Electric Power Bunker Fuels Industrial Summary-MMTCE Summary-MMTCE Uncertainty

Step (8) View Estimates on Bunker Fuels Worksheet

Emissions from international bunker fuels are calculated in step 7. International bunker fuels are fuels used in marine and aviation transport originating in the United States with international destinations. According to the Revised 1996 IPCC Guidelines, emissions from international transport should be reported separately as a memo item, instead of allocating them to a particular country.

Step (9) Complete Non-Energy Use Activity Data on the Industrial Sector Worksheet

The industrial worksheet is unique because both total energy consumption and total non-energy consumption are required as inputs in order to calculate CO₂ emissions, seen in Figure 8 (input cells are shown in green). Including activity data on non-energy use allows calculation of the amount of carbon from these fuels that is stored in non-energy products for a significant period of time (i.e., more than 20 years). The CO₂FFC module estimates carbon stored in non-energy uses for each state by multiplying the total number of Btu consumed by the default percent of that fuel type that is used for non-energy purposes, and then by a storage factor (i.e., the amount of carbon in non-energy uses that typically remains stored for longer than 20 years, entered in Step 2). This non-energy consumption is then subtracted from the total consumption to yield the net combustible consumption. From this point forward, the industrial worksheet functions in the same manner as the other sector worksheets. The net combustible consumption is multiplied by the carbon content and the combustion efficiency to obtain the total carbon oxidized. Then, the total tons of carbon oxidized are converted into MMTCO₂E, by multiplying by the ratio of metric tons per short ton (0.9072) to obtain metric tons and dividing by 10⁶ and multiplying by 44/12 to

express emissions in MMTCO₂E (Equation 2). Click on the orange "Click here for the bulk data worksheet." button to return to the energy consumption data entry worksheet.

Figure 8. Example of Energy and Non-Energy Consumption Data Applied in the Industrial Worksheet

State Inventory Tool - CO₂ Emissions from Combustion of Fossil Fuel

File Edit Module Options

8. Industrial Consumption and CO₂ Emissions in Colorado

CO₂ emissions from fossil fuel combustion in the industrial sector are calculated by first subtracting non-energy consumption multiplied by carbon storage factors from the energy consumption for each fuel type. The resulting combustible consumption for each fuel is then multiplied by a carbon content coefficient and by the percentage of carbon oxidized during combustion ("combustion efficiency"). The resulting fuel emissions, in pounds of carbon, are then converted to short tons of carbon and million metric tons of carbon equivalent (MMTCE), then to million metric tons of carbon dioxide equivalent (MMTCO₂E), and summed. Note that default emission factors are available through 2008. To facilitate emission calculations for later years, the tool utilizes 2008 emission factors as proxies for emission factors in subsequent years (2009 through 2020). Emission factors for 2009 and beyond will be updated as soon as new data become available. For further detail on this method, refer to CO₂FFC Chapter in the User's Guide. Click on the orange "Click here for the bulk data worksheet." button to return to the energy consumption data entry worksheet.

Go to the Control Sheet

Go to the MMTCO₂E Summary Sheet

Check All Boxes

Clear All Data

4 Industrial Sector 1990 ☒ Default Non-Energy Consumption data?

Fuel Type	Total Consumption (Billion Btu)	Non-Energy Consumption (Billion Btu)	Storage Factor (%)	Net combustible Consumption (Billion Btu)	Emission Factor (lbs CO ₂ /Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
1 Coking Coal	-	-	10%	-	0.00	100.0%	-	0.000	0.000
2 Other Coal	85,383	77	0%	85,383	57.82	100.0%	444,708	0.483	1.479
3 Asphalt and Road Oil	2,634	2,634	100%	-	-	-	-	0.000	0.000
4 Aviation Gasoline Blending Components	1	-	0%	1	-	-	25	0.000	0.000
5 Crude Oil	-	-	0%	-	-	-	-	0.000	0.000
6 Distillate Fuel	85,789	801	90%	77,788	42.83	100.0%	348,887	0.217	1.84
7 Feedstocks, Naphtha less than 40°F	-	-	50%	-	-	-	-	0.000	0.000
8 Feedstocks, Other Oils greater than 40°F	-	-	50%	-	-	-	-	0.000	0.000
9 Kerosene	103	-	0%	103	43.97	100.0%	2,282	0.002	0.008
10 LPG	3,533	2,459	1%	2,096	37.46	100.0%	38,260	0.036	0.131
11 Lubricants	1,481	1,481	100%	-	-	-	28,625	0.027	0.089
12 Motor Gasoline	2,135	-	0%	2,135	42.83	100.0%	45,728	0.041	0.162
13 Motor Gasoline Blending Components	273	-	0%	273	42.83	100.0%	5,842	0.005	0.018
14 Misc. Petro Products	-	-	0%	-	44.42	100.0%	-	0.000	0.000
15 Petroleum Coke	1,782	206	50%	1,689	81.34	100.0%	81,793	0.047	0.172
16 Pentanes Plus	-	-	50%	-	42.08	100.0%	-	0.000	0.000
17 Residual Fuel	79	-	50%	79	45.11	100.0%	1,775	0.002	0.006
18 Still Gas	7,485	108	80%	7,398	40.09	100.0%	143,261	0.134	0.433
19 Special Naphtha	398	374	0%	398	43.47	100.0%	8,643	0.008	0.029
20 Unrefined Oils	(1,875)	-	0%	(1,875)	44.42	100.0%	(4,158)	(0.038)	(0.138)
21 Vases	-	-	50%	-	43.60	100.0%	-	0.000	0.000
22 Natural Gas	66,453	2,283	50%	65,169	31.87	100.0%	1,038,318	0.942	3.454
23 Other	-	-	0%	-	-	-	-	0.000	0.000

32 Industrial Sector 1991 ☒ Default Non-Energy Consumption data?

Fuel Type	Total Consumption (Billion Btu)	Non-Energy Consumption (Billion Btu)	Storage Factor (%)	Net combustible Consumption (Billion Btu)	Emission Factor (lbs CO ₂ /Million Btu)	Combustion Efficiency (%)	Emissions (short tons carbon)	Emissions (MMTCE)	Emissions (MMTCO ₂ E)
-----------	---------------------------------	--------------------------------------	--------------------	---	--	---------------------------	-------------------------------	-------------------	----------------------------------

Required Non-Energy Consumption Data

Step (10) Review Summary Information

The steps above provide estimates of total carbon in fossil fuels consumed, carbon stored in non-energy products, and amount of carbon oxidized to CO₂. Total carbon emissions are equal to the total carbon content in fuel, minus carbon stored in non-energy uses, adjusted for the carbon not oxidized during combustion, and summed over all fuel types and sectors, for each year. The information is collected on the summary worksheet, displaying results in MMTCO₂E. Figure 9 shows the summary worksheet that sums the emissions from all sectors in the CO₂FFC module. In addition, the results are displayed in graphical format at the bottom of the summary worksheets.

Figure 9. Example of the Emissions Summary Worksheet in the CO₂FFC Module

State Inventory Tool - CO₂ Emissions from Combustion of Fossil Fuel

File Edit Module Options Type a question for help

California Emissions Summary (MMTCO₂E)

Go to the Control Sheet Review discussion of uncertainty associated with these results

MMTCO ₂ E	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002
Residential	29.59	29.40	27.30	28.89	29.46	26.85	27.03	26.81	32.38	32.04	27.63	28.74	27.85
Coal	0.01	0.02	0.00	0.05	0.05	0.04	0.05	0.03	0.03	0.01	0.01	0.00	0.00
Petroleum	1.44	1.70	1.21	1.27	1.26	1.22	1.03	0.96	1.56	1.46	1.43	1.10	1.12
Natural Gas	28.15	27.68	26.10	27.57	28.15	25.59	25.95	25.82	30.79	30.58	26.20	27.63	26.73
Commercial	18.78	18.89	17.26	15.34	15.74	16.83	14.60	15.21	17.55	14.71	14.18	14.73	13.68
Coal	0.04	0.08	0.00	0.25	0.30	0.25	0.34	0.21	0.22	0.05	0.05	0.00	0.00
Petroleum	3.14	3.17	1.75	1.32	1.29	1.64	1.37	1.31	1.52	1.50	1.64	1.49	1.21
Natural Gas	15.60	15.65	15.51	13.77	14.15	14.94	12.89	13.69	15.80	13.16	12.49	13.25	12.47
Industrial	71.91	72.99	73.35	70.79	71.09	69.89	72.51	77.43	74.89	72.85	72.57	74.84	75.22
Coal	6.01	5.85	6.00	4.96	5.02	5.36	5.20	5.76	4.02	4.34	4.40	4.34	4.37
Petroleum	34.40	29.46	30.62	28.05	30.37	27.94	29.66	29.86	26.22	27.11	26.81	32.94	30.92
Natural Gas	31.50	37.68	36.73	37.77	35.70	36.59	37.65	41.81	44.65	41.40	41.36	37.57	39.93
Transportation	203.70	192.56	192.13	189.31	197.85	201.67	204.75	199.11	199.68	204.47	215.57	211.31	223.24
Coal	-	-	-	-	-	-	-	-	-	-	-	-	-
Petroleum	202.60	191.56	191.31	188.63	197.16	200.61	203.69	197.81	199.11	203.85	214.96	210.57	222.59
Natural Gas	1.10	1.01	0.83	0.68	0.69	1.06	1.06	1.30	0.58	0.62	0.61	0.73	0.65
Electric Power	40.34	37.98	45.54	42.00	49.43	37.09	32.77	35.75	39.29	43.22	52.82	57.64	43.65
Coal	1.78	2.41	2.53	2.63	2.52	2.21	1.89	1.70	1.86	2.05	2.05	1.96	2.13
Petroleum	4.16	1.30	1.21	2.58	2.66	2.01	2.33	1.82	2.23	1.98	2.47	2.79	2.18
Natural Gas	34.40	34.27	41.80	36.80	44.26	32.86	28.55	32.23	35.20	39.18	48.30	52.88	39.35
International Bunker Fuels	-	0.23	0.13	0.11	0.09	0.11	0.11	0.11	0.10	0.11	0.08	0.10	0.10
Petroleum	-	0.23	0.13	0.11	0.09	0.11	0.11	0.11	0.10	0.11	0.08	0.10	0.10
TOTAL	364.32	351.81	355.59	346.34	363.57	352.33	351.67	354.30	363.79	367.29	382.77	387.25	383.64
Coal	7.84	8.35	8.53	7.90	7.89	7.86	7.48	7.69	6.14	6.46	6.50	6.30	6.50
Petroleum	245.74	227.18	226.09	221.85	232.74	233.43	238.09	231.77	230.64	235.90	247.32	248.89	258.02
Natural Gas	110.74	116.28	120.96	116.59	122.95	111.04	106.10	114.84	127.02	124.94	128.96	132.06	119.12

Multi-Sector Charts Individual Sector Charts

Control / Residential / Commercial / Industrial / Transportation / Electric Power / Bunker Fuels / Summary-MMTCE / Summary-MMTCO₂E

Step (11) Export Data

The final step is to export the summary data. Exporting data allows the estimates from each module to be combined later by the Synthesis Module to produce a comprehensive greenhouse gas inventory for the state.

To access the “Export Data” button, return to the control sheet and scroll down to the bottom (11). Click on the “Export Data” button and a message box will open that reminds the user to make sure all steps of the module have been completed. If you make any changes to the CO₂FFC module later, you will then need to re-export the results.

Note: the resulting export file should not be modified. The export file contains a summary worksheet where users can view the results, as well as a separate data worksheet with an unformatted version of the results; this data worksheet contains the information that is exported to the Synthesis Tool, and it is especially important that users do not modify it. Adding/removing rows, moving data, or making other modifications jeopardize the ability of the Synthesis Module to accurately analyze the data.

Clicking “OK” prompts you to save the file. The file is already named, so you only need to choose a convenient place to save the file. After the file is saved, a message box will appear indicating that the data was successfully exported.

While completing the modules, you are encouraged to save each completed module; doing so will enable you to easily make changes without re-running it entirely.

Following data export, the module may be reset and run for an additional state. Alternatively, you may run the remaining modules of the State Inventory Tool to obtain a comprehensive profile of emissions for your state.

1.4 UNCERTAINTY

In the upper right-hand corner of the summary worksheet is a button: “Review discussion of uncertainty associated with these results.” By clicking on this button, you are taken to a worksheet that discusses the uncertainty surrounding the activity data and emission factors, and how the uncertainty estimates for this source category affect the uncertainty of the emission estimates for your state.

1.5 REFERENCES

- EIA. 2001. *Historical Natural Gas Annual 1930-2000*. Energy Information Administration, U.S. Department of Energy. DOE/EIA-0110(00). Internet Address: http://www.eia.doe.gov/oil_gas/natural_gas/data_publications/historical_natural_gas_annual/hnga.html.
- EIA. 2016. *State Energy Data 2014 Consumption*. Energy Information Administration, U.S. Department of Energy. DOE/EIA-0214(2013). Internet address: <http://www.eia.doe.gov/emeu/states/seds.html>.
- EIA. 2015. *Natural Gas Annual 2013*. Energy Information Administration, U.S. Department of Energy, Washington, DC. DOE/EIA-0131(10).
- IPCC. 2006. IPCC Guidelines for National Greenhouse Gas Inventories. The National Greenhouse Gas Inventories Programme, H.S. Eggleston, L. Buendia, K. Miwa, T. Ngara, and K. Tanabe, eds.; Institute for Global Environmental Strategies (IGES). Hayama, Kanagawa, Japan.
- Marland, G., and R.M. Rotty. 1984. “Carbon Dioxide Emissions from Fossil Fuels: A Procedure for Estimation and Results for 1950-1982,” *Tellus* 36b:232-261.
- FHWA. 2016. *Highway Statistics 1992-2014*, Federal Highway Administration, U.S. Department of Transportation. Internet address: <http://www.fhwa.dot.gov/policy/ohpi/hss/index.cfm>.
- U.S. EPA. 2016. *Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990 – 2014*. Office of Atmospheric Programs, U.S. Environmental Protection Agency. EPA 430-R-16-002. Internet address: <https://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks-1990-2014>.