

US EPA ARCHIVE DOCUMENT

Assessment of Dam Safety

Coal Combustion Surface Impoundments (Task 3)

Final Report

American Electric Power
General James Gavin
Power Plant
Cheshire, Ohio



Prepared for

Lockheed Martin

2890 Woodridge Ave #209
Edison, New Jersey 08837

September 14, 2009

CHA Project No. 20085.4000.1510



I acknowledge that the management units referenced herein:

- Bottom Ash Pond
- Stingy Run Ash Disposal Pond

Have been assessed on June 1, 2009 and June 2, 2009.

Signature: _____

Malcolm D. Hargraves

Malcolm D. Hargraves, P.E.
Senior Geotechnical Engineer
Registered in the State of Ohio



Signature: _____

Katherine E. Adnams

Katherine E. Adnams, P.E.
Senior Geotechnical Engineer

Reviewer: _____

Warren A. Harris

Warren A. Harris, P.E.
Geotechnical Operating Manager
Registered in the State of Georgia

TABLE OF CONTENTS

SECTION	PAGE NUMBER
1.0 INTRODUCTION & PROJECT DESCRIPTION.....	1
1.1 Introduction.....	1
1.2 Project Background.....	2
1.2.1 State Issued Permits	2
1.2.1.2 Bottom Ash Pond	2
1.2.1.3 Stingy Run Dam	3
1.3 Site Description and Location.....	3
1.3.1 Other Impoundments	4
1.4 Previously Identified Safety Issues.....	4
1.5 Site Geology	5
1.6 Bibliography	5
2.0 FIELD ASSESSMENT	14
2.1 Visual Observations	14
2.2 Visual Observation – Bottom Ash Pond	15
2.2.1 Embankments and Crest	15
2.2.1.1 South Dike	15
2.2.1.2 East Dike	16
2.2.1.3 North Dike	17
2.2.1.4 West Dike	18
2.2.2 Bottom Ash Outlet Control Structure and Discharge Channel	18
2.3 Visual Observations – Stingy Run Dam	19
2.3.1 Embankments and Crest	19
2.3.2 Stingy Run Dam Outlet Control Structure.....	19
2.3.3 Stingy Run Dam Discharge Channel.....	20
2.3.4 Stingy Run Abandoned Emergency Spillway.....	20
2.4 Monitoring Instrumentation	20
3.0 DATA EVALUATION	62
3.1 Design Assumptions	62
3.2 Hydrologic and Hydraulic Design	62
3.2.1 Hydrologic and Hydraulic Design – Bottom Ash Pond.....	62
3.2.3 Hydrologic and Hydraulic Design – Stingy Run Dam	63
3.3 Structural Adequacy & Stability	64
3.3.1 Bottom Ash Pond.....	65
3.3.2 Stingy Run Dam.....	69
3.4 Operations & Maintenance	73
4.0 CONCLUSIONS/RECOMMENDATIONS	84
4.1 Acknowledgement of Management Unit Condition	84
4.2 Maintaining Vegetation Growth	84
4.3 Bottom Ash Pond South Dike Upstream Slope Stabilization and Wet Area.....	84
4.4 Bottom Ash Pond South Dike Wet Area	85
4.5 Bottom Ash Pond East Dike Erosion.....	85

TABLE OF CONTENTS

SECTION	PAGE NUMBER
4.6 Bottom Ash Pond East Dike Repair of Rodent Holes	85
4.7 Bottom Ash Pond East Dike Tree and Stump Removal	85
4.8 Bottom Ash Pond North Dike Runoff from Flushing the Conveyor	86
4.9 Stingy Run Dam Hydraulic Analysis.....	86
4.10 Recommendations for Additional Stability Analyses – Bottom Ash Pond	87
4.11 Stingy Run Dam Recommendations for Additional Stability Analyses	88
4.12 Stingy Run Dam Outlet Structure Access.....	89
4.13 Stingy Run Dam Destroyed Instrumentation.....	89
5.0 CLOSING.....	90

TABLES

Table 1– Approximate Precipitation Prior to Site Visit	14
Table 2 - Comparison of Design Assumptions	63
Table 3 - Minimum Safety Factors Required.....	64
Table 4 - Soil Strength Parameters Used in BBCM June 2009 Draft Investigation Report	66
Table 5 – Summary of Safety Factors.....	67
Table 6 - Soil Strength Parameters Used in the 1986 Dam Raising Evaluation	70
Table 7 – Summary of Safety Factors – Stingy Run Dam.....	71

FIGURES

Figure 1- Project Location Map	7
Figure 2A - Photo Plan	8
Figure 2B - Photo Plan.....	9
Figure 2C - Photo Plan.....	10
Figure 3 - Bottom Ash Pond Typical Cross Section.....	11
Figure 4 - Stingy Run Dam Typical Cross Section.....	12
Figure 5 - Critical Infrastructure Map.....	13
Figure 6A - Bottom Ash Pond Photo Locations	22
Figure 6B - Stingy Run Dam Photo Locations	23
Figure 7A - Bottom Ash Pond Piezometer Locations.....	60
Figure 7B -Stingy Run Dam Instrument Locations	61
Figure 8A - Bottom Ash Pond Slope Stability.....	74
Figure 8B - Bottom Ash Pond Slope Stability.....	75
Figure 8C - Bottom Ash Pond Slope Stability.....	76
Figure 8D - Bottom Ash Pond Slope Stability.....	77
Figure 9A - Bottom Ash Pond Slope Stability.....	78
Figure 9B - Bottom Ash Pond Slope Stability.....	79
Figure 9C - Bottom Ash Pond Slope Stability.....	80
Figure 10A - Piezometer Readings Bottom Ash Pond.....	81
Figure 10B - Piezometer Readings Stingy Run Dam.....	82
Figure 10C - V-Notch Weir Readings Stingy Run Dam.....	83

APPENDIX

Appendix A - Completed EPA Coal Combustion Dam Inspection Checklist Forms & Completed EPA Coal Combustion Waste (CCW) Impoundment Inspection Forms
--



1.0 INTRODUCTION & PROJECT DESCRIPTION

1.1 Introduction

CHA was contracted by Lockheed Martin (a contractor to the United State Environmental Protection Agency) to perform site assessments of selected coal combustion surface impoundments (Project #0-381 Coal Combustion Surface Impoundments/Dam Safety Inspections). As part of this contract, CHA was assigned to perform a site assessment of American Electric Power's (AEP) General James Gavin Power Plant, which is located in Cheshire, Ohio as shown on Figure 1 – Project Location Map.

CHA made a site visit on June 1, 2009 and June 2, 2009 to inventory coal combustion surface impoundments at the facility, perform visual observations of the containment dikes, and collect relevant information regarding the site assessment.

CHA Engineers Malcolm Hargraves, P.E. and Katherine Adnams, P.E. were accompanied by the following individuals:

Company or Organization	Name and Title
American Electric Power	Gary Zych, Geotechnical Engineer
American Electric Power	Shah Baig, Geotechnical Engineer
American Electric Power	Christina Svoboda, Environmental Specialist
American Electric Power	Doug Workman
American Electric Power	Jeff Mullins
American Electric Power	Don Anderson
Environmental Protection Agency	Nate Nemani
Ohio EPA	Brian Queen
Ohio Dam Safety	Keith Banachowski (June 1 st only)
Ohio Dam Safety	Mark Ogden (June 2 nd only)



1.2 Project Background

The Bottom Ash Pond and the Stingy Run Dam at the General James Gavin Power Plant are under the jurisdiction of the Ohio Department of Natural Resources (DNR) Division of Water – Dam Safety program. These impoundments are listed on the National Inventory of Dams (NID) with the following identification numbers:

Impoundment	NID ID	Ohio ID
Bottom Ash Pond	OH00971	8720-003
Stingy Run Dam	OH00919	8721-009

These impoundments are classified by Ohio DNR as Class I dams, which are likely to cause loss of life in the event of an unexpected breach.

1.2.1 State Issued Permits

AEP has received the following state issued permits for the Bottom Ash Pond and Stingy Run Dam:

1.2.1.2 Bottom Ash Pond

Ohio State Permit No. OH0028762 has been issued to AEP authorizing discharge under the National Pollutant Discharge Elimination System (NPDES) to the Ohio River in accordance with effluent limitations, monitoring requirements and other conditions set forth in the permit. The permit became effective on August 1, 2008 and will expire on January 31, 2013. (Note this permit also covers Stingy Run Dam and other surface runoff locations not containing coal combustion waste controlled by AEP on the site.)

1.2.1.3 Stingy Run Dam

Ohio State Permit No. OH0028762 has been issued to AEP authorizing discharge under the National Pollutant Discharge Elimination System (NPDES) to the Ohio River in accordance with effluent limitations, monitoring requirements and other conditions set forth in the permit. The permit became effective on August 1, 2008 and will expire on January 31, 2013. (Note this permit also covers the Bottom Ash Pond and other surface runoff locations not containing coal combustion waste controlled by AEP on the site.)

The Ohio Department of Natural Resources Division of Water issued Permit No. 87-159 for the dam raising in 1987.

In 1997 a Spillway Variance Request was submitted to OH DNR Division of Water as part of the permitting process for the landfill which is now located at the outlet of the original emergency spillway. This request was deemed reasonable by OH DNR.

1.3 Site Description and Location

Figure 2A – Photo Plan shows the two management units constructed for the General James Gavin Power Plant. The Bottom Ash Pond is located on the south side of the plant, and the Stingy Run Dam is located on Stingy Run about 2.25 miles northwest of the plant. Stingy Run is a tributary to Kyger Creek that ultimately discharges into the Ohio River about 2 miles south of the Gavin Power Plant.

The Bottom Ash Pond is a four sided, diked impoundment that receives bottom ash, pyrite, and yard drainage for disposal. The Bottom Ash Pond was constructed in 1974, and is an approximately 36-foot high homogeneous earth fill. The created basin area is about 85 acres. Figure 2B is a site plan for the Bottom Ash Pond. Figure 3 shows a typical cross section of the dikes creating this impoundment.

Stingy Run Dam was formerly used for fly ash disposal. Its use as an active fly ash disposal site was discontinued in 1994. However, the reservoir still contains previously deposited fly ash. The Stingy Run Dam was originally constructed in 1974 to a height of about 90 feet. The dam was raised in 1988 and is now about 144 feet high. This dam in its raised condition was designed to have a surface area of about 325 acres. Because the site was discontinued for use, the impoundment only has a surface area of about 280 acres based on the aerial photos used in Figure 2C. This area includes an area only a few feet above the current operating pool that is covered fly ash. The Stingy Run discharges into Kyger Creek, which is a tributary to the Ohio River. Figure 2C shows the Stingy Run Impoundment and Figure 4 shows a cross section of the current (raised) dam construction.

A map of the region indicating the location of the General James Power Plant Bottom Ash Pond and Stingy Run Dam and identifying schools, hospitals, or other critical infrastructure located within approximately 5 miles down gradient of the ash pond is provided as Figure 5.

1.3.1 Other Impoundments

CHA also observed two connected impoundments adjacent to the currently operational landfill site. AEP reported that these ponds collect storm water runoff and leachate from the landfill and are permitted as part of the landfill operation. CHA did not perform an inspection of these impoundments, but did note that they appear to be lined with geosynthetic liner.

Four shallow storm water runoff collection ponds are located around the perimeter of the coal pile.

1.4 Previously Identified Safety Issues

Based on our review of the information provided to CHA and as reported by AEP, there have been no identified safety issues at either the Bottom Ash Pond or Stingy Run Dam in the last 10 years.

1.5 Site Geology

Based on a review of available surficial and bedrock geology maps, and reports by others, the site is in an unglaciated area of Ohio. The local geologic conditions at the Bottom Ash Pond are likely to consist of an alluvial silt, clay and/or sand deposited by the Ohio River floodwaters, and glacial outwash sand and gravel deposits overlying bedrock categorized as part of the Conemaugh Formation, which consists predominantly of interbedded shales, sandstones, coal and limestone. At Stingy Run Dam, which is outside of the floodplain, the surficial materials are likely colluvium resulting from local bedrock, and scattered areas of residuum. The mapped adjacent bedrock formation is part of the Monongahela Formation, which consists of similar interbedded sedimentary rocks as the Conemaugh Formation with the exception of the limestone.

1.6 Bibliography

Following the impoundment failure in Tennessee in December 2008, AEP, realizing they did not have current stability analyses of the Bottom Ash Pond dikes, hired a consultant to perform a geotechnical assessment to provide an indication as to the level of safety provided by the embankment dam surrounding the bottom ash pond. The scope of work included the advancement of borings, laboratory testing and analyzing the stability of the Bottom Ash Pond. A draft version of this updated stability report dated June 5, 2009 was forwarded to CHA following our site visit and was reviewed with other documents for the preparation of this report.

Other documents that CHA reviewed in preparing this report include:

- Various *Dam & Dike Inspection Checklists*, dated April 2005 through October 2008, American Electric Power
- Various *Dike & Dam Inspection Reports*, dated 2004 through 2009, American Electric Power
- *Deformation Review Report of Survey*, November 17, 2008, American Electric Power



-
- *Gavin Generating Plant Bottom Ash Pond Investigation*, June 5, 2009, BBCM Engineering, Inc.
 - *Preliminary Design Report Proposed Dam Raising for Phase II Stingy Run Fly Ash Retention Pond*, March 1986, American Electric Power Service Corporation
 - *Final Design Report Proposed Dam Raising for Phase II Stingy Run Fly Ash Retention Pond*, December 1986, American Electric Power Service Corporation
 - Variance Request Stingy Run Fly Ash Dam, July 1997, American Electric Power
 - Selected drawings from dam raising at the Stingy Run Dam
 - Selected original construction drawings of the Bottom Ash Pond

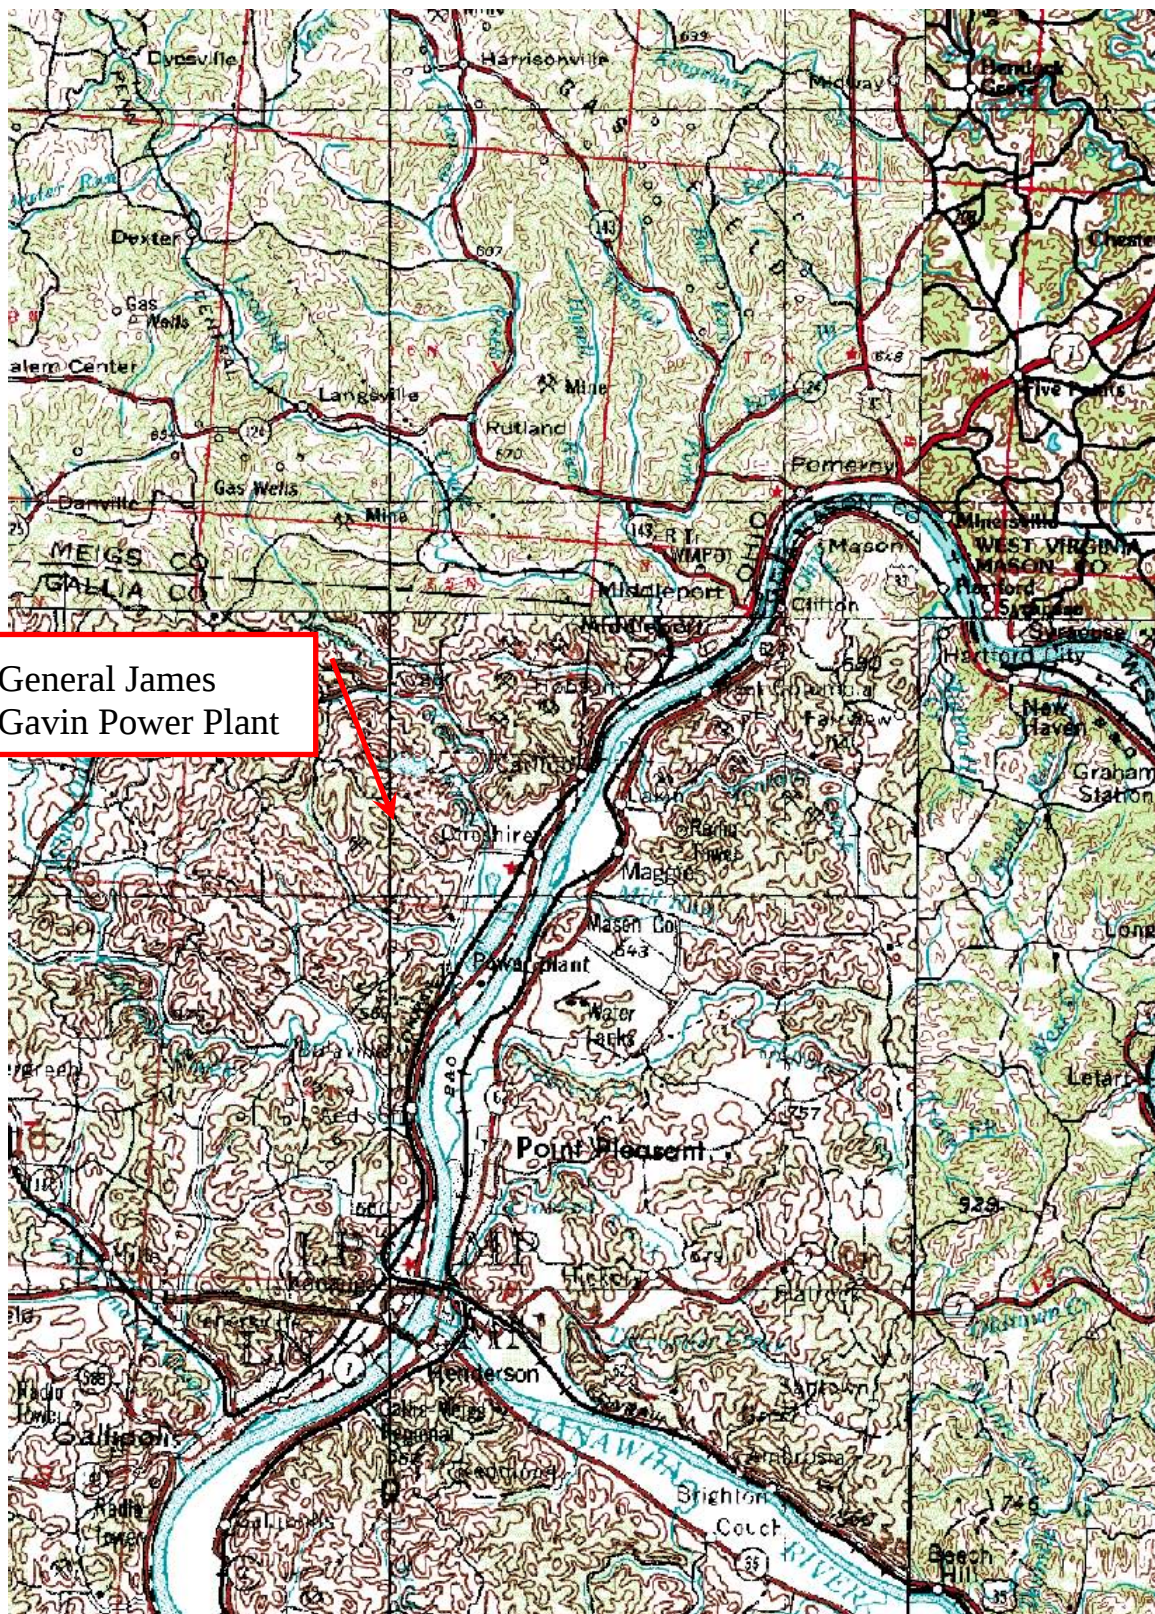


Figure 1
Project Location Map

Scale: 1" = 2 miles

Project No.:
20085.4000.1510

American Electric and Power Company
General James Gavin Power Plant
Cheshire, Ohio

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN PLANS-MAPS.DWG Saved: 7/2/2009 5:40:14 PM Plotted: 9/14/2009 12:16:07 PM User: Fikins, Rebecca



IMAGE REFERENCE: GOOGLE EARTH, IMAGE DATED AUGUST 25, 2007.




PHOTO SITE PLAN
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000


DATE: JULY 2009

FIGURE 2A

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN PLANS-MAPS.DWG Saved: 7/2/2009 5:40:14 PM Plotted: 9/14/2009 12:23:04 PM User: Filkins, Rebecca



IMAGE REFERENCE: GOOGLE EARTH, IMAGE DATED AUGUST 25, 2007.



Drawing Copyright © 2007 CHA

PHOTO SITE PLAN OF
BOTTOM ASH POND
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000


DATE: JULY 2009

FIGURE 2B

File: K:\20085\CADD\ACAD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN PLANS-MAPS.DWG Saved: 7/2/2009 5:40:14 PM Plotted: 9/14/2009 12:26:40 PM User: Filkins, Rebecca



IMAGE REFERENCE: GOOGLE EARTH, IMAGE DATED AUGUST 25, 2007.



Drawing Copyright © 2007 CHA

**PHOTO SITE PLAN OF
STINGY RUN DAM**
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 2C

File: K:\20085\CADD\ACAD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 1:08:33 PM Plotted: 7/2/2009 3:18:17 PM User: Filkins, Rebecca

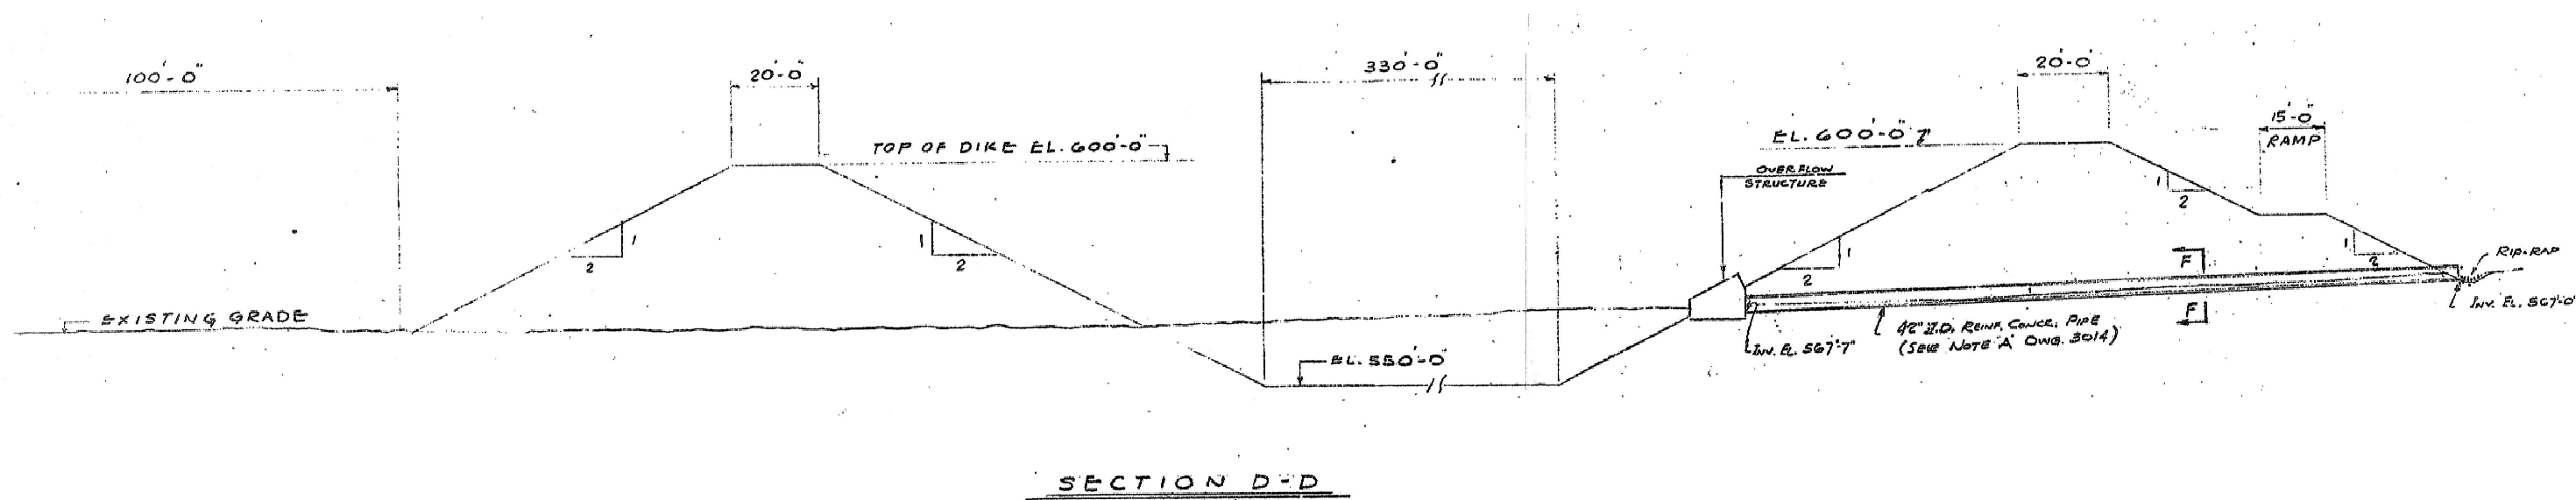


IMAGE REFERENCE: BOTTOM ASH DISPOSAL AREA SECTIONS,
DRAWING NO. 12-3015A



BOTTOM ASH POND TYPICAL CROSS SECTION
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 3

File: K:\20085\CADD\ACAD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN PLANS-MAPS.DWG Saved: 7/2/2009 5:40:14 PM Plotted: 9/14/2009 12:29:57 PM User: Filkins, Rebecca


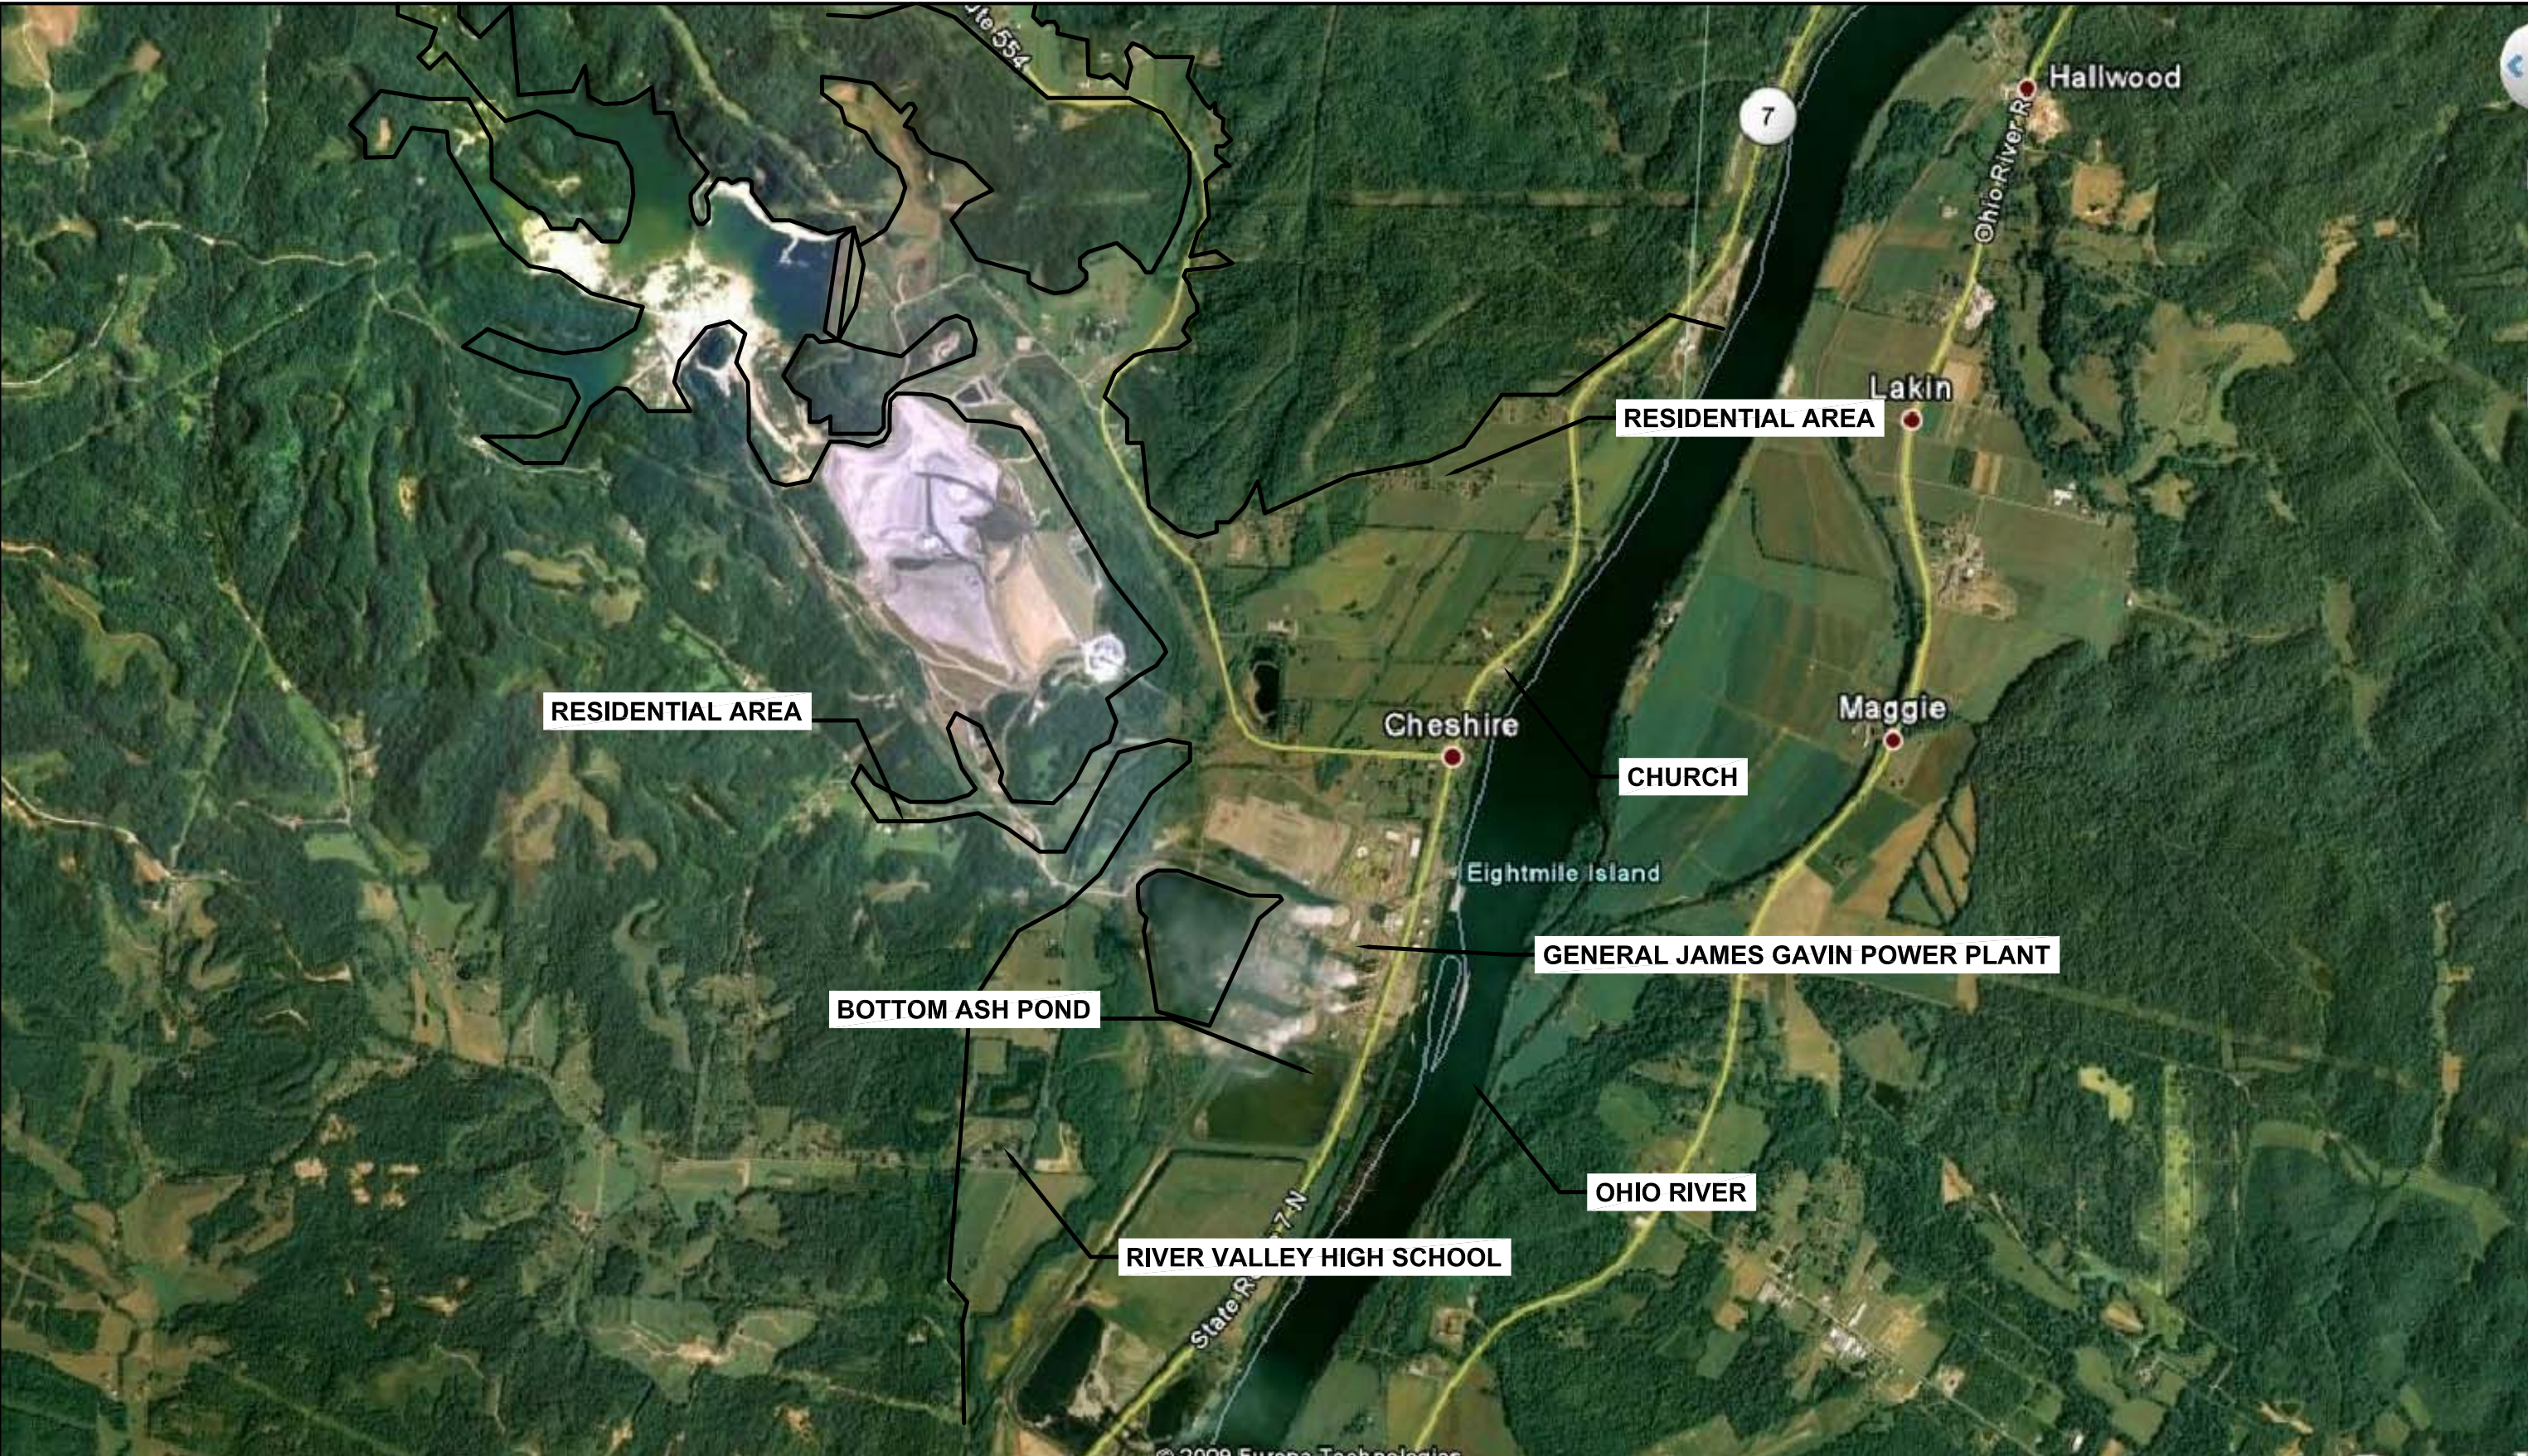


IMAGE REFERENCE: GOOGLE EARTH, IMAGE DATED JUNE 17, 2006.

LEGEND

— APPROXIMATE LIMIT OF DAM-BREAK OVER FLOW AREA
AS SHOWN ON AEPGV 002825 FLOOD INUNDATION MAP



CHA

CRITICAL INFRASTRUCTURE
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 5

2.0 FIELD ASSESSMENT

2.1 Visual Observations

CHA performed visual observations of the Bottom Ash Pond and Stingy Run Dam following the general procedures and considerations contained in Federal Emergency Management Agency's (FEMA's) *Federal Guidelines for Dam Safety* (April 2004), and Federal Energy Regulatory Commission (FERC) Part 12 Subpart D to make observations concerning settlement, movement, erosion, seepage, leakage, cracking, and deterioration. A Coal Combustion Dam Inspection Checklist and Coal Combustion Waste (CCW) Impoundment Inspection Form,, prepared by the US Environmental Protection Agency, were completed on-site during the site visit. Copies of the completed forms were submitted via email to a Lockheed Martin representative approximately three days following the site visit to the General James Gavin Plant. Copies of these completed form are included in Appendix A. Photo logs and Site Photo Location Maps (Figures 6A and 6B) for the Bottom Ash Pond and Stingy Run Dam, respectively are located at the end of Section 2.4.

CHA's visual observations were made on June 1, 2009 and June 2, 2009. The weather was sunny with temperatures between 50 and 90 degrees Fahrenheit. Prior to the days we made our visual observations, the following approximate rainfall amounts occurred (as reported by www.weather.com).

Table 1– Approximate Precipitation Prior to Site Visit

Dates of Site Visits – June 1, 2009 & June 2, 2009		
Day	Date	Precipitation (inches)
Monday	May 25, 2009	0.85
Tuesday	May 26, 2009	0.40
Wednesday	May 27, 2009	0.17
Thursday	May 28, 2009	0.36
Friday	May 29, 2009	0.00
Saturday	May 30, 2009	1.10
Sunday	May 31, 2009	0.00
Monday	June 1, 2009	0.00
Tuesday	June 2, 2009	0.17



Dates of Site Visits – June 1, 2009 & June 2, 2009		
Day	Date	Precipitation (inches)
Total	Week Prior to Site Visit	2.88
Total	Month of May	7.14

2.2 Visual Observation – Bottom Ash Pond

CHA performed visual observations of the Bottom Ash Pond dikes. The dikes in total are about 6,565 feet long and about 36 feet high. The vegetation growth was cut on the embankments immediately prior to our site visit and was completed during our site visit. Therefore, some photographs may show tall weeds. CHA was able to make observations subsequent to mowing activities.

2.2.1 Embankments and Crest

In general, the alignment of the Bottom Ash Pond dike crests do not show signs of change in their horizontal alignment. According to AEP personnel, the crest is re-graded as needed to fill in tire ruts and prevent ponding of storm water along the crest. Refer to the following photos showing the dike crest alignment:

- Photo 1 – West Dike
- Photo 15 – South Dike
- Photo 24 – East Dike
- Photo 26 – North Dike

2.2.1.1 South Dike

The crest width shown on the construction drawings was 20 to 35 feet wide. CHA measured the crest to be as wide as 40 feet. It appears that routine grading of the crest has resulted in an oversteepening of the upper portion of the embankments. The design slopes were already 2H:1V.

Along the south dike, the combination of this over-steepening and wave action undercutting has resulted in surface sloughing as shown in Photos 11 through 16.

At about the mid point along the length of the south dike downstream slope, there is a wet area that has been noted in previous reports to be seepage. AEP personnel indicated that in February 2009 the storm water drainage from the field to the south of the Bottom Ash Pond was re-graded so rather than draining towards the Bottom Ash Pond, the runoff would run away from the Bottom Ash Pond. AEP indicated this appears to be largely improving the condition at the toe of the south dike. Piezometer readings indicate the groundwater table is about 18 feet below the toe of the south dike further suggesting that the observed water was perched on surface soil layers. No flow was observed in ponded water at the toe of the south dike.

Occasional trees were observed on the upstream slope at the water line.

2.2.1.2 East Dike

The upstream slope of the east dike is piled with CCW as there are three primary sluice areas along this dike; one from Unit 1, one from Unit 2, and one containing “pyrite” waste.

The downstream slope is tiered due to an access road that traverses from the bottom of the east dike at the north corner to the top of the east dike at the south corner. This access bench is shown in Photo 24.

There were many areas of erosion gullies along the transition from the crest to the downstream slope. The deepest of these was 18 inches deep. There was evidence that the development of these is common and that AEP routinely repairs them as part of ongoing maintenance of the dikes. Photos 22 and 23 show a typical representation of these areas on the east dike.

Along the east dike toe, several rodent holes were observed as shown in Photo 32. A few of these appeared to be plugged and AEP personnel indicated they have had to trap rodents from time to time. Some of the observed rodent holes may have been active, although it was difficult to distinguish.

There are a few tree stumps along the toe of the east dike as shown in Photo 33. AEP personnel did not know when these trees were cut or why the bench with the access road was apparently constructed around them. These stumps should be monitored for decay and the stumps and associated root balls removed as a maintenance task in the next 2 to 5 years under the direction of a professional engineer.

2.2.1.3 North Dike

Previous inspection reports had indicated that there was an area at the northeast corner where runoff from flushing dust from the coal conveyor was resulting in an erosion gully on the downstream slope. In 2008 a concrete pad and knee wall was placed under the coal conveyor at this location to minimize the impact of routine cleaning of the coal conveyor on the dike. The runoff now flows across the crest and drains to the pond.

Although not resulting in as severe an erosion feature, several other locations on the downstream slope of the north dike similarly showed runoff from flushing of the coal conveyor as shown in Photos 34 and 35.

Along the upstream slope of the north dike, there are a few locations where various sumps from the plant area are discharged into the pond. Most of these discharge pipes have concrete splash pads underneath these. Sections of conveyor belt have been placed over these because abrasion from particles in the discharge was degrading the surface of the concrete. Because of this covering and active flow, CHA could not observe the condition around these splash pads. CHA recommends that these areas be inspected as plant operation allows (i.e. when water is not

flowing across the splash pads) to evaluate the concrete condition, and make sure flows are not eroding the adjacent soil of the dike.

2.2.1.4 West Dike

Along the west dike there are several signs of previous surface erosion features. AEP has repaired these as they occur. Photo 2 shows one of these repaired areas.

Previous reports indicated there is a bulge on the downstream slope of the west dike. CHA observed this area and did not see signs of current movement, nor an area above this slope where it appears that either the bulged soil came from or that the area was repaired. AEP should continue to monitor this area for changes as they have in the past.

Occasional small trees were observed on the upstream slope at the water line, which should be removed during routine mowing activities.

2.2.2 Bottom Ash Outlet Control Structure and Discharge Channel

There are two outlet control structures in the Bottom Ash Pond. The Primary Outlet is a drop inlet structure with a concrete pipe beneath the intermediate dike. The outlet pipe was submerged and could not be observed. Photos 37, 41 and 42 show this outlet control structure.

The secondary outlet has been relocated to the north dike from the west dike. According to AEP, the intake platform on the upstream slope of the west dike in the secondary pond is still in place, but the pipe has been filled with grout and a new spirolite pipe was jacked beneath the north dike. The new pipe connects to a buried discharge pipe conveying outflow to the Ohio River. Photo 43 shows this submerged outlet. The downstream end of the outflow is buried.

2.3 Visual Observations – Stingy Run Dam

CHA performed visual observations of Stingy Run Dam. The Stingy Run Dam is about 1,800 feet long and about 144 feet high.

2.3.1 Embankments and Crest

In general, the alignment of the crest of Stingy Run Dam does not show signs of change in horizontal alignment. This alignment arches slightly in the upstream direction. Both the north and south abutments have large bedrock outcrops (Photos 50 and 51).

The upstream slope is armored with 8-inch diameter rip rap, which extend below the current reservoir water level (Photo 63).

The toe drain is armored with 6-inch diameter rip rap (Photo 49). This rip rap extends about 45 feet up the slope, and ends at the drainage swale at the toe. This drainage swale has three operating V-notch weirs (Photos 48 and 54). AEP personnel reported that during dry spells the flow in this swale reduces significantly although portions of the swale show vegetative signs of being perennially wet (Photo 52). During our visit, about 1.8 gallons per minute was flowing through the most downstream weir based on field measured weir geometry. A sample was taken from this weir, and appeared clear. Flow in the upstream portions of the swale also appeared clear. The depth of flow over each of these three weirs is measured and recorded by AEP personnel quarterly.

2.3.2 Stingy Run Dam Outlet Control Structure

The intake tower in Stingy Run Dam was inaccessible at the time of our visit. The floating access bridge to the tower is severely deteriorated and AEP blocked it off in 2008. Photos 65 and 66 show the tower and access bridge.

2.3.3 Stingy Run Dam Discharge Channel

Stingy Run discharges through a concrete and metal weir structure as shown in Photo 47. From this point the flow enters the natural stream channel of Stingy Run.

2.3.4 Stingy Run Abandoned Emergency Spillway

To the south of the dam there is an area that was formerly in place to act as an emergency spillway. The dam was raised in 1988 but the water level was never raised to the full height planned and the reservoir is no longer used for fly ash disposal so the water level is not expected to change. AEP has constructed a landfill immediately downstream of the original emergency spillway and confirmed that this would not be needed for design storm passage based on the current water level operations. Photos 70 through 72 show this abandoned emergency spillway. A more complete discussion on this is included in Section 3.3.2.

2.4 Monitoring Instrumentation

There is monitoring instrumentation installed at both the Bottom Ash Pond and Stingy Run Dam. Figure 7A shows the approximate locations of instrumentation at the Bottom Ash Pond, and Figure 7B shows the approximate locations of instrumentation at Stingy Run Dam.

The Bottom Ash Pond is monitored with piezometers. Two “old” piezometers, BAP-1 and BAP-2, are in place at the toe of the west and south dikes, respectively. These piezometers have been monitored for many years although the installation date of these is unknown. Four additional piezometers were installed as part of a recent evaluation of the Bottom Ash Pond initiated by AEP following the TVA incident. Piezometers GV-PZ-BAP-901 through GV-PZ-BAP-904 were installed at the crest and toe of the west and south dikes as shown in Figure 7A.

At Stingy Run Dam many piezometers, settlement monitoring monuments, and inclinometers are in place as shown in Figure 7B. The locations shown in Figure 7B represent what was provided to CHA although AEP acknowledged that some of these locations have been destroyed over the years by mowers and vandals. Therefore, this figure should not be considered an accurate depiction of currently operating instrumentation.

A more complete discussion of the data collected from this instrumentation is contained in Section 3.4.

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN PLANS-MAPS.DWG Saved: 7/2/2009 12:01:05 PM Plotted: 7/2/2009 5:11:42 PM User: Filkins, Rebecca

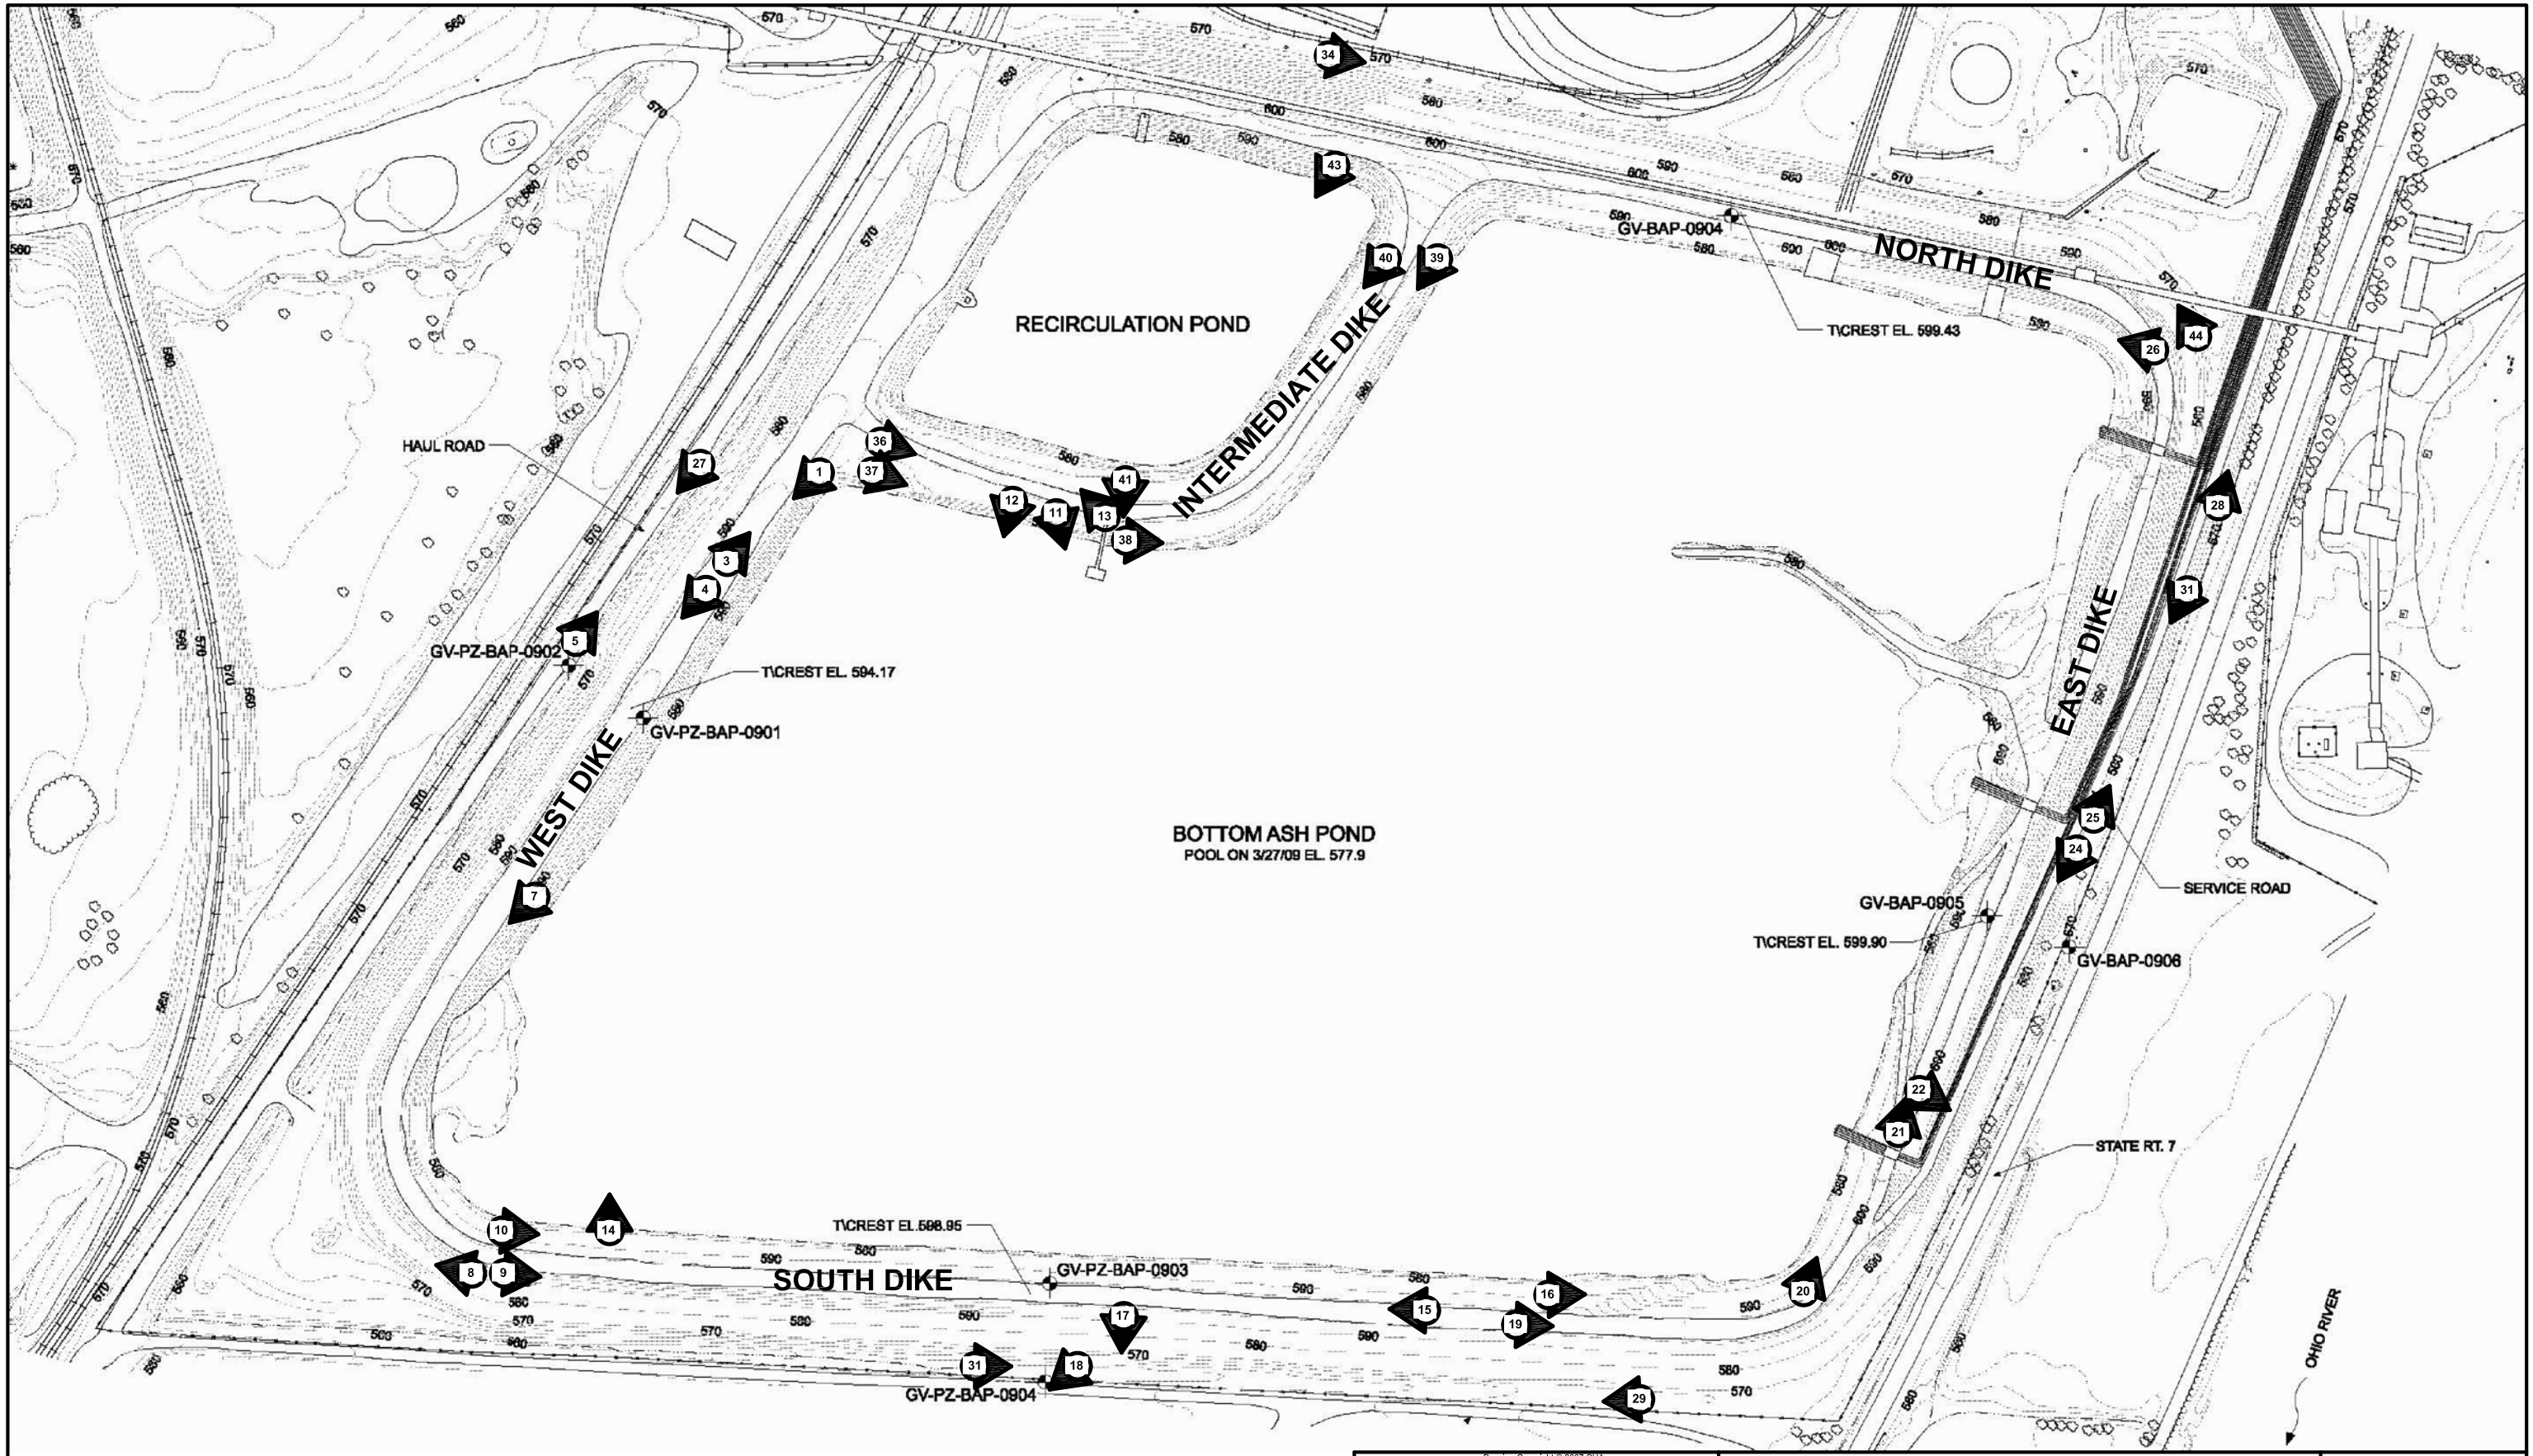


IMAGE REFERENCE: BOTTOM ASH POND INVESTIGATION,
PLAN OF BORINGS
Page 22



BOTTOM ASH POND PHOTO LOCATIONS GENERAL JAMES GAVIN POWER PLANT AMERICAN ELECTRIC POWER CHESHIRE, OHIO	PROJECT NO. 20085.4000
	DATE: JULY 2009
	FIGURE 6A

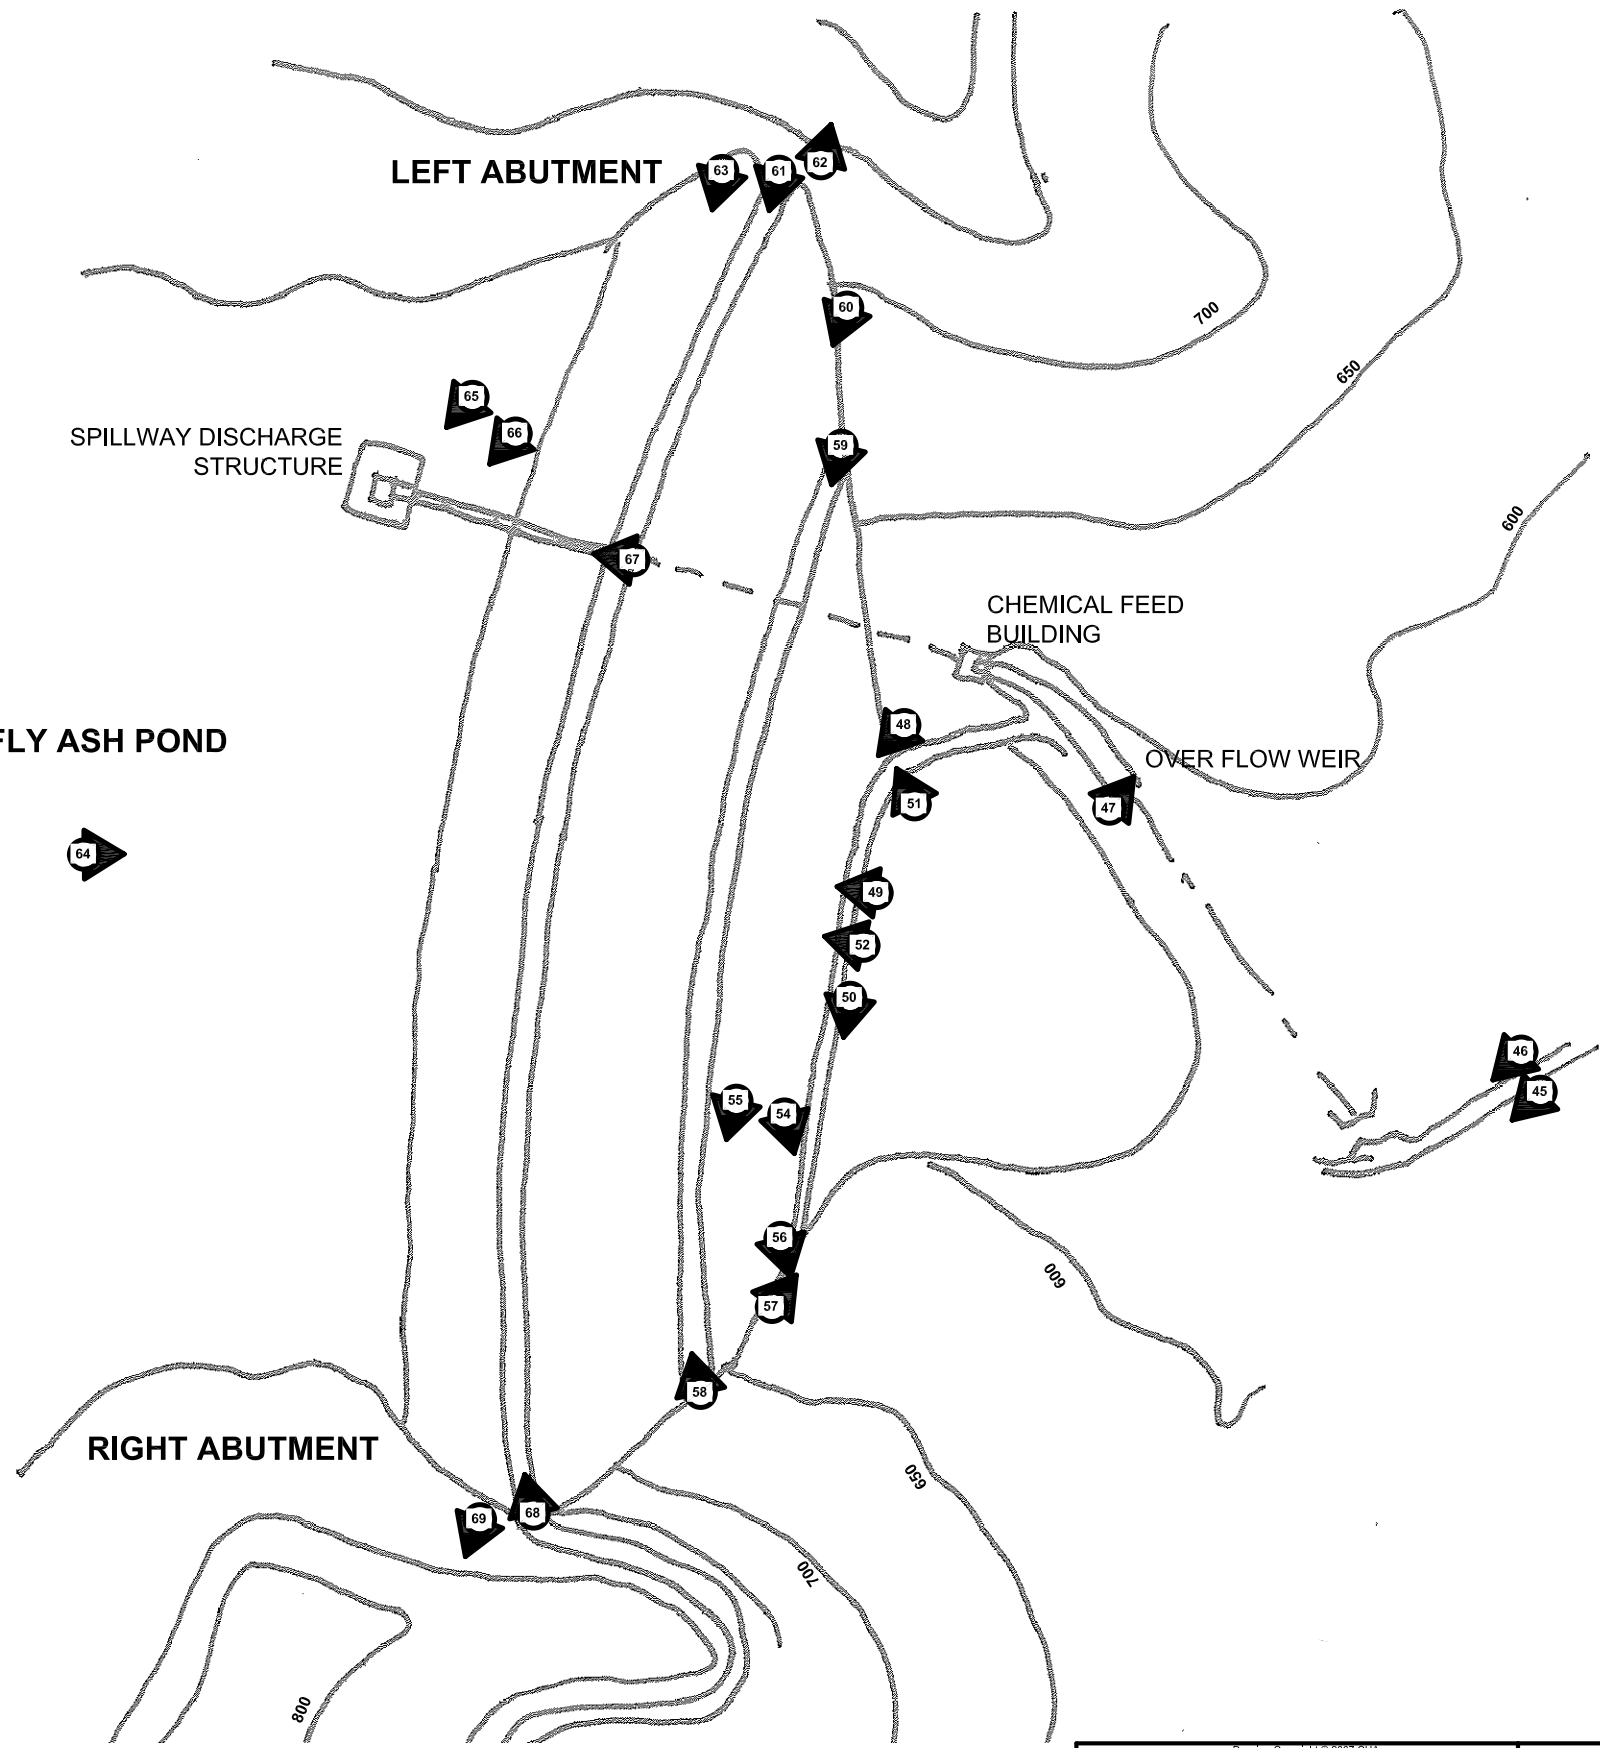


IMAGE REFERENCE: STINGY RUN FLY ASH DAME
INSPECTION LOCATION PLAN, AEPGV00305



STINGY RUN DAM PHOTO LOCATIONS
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 6B

1



Upstream slope of the west dike, looking south.

2



Erosion feature filling on the upstream slope of the west dike.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

3



Downstream slope of the west dike, looking north.

4



Downstream slope of the west dike, looking south. Note that weed-whacking was in progress and is reportedly performed twice a year.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

5



Downstream toe of the west dike, looking north.

6



Standing water in drainage swale at toe of west dike. Appears related to surface water runoff. Piezometer readings confirm groundwater is well below the ground surface.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

7



Southwest corner of the bottom ash pond. Area used for trucked in bottom ash from various cleaning operations.

8



Downstream slope at southwest corner, looking west. Note that weed-whacking was in progress and is reportedly performed twice a year.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

9



Downstream slope of the south berm, looking east. Note that weed-whacking was in progress and is reportedly performed twice a year.

10



Upstream slope of the south dike, looking east.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

11



Upstream slope of the south dike, looking south. Note surficial sloughing.

12



Upstream slope of the south dike, looking south. Note surficial sloughing.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

13



Upstream slope of the south dike, looking south. Note surficial sloughing.

14



Close up of surficial slough on the upstream slope of the south dike, looking west.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

15



Upstream slope of the south dike, looking west.

16



Upstream slope of the south dike, looking east.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

17



Downstream slope of the south dike about mid-slope. Note cattails growing at the toe of the slope. This area has been reportedly a wet area, but AEP believes it is related to surface drainage and in the fall 2008 reset culverts crossing the adjacent access road to pitch away from the wet area and the conditions appears to be improving. Recent spring rains have resulted in standing water in this area.

18



Downstream slope of the south dike. Note one of the re-set culverts at the fence line.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

19



South end of the east dike. Bottom ash sluicing area.

20



East end of the bottom ash pond. Bottom ash sluicing performed throughout this slope area.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

21



Ash disposal along upstream slope of east dike, looking north.

22



Surface erosion features (typical) along graded ash at east dike upstream slope/crest transition.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 34

23



Surface erosion features (typical) along graded ash at east dike upstream slope/crest transition.

24



Crest and downstream slope alignment of east dike looking south.
Note east dike is benched to allow an access road and sluice pipe placement.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

25



Crest and downstream slope alignment of east dike, looking north. Crest is raised at sluice pipe crossings.

26



Crest and upstream slope alignment of north dike, looking west. Coal conveyor runs the length of the north dike crest.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

27



Apparent bulge reported in previous reports along west dike. No signs of current movement.

28



North end of east dike, looking north. This portion of the downstream slope is part of the benched out area for the access road.



CHA Project No.: 20085.4000.1510

**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

June 2, 2009
Page 37

29



Downstream slope of south dike, looking west.

30



Downstream slope of south dike, looking east. Tractor ruts are in wet area at the toe where drainage backs up. This has been previously reported as a seepage area. Recent regrading to improve surface runoff appears to have dried this area and piezometer readings indicate the water table is below the toe of the dike.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

31



Downstream slope of east dike, looking south.

32



Several rodent holes were noted on the downstream slope of the east dike. Some were plugged from previous AEP efforts to deter rodents and repair holes. Others were unidentifiable as active or abandoned holes.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 39

33



Several tree stumps noted on the downstream slope of the east dike (others except this one were cut flush to ground surface). This is in the benched out area of the east dike.

34



Downstream slope of north dike, looking east. Note dark areas in the grass on the slope are coal residue runoff from flushing the coal conveyor to remove dust buildup.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

35



Close-up of one area of coal residue from coal conveyor flushing.

36



South intermediate dike separating primary from secondary ponds, looking east.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

37



South intermediate dike separating primary from secondary ponds, looking east.

38



Intermediate dike, looking east.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

39



East intermediate dike separating primary from secondary ponds, looking south.

40



East intermediate dike separating primary from secondary ponds, looking south.



CHA Project No.: 20085.4000.1510

**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH**

June 2, 2009
Page 43

41



Main intake from primary pond to secondary pond.

42



Main intake from primary pond to secondary pond.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 44

43



Outlet from secondary pond.

44



In 2008 a concrete pad and knee wall was placed under the coal conveyor at this location to minimize the impact of routine cleaning of the coal conveyor on the dike. The runoff now flows across the crest and drains to the pond.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
BOTTOM ASH POND
CHESHIRE, OH

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 45

45



Right (south) side of Stingy Creek Dam as seen from downstream.

46



Left (north) side of Stingy Creek Dam as seen from downstream.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

47



Outlet flow from the intake tower within the reservoir.

48



Drainage swale along toe of dam. Note monitoring weir structures. Much of the flow observed here was reportedly from recent rainfall runoff.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

49



Toe drain covered with 6-inch diameter rip rap.

50



Right (south) downstream abutment contact.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 48

51



Left (north) downstream abutment contact.

52



Toe drain area shows vegetative signs of being perennially wet.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 49

53



Vegetative growth within toe drain rip rap.

54



Close-up of Weir 3 near right (south) abutment/toe contact. Note significant difference in flow here compared to that shown in Photo (4) where all toe and groin flow for the whole length of the dam cumulates and discharges at Weir 1.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

55



Close-up of Weir 3. Note the week prior to CHA's visit the site received approximately 2.9 inches of rain.

56



Abandoned weir structure located upstream of Weir 3 (appears weir plate was chipped out of the concrete). AEP staff was not aware when this was abandoned.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

57



View of the dam toe looking north from the south abutment.

58



View along the bench on the downstream slope looking north.
Note survey monitoring points, monitoring wells, and inclinometers.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 52

59



View along the bench on the downstream slope looking south.

60



Downstream slope looking south (taken from north abutment).



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

61



Dam crest from left (south) abutment. Note area of tire ruts appears to be from wet area resulting from runoff from the abutment.

62



Left (north) abutment.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

63



Upstream slope covered with 8-inch diameter rip rap.

64



Upstream slope of the dam.



AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH

65



The intake tower was inaccessible due to recent (spring 2009) closing of floating access bridge due to safety concerns.

66



Floating Bridge to Intake Tower. Note the deteriorated condition of this structure resulted in AEP closing it in the spring of 2009.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 56

67



Intake tower from the dam crest (looking west).

68



Dam crest and downstream slope from the right (south) abutment looking north.




**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 57

69

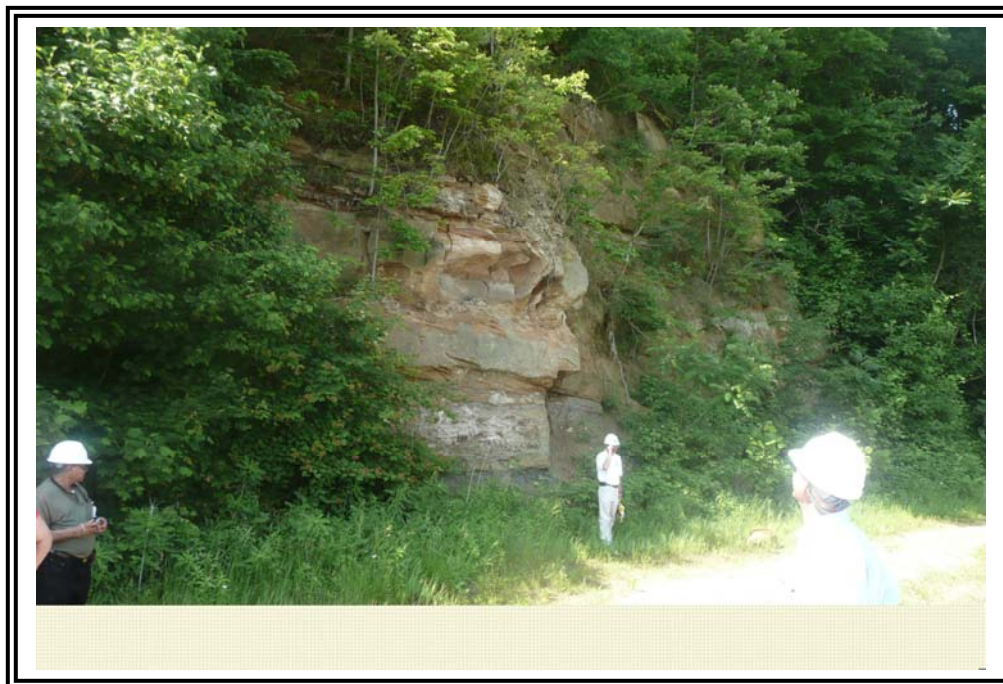

Right (south) abutment.

70



Left abutment of abandoned emergency spillway. Note landfill in right of photo.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 58

71



Right abutment of abandoned emergency spillway. Note landfill in left of photo.

72



Abandoned emergency spillway looking toward reservoir.



**AMERICAN ELECTRIC POWER
GEN. JAMES GAVIN POWER PLANT
STINGY RUN DAM
CHESHIRE, OH**

CHA Project No.: 20085.4000.1510

June 2, 2009
Page 59

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN PLANS-MAPS.DWG Saved: 7/2/2009 12:01:05 PM Plotted: 7/2/2009 5:35:14 PM User: Filkins, Rebecca

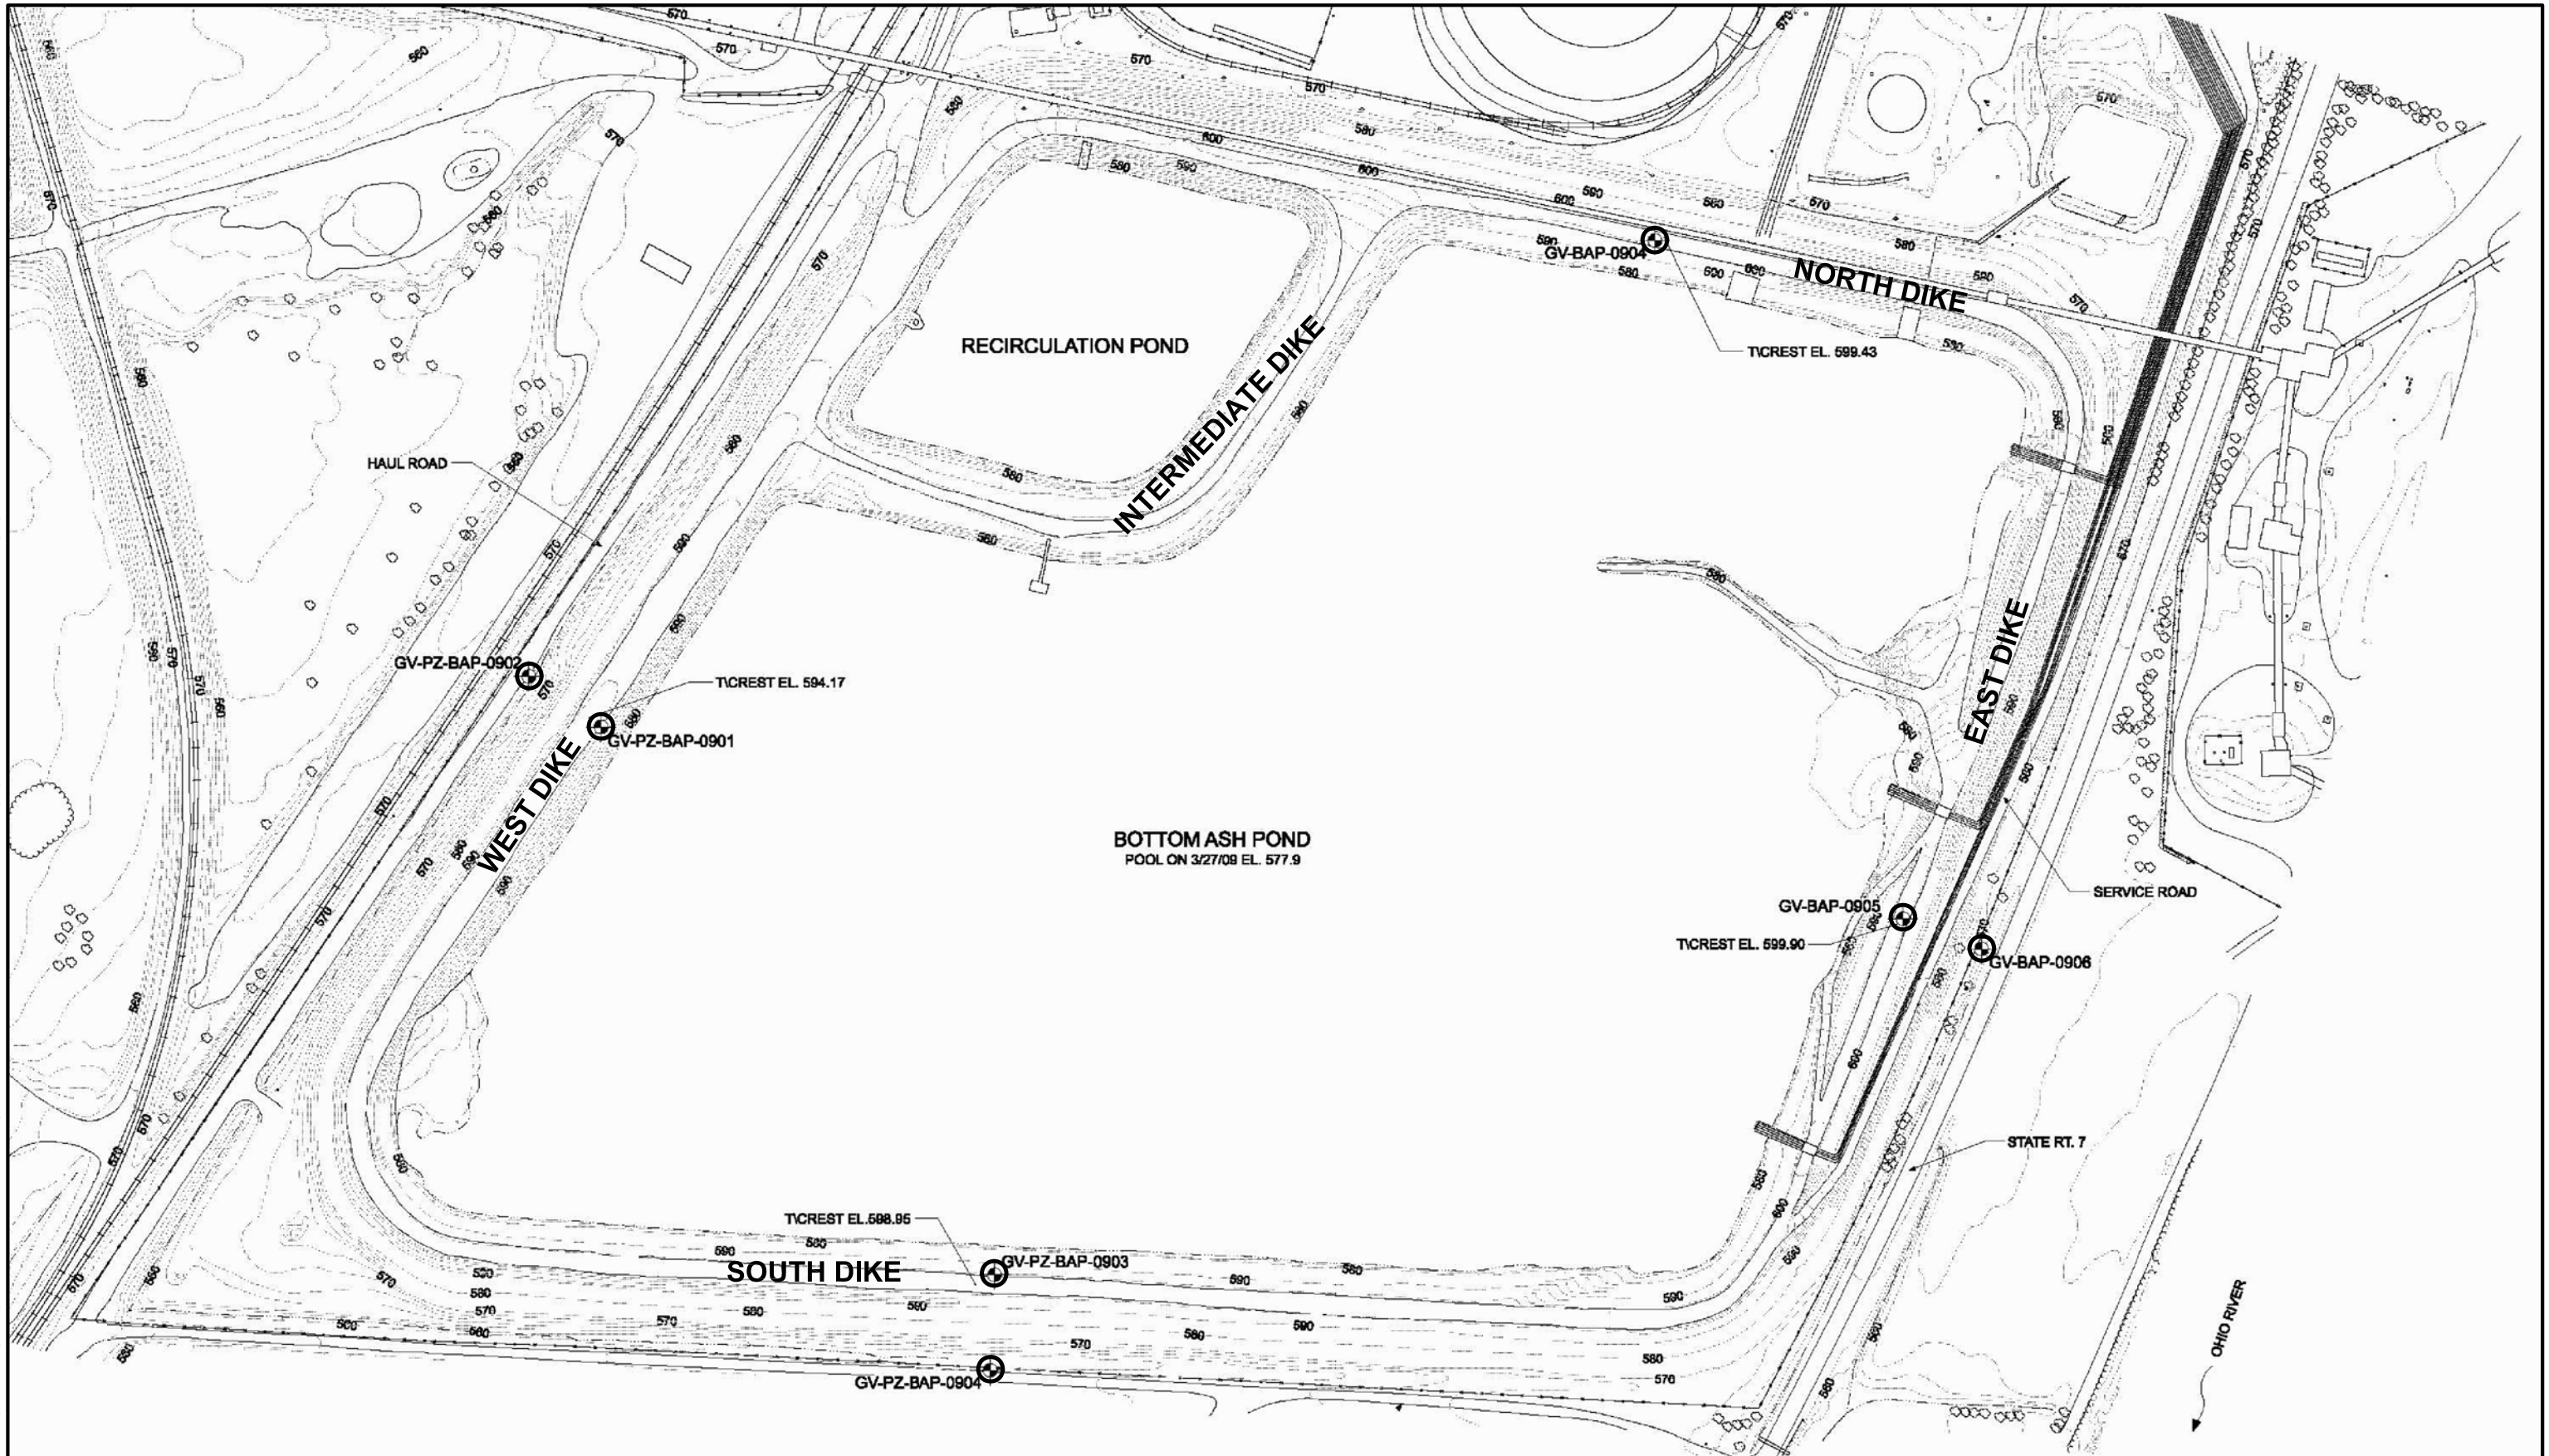


IMAGE REFERENCE: BOTTOM ASH POND INVESTIGATION, PLAN OF BORINGS

NOTE: BORINGS LABELED GV-PZ-BAP HAD PIEZOMETERS INSTALLED IN THEM. BORINGS LABELED GV-BAP DID NOT HAVE PIEZOMETERS INSTALLED.

LEGEND

- 570 — EXISTING GRADE CONTOUR (2 FT. INTERVAL)
- EXISTING WATER SURFACE (AT TIME OF SURVEY)
- FENCE LINE
- EXISTING VEGETATION
- GV-PZ-BAP-0901 BORING NUMBER AND LOCATION

Drawing Copyright © 2007 CHA

CHA

BOTTOM ASH POND PIEZOMETER LOCATIONS

GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELETRIC POWER
CHESCHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 7A

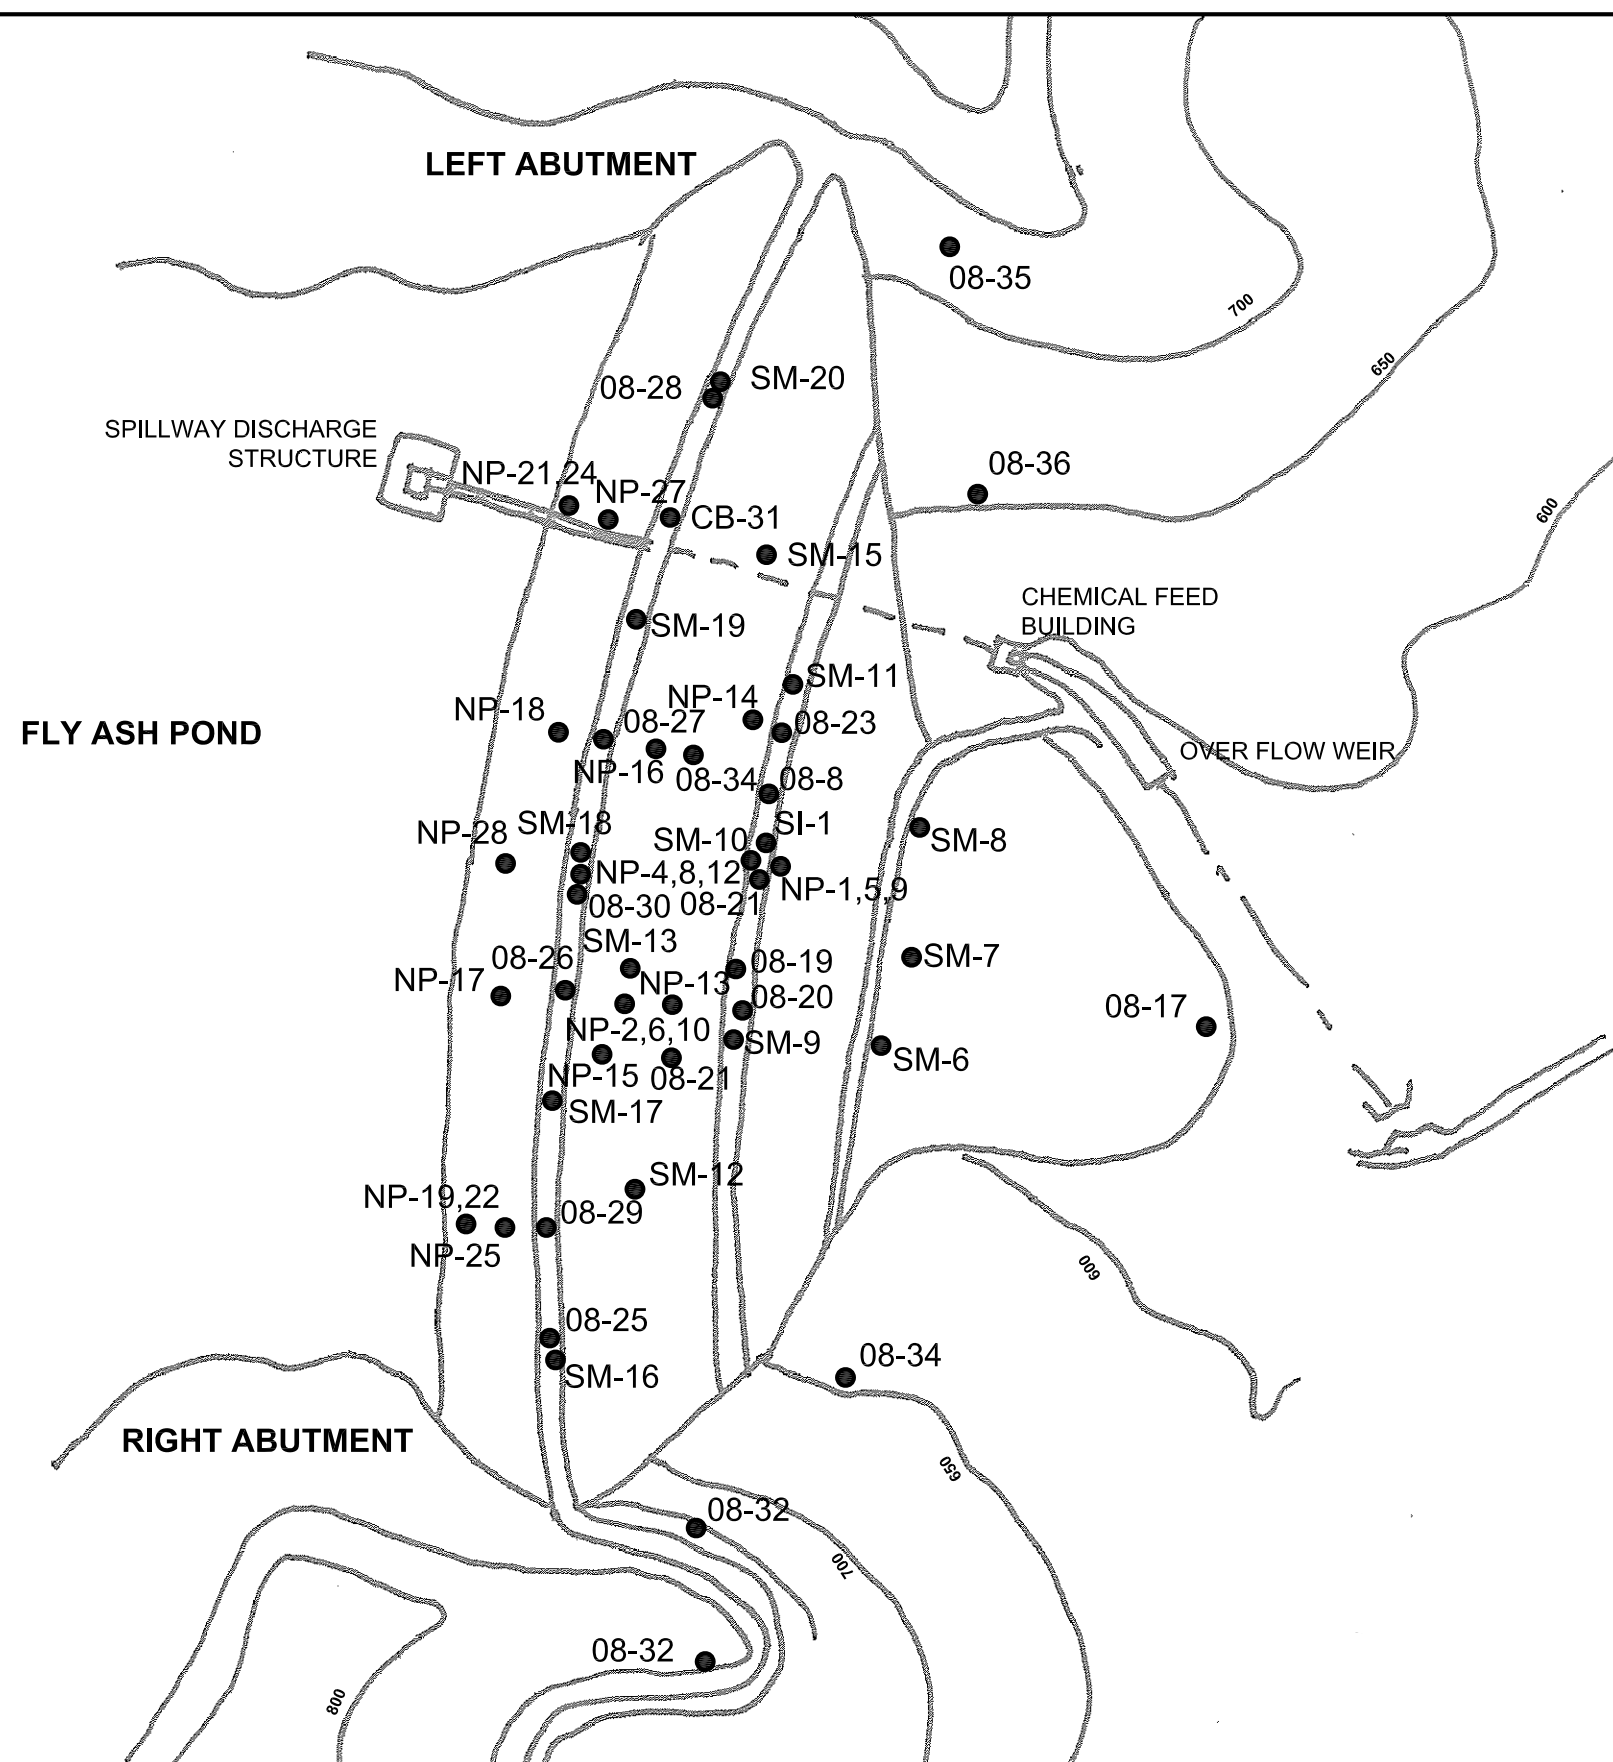


IMAGE REFERENCE: STINGY RUN FLY ASH DAME
INSPECTION LOCATION PLAN, AEPGV00305



STINGY RUN DAM INSTRUMENT LOCATIONS
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO. 20085.4000

DATE: JULY 2009

FIGURE 7B

3.0 DATA EVALUATION

3.1 Design Assumptions

CHA has reviewed the design assumptions related to the design and analysis of the stability and hydraulic adequacy of the Bottom Ash Pond and Stingy Run Dam, which were available at the time of our site visits and provided to us by AEP. The design assumptions are listed in the following sections.

3.2 Hydrologic and Hydraulic Design

3.2.1 Hydrologic and Hydraulic Design – Bottom Ash Pond

The Bottom Ash Pond is classified as a Class 1 dam based on the Ohio Revised Code Chapter 1521 and Administrative Rules Chapter 1501:21 as indicated in the Division of Water Permit No. 87-159 dated February 19, 1987. This classification requires the dam to safely pass or store the inflow from the Probable Maximum Precipitation (PMP). This classification and design flood is still applicable based upon our review of Chapter 1501:21 as published at <http://codes.ohio.gov/oac>. This Chapter also requires a minimum freeboard of 5 feet above maximum operating pool.

AEP did not provide CHA with a hydraulic analysis for the Bottom Ash Pond but indicated that the 24-hour PMP (design storm) for this region is 34.5 inches, and that OHDNR requires a minimum of 5 feet of freeboard above the maximum operating level. The Bottom Ash Pond is an entirely diked impoundment. As such, the only runoff during a storm event is from the crest and upstream side slopes of the impoundment. CHA performed preliminary analyses to confirm that the length of the dike (about 6,565 feet) does not produce excessive runoff resulting in a significant rise in the Bottom Ash Pond water level. CHA's analyses suggest that the required 5

feet of freeboard is maintained during the 24-hour PMP provided the normal operating level of the Bottom Ash Pond is maintained at about El. 578..

3.2.3 Hydrologic and Hydraulic Design – Stingy Run Dam

The Stingy Run Dam is classified as a Class 1 dam based on the Ohio Revised Code Chapter 1521 and Administrative Rules Chapter 1501:21 as indicated in the Division of Water Permit No. 87-159 dated February 19, 1987. This classification requires the dam to safely pass or store the inflow from the Probable Maximum Precipitation (PMP). This classification and design flood is still applicable based upon our review of Chapter 1501:21 as published at <http://codes.ohio.gov/oac>. This Chapter also requires a minimum freeboard of 5 feet above maximum operating pool.

The dam, as raised in 1988, included the following design assumptions as compared with the current operating parameters that were used to request a permit variance by AEP in 1997.

Table 2 - Comparison of Design Assumptions

Condition	1988 Permit (Based on 6-hr PMP)	Current Operation (Based on 24-hr PMP)
Normal Pool	726 feet	698 feet
Dam Crest	735 feet	735 feet (Permitted for lowering to 715 feet)
PMP Max Pool	731 feet	709.5 feet (with operating primary spillway) 711.6 feet (with clogged primary spillway condition)

Based on our visual observations, the current normal pool behind Stingy Run Dam appears to be approximately equal to the proposed operating pool of 698 as noted in the 1997 variance request.

The hydrologic and hydraulic evaluations were prepared by AEP engineers, peer reviewed for AEP by an outside consultant, and the resulting analyses were reviewed by OH DNR engineers. Based on the design report and permit variance request reviewed by CHA, and our observation

that recent aerial mapping does not show development within the drainage basin that could change inflow characteristics during the design storm, it appears that the Stingy Run Dam will fully store the PMP.

3.3 Structural Adequacy & Stability

The Ohio Department of Natural Resources, Division of Water, Dam Safety Program recognizes “design procedures that have been established by the United States Army Corps of Engineers, the United States Department of Interior, Interior Bureau of Reclamation, the Federal Energy Regulatory Commission, The United States Natural Resources Conservation Service, and others that are generally accepted as sound engineering practice, will be acceptable to the Chief.”

In performing an evaluation of the structural adequacy and stability of the Bottom Ash Pond and Stingy Run Dam, CHA has compared the computed factor of safety provided in the BBCM Engineering, Inc. report dated June 2009 and additional stability models prepared by CHA with minimum required factors of safety as outlined by the U.S. Army Corps of Engineers in EM 1110-2-1902, Table 3-1. The guidance values for minimum factor of safety are provided in Table 3.

Table 3 - Minimum Safety Factors Required

Load Case	Required Minimum Factor of Safety
Steady State Conditions at Present Pool or Flood Elevation	1.5
Rapid Draw-Down Conditions from Present Pool Elevation	1.3
Maximum Surcharge Pool (Flood) Condition	1.4
Seismic Conditions from Present Pool Elevation	1.0
Liquefaction	1.3

In Sections 3.3.1 and 3.3.2 we discuss our review of the effects of overtopping, stability analyses, and performance of the Bottom Ash Pond and Stingy Run Dam, respectively.

3.3.1 Bottom Ash Pond

AEP developed a scope of work to perform a geotechnical assessment to provide an indication as to the level of safety provided by the embankment dikes creating the Bottom Ash Pond. A Draft Bottom Ash Investigation Report was prepared by BBCM Engineering, Inc. in June 2009. The scope of work consisted of the following;

- Advancement of a total of seven borings;
- Installation of four monitoring wells;
- Laboratory testing on the recovered samples; and
- Engineering analyses of the existing embankments at the investigated sections with consideration to seepage, steady state slope stability and seismic slope stability.

Static steady state and seismic slope stability analyses were performed on the downstream (outboard) embankment slopes for two cross sections. Two strata were modeled below the Bottom Ash Pond embankment. According to BBCM's report, the permeability and shear strength parameters used to represent the fill were based on the totality of test data available across the entire site. The natural alluvium soils encountered in the borings below the embankment fill were also found to be highly variable, consistent with the depositional environment of such soils and BBCM used parameters based on the totality of test data available across the entire site.

The shear strength and unit weight values used for the slope stability analyses were reportedly based on a combination of the laboratory index test results, triaxial shear test results, published values and correlations, and judgment and were intended to be representative of long term conditions (drained). To estimate the effective friction angle of the cohesive embankment fill and alluvium layers several correlation methods were examined and laboratory shear strength tests were performed on the embankment fill as well. The properties of the four strata model in the analyses are provided in Table 4.

Table 4 - Soil Strength Parameters Used in BBCM June 2009 Draft Investigation Report

Soil Stratum	Unit Weight (pcf)	Friction Angle (ϕ)	Cohesion (psf)	Description
Cohesive Embankment Fill	125	28°	100	Embankment
Roadway Fill	125	30°	0	Embankment
Alluvium Silt/Clay	125	29°	0	Natural Subgrade
Glacial Outwash Sand/Gravel	120	32°	0	Natural Subgrade

At the time of the topographical survey on March 27, 2009 performed as part of the BBCM investigation, the pool level in the Bottom Ash Pond was at EL 577.9 feet, resulting freeboard ranges between approximately 16 and 21 feet. It is understood that this represents the normal operating pool level, and is consistent with the conditions CHA observed during our June 2009 site visit.

The location of the groundwater table within the embankments was estimated based on extended groundwater readings taken within the observation wells and conditions encountered during drilling. Results from the seepage analysis performed as part of BBCM's investigation provided pore pressure values within the model to be used in the stability analysis.

Seismic analyses were performed using a pseudo static analysis with a horizontal seismic coefficient of 0.06g. This coefficient was determined from the 2008 USGS National Seismic Hazard Maps for the Peak Acceleration (%g) with 2% Probability of Exceedance in 50 Years.

Table 5 provides a summary of the calculated factors of safety for the loading conditions outlined by the U.S. Army Corps of Engineers in EM 1110-2-1902, Table 3-1. CHA, using the south embankment geometry and soil parameters provided in the June 2009 investigation report, duplicated the downstream embankment slope using the steady state load condition to confirm

the factor of safety for this load case provided in the report. Our Slide™ output resulted in a similar factor of safety as shown on Figure 9A.

Table 5 – Summary of Safety Factors

Load Case	Required Minimum Factor of Safety	Calculated Minimum Factor of Safety	
		Section A	Section B
Steady State Conditions at Present Pool or Flood Elevation (Downstream Slope) (See Figures 8A and 8B)	1.5	1.7	1.5
Rapid Draw-Down Conditions from Present Pool Elevation	1.3	Not Performed as Part of the BBCM Evaluation	
Maximum Surge Pool (Flood) Condition	1.4	Not Performed as Part of the BBCM Evaluation	
Seismic Conditions from Present Pool Elevation (See Figures 8C and 8D)	1.0	1.4	1.2
Liquefaction	1.3	Not Performed as Part of the BBCM Evaluation	

Review of the Slide™ outputs and corresponding factors of safety for the various loading conditions, boring logs, laboratory test data and parameter justifications provided in the appendices of the June 2009 investigation report indicate the following;

- The factor of safety for the upstream (inboard) embankment slope of the pond was not evaluated as part of BBCM's June 2009 investigation. CHA modeled the upstream slope using the south embankment geometry and the steady state loading condition (see Figure 9B) and the soil parameter provided in BBCM's report. The calculated factor of safety was 1.3 which is below the minimum required factor of safety (according to the USACOE). This factor of safety is in part the result of the over steepened nature of the

upstream slopes resulting from crest regrading operations (refer to Section 2.2.1). AEP commented on this in their review of the Draft of this report and indicate they agree that the upstream slope needs to be reshaped to the original design slope, and that their consultant has confirmed that regrading the slope will result in a factor of safety of at least 1.5.

- A model was not developed for the maximum surcharge pool (flood) condition as part of the June 2009 investigation.
- Review of the boring logs indicates that the alluvium silt/clay had a layer of significantly lower SPT N-values. For example, boring B-0904 contains a layer of alluvium with sample effort or blow counts equal to the weight of the hammer at approximately 16 feet below the existing ground surface. This soft layer continues to approximately a depth of 30 feet. Hand penetrometer tests performed on samples retrieved during drilling operations ranged from 0.0 to 1.25 tsf. The alluvium silt/clay layer in BBCM's June 2009 investigation was modeled as one layer with a friction angle of 29 degrees. It may be more appropriate to model the alluvium in more than one layer with corresponding strength parameters to more accurately reflect field conditions.
- Thirty-three samples from the alluvium stratum were tested to determine index properties such as Atterberg Limits and grain size distribution. Of these 33 tests, 9 were performed on the softer alluvium.
- The downstream slope stability outputs for the steady state load condition for Cross Sections A and B show failure planes within the embankment soils. If the alluvium silt/clay was modeled with a soft layer at the depth corresponding to the low sample effort, the failure plane may actually fall within the alluvium foundation soils and not the embankment soils.

- The rapid-draw down load case was not evaluated as part of the June 2009 investigation. CHA modeled the south embankment slope using a combination of soil parameters provided in the June 2009 investigation report and parameters which may more closely represent field conditions (i.e. undrained embankment and alluvium soils on the upstream slope and a softer alluvium silt/clay layer). Figure 9C indicates that the calculated factor of safety for the rapid draw-down load condition is close to 1.0, which is below the minimum required value of 1.3 (according to the USACOE).
- A liquefaction analysis was not performed as part of the June 2009 investigation. Comments received from AEP on CHA's draft report indicate they have reviewed the laboratory tests for liquefaction susceptibility, and based on a clay content in the range of 22 to 48 percent, the alluvium soils at this site have a low potential for liquefaction under the design seismic accelerations. CHA concurs with this review.

Section 4.10 outlines our recommendations for tasks that should be performed to confirm that the embankments are stable under the loading conditions discussed above.

3.3.2 Stingy Run Dam

Soil borings, cone penetration tests, and laboratory testing were performed on the original portion of the dam in preparation for designing the raising in 1986. These data in combination with data collected during the design of the original dam used by AEP to evaluate the stability of the raised dam. Table 6 summarizes the soil parameters were used in the evaluation of the raised dam. CHA has not reviewed the "End of Construction" data for this evaluation as the dam has been in the raised condition for 21 years (since 1988) and therefore has more than likely reached a "Steady State" condition.

Table 6 - Soil Strength Parameters Used in the 1986 Dam Raising Evaluation

Material	C (psf)	ϕ (degrees)
Fill Materials		
1988 Upstream Clay Core	700	16
1988 Downstream Random Fill	800	16
Bottom Ash	0	39
1974 Clay Core	0	23
1974 Downstream Random Fill	0	25
1974 Upstream Random Fill	0	21
Upstream Fly Ash	0	0
Foundation Materials		
Upper Clay	860	21
Upper Sand	0	30
Intermediate Clay	0	22
Lower Sand	0	30
Lower Clay/Shale	0	22

The stability analyses were performed for the maximum pool, based on using the Stingy Run impoundment for fly ash disposal until full, which would have continually, year to year, raised the normal operating pool based on the volume of disposed fly ash. Because fly ash disposal into the Stingy Run impoundment ceased in 1994, the current normal pool is about 28 feet below the design pool. CHA reviewed piezometer data provided by AEP and compared the phreatic surface in the dam to the design elevation. CHA concluded that the current phreatic surface ranges between 30 to 40 feet below the design phreatic surface which is consistent with the lower operating pool, and favorable from a stability perspective.

Table 7 summarizes the minimum factors of safety computed by AEP, and peer reviewed by their outside consultant as part of the dam raising design.

Table 7 – Summary of Safety Factors – Stingy Run Dam

Load Case	Required Minimum Factor of Safety	Calculated Minimum Factor of Safety
Steady State Conditions at Present Pool Downstream Slope ▪ Shallow Wedge Analysis ▪ Deep Wedge Analysis	1.5	1.5 1.5
Steady State Conditions at Present Pool Upstream Slope ▪ Partial Pool – El. 685 feet ▪ Full Pool – El. 726 feet	1.5	1.5 1.8
Rapid Draw-Down Conditions from Present Pool Elevation	1.3	Not Performed
Maximum Surge Pool (Flood) Condition (El. 731 feet)	1.4	Not Performed
Seismic Conditions from Present Pool Elevation Downstream Slope ▪ Shallow Wedge Analysis ▪ Deep Wedge Analysis	1.0	1.3 1.2
Seismic Conditions from Present Pool Elevation Upstream Slope	1.0	1.4
Liquefaction	1.3	Not Performed

- Rapid Draw-down – The design report prepared by AEP reads “Because of the manner of reservoir usage the proposed dam raising is not being evaluated in the rapid drawdown loading condition.” While CHA can understand that it would be undesirable to rapidly evacuate water containing suspended fly ash from an impoundment, in the current operation of the Stingy Run Dam, existing fly ash is covered and the impounded water is free of “added” suspended solids, although it may contain suspended solids based on the overland runoff and other impoundment characteristics. Therefore, CHA suggests that in the event of an emergency at the dam (the classic rapid drawdown scenario) it may be favorable to evacuate impounded water to reduce stresses on the dam to reduce the risk of an uncontrolled release in the event of failure. Therefore, CHA recommends that a rapid drawdown analysis be performed for the Stingy Run Dam in the current configuration.
- Maximum Surcharge – No analysis was performed for the flood pool condition. CHA understands from our review of the H&H analyses (see Section 3.2.2) that in the event of the design storm (PMP) the water level in the impoundment will rise to about El. 731. We recommend a maximum surcharge stability evaluation be performed for the current conditions.
- Liquefaction – No liquefaction analysis was performed. CHA reviewed logs provided in the dam raising design report, and agrees based on the level of review associated with this evaluation that there is not likely a liquefaction potential at this site. However, as seen in the summary of soil properties and strata used in the stability analyses in Table 6, CHA recommends that AEP confirm that the Upper Sand and Lower Sand strata do not pose a liquefaction risk at this site.

The Stingy Run Dam is also instrumented with both horizontal and vertical deformation monitoring points and two slope inclinometers. Data is collected from these instrument points twice a year. CHA reviewed the latest deformation monitoring summary provided by AEP which included data through November 2008. AEP predicted settlements for the dam raising of

2.8 feet. Their evaluation included adjusting soil parameters based on observed settlements of the original dam that were significantly (about 10% of predicted) less than predicted.

Settlement monitoring points along the crest and downstream slope have shown settlements ranging between 2 and 6 inches over the 20 years of monitoring data. Inclinator SI-1 has shown a total of about 6 inches of downstream deformation since its installation. Data was provided for this inclinometer back to 2006, during which time period there has been negligible movement. Inclinator SI-2 has exhibited about 1 inch of downstream movement since its installation. Only data from 2007 and 2008 was provided, but during this 2 year time period negligible movement occurred.

These measurements are consistent with the design stability of the dam. AEP should continue to be vigilant in monitoring the instrumentation at this facility as a way of evaluating the performance of the dam.

3.4 Operations & Maintenance

AEP General James Gavin Power Plant staff make quarterly inspections of the Bottom Ash Pond and Stingy Run Dam. Maintenance staff from the plant make daily visits and broad view observations daily. On an annual basis, AEP engineers from the Columbus, Ohio office perform inspections of these facilities. And Ohio DNR Dam Safety personnel perform an inspection every 5 years. Between 1978 and 1998 a biannual third party inspection was made, although this practice was discontinued in 1998.

Piezometer and V-notch weir readings are taken during the quarterly inspections, and the settlement monuments and slope inclinometers at Stingy Run Dam are surveyed twice a year by AEP's Civil Laboratory Section. A summary of these instrumentation data are included in Figures 10A, 10B, and 10C.

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 1:08:33 PM Plotted: 7/2/2009 4:25:06 PM User: Filkins, Rebecca

AEFGV002973

PLATE 6

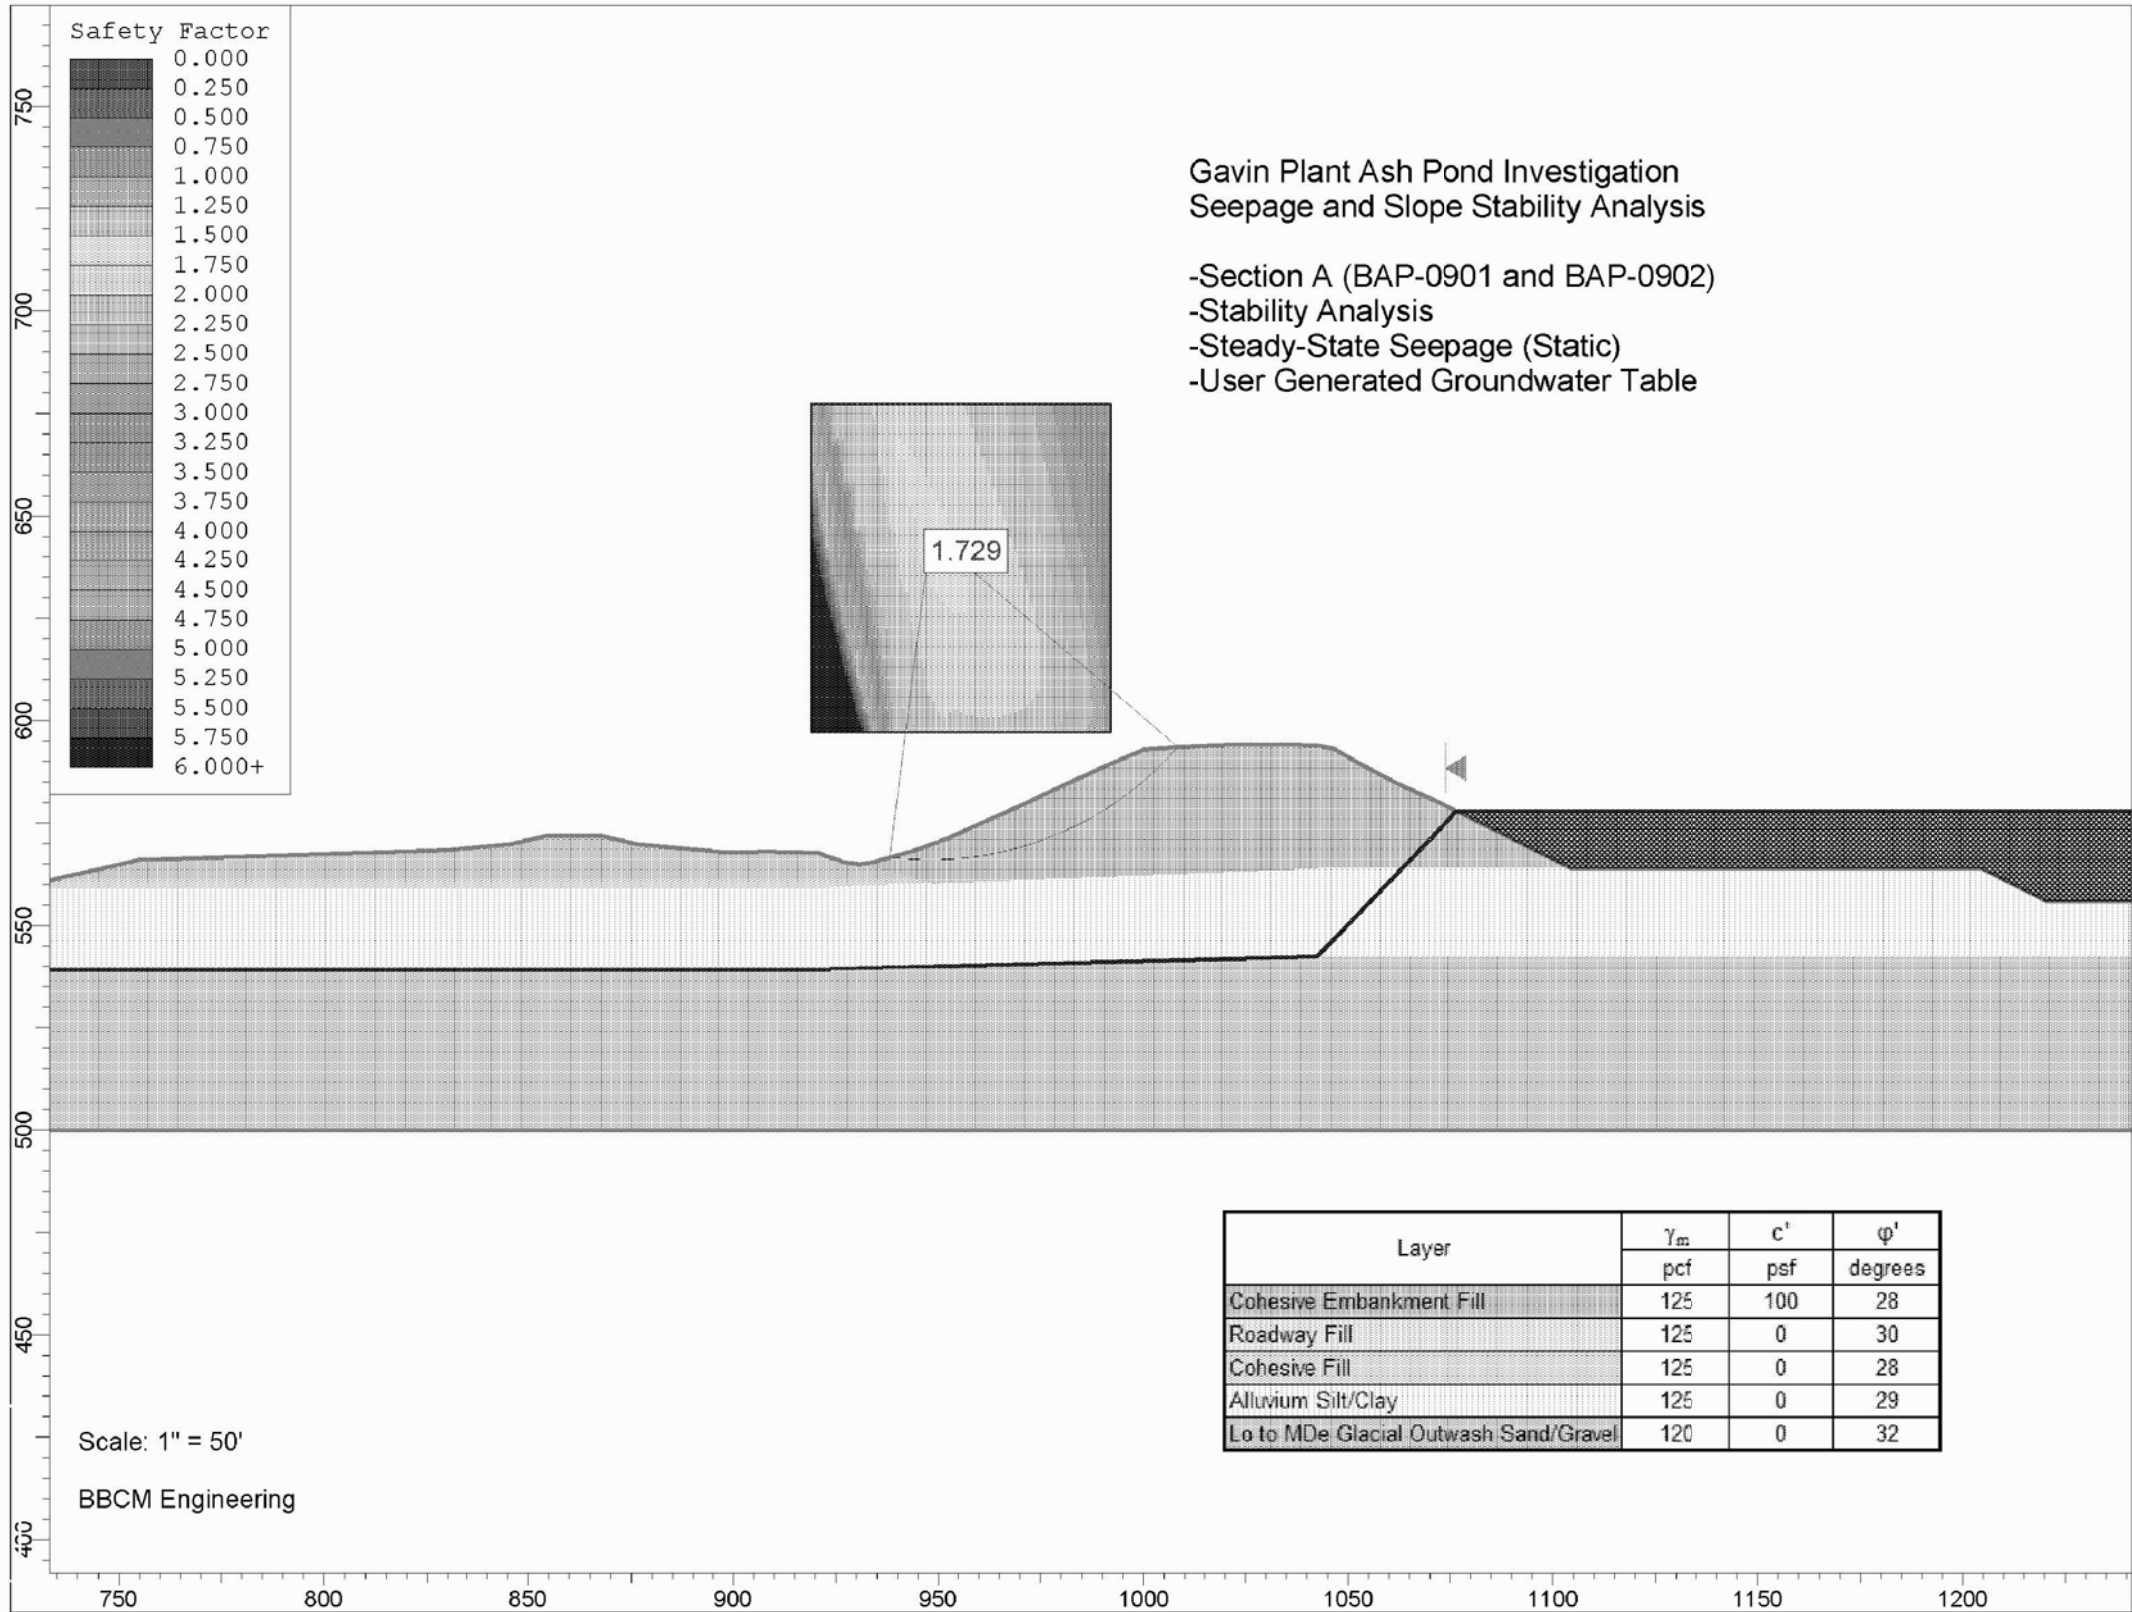


IMAGE REFERENCE: BBC&M BOTTOM ASH POND STABILITY ANALYSIS REPORT, APPENDIX D, PAGE 7



BOTTOM ASH POND SLOPE STABILITY
SECTION A
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000
DATE: JULY 2009
FIGURE 8A

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 1:08:33 PM Plotted: 7/2/2009 4:26:25 PM User: Filkins, Rebecca

AEPGV002974

PLATE 7

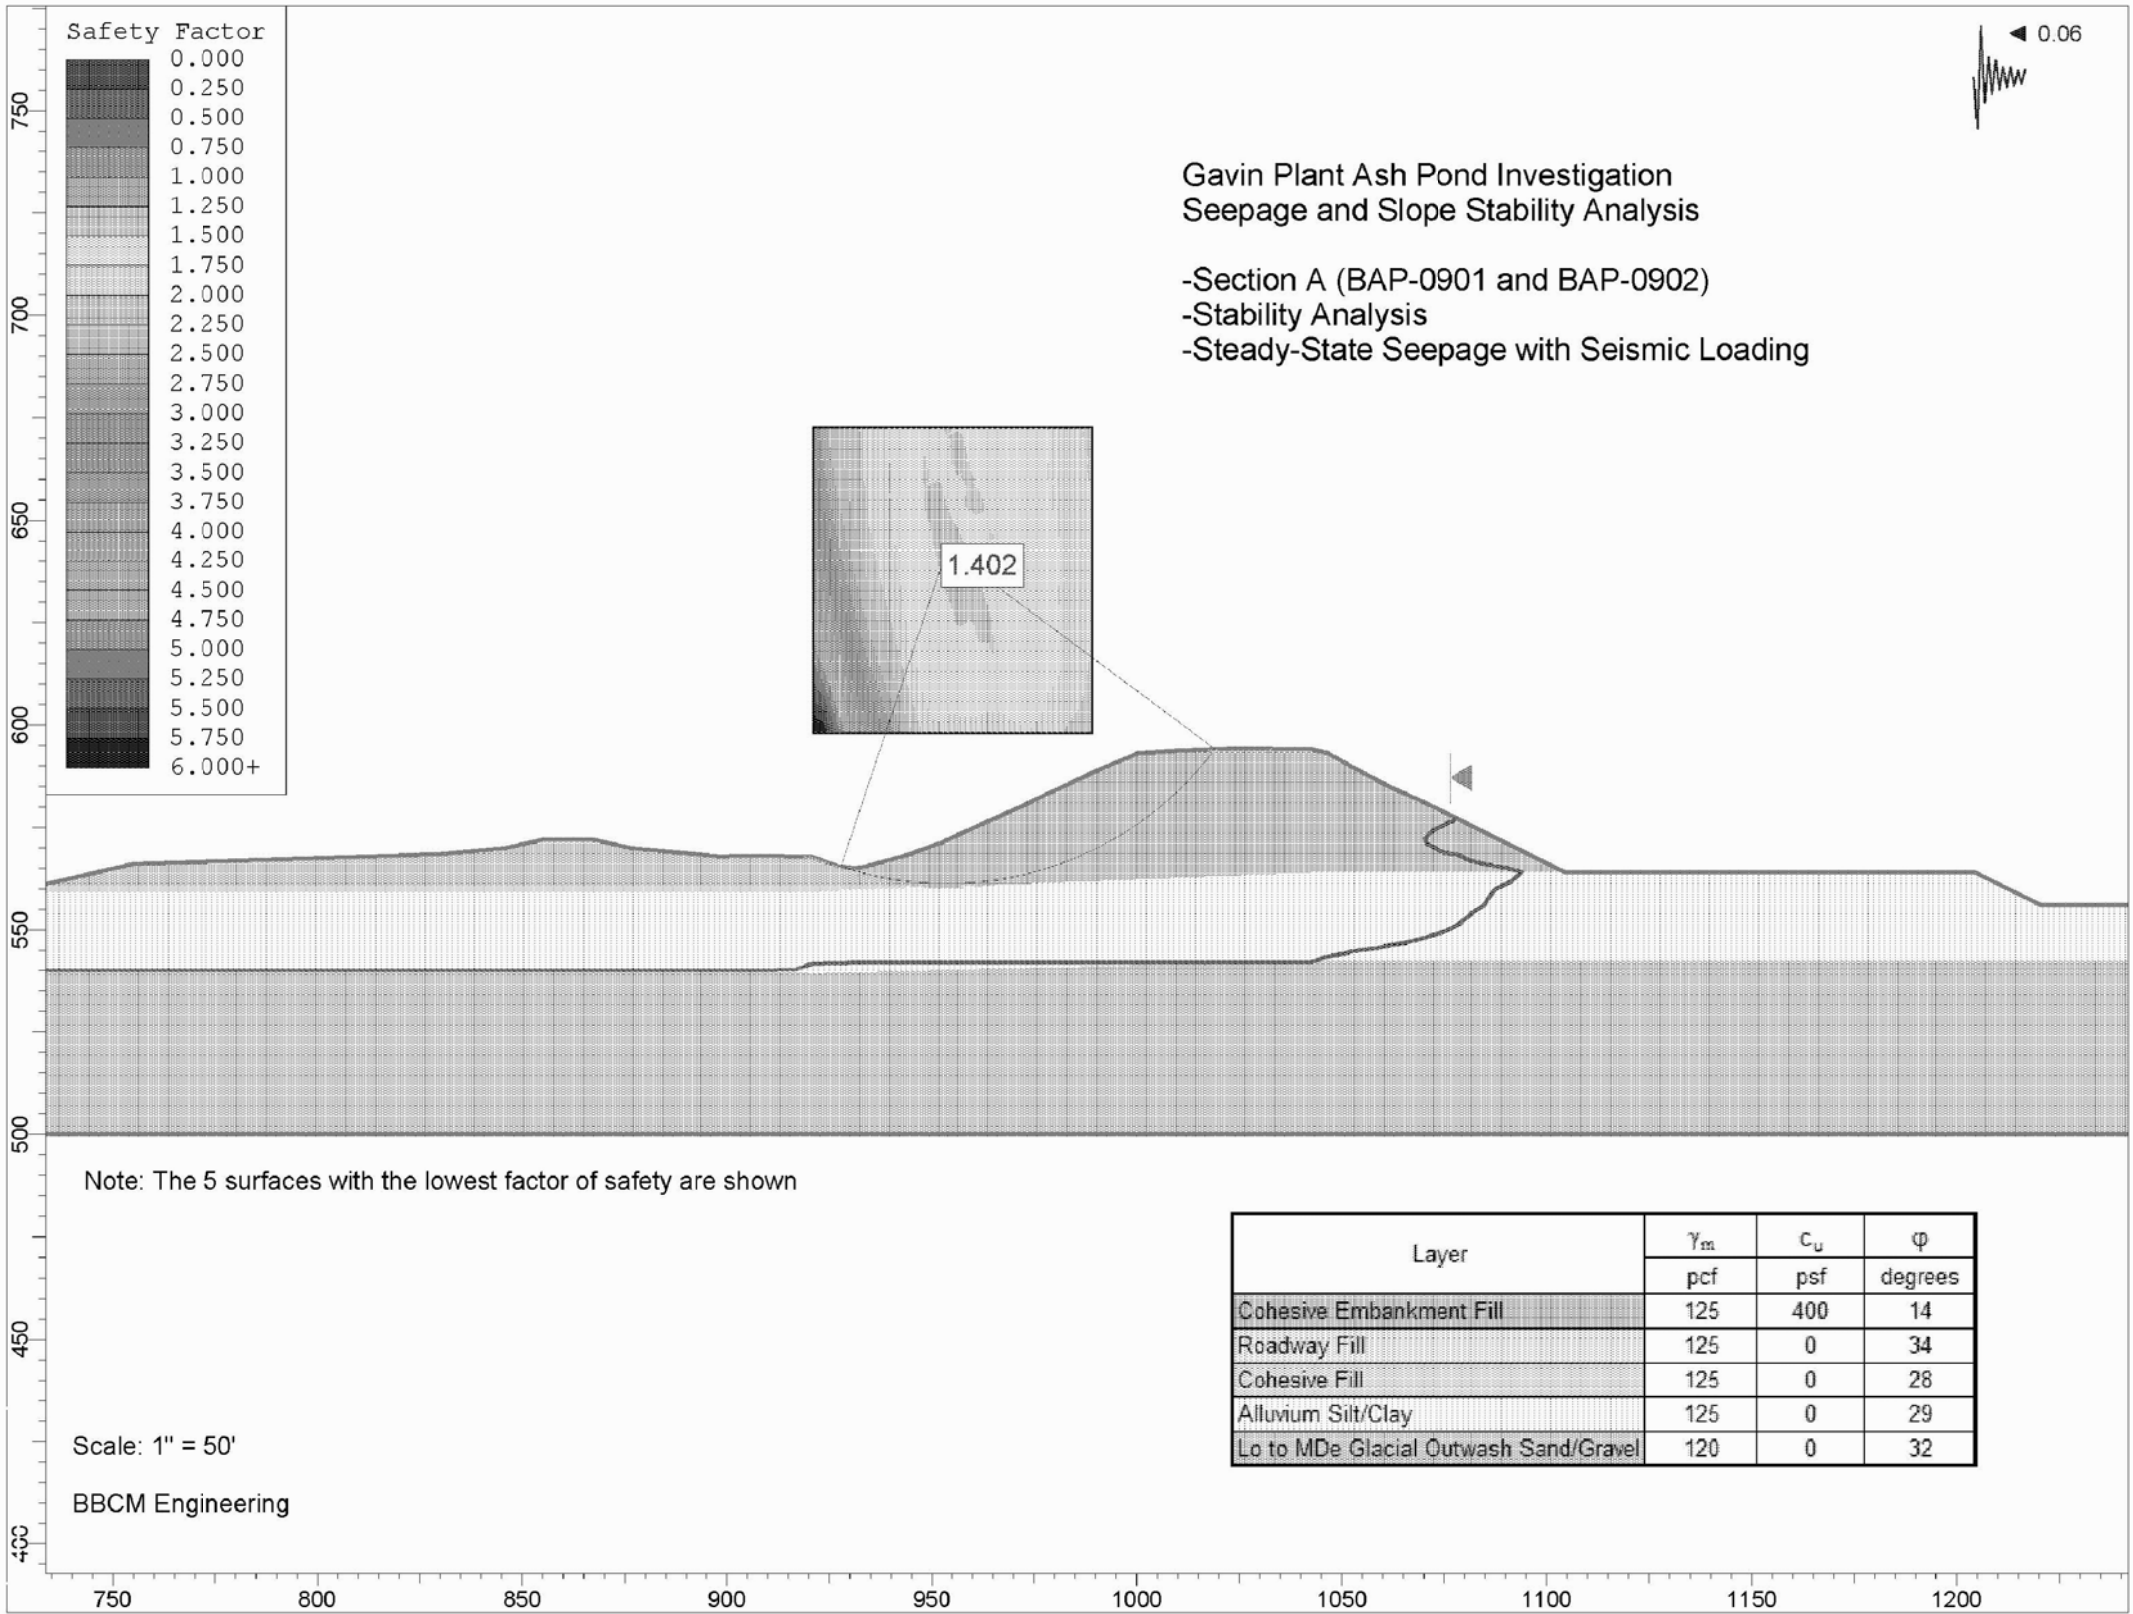


IMAGE REFERENCE: BBC&M BOTTOM ASH POND STABILITY ANALYSIS REPORT, APPENDIX D, PAGE 8



GAVIN PLANT ASH POND
SLOPE STABILITY SECTION A
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 8B

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 1:08:33 PM Plotted: 7/2/2009 4:27:53 PM User: Filkins, Rebecca

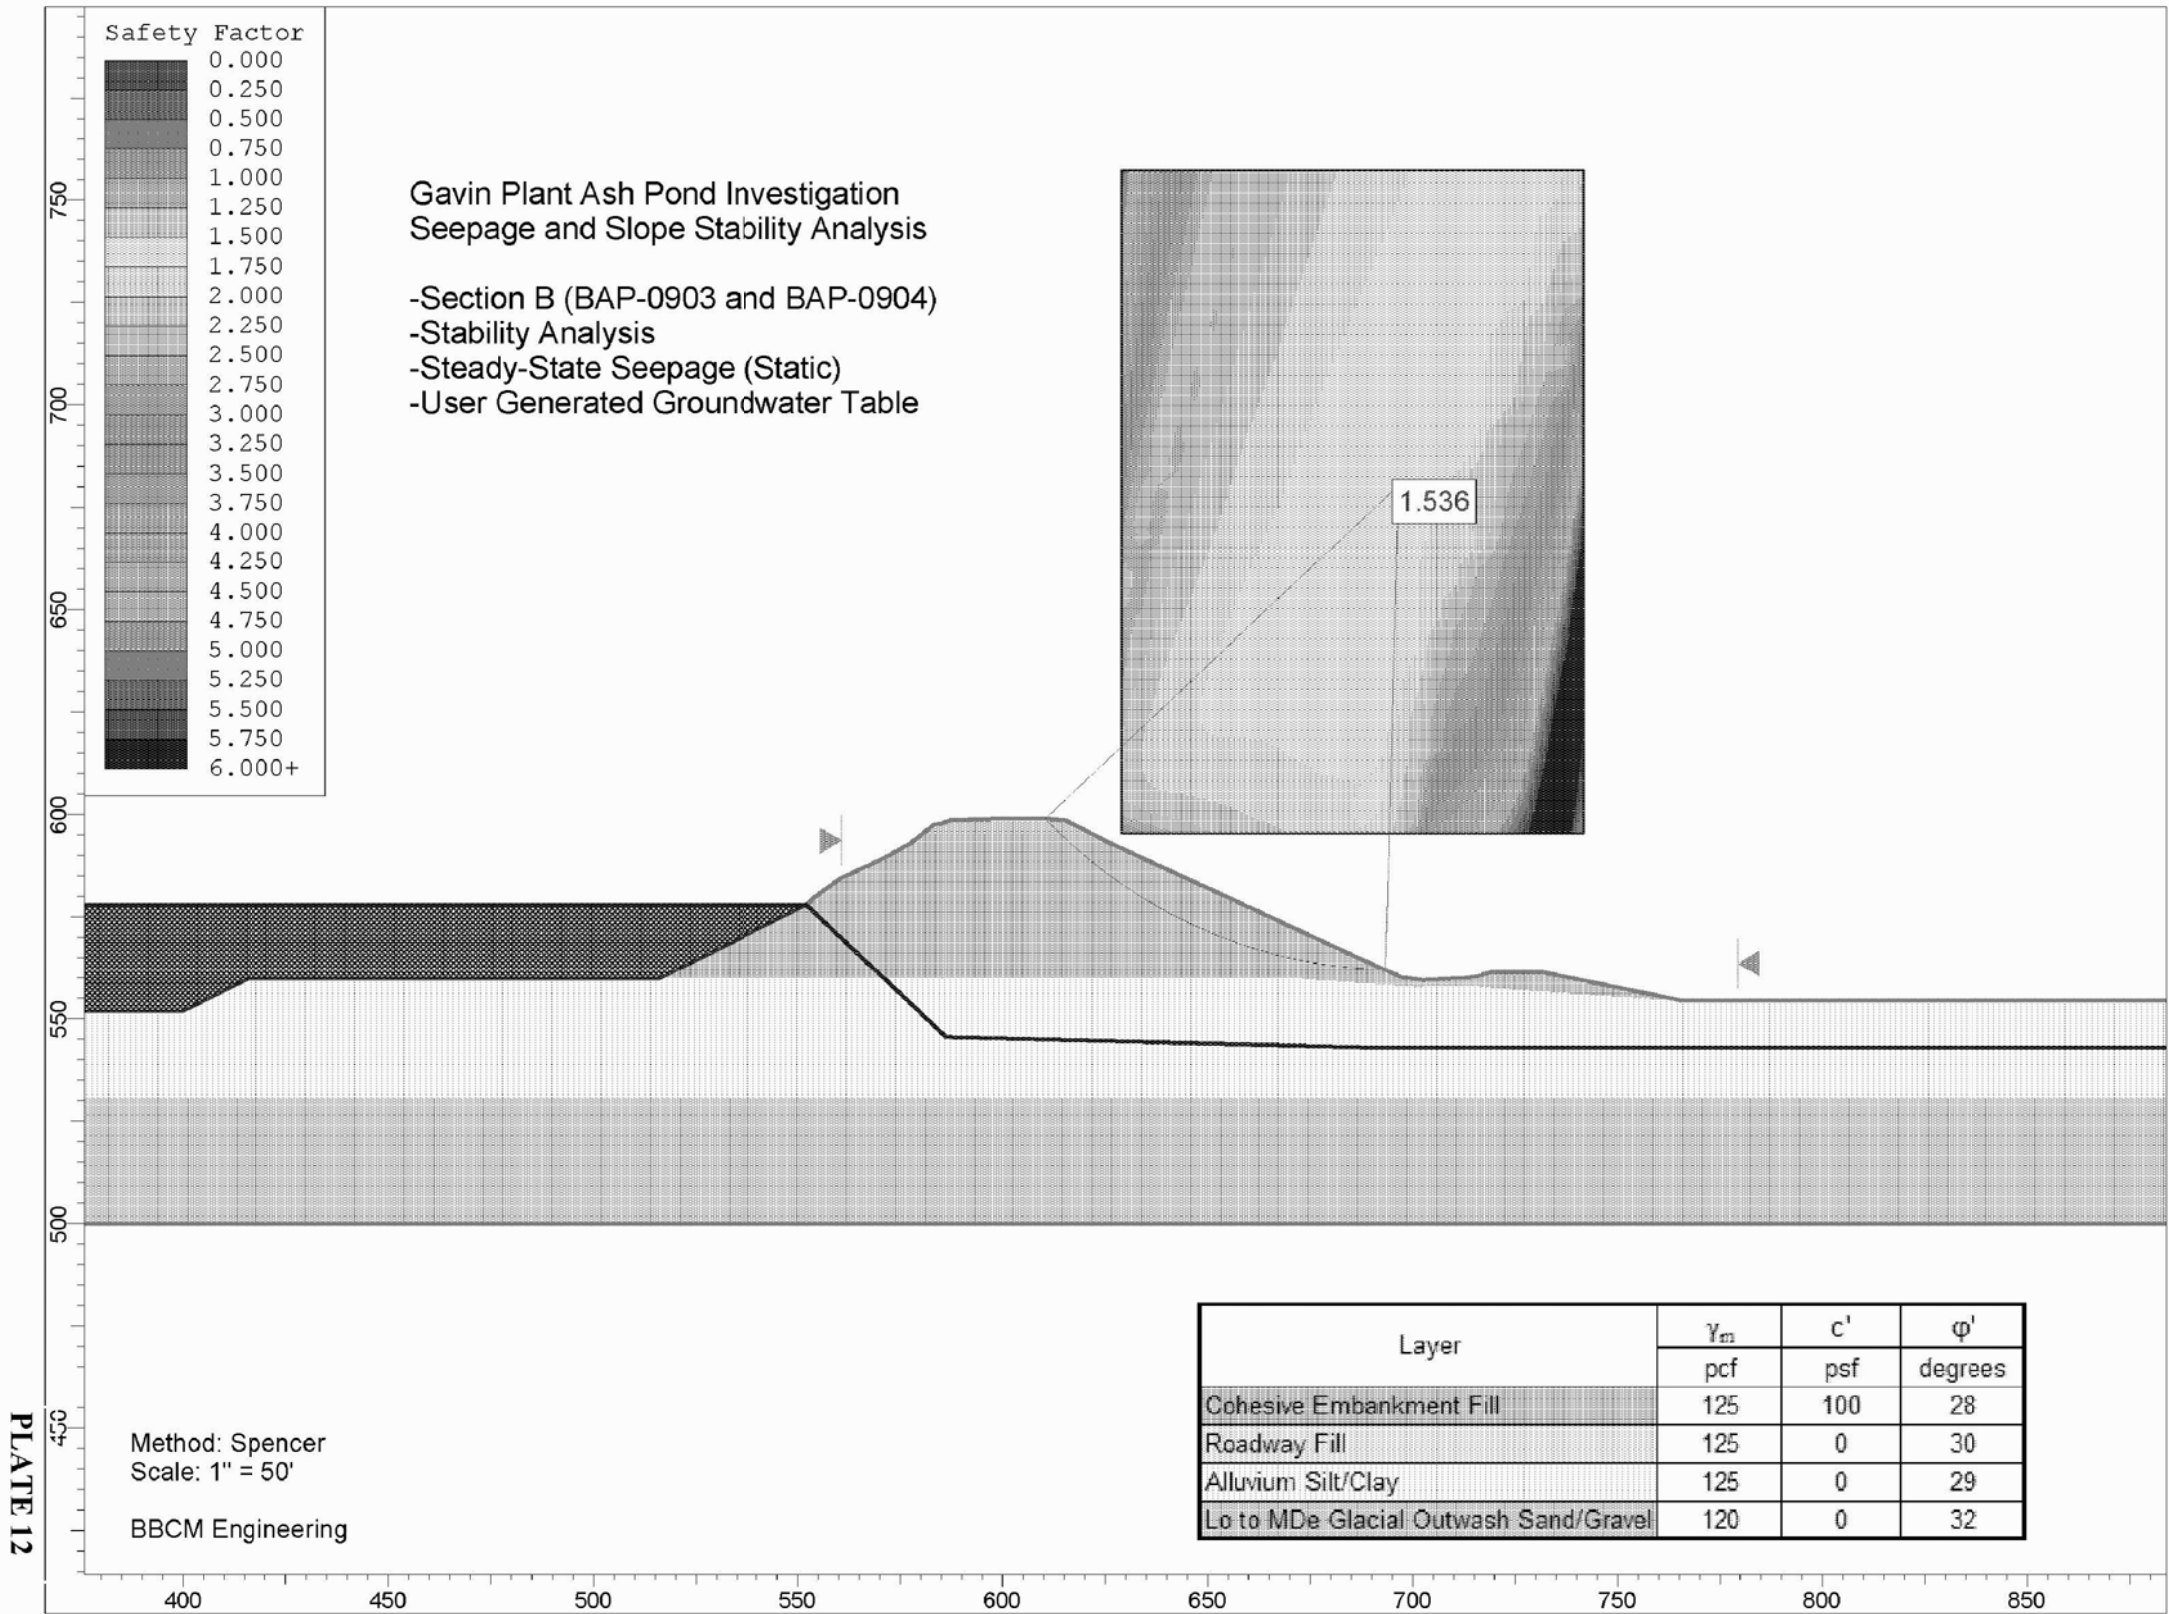


IMAGE REFERENCE: BBC&M BOTTOM ASH POND STABILITY
ANALYSIS REPORT, APPENDIX D, PAGE 13



GAVIN PLANT ASH POND
SLOPE STABILITY SECTION B
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 8C

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 1:08:33 PM Plotted: 7/2/2009 4:28:56 PM User: Filkins, Rebecca

AEFGV002980

PLATE 13

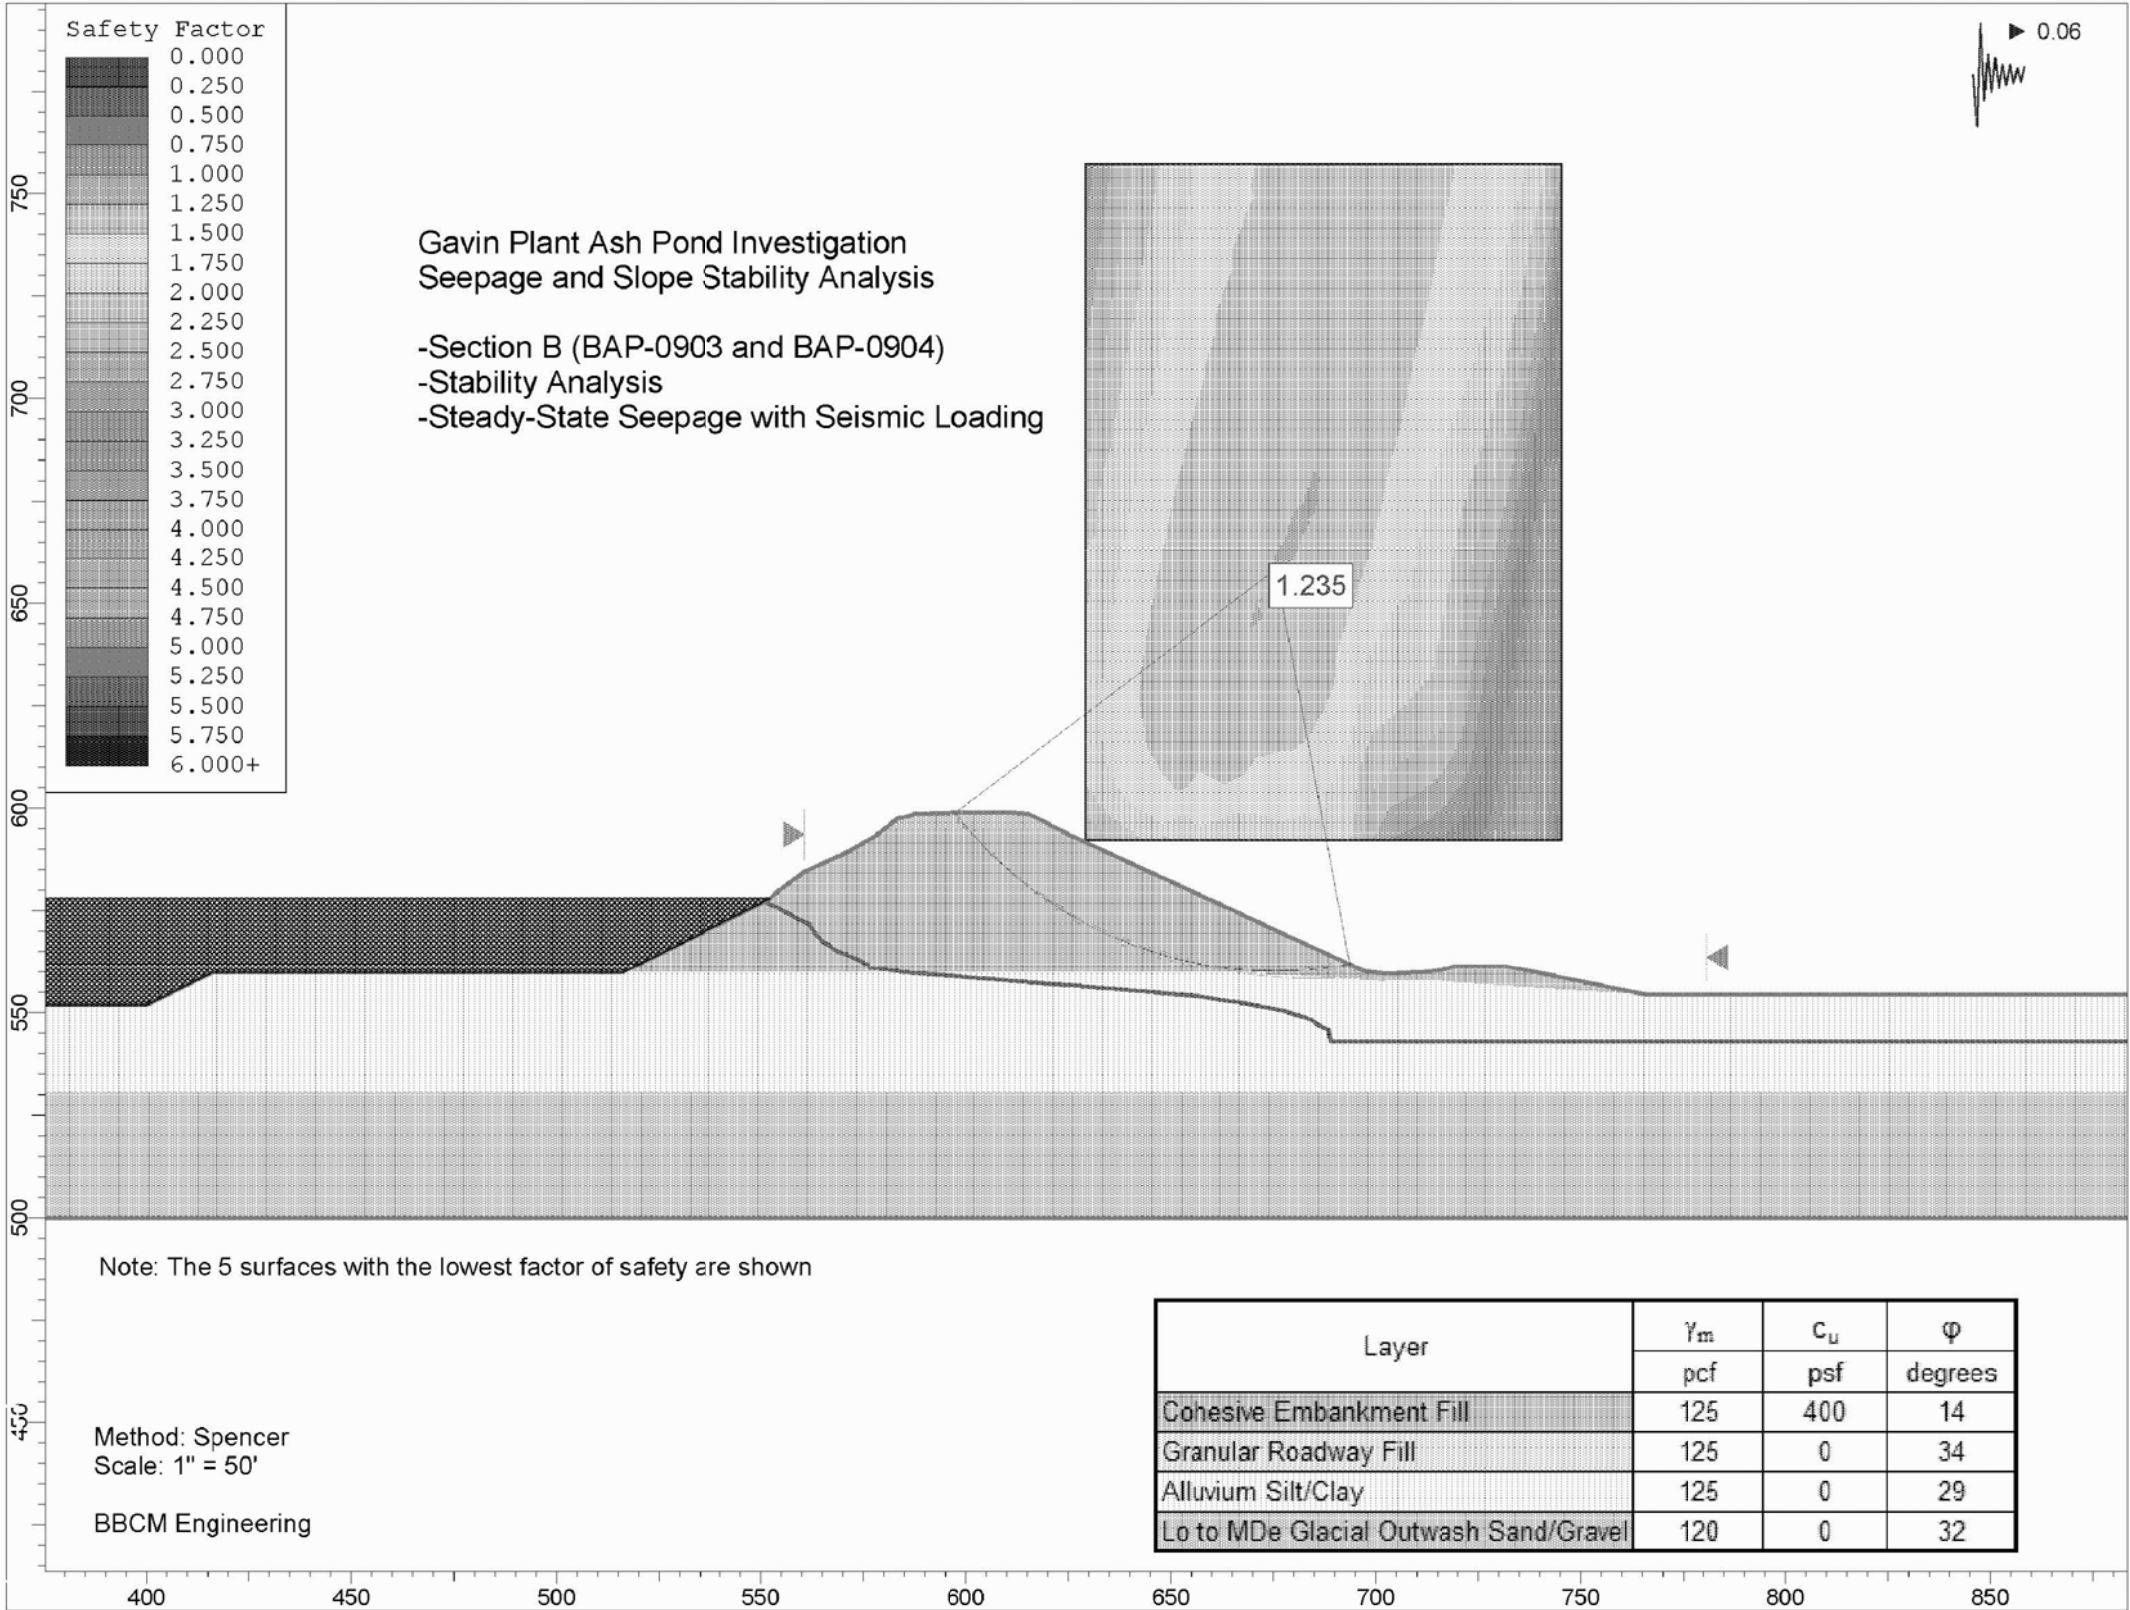


IMAGE REFERENCE: BBC&M BOTTOM ASH POND STABILITY ANALYSIS REPORT, APPENDIX D, PAGE 14



GAVIN PLANT ASH POND
SLOPE STABILITY SECTION B
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 8D

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 4:30:31 PM Plotted: 7/2/2009 5:49:19 PM User: Filkins, Rebecca

American Electric Power
General James Gavin Power Plant
Cheshire, Ohio
CHA Project No. 20085.4000.1510
June 2009

Bottom Ash Pond
Outboard Slope - Steady State
Normal Operating Storage Volume (Approx. El. 578.0')
Section B-B' (Borings B-0903 and B-0904)
Factor of Safety = 1.56

Analysis Methods Used: Spencer

Material Properties

Material: Roadway Fill
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 30 degrees
Water Surface: Water Table

Material: Cohesive Embankment Fill
Unit Weight: 125 lb/ft³
Cohesion: 100 psf
Friction Angle: 28 degrees
Water Surface: Water Table

Material: Alluvium Silt/Clay
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 29 degrees
Water Surface: Water Table

Material: Glacial Outwash Sand/Gravel
Unit Weight: 120 lb/ft³
Cohesion: 0 psf
Friction Angle: 32 degrees
Water Surface: Water Table

Material: Normal Operation Storage Vol.
Strength Type: No strength
Unit Weight: 62.4 lb/ft³

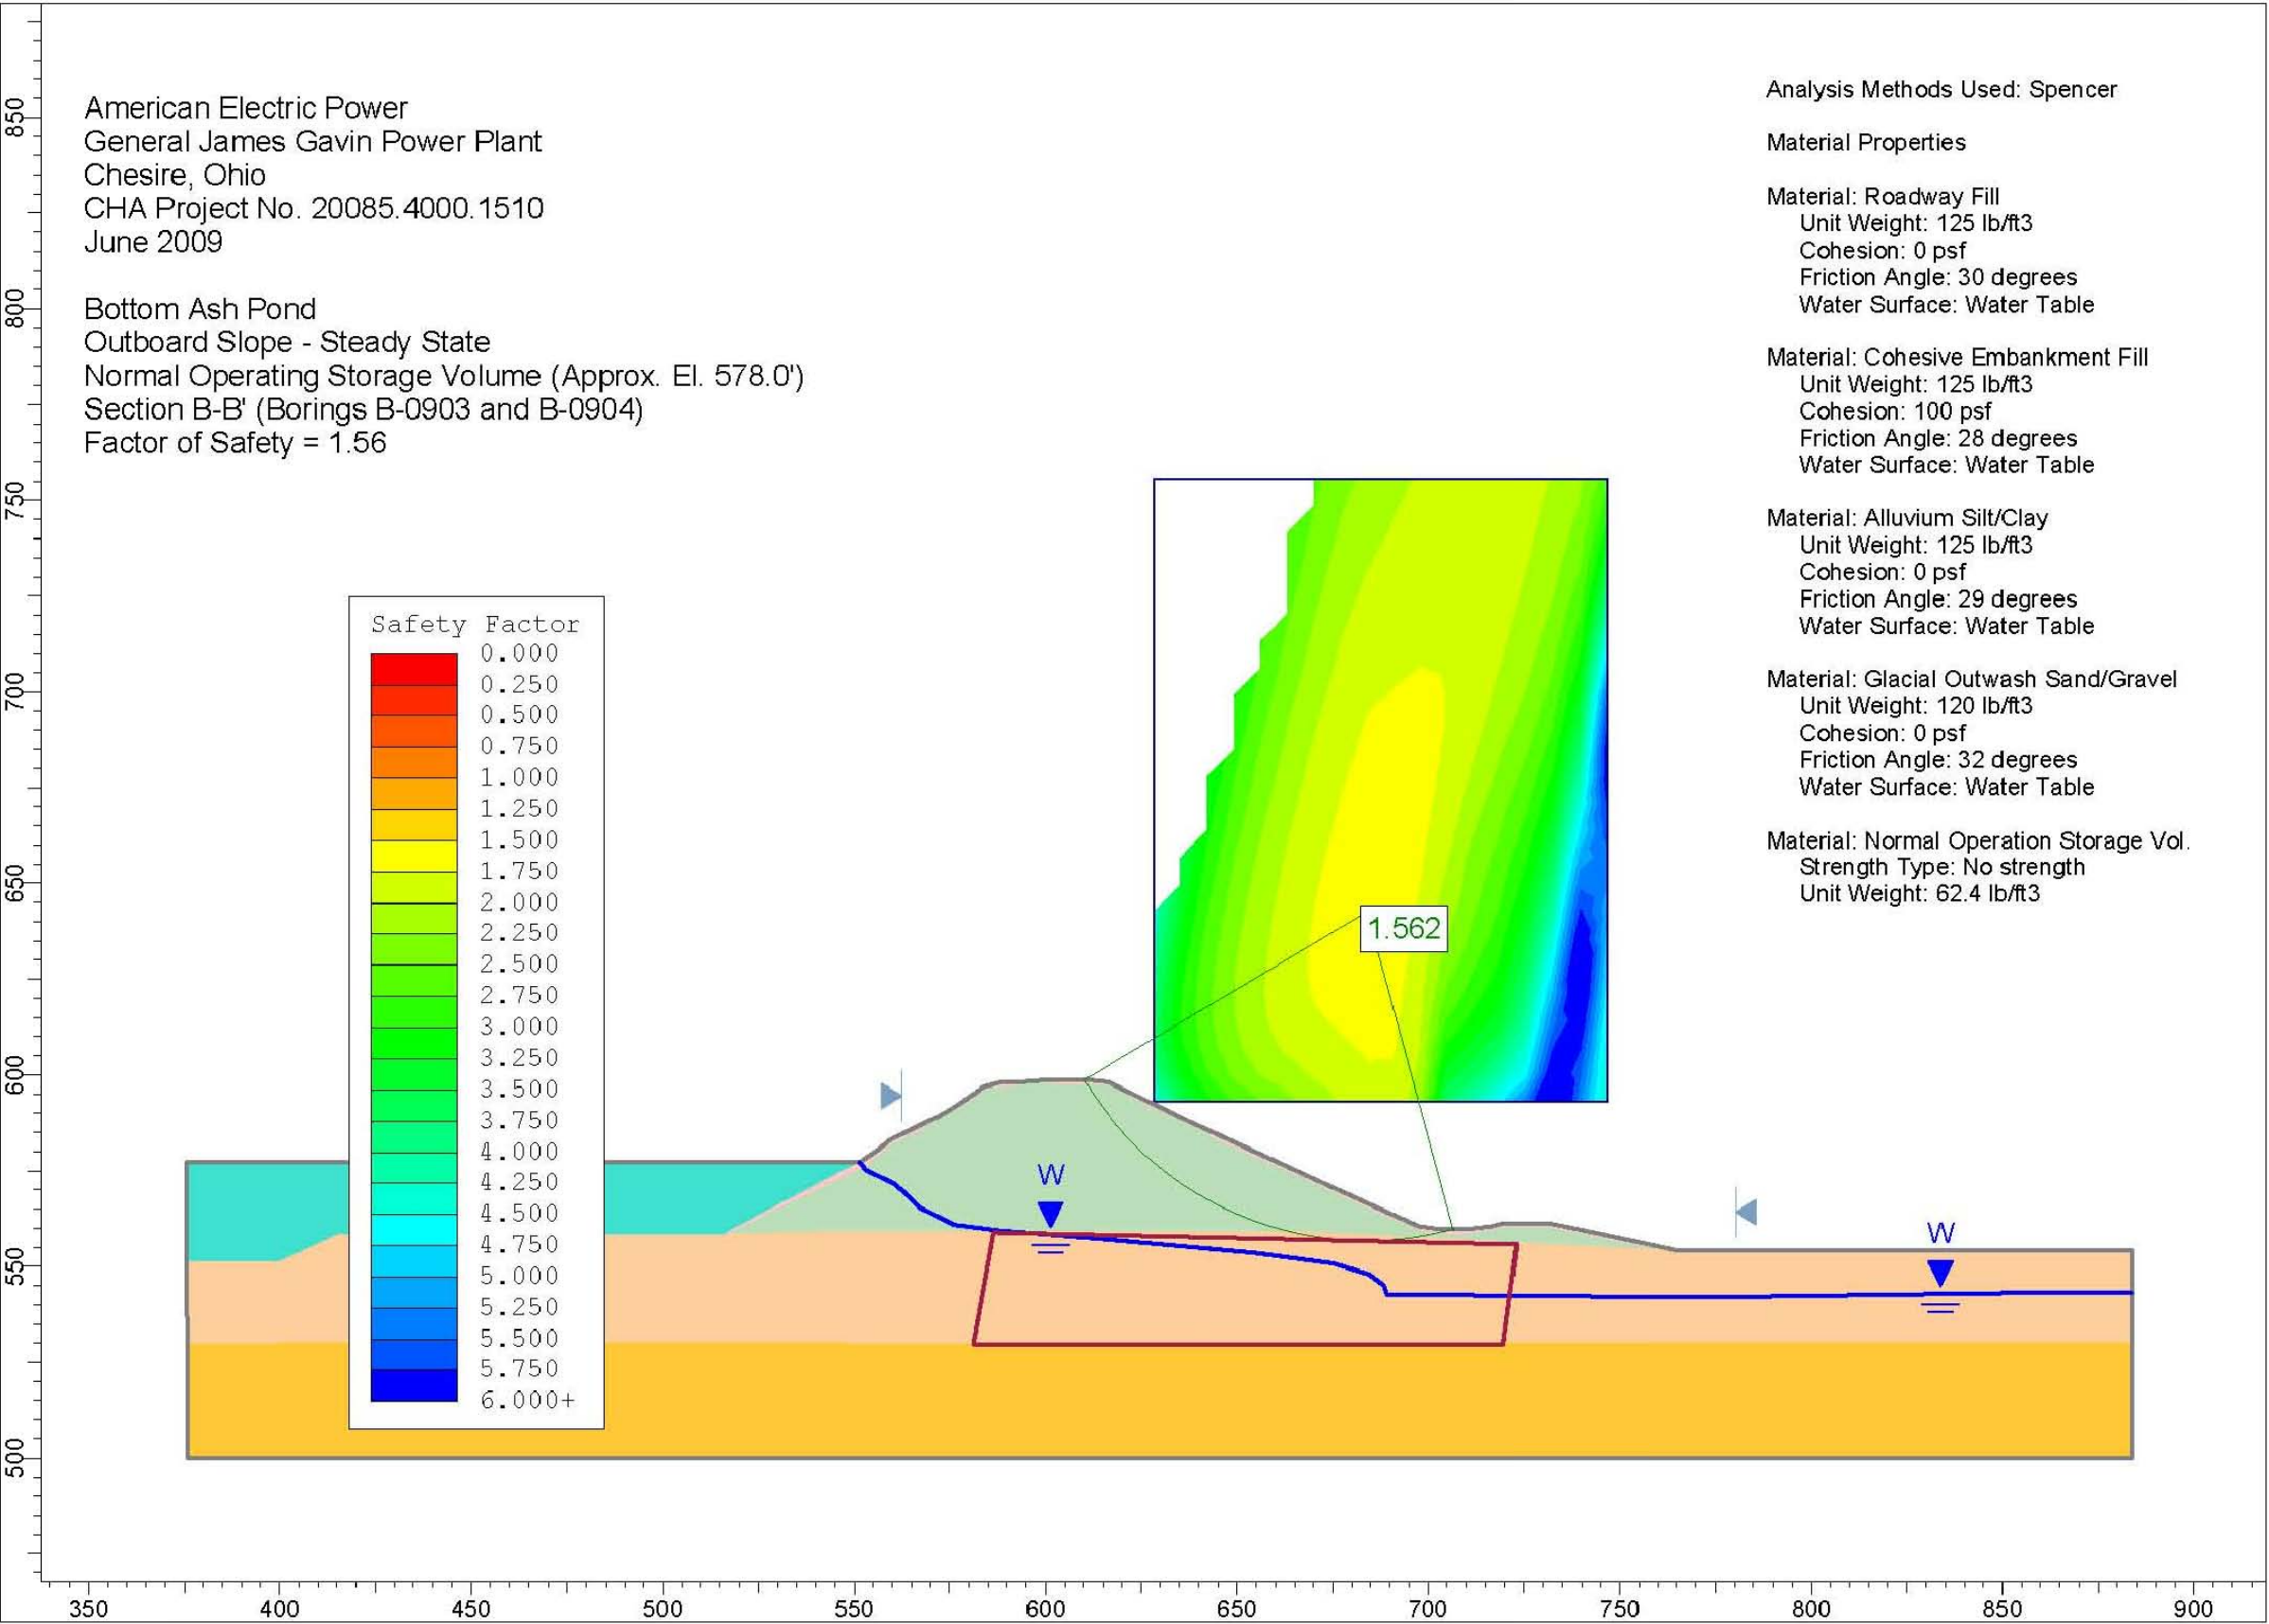


IMAGE REFERENCE: 07-01-09 GAVIN OUTBOARD STEADY STATE



BOTTOM ASH POND SLOPE STABILITY
OUTBOARD STEADY STATE
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 9A

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 4:30:31 PM Plotted: 7/2/2009 5:47:07 PM User: Filkins, Rebecca

American Electric Power
General James Gavin Power Plant
Cheshire, Ohio
CHA Project No. 20085.4000.1510
June 2009

Bottom Ash Pond
Inboard Slope - Steady State
Normal Operating Storage Volume (Approx. El. 578.0')
Section B-B' (Borings B-0903 and B-0904)
Factor of Safety = 1.31

Analysis Methods Used: Spencer

Material Properties

Material: Roadway Fill
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 30 degrees
Water Surface: Water Table

Material: Cohesive Embankment Fill
Unit Weight: 125 lb/ft³
Cohesion: 100 psf
Friction Angle: 28 degrees
Water Surface: Water Table

Material: Alluvium Silt/Clay
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 29 degrees
Water Surface: Water Table

Material: Glacial Outwash Sand/Gravel
Unit Weight: 120 lb/ft³
Cohesion: 0 psf
Friction Angle: 32 degrees
Water Surface: Water Table

Material: Normal Operation Storage Vol.
Strength Type: No strength
Unit Weight: 62.4 lb/ft³

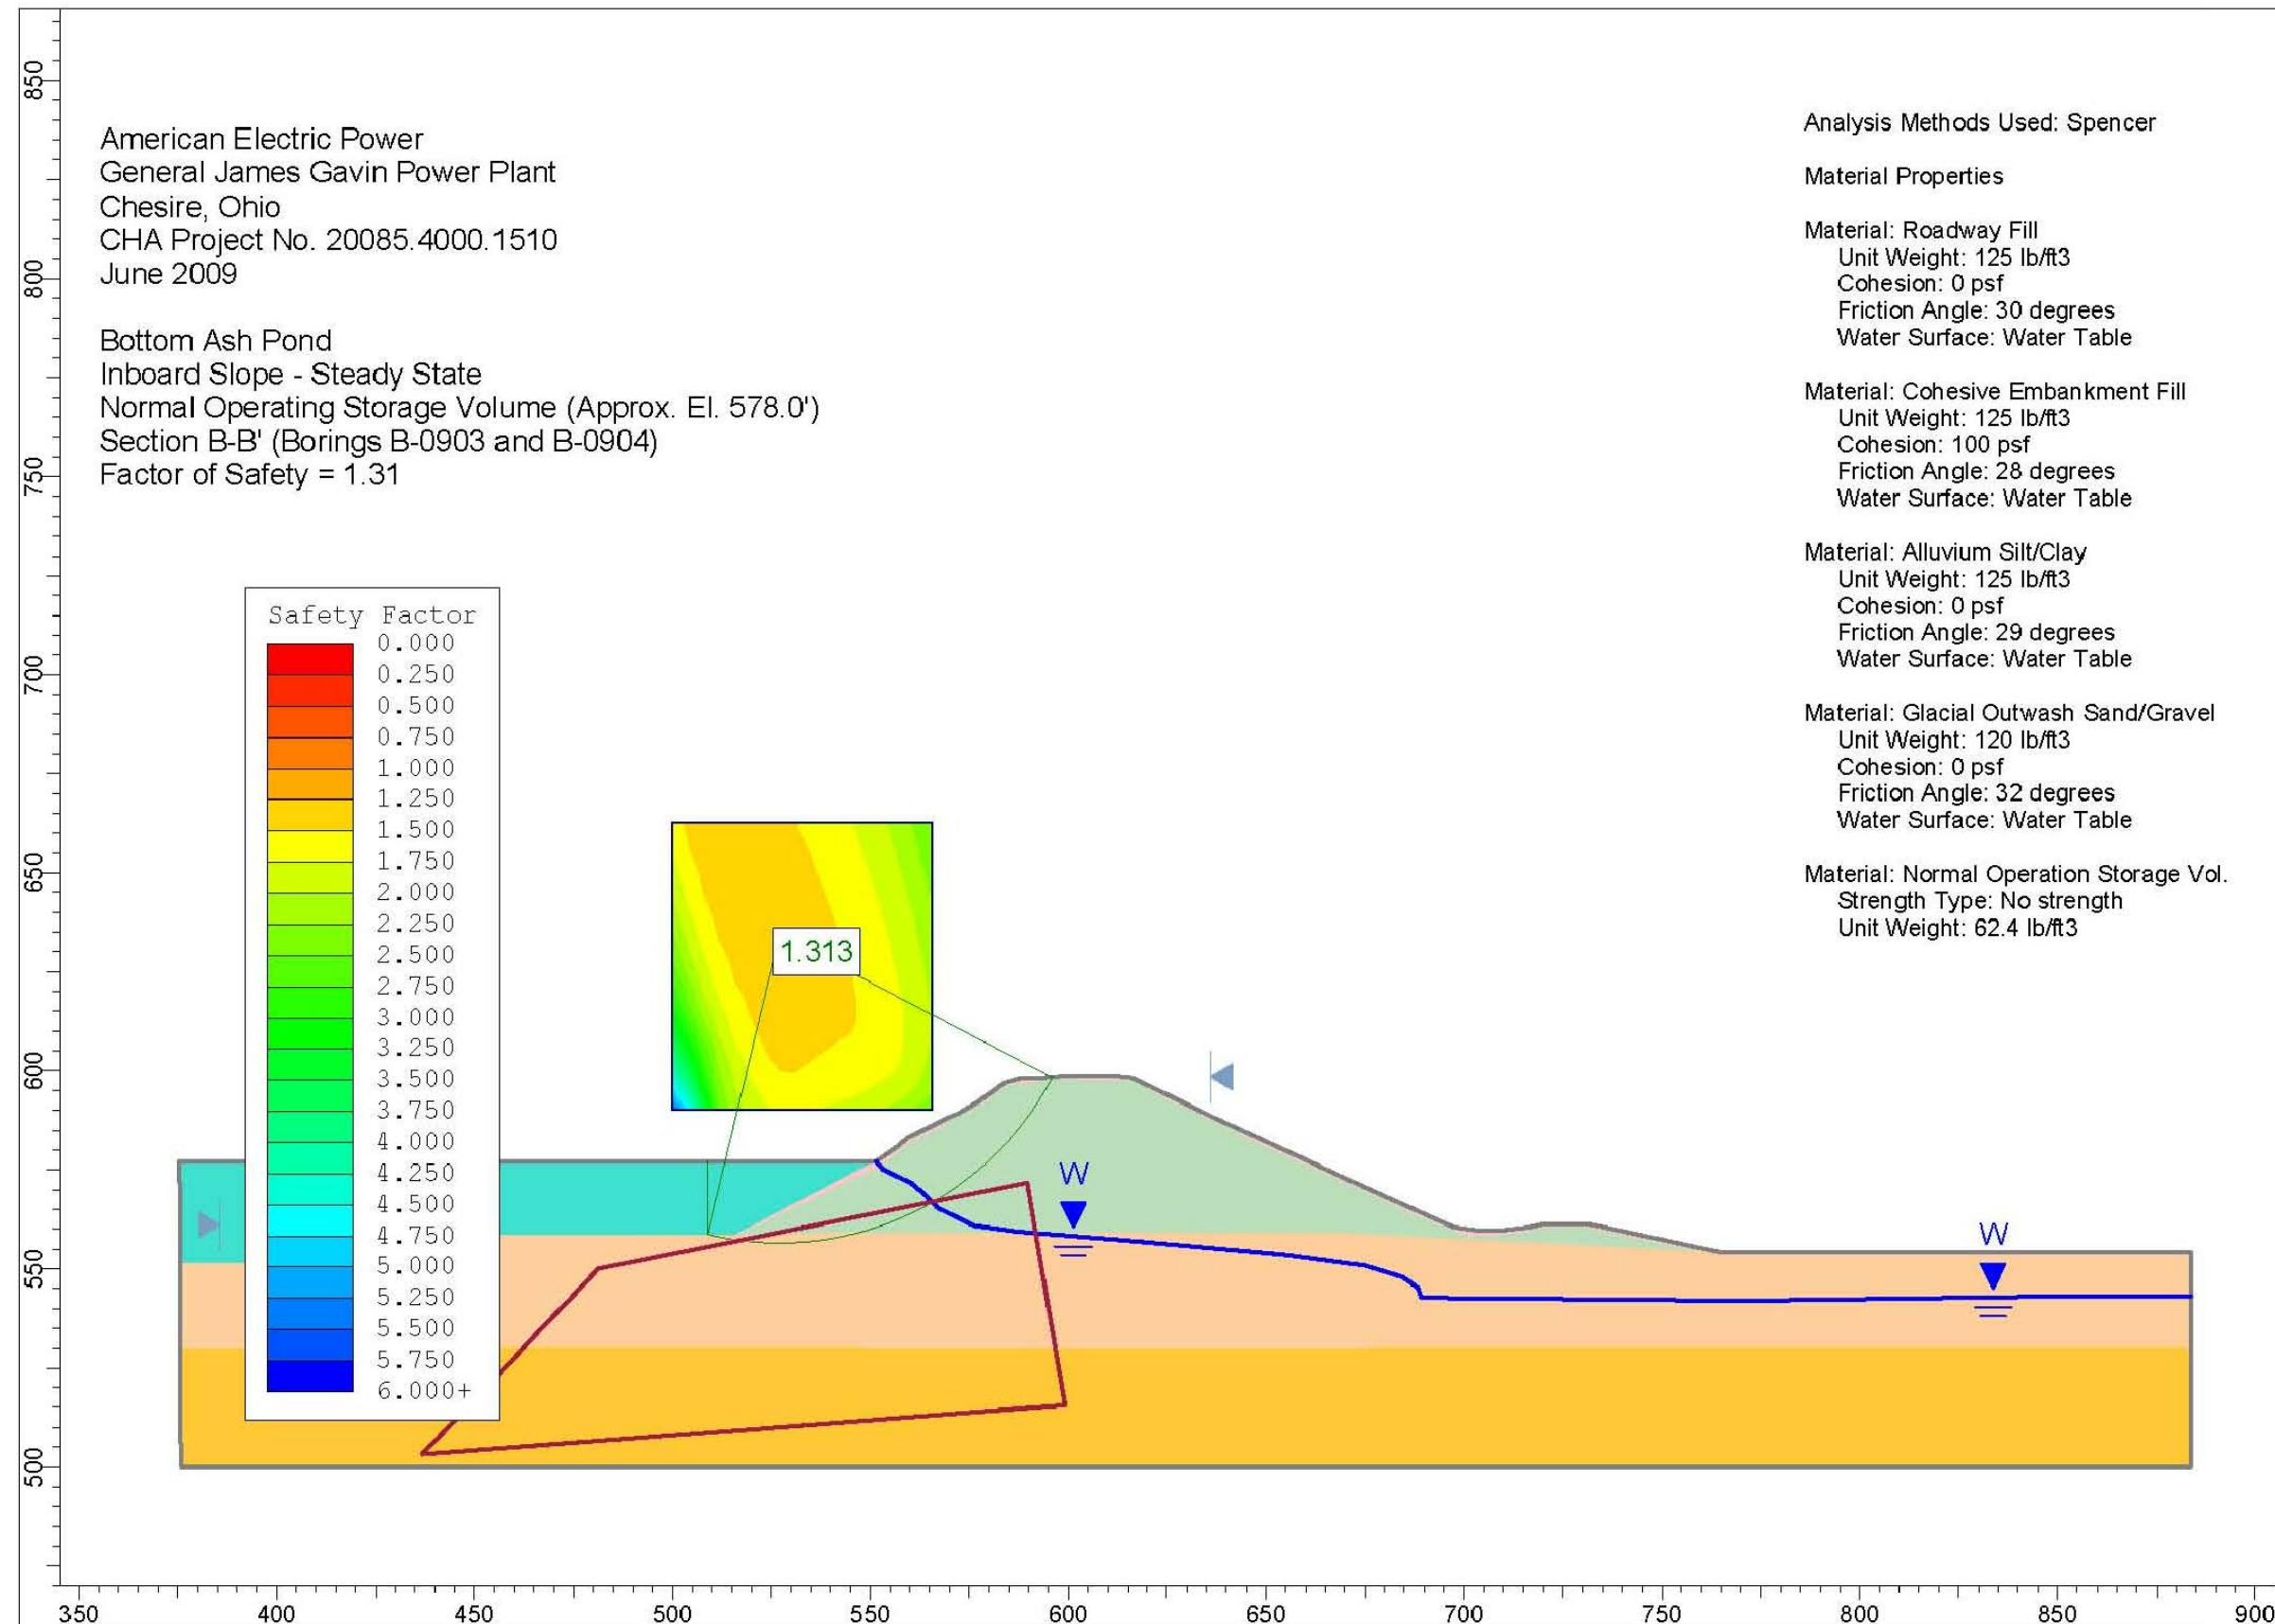


IMAGE REFERENCE: 07-01-09 GAVIN INBOARD STEADY STATE



**BOTTOM ASH POND SLOPE STABILITY
INBOARD STEADY STATE**
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 9B

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN XSECTIONS.DWG Saved: 7/2/2009 4:30:31 PM Plotted: 7/2/2009 5:44:05 PM User: Filkins, Rebecca

American Electric Power
General James Gavin Power Plant
Cheshire, Ohio
CHA Project No. 20085.4000.1510
June 2009

Bottom Ash Pond
Inboard Slope - Rapid Drawdown
Storage Volume Approx. El. 556.0'
Section B-B' (Borings B-0903 and B-0904)
Factor of Safety = 1.0

Analysis Methods Used: Spencer

Material Properties

Material: Water
Strength Type: No strength
Unit Weight: 62.4 lb/ft³

Material: Cohesive Embankment Fill
Unit Weight: 125 lb/ft³
Cohesion: 100 psf
Friction Angle: 28 degrees
Water Surface: Water Table

Material: Alluvium Silt _Clay
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 29 degrees
Water Surface: Water Table

Material: Glacial Outwash Sand _Grave
Unit Weight: 120 lb/ft³
Cohesion: 0 psf
Friction Angle: 32 degrees
Water Surface: Water Table

Material: Roadway Fill
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 30 degrees
Water Surface: Water Table

Material: Undrained Embankment Fill
Unit Weight: 120 lb/ft³
Cohesion: 1860 psf
Friction Angle: 0 degrees
Water Surface: Water Table

Material: Alluvium Soft Layer
Unit Weight: 125 lb/ft³
Cohesion: 0 psf
Friction Angle: 26 degrees
Water Surface: Water Table

Material: Undrained Alluvium
Unit Weight: 120 lb/ft³
Cohesion: 1250 psf
Friction Angle: 0 degrees
Water Surface: Water Table

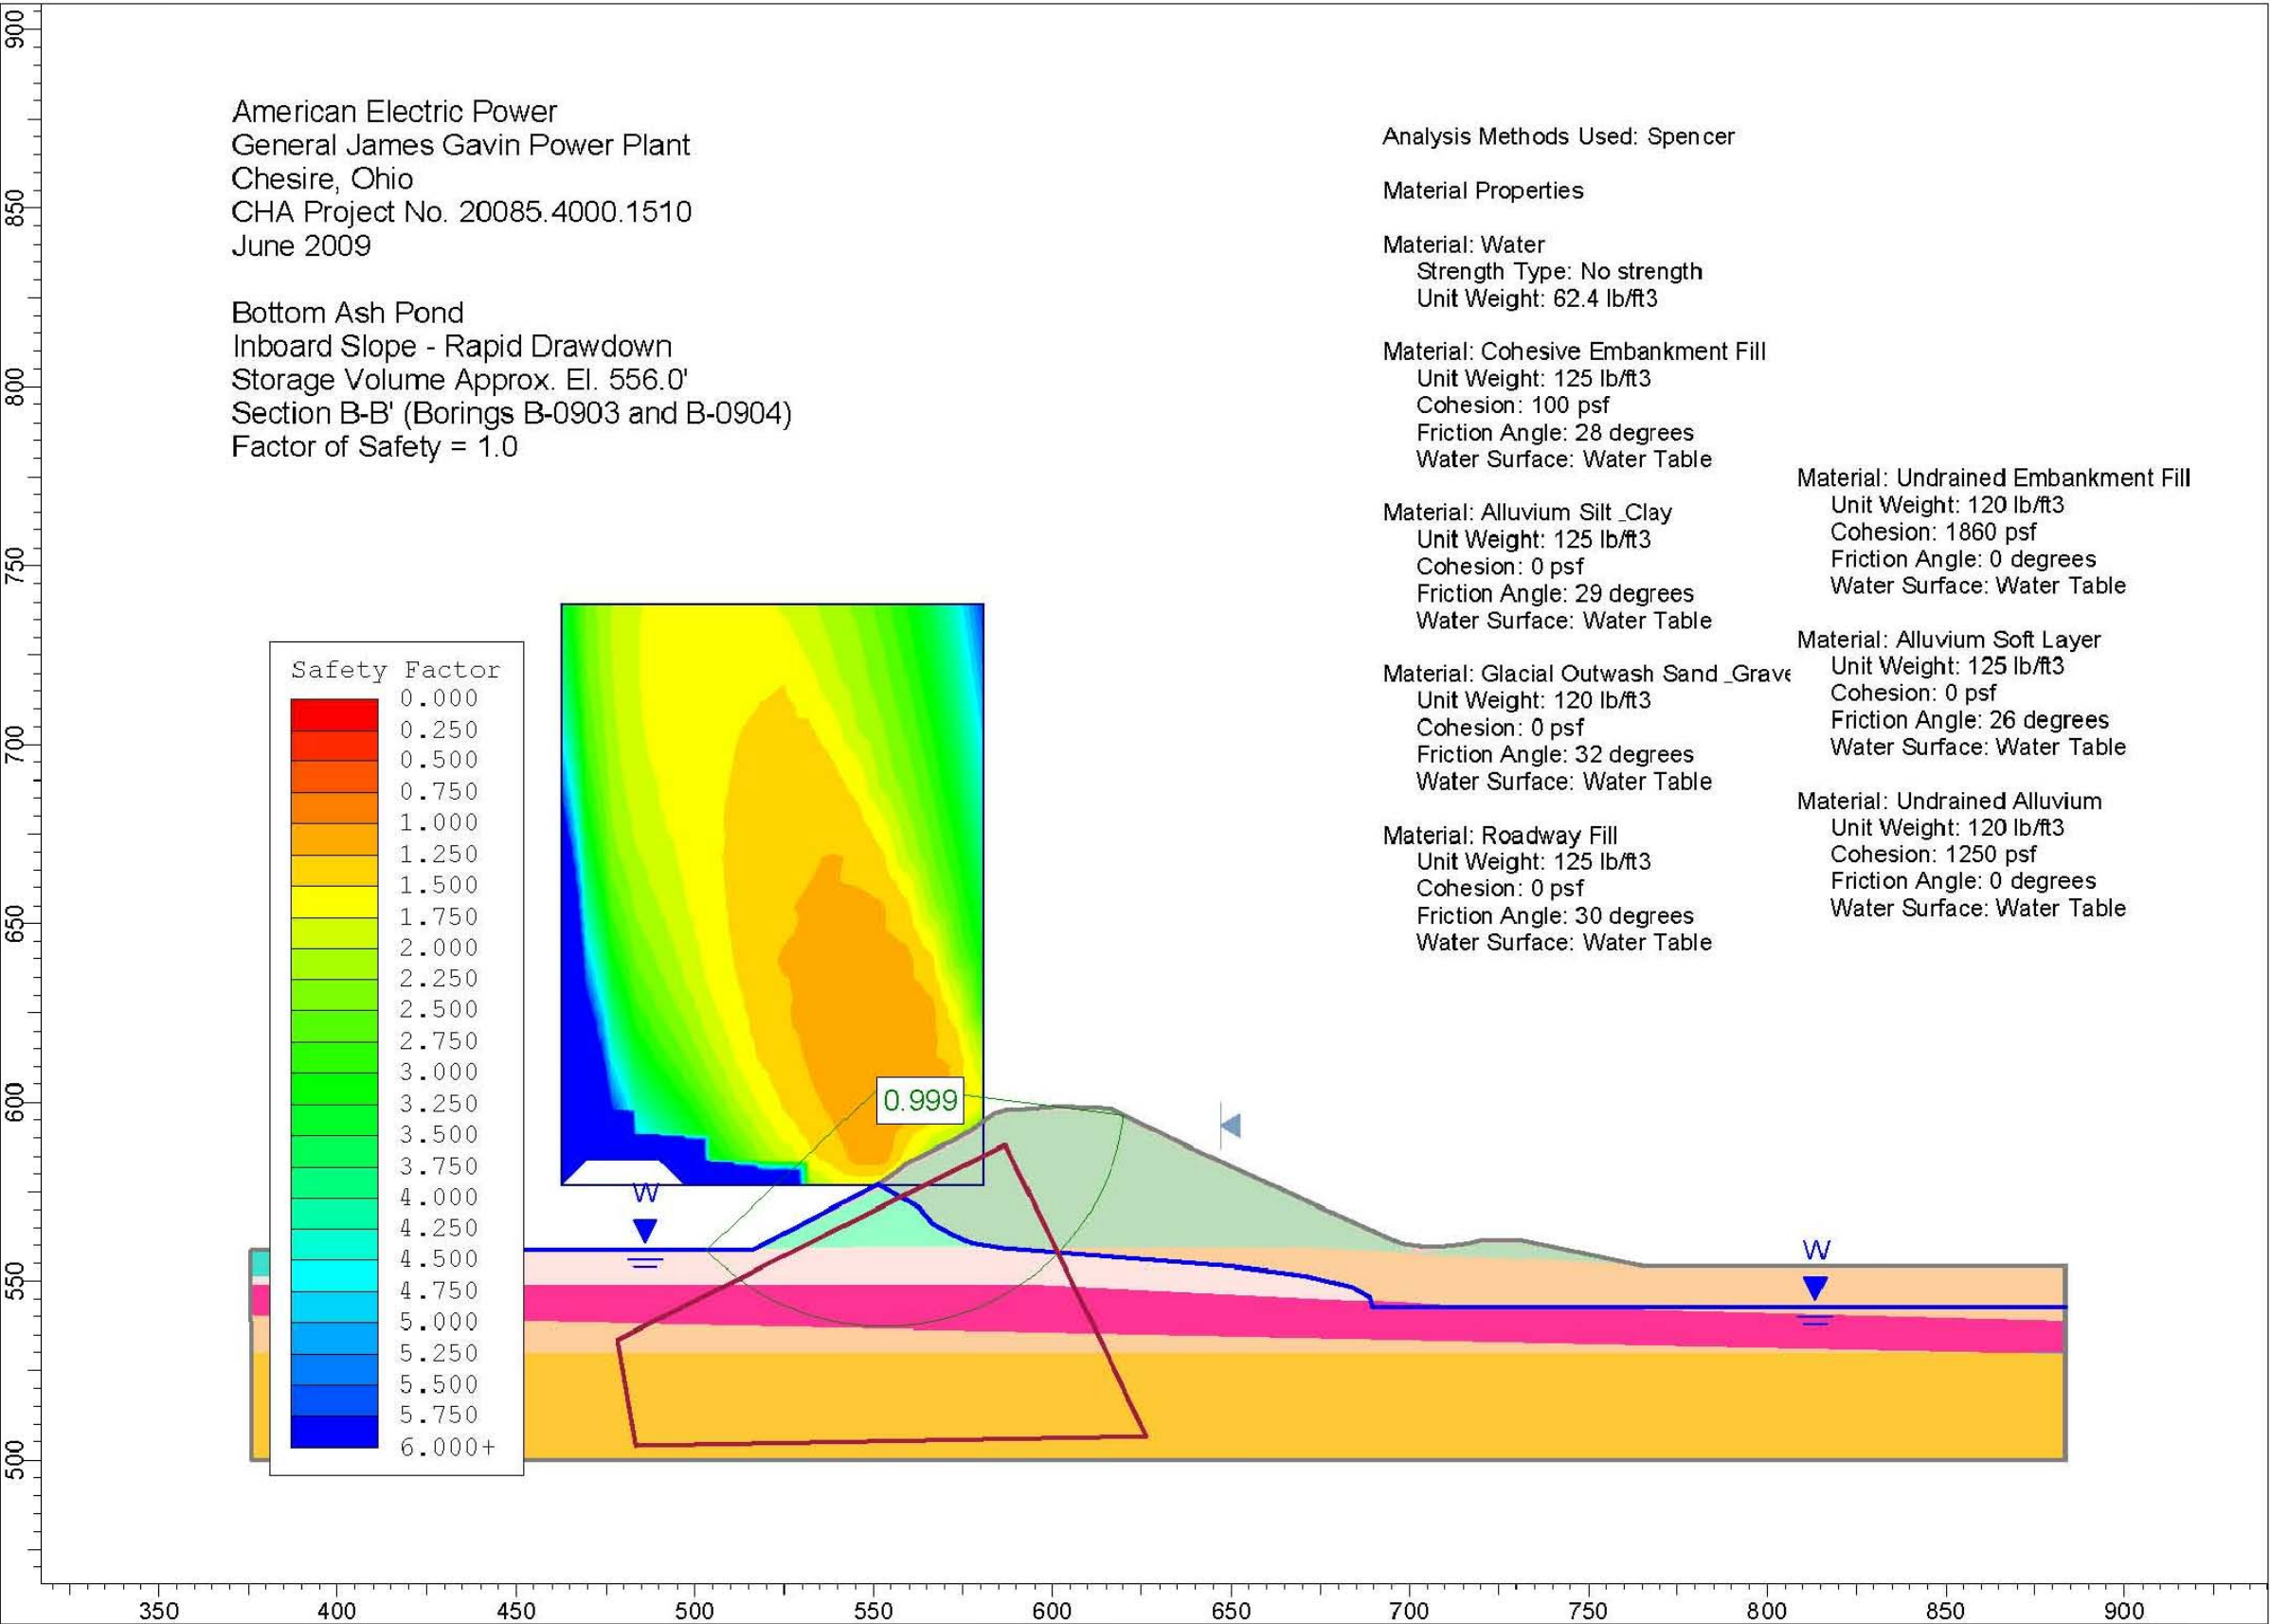


IMAGE REFERENCE: 07-01-09 GAVIN INBOARD RAPID
DRAWDOWN



BOTTOM ASH POND SLOPE STABILITY
RAPID DRAW-DOWN STATE
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO


PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 9C

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN DATA.DWG Saved: 6/30/2009 3:10:07 PM Plotted: 7/2/2009 6:17:08 PM User: Filkins, Rebecca

Bottom Ash Pond
Piezometer Readings

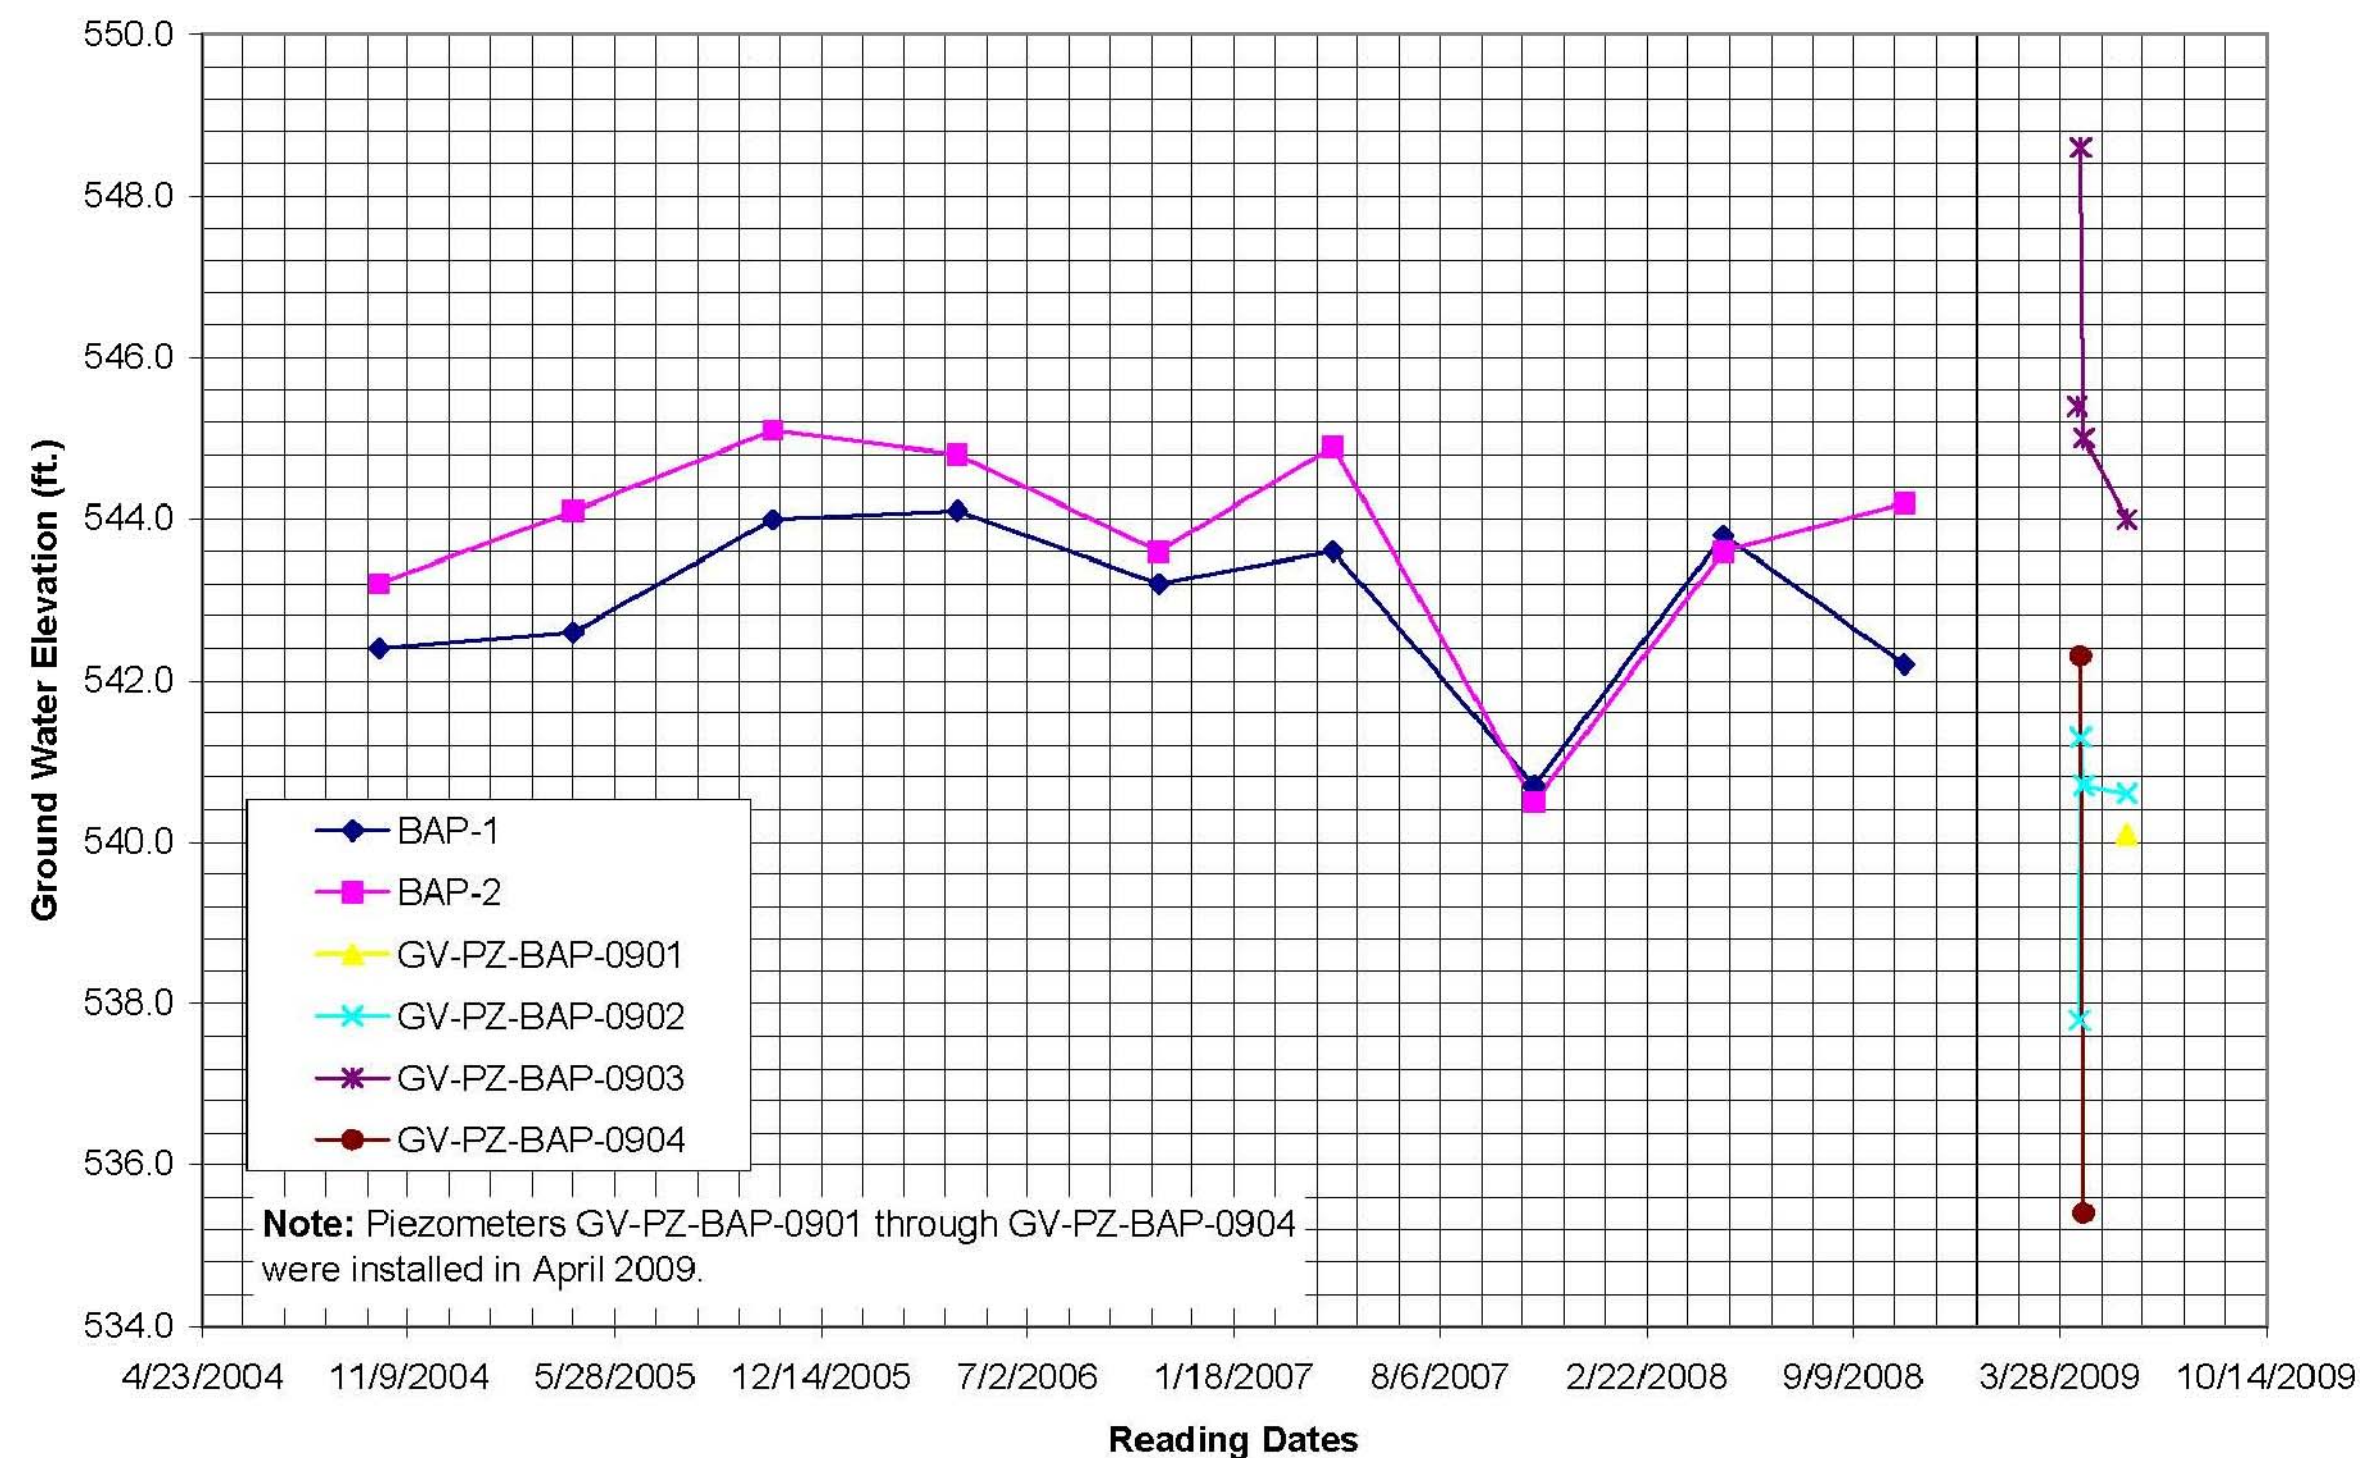

 Drawing Copyright © 2007 CHA	PIEZOMETER READINGS GENERAL JAMES GAVIN POWER PLANT AMERICAN ELECTRIC POWER CHESHIRE, OHIO	PROJECT NO. 20085.4000
		DATE: JULY 2009
		FIGURE 10A

 GP-1 GP-3 GP-4R GP-5 GP-7 GP-9 GP-10 GP-11 GP-13 GP-14 GP-15
 GP-19 GP-20 GP-21 GP-22 GP-23 GP-25 GP-26 GP-27 OB-23 OB-24 OB-25
 OB-26 OB-27 OB-28 OB-29 OB-30 OB-31 OB-32 OB-33 OB-35 OB-36



PIEZOMETER READINGS
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO


PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 10B

File: K:\20085\CADD\FIGURES\GEO\4000 GEN JAMES GAVIN\4000 GAVIN DATA.DWG Saved: 6/30/2009 3:10:07 PM Plotted: 7/2/2009 6:22:41 PM User: Filkins, Rebecca

Stingy Run Dam
V-Notch Weir Readings

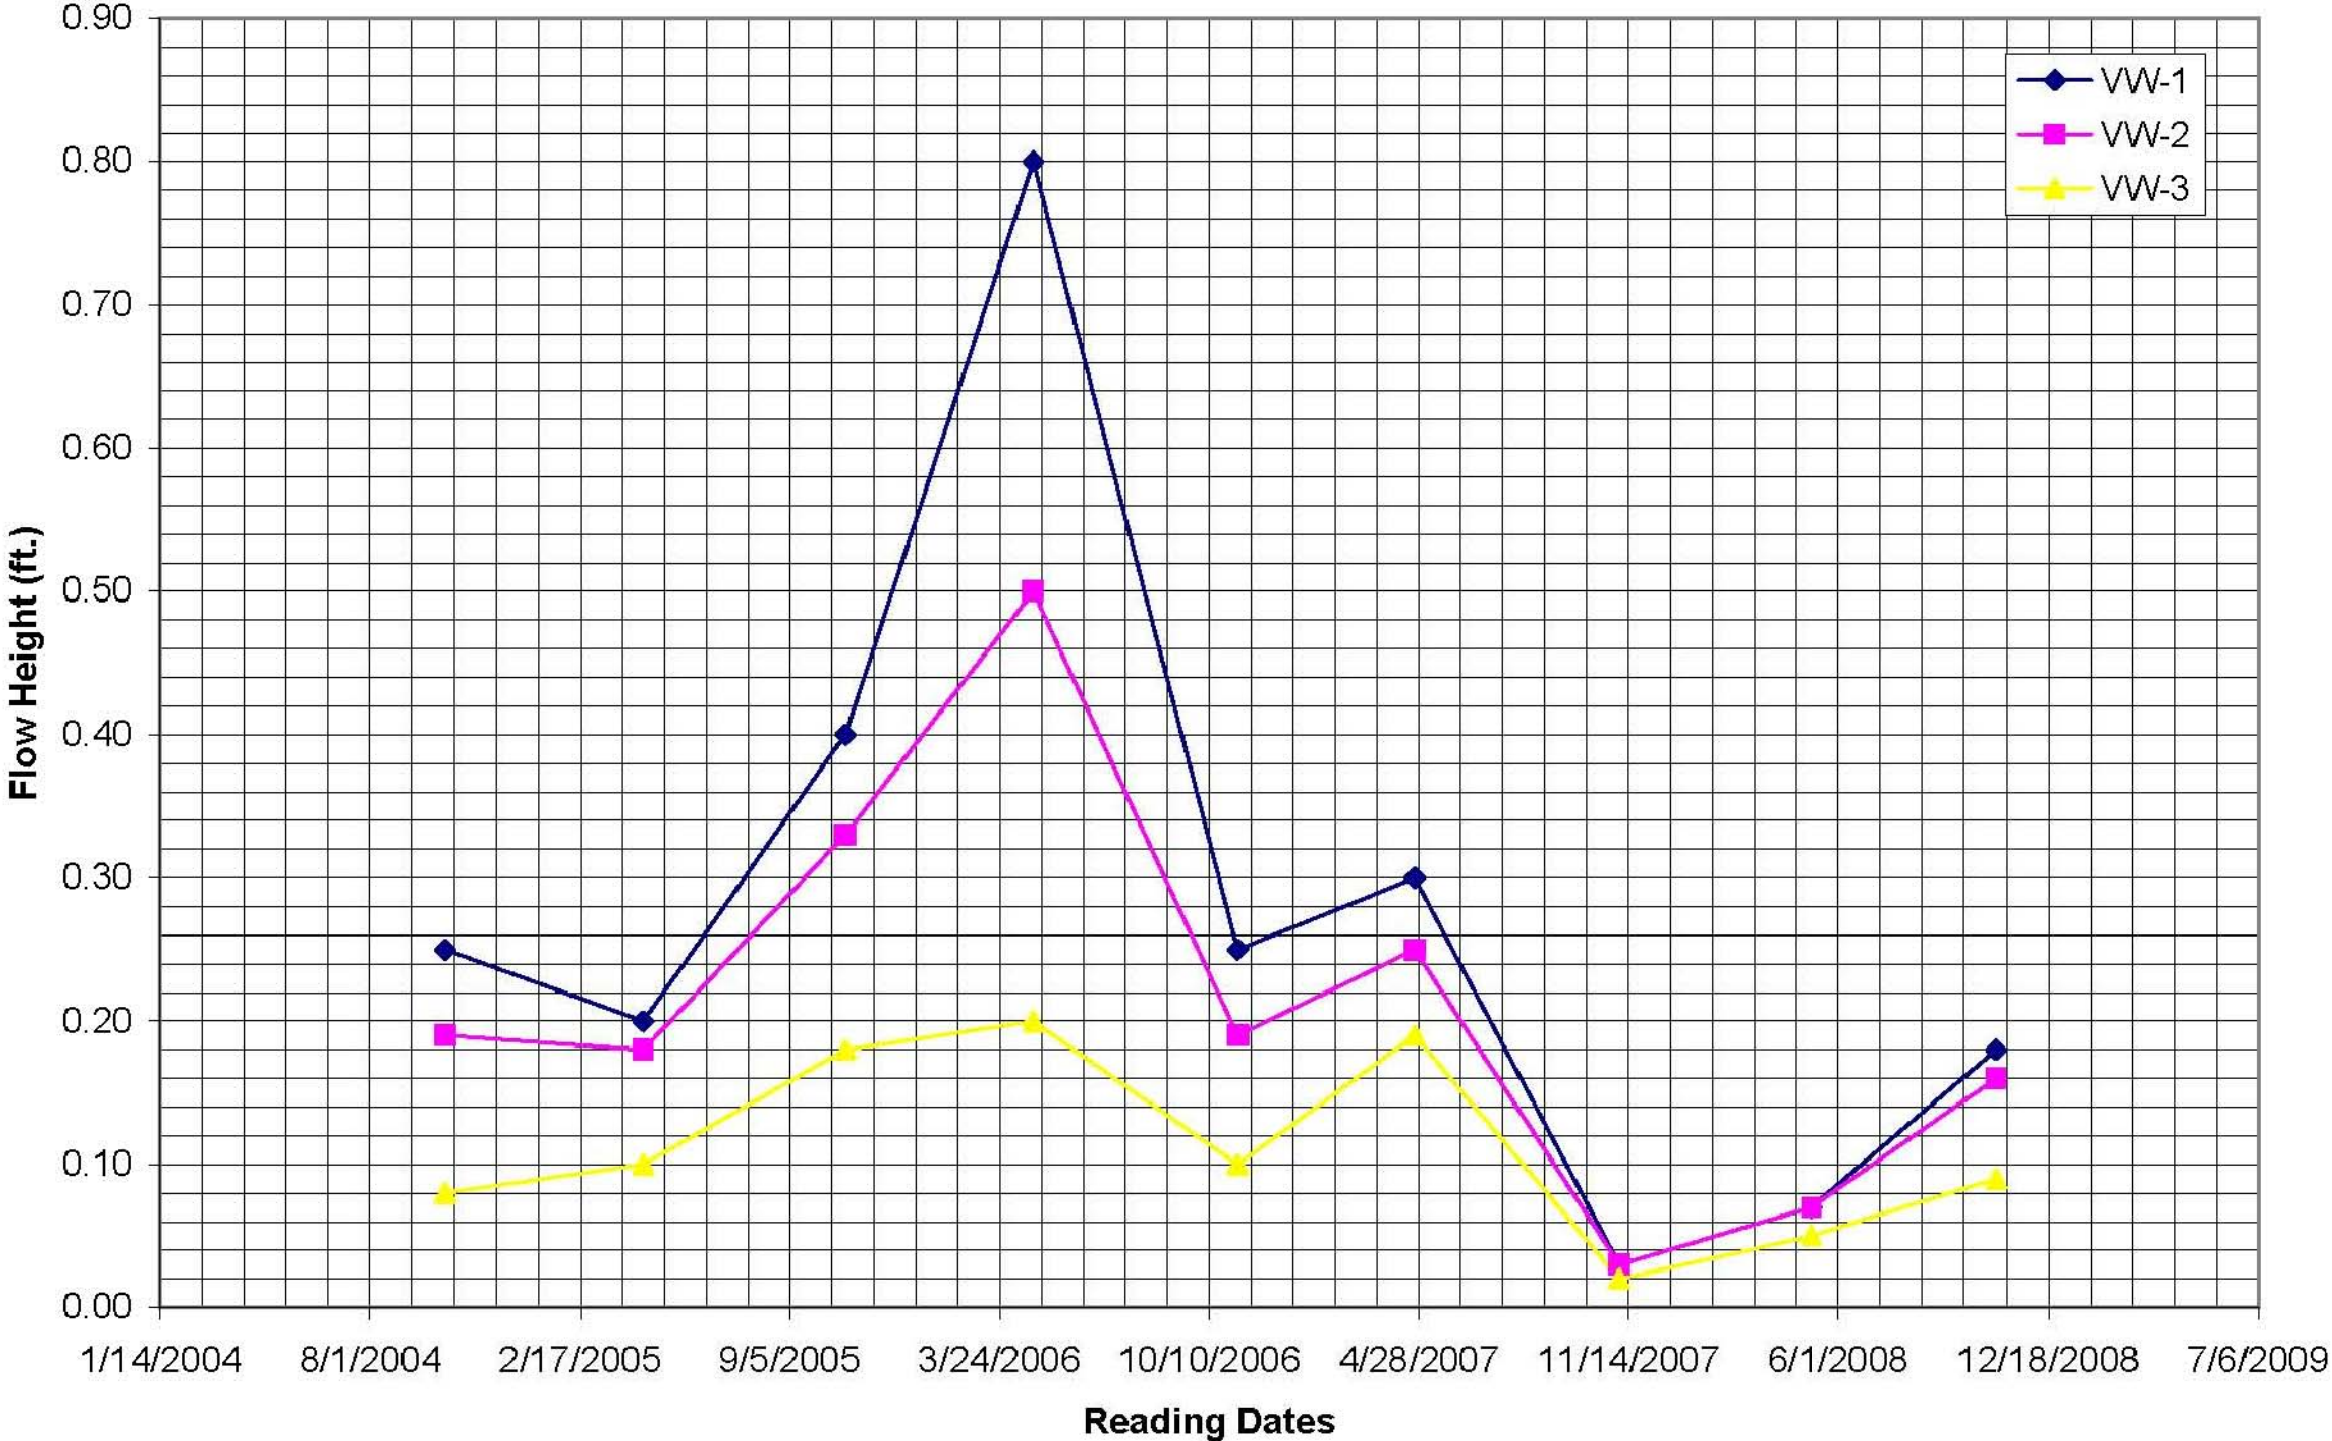

PIEZOMETER READINGS
GENERAL JAMES GAVIN POWER PLANT
AMERICAN ELECTRIC POWER
CHESHIRE, OHIO

PROJECT NO.
20085.4000

DATE: JULY 2009

FIGURE 10C

4.0 CONCLUSIONS/RECOMMENDATIONS

4.1 Acknowledgement of Management Unit Condition

I acknowledge that the management unit referenced herein was personally inspected by me and was found to be in the following condition: **Fair**.

CHA's assessment of the Bottom Ash Pond and Stingy Run Dam indicate that they are in fair condition. Evidence was observed indicating that AEP attempts a proactive maintenance and monitoring program at these facilities. These efforts should be continued.

CHA presents recommendations for maintenance and further studies to bring these facilities into Satisfactory in the following sections.

4.2 Maintaining Vegetation Growth

The vegetation growth was cut on the embankments immediately prior to our site visit and during our site visit. We recommend that vegetation be cut prior to each quarterly performed by AEP representatives so that adequate visual inspections can be made.

4.3 Bottom Ash Pond South Dike Upstream Slope Stabilization and Wet Area

The upstream slope of the South Dike at the Bottom Ash Pond has experienced several surficial slumps, which are likely the result of over steepening of the slope by crest road grading activities which has resulted in a widening of the crest in combination with undercutting from wave action.

CHA recommends the upstream slope be re-graded to correct the steepness and slumped areas for stabilization. This effort should be coordinated with the recommendations made in Section 4.11 to analyze the upstream slope.

4.4 Bottom Ash Pond South Dike Wet Area

At about the mid-point along the length of the south dike downstream slope, there is a wet area which appears to be perched water on surface soil layers. The area was recently re-graded to improve drainage. This area should be monitored on a continual basis. Should a change be observed in this area during an inspection, a qualified engineer should further evaluate this new condition.

4.5 Bottom Ash Pond East Dike Erosion

Areas of erosion gullies along the transition from the crest to the downstream slope were observed during our site visit. AEP should continue to monitor these areas and perform repairs, as part of ongoing maintenance of the dikes. Repairs should included stabilizing the areas with seed and mulching the areas to establish better vegetation.

4.6 Bottom Ash Pond East Dike Repair of Rodent Holes

As discussed in Section 2.2.1.2 – East Dike, several large rodent holes were observed. A few of these appeared to be plugged and AEP personnel indicated that they have had to trap rodents from time to time. CHA recommends that AEP continue with efforts to plug these holes and trap rodents. In addition, noting the locations that have been plugged will provide a record which can be used to more easily identify active versus inactive rodent burrows (i.e. stable versus potentially changing conditions).

4.7 Bottom Ash Pond East Dike Tree and Stump Removal

As discussed in Section 2.2.1.2 – East Dike, there are a few tree stumps along the toe of the east dike. AEP personnel did not know when these trees were cut or why the bench with the access

road was apparently constructed around them. These stumps should be monitored for decay and the stumps and associated root balls removed under the direction of a professional engineer.

Several small diameter trees were observed at the water line around the pond. These trees have been allowed to grow despite routine mowing efforts. CHA recommends that these trees be cut and the root mass be left in place for trees less than 5 inches in diameter. Trees equal to or larger than 5 inches in diameter should have the root masses removed under the direction of a professional engineer.

4.8 Bottom Ash Pond North Dike Runoff from Flushing the Conveyor

Previous inspection reports indicated that there was an area at the northeast corner where runoff from flushing dust from the coal conveyor was resulting in an erosion gully on the downstream slope. A concrete pad and knee wall was placed under the coal conveyor at this location to minimize the impact of routine cleaning of the coal conveyor on the dike. There are other areas along the conveyor at which coal dust runs out of the conveyor during this process. We recommend that best management practices be utilized during flushing operations to minimize erosion of the embankment.

4.9 Stingy Run Dam Hydraulic Analysis

We recommend that in the event of a major storm event that raises the pool elevation, AEP closely monitor the behavior of the structure. First filling of a dam is a sensitive time because of changes in stress on the earthen embankment. Because the normal pool and design flood storage elevations are significantly different, it is our opinion that storm events that cause the reservoir elevation to rise should be considered as first filling events and the appropriate level of observation be taken to ensure that the dam is not exhibiting signs of internal erosion, piping and/or other concerns as a result of the surcharge pool.

4.10 Recommendations for Additional Stability Analyses – Bottom Ash Pond

Based on our review of available information for the Bottom Ash Pond we recommend that the following tasks be performed to confirm that the embankments are indeed stable under the various loading conditions outlined in Section 3.3.

- We recommend that an investigation be performed in which the properties of the alluvium silt/clay layer can be investigated in more detail in order to determine the presence and thickness of the soft layer of material indicated in the boring logs from June 2009. This scope of work should include additional laboratory testing of samples retrieved from the alluvium layer. (AEP disagrees with this recommendation, see comment 1 on Section 4.11 (page 3 of 5) received from AEP on August 18, 2009)
- We recommend that additional borings be performed to provide better areal coverage of the dikes and the potential soft alluvium layer. This layer appears, from the borings already performed, to vary in elevation and thickness. While at the elevation encountered under the south dike this layer does not create a critical surface, at a higher elevation, and potentially revised design strength, we suggest that this layer may produce a critical surface. (AEP disagrees with this recommendation, see comment 1 on Section 4.11 (page 3 of 5) received from AEP on August 18, 2009)
- CHA modeled the upstream slope using the south embankment geometry and the steady state loading condition and the soil parameter provided in the June 2009 report. The calculated factor of safety was 1.3 which is below the minimum required factor of safety (according to the USACOE). We recommend that a model be prepared for this load case using the soil parameters for the soft alluvium layer described above. AEP indicated in review comments on the Draft version of this report that their consultant has confirmed

that regrading the upstream slopes to design grades will result in a factor of safety of at least 1.5 using the soil parameters summarized in Table 4.

- The rapid-draw load case was not evaluated as part of the June 2009 investigation. CHA performed a preliminary analysis of the south embankment slope which indicated that the calculated factor of safety for the rapid draw-down load condition is close to 1.0, which is the minimum required value (according to the USACOE). We recommend that a model be prepared for this load case. While a rapid drawdown is not a scenario that has a high probability of occurrence, CHA recommends understanding the condition and meeting recommended stability factors of safety for the unlikely event that water must be evacuated rapidly via methods other than the existing outlet control structures such as pumping to prevent a more catastrophic release should an emergency condition develop in the embankment. (AEP disagrees with this recommendation, see comment 5 on Section 4.11 (page 3 of 5) received from AEP on August 18, 2009)

4.11 Stingy Run Dam Recommendations for Additional Stability Analyses

Based on our review of available information for the Stingy Run Dam we recommend that the following tasks be performed to confirm that the embankments are indeed stable under the various loading conditions outlined in Section 3.3.

- CHA recommends that AEP confirm that the Upper Sand and Lower Sand strata do not pose a liquefaction risk at this site.
- Although previously designed for a higher operating pool, the Stingy Run Dam has not been subjected to these higher levels. Because “first filling” is a critical time for embankment dams, CHA recommends a maximum surcharge stability evaluation be performed for the current conditions. (AEP disagrees with this recommendation, see comment 2 on Section 4.12 (page 4 of 5) received from AEP on August 18, 2009)

-
- CHA recommends a rapid drawdown analysis be performed for the current conditions. While a rapid drawdown is not a scenario that has a high probability of occurrence, CHA recommends understanding the condition and meeting recommended stability factors of safety for the unlikely event that water must be evacuated rapidly via methods other than the existing outlet control structures such as pumping to prevent a more catastrophic release should an emergency condition develop in the embankment. (AEP disagrees with this recommendation. See comment 3 on Section 4.12 (page 4 of 5) received from AEP on August 18, 2009.)

4.12 Stingy Run Dam Outlet Structure Access

The access stairs and floating bridge to the Stingy Run outlet tower were barricaded in 2008 by AEP because of advanced deterioration. We recommend that the access to the tower be repaired so continued monitoring of the condition of the outlet structure can be made during the routine inspections.

4.13 Stingy Run Dam Destroyed Instrumentation

We recommend AEP evaluate the need for and/or replace instrumentation that has been destroyed at the Stingy Run Dam. We understand that mower damage and vandals have been a problem at this site. Additional protection may be needed at the instrument locations to protect against this damage.

5.0 CLOSING

The information presented in this report is based on visual field observations, review of reports by others and this limited knowledge of the history of the General James Gavin Power Plant surface impoundments. The recommendations presented are based, in part, on project information available at the time of this report. No other warranty, expressed or implied is made. Should additional information or changes in field conditions occur, the conclusions and recommendations provided in this report should be re-evaluated by an experienced engineer.

APPENDIX A

Completed EPA Coal Combustion Dam Inspection Checklist Forms

&

Completed EPA Coal Combustion Waste (CCW) Impoundment Inspection Forms



*Final Report
Assessment of Dam Safety of
Coal Combustion Surface Impoundments
American Electric Power
General James Gavin Power Plant
Cheshire, OH*

**Coal Combustion Waste (CCW)
Impoundment Inspection**

Impoundment NPDES Permit # _____ INSPECTOR _____

Date _____

Impoundment Name _____

Impoundment Company _____

EPA Region _____

State Agency (Field Office) Address _____

Name of Impoundment _____

(Report each impoundment on a separate form under the same Impoundment NPDES Permit number)

New _____ Update _____

Is impoundment currently under construction?

Yes

No

Is water or ccw currently being pumped into the impoundment?

IMPOUNDMENT FUNCTION: _____

Nearest Downstream Town : Name _____

Distance from the impoundment _____

Impoundment

Location: Longitude _____ Degrees _____ Minutes _____ Seconds

Latitude _____ Degrees _____ Minutes _____ Seconds

State _____ County _____

Does a state agency regulate this impoundment? YES _____ NO _____

If So Which State Agency? _____

HAZARD POTENTIAL (In the event the impoundment should fail, the following would occur):

_____ **LESS THAN LOW HAZARD POTENTIAL:** Failure or misoperation of the dam results in no probable loss of human life or economic or environmental losses.


_____ **LOW HAZARD POTENTIAL:** Dams assigned the low hazard potential classification are those where failure or misoperation results in no probable loss of human life and low economic and/or environmental losses. Losses are principally limited to the owner's property.

_____ **SIGNIFICANT HAZARD POTENTIAL:** Dams assigned the significant hazard potential classification are those dams where failure or misoperation results in no probable loss of human life but can cause economic loss, environmental damage, disruption of lifeline facilities, or can impact other concerns. Significant hazard potential classification dams are often located in predominantly rural or agricultural areas but could be located in areas with population and significant infrastructure.

_____ **HIGH HAZARD POTENTIAL:** Dams assigned the high hazard potential classification are those where failure or misoperation will probably cause loss of human life.

DESCRIBE REASONING FOR HAZARD RATING CHOSEN:

CONFIGURATION:

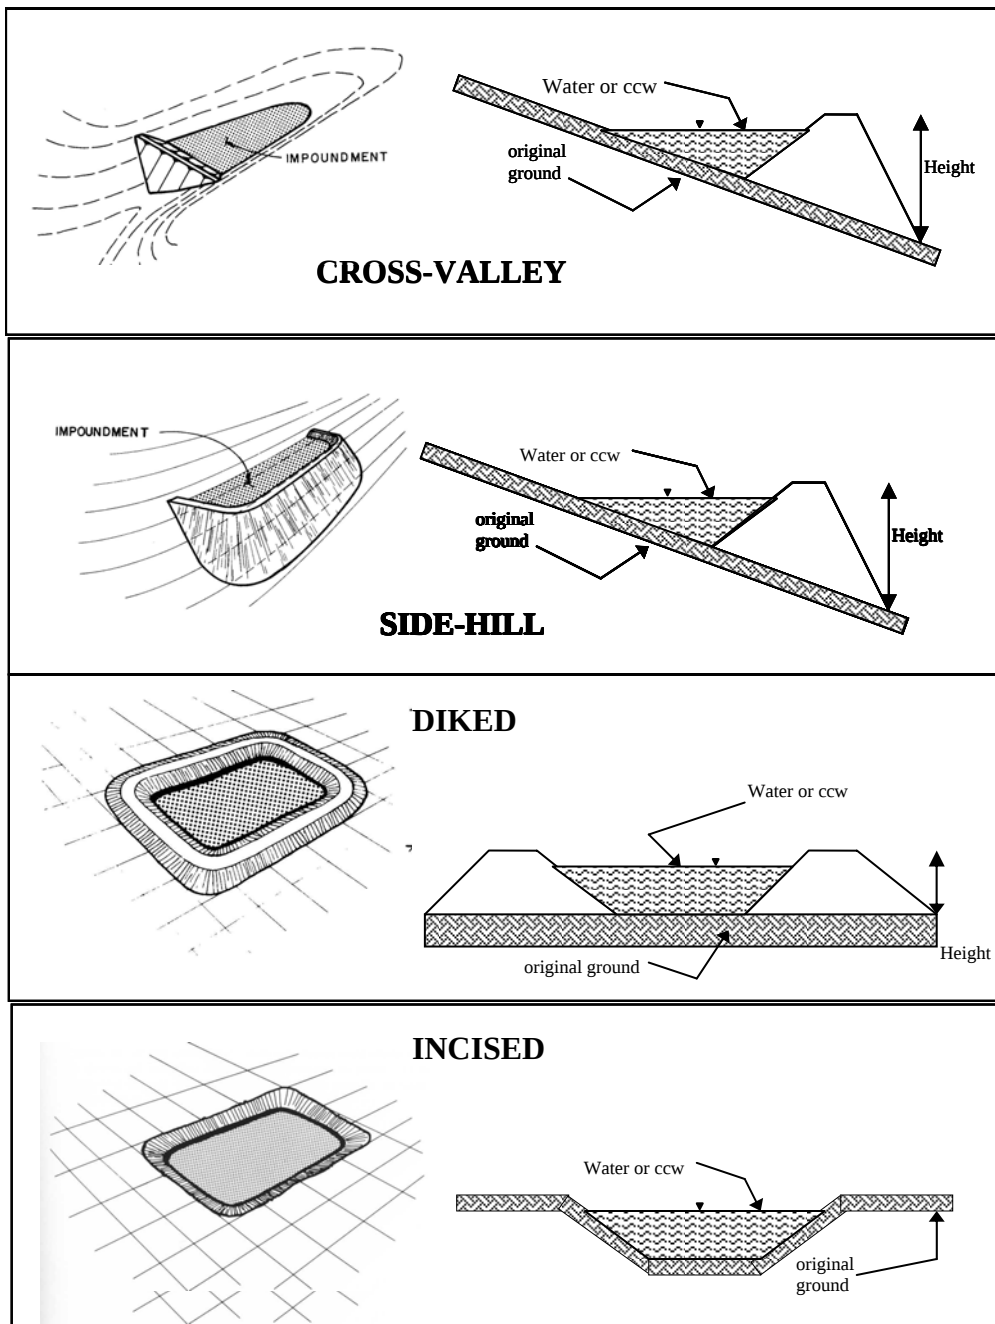

☐ Cross-Valley
☐ Side-Hill
☐ Diked
☐ Incised (form completion optional)
☐ Combination Incised/Diked

Embankment Height _____ feet Embankment Material _____
 Pool Area _____ acres Liner _____
 Current Freeboard _____ feet Liner Permeability _____

TYPE OF OUTLET (Mark all that apply)

 Open Channel Spillway

 Trapezoidal

 Triangular

 Rectangular


 Irregular

 depth


 bottom (or average) width

 top width


TRAPEZOIDAL

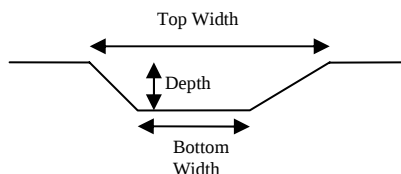


TRIANGULAR



RECTANGULAR



IRREGULAR



 Outlet

 inside diameter

Material

 corrugated metal

 welded steel

 concrete

 plastic (hdpe, pvc, etc.)


 other (specify) _____

Is water flowing through the outlet? YES _____ NO _____

 No Outlet

 Other Type of Outlet (specify) _____

The Impoundment was Designed By _____



If So When? _____

If So Please Describe : _____

[illegible]

US EPA ARCHIVE DOCUMENT

This image shows a full page of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page, providing a template for handwriting practice or general writing. There are no margins, text, or other markings on the page.

If so, which method (e.g., piezometers, gw pumping,...)? _____

If so Please Describe : _____

EPA Form XXXX-XXX, Jan 09



Site Name: General James Gavin Steam Plant	Date: June 2, 2009
Unit Name: Stingy Run Ash Disposal Pond	Operator's Name: Ohio AEP
Unit I.D.:	Hazard Potential Classification: High Significant Low
Inspector's Name: Katherine Adnams/Malcolm D. Hargraves	

Check the appropriate box below. Provide comments when appropriate. If not applicable or not available, record "N/A". Any unusual conditions or construction practices that should be noted in the comments section. For large diked embankments, separate checklists may be used for different embankment areas. If separate forms are used, identify approximate area that the form applies to in comments.

	Yes	No		Yes	No
1. Frequency of Company's Dam Inspections?		quarterly	18. Sloughing or bulging on slopes?		X
2. Pool elevation (operator records)?		698	19. Major erosion or slope deterioration?		X
3. Decant inlet elevation (operator records)?		n/a	20. Decant Pipes:		
4. Open channel spillway elevation (operator records)?		n/a	Is water entering inlet, but not exiting outlet?	n/a	
5. Lowest dam crest elevation (operator records)?		735	Is water exiting outlet, but not entering inlet?	n/a	
6. If instrumentation is present, are readings recorded (operator records)?	X		Is water exiting outlet flowing clear?	n/a	
7. Is the embankment currently under construction?		X	21. Seepage (specify location, if seepage carries fines, and approximate seepage rate below):		
8. Foundation preparation (remove vegetation, stumps, topsoil in area where embankment fill will be placed)?		n/a	From underdrain?	X	
9. Trees growing on embankment? (If so, indicate largest diameter below)		X	At isolated points on embankment slopes?		X
10. Cracks or scarps on crest?		X	At natural hillside in the embankment area?		X
11. Is there significant settlement along the crest?		X	Over widespread areas?		X
12. Are decant trashracks clear and in place?		n/a	From downstream foundation area?		X
13. Depressions or sinkholes in tailings surface or whirlpool in the pool area?		X	"Boils" beneath stream or ponded water?		X
14. Clogged spillways, groin or diversion ditches?		X	Around the outside of the decant pipe?	n/a	
15. Are spillway or ditch linings deteriorated?		not seen	22. Surface movements in valley bottom or on hillside?		X
16. Are outlets of decant or underdrains blocked?		n/a	23. Water against downstream toe?		X
17. Cracks or scarps on slopes?		X	24. Were Photos taken during the dam inspection?	X	

Major adverse changes in these items could cause instability and should be reported for further evaluation. Adverse conditions noted in these items should normally be described (extent, location, volume, etc.) in the space below and on the back of this sheet.

Inspection Issue #

Comments

Note that the Hazard Potential Classification is based on the EPA classification prior to the site visit.

- | | |
|----|--|
| 1 | Ohio Power makes quarterly and annual inspections of the dam along with periodic measurements of monitoring wells, inclinometers, and settlement plates. |
| 15 | Upstream spillway entrance is submerged. |
| 21 | Seepage was observed in wet area at downstream toe at a v-notched weir location. Water was generally clear at v-notched weir in ditch line. There had been rain in days prior to site visit. |

**Coal Combustion Waste (CCW)
Impoundment Inspection**Impoundment NPDES Permit # OH0028762INSPECTOR Adnams/HargravesDate June 2, 2009Impoundment Name Stingy Run Ash Disposal PondImpoundment Company Ohio Power CompanyEPA Region 4

State Agency (Field Office) Addresss _____

Name of Impoundment Stingy Run Ash Disposal Pond

(Report each impoundment on a separate form under the same Impoundment NPDES Permit number)

New _____ Update x

Is impoundment currently under construction?

Yes

No

x

Is water or ccw currently being pumped into the impoundment?

x**IMPOUNDMENT FUNCTION:** Fly Ash disposal; now pH buffer for Acid Mine DrainageNearest Downstream Town : Name Cheshire, OhioDistance from the impoundment 2 miles

Impoundment

Location: Longitude 82 Degrees 8 Minutes 37 SecondsLatitude 38 Degrees 57 Minutes 50 SecondsState Ohio County GalliaDoes a state agency regulate this impoundment? YES x NO _____If So Which State Agency? ODNR-Division of Water

HAZARD POTENTIAL (In the event the impoundment should fail, the following would occur):

_____ **LESS THAN LOW HAZARD POTENTIAL:** Failure or misoperation of the dam results in no probable loss of human life or economic or environmental losses.

_____ **LOW HAZARD POTENTIAL:** Dams assigned the low hazard potential classification are those where failure or misoperation results in no probable loss of human life and low economic and/or environmental losses. Losses are principally limited to the owner's property.


_____ **SIGNIFICANT HAZARD POTENTIAL:** Dams assigned the significant hazard potential classification are those dams where failure or misoperation results in no probable loss of human life but can cause economic loss, environmental damage, disruption of lifeline facilities, or can impact other concerns. Significant hazard potential classification dams are often located in predominantly rural or agricultural areas but could be located in areas with population and significant infrastructure.

☒ **HIGH HAZARD POTENTIAL:** Dams assigned the high hazard potential classification are those where failure or misoperation will probably cause loss of human life.

DESCRIBE REASONING FOR HAZARD RATING CHOSEN:

There are presently isolated single family dwellings and what remains of Cheshire, Ohio (Ohio Power purchased most, if not all, of the town as part of an air pollution settlement agreement, allowing the citizens to relocate) downstream of the impoundment. Should a full failure and breach occur under a full pool, these items as well as the Gavin Power Plant and Ohio State Route 7 would likely be adversely affected, with the potential loss of human life.

CONFIGURATION:

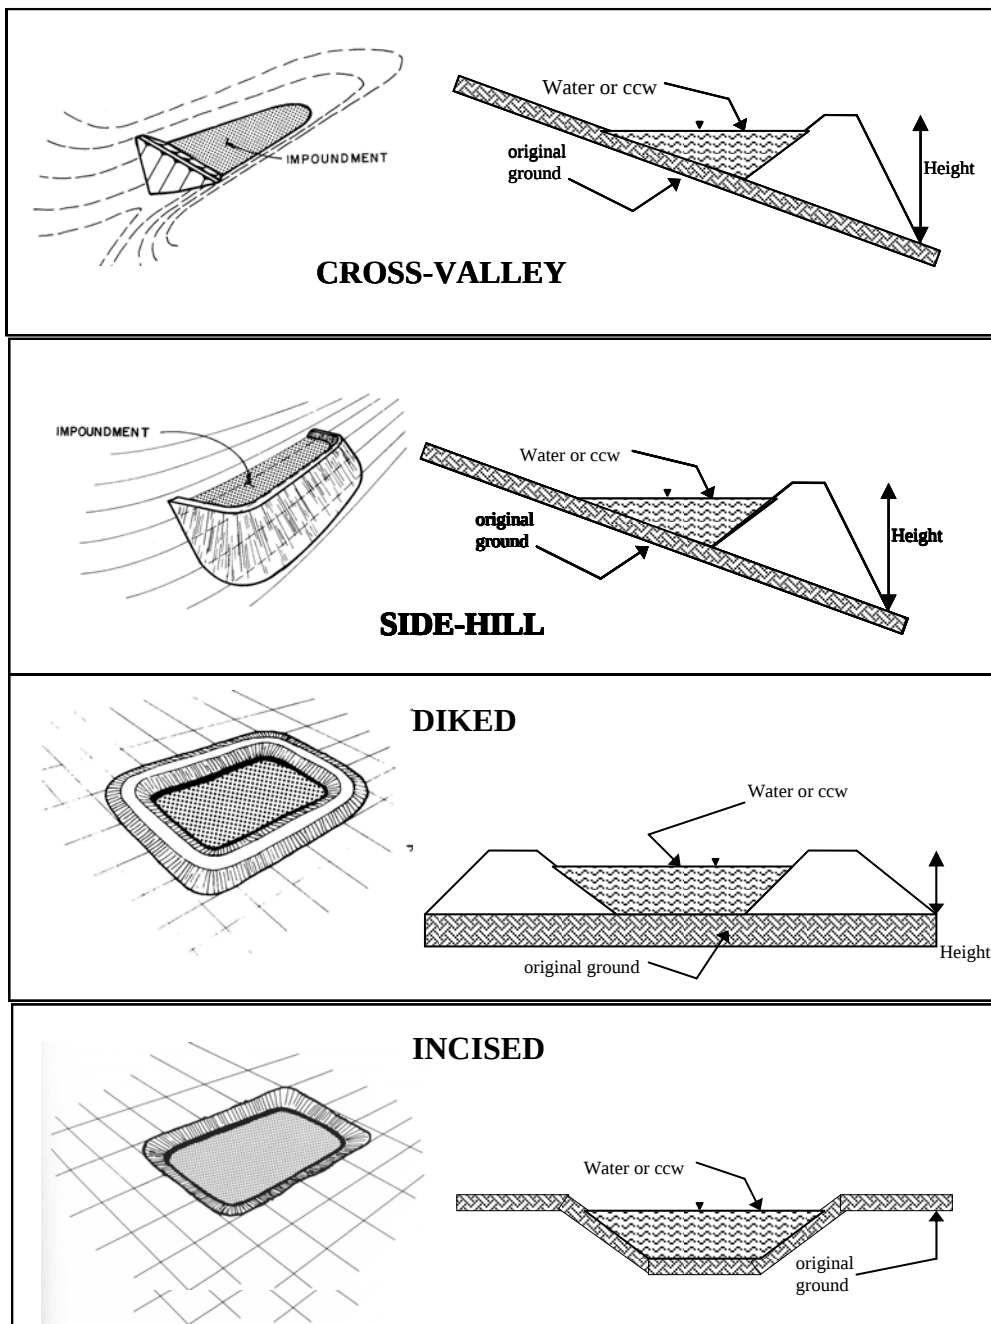

- ☒ Cross-Valley
☐ Side-Hill
☐ Diked
☐ Incised (form completion optional)
☐ Combination Incised/Diked

Embankment Height 144 feet Embankment Material Native Borrow
 Pool Area 324.5 acres Liner none
 Current Freeboard 37 feet Liner Permeability n/a

TYPE OF OUTLET (Mark all that apply)

n/a **Open Channel Spillway**

☐ Trapezoidal

☐ Triangular

☐ Rectangular


☐ Irregular

☐ depth


☐ bottom (or average) width

☐ top width


TRAPEZOIDAL

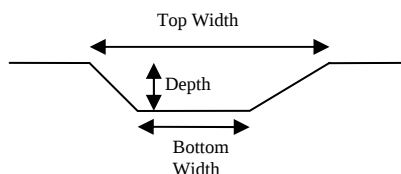


TRIANGULAR



RECTANGULAR



IRREGULAR



yes **Outlet**

48 ☐ inside diameter

Material


☐ corrugated metal

☐ welded steel

☒ concrete

☐ plastic (hdpe, pvc, etc.)

☐ other (specify) _____



Is water flowing through the outlet? YES ☒ NO ☐

n/a **No Outlet**

☐ **Other Type of Outlet** (specify) _____

The Impoundment was Designed By Harza Engineering Company

Has there ever been a failure at this site? YES _____ NO x _____

If So When? _____

If So Please Describe : _____

Has there ever been significant seepages at this site? YES _____ NO x _____

If So When? _____

IF So Please Describe:

Has there ever been any measures undertaken to monitor/lower
Phreatic water table levels based on past seepages or breaches
at this site?

YES _____ NO x _____

If so, which method (e.g., piezometers, gw pumping,...)? see below _____

If so Please Describe :

There have been monitoring wells/piezometers, inclinometers, and settlement plates installed at different times as a part of a monitoring and maintenance program. Water level and deformation measurements have been and continue to be recorded periodically at these locations.