

US EPA ARCHIVE DOCUMENT



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

OCT 4 1989

OFFICE OF
SOLID WASTE AND EMERGENCY RESPONSE

TO ALL NRC LICENSEES:

SUBJECT: GUIDANCE ON THE DEFINITION AND IDENTIFICATION OF
COMMERCIAL MIXED LOW-LEVEL RADIOACTIVE AND HAZARDOUS
WASTE AND ANSWERS TO ANTICIPATED QUESTIONS

The U.S. Environmental Protection Agency (EPA) has jurisdiction under the Resource Conservation and Recovery Act (RCRA) over the management of wastes with the exception of radioactive wastes subject to the Atomic Energy Act (AEA). Accordingly, commercial use and disposal of source, byproduct and special nuclear material wastes are regulated by the U.S. Nuclear Regulatory Commission (NRC) to meet EPA environmental standards. Under the AEA Low-Level Radioactive Wastes (LLW) contain source, byproduct, or special nuclear material, but they may also contain chemical constituents which are hazardous under EPA regulations in 40 CFR Part 261. Such wastes are commonly referred to as Mixed Low-Level Radioactive and Hazardous Waste (Mixed LLW).

NRC regulations exist to control the byproduct, source, and special nuclear material components of commercial Mixed LLW; EPA has the authority and continues to develop regulations to control the non-radioactive component of the Mixed LLW. Thus, the individual constituents of commercial Mixed LLW are subject to either NRC or EPA regulations. However, when the components are combined to become Mixed LLW, neither statute has exclusive jurisdiction. This has resulted in a situation of dual regulation where both NRC and EPA may regulate the same waste.

Enclosed is the revised guidance document entitled, "Guidance on the Definition and Identification of Commercial Mixed Low-Level Radioactive and Hazardous Waste." This document was developed jointly by the NRC and EPA to aid commercial LLW generators in assessing whether they are currently generating Mixed LLW. It is based on NRC and EPA regulations in effect on December 31, 1988.

Notice of availability of
for comments were published in
1987, and comments were subse
public comment in the questio
document to provide clarifica
were raised.

**GUIDANCE ON THE DEFINITION AND IDENTIFICATION
OF COMMERCIAL MIXED LOW-LEVEL RADIOACTIVE AND HAZARDOUS WASTE**

Definition

Mixed Low-Level Radioactive and Hazardous Waste (Mixed LLW) is defined as waste that satisfies the definition of low-level radioactive waste (LLW) in the Low-Level Radioactive Waste Policy Amendments Act of 1985 (LLRWPA) and contains hazardous waste that either (1) is listed as a hazardous waste in Subpart D of 40 CFR Part 261 or (2) cause the LLW to exhibit any of the hazardous waste characteristics identified in Subpart C of 40 CFR Part 261.

Identification

The policy provided in this guidance was developed jointly by the U.S. Nuclear Regulatory Commission (NRC) and the U.S. Environmental Protection Agency (EPA). LLW that contains hazardous wastes defined under the Resource Conservation and Recovery Act (RCRA) is Mixed LLW. Under current Federal law, such waste is subject to regulation by NRC under the Atomic Energy Act (AEA), as amended, and by EPA under RCRA, as amended. In the absence of legislation to the contrary, management and disposal of this waste must be conducted in compliance with NRC and EPA or equivalent state regulations.

This guidance presents a methodology (Figure 1) that may be used by generators of commercial LLW to identify Mixed LLW. Implementation of the methodology should identify Mixed LLW and aid generators in assessing whether they are currently generating Mixed LLW. Generators are cautioned, however, that application of the methodology does not affect the need to comply with applicable NRC and EPA regulations. Because EPA's regulations for hazardous waste are currently changing, generators should use applicable regulations that are in effect at the time of implementation of the methodology. This guidance has been prepared based on NRC and EPA regulations in effect on December 31, 1988.

Application of this methodology to identify Mixed LLW will reveal the complexities of the definition of Mixed LLW. If generators have specific questions about whether LLW is Mixed LLW, they should promptly contact the agencies by writing to the persons listed below.

For questions about whether the waste is low-level radioactive waste, contact:

Mr. Dan E. Martin
Division of Low-Level Waste
Management and Decommissioning
U.S. Nuclear Regulatory Commission
Mail Stop WF5E4
Washington, D.C. 20555

For questions about whether the waste is hazardous waste, contact:

Ms. Betty Shackelford
Mixed Waste Coordinator
Permits and State
Programs Division
Mail Code OS-342
U.S. Environmental
Protection Agency
401 M St., S.W.
Washington, D.C. 20460

Methodology

Step 1. Identify LLW

Step 1 in the methodology requires that the generator determine whether the waste is LLW as defined in the LLRWPA. This Act defines LLW as radioactive material that (A) is not high-level radioactive waste, spent nuclear fuel, or byproduct material as defined in section 11e(2) of the AEA (i.e., uranium or thorium mill tailings) and (B) the NRC classifies as LLW consistent with existing law and in accordance with (A). If the generator determines that the waste is LLW, the generator should proceed to step 2. If the determination is negative, then the waste cannot be Mixed LLW because it is not LLW. However, the waste may be another radioactive or hazardous waste regulated under AEA, RCRA, or both statutes.

Step 2. Identify Listed Hazardous Waste

In step 2, the generator determines whether the LLW contains any hazardous wastes listed in Subpart D of 40 CFR Part 261. Subpart D of Part 261 is reproduced in Appendix I of this guidance. LLW is Mixed LLW if it contains any hazardous wastes specifically listed in Subpart D of 40 CFR Part 261. Listed hazardous wastes include hazardous waste streams from specific and non-specific sources listed in 40 CFR Parts 261.31 and 261.32 and discarded commercial chemical products listed in 40 CFR Part 261.33. The generator is responsible for determining whether LLW contains listed hazardous wastes. The determination should be based on knowledge of the process that generates the waste. For example, if a process produces LLW that contains spent solvents that are specifically listed in the tables of Subpart D of Part 261, the generator should suspect that the waste is Mixed LLW.

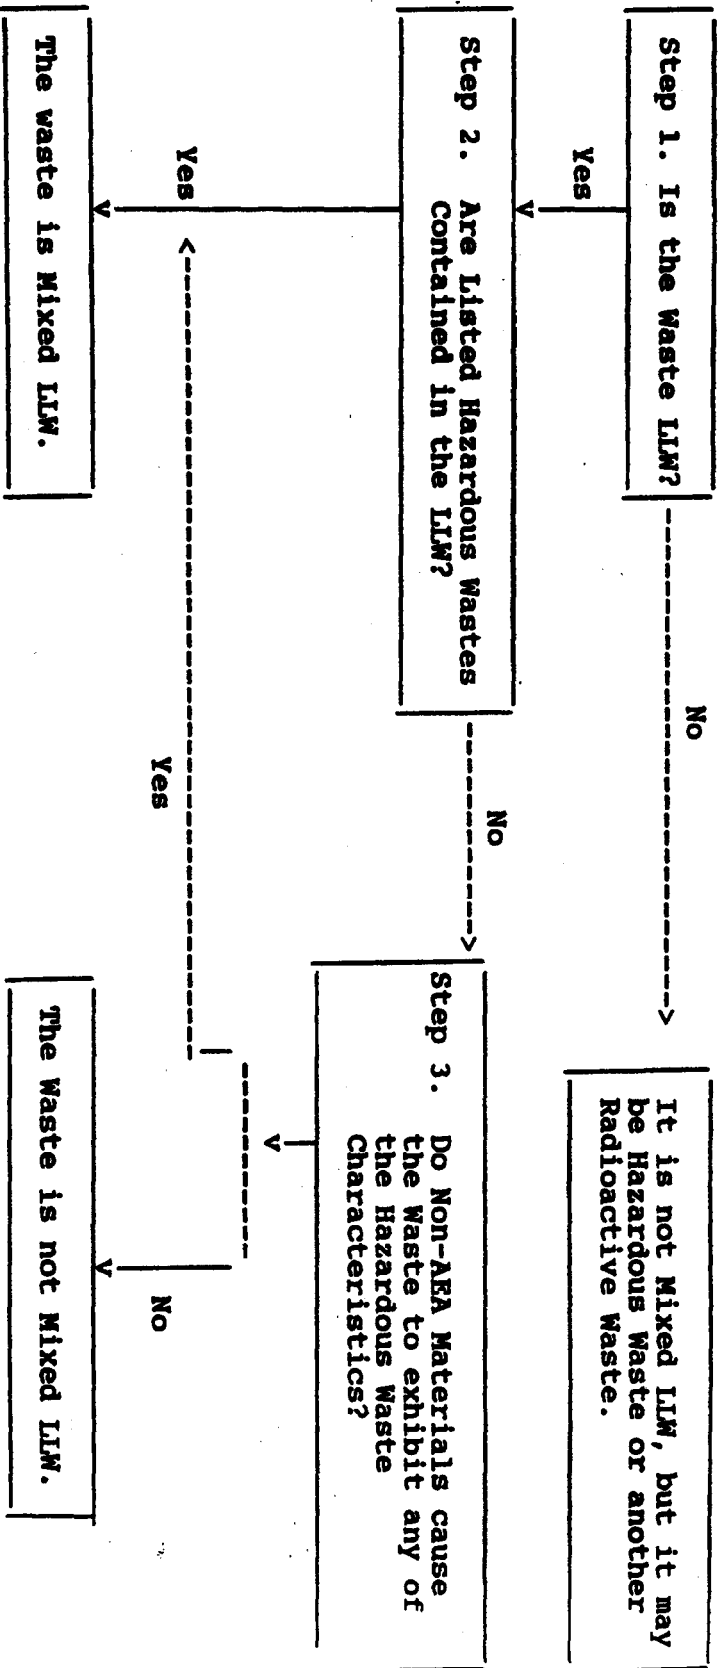


Figure 1. Identification of Mixed LLW.

Step 3. Identify Hazardous Characteristics

If the LLW does not contain a listed hazardous waste, Step 3 of the methodology requires the generator to determine whether the LLW contains hazardous wastes that cause the LLW to exhibit any of the hazardous waste characteristics identified in Subpart C of 40 CFR Part 261. This determination can be based on either (1) an assessment of whether the LLW exhibits one or more of the hazardous waste characteristics because it contains non-AEA materials (i.e., materials other than source, special nuclear, and byproduct materials) based on the generator's knowledge of the materials or processes used in generating the LLW or (2) testing of the LLW in accordance with the methods identified in Subpart C of Part 261. Except for certain ores containing source material, which are defined as source material in 10 CFR 40.4(h), and uranium and thorium mill tailings or wastes, NRC and EPA interpret the definitions of source, special nuclear, and byproduct materials to include only the radioactive elements themselves. Generators should identify non-AEA materials contained in the LLW by examining the process that generates the waste. For example, if the process mixes byproduct material (an AEA material) with a volatile organic solvent (a non-AEA material), the generator would determine either through his knowledge or testing of representative samples of the LLW that contain the solvent waste whether the waste exhibits any of the hazardous waste characteristics because it contains the solvent.

If the wastes are tested, the generator should collect and test representative samples of the LLW to determine if the waste exhibits any of the characteristics identified in Subpart C because it contains the non-AEA materials. These characteristics include ignitability (Section 261.21), corrosivity (Section 261.22), reactivity (Section 261.23), and Extraction Procedure (EP) toxicity (Section 261.24). Waste testing should be conducted in a manner that is consistent with the worker protection requirements in 10 CFR Part 20. The purpose of the characteristics tests is to identify hazardous wastes that are not specifically listed in Subpart D of 40 CFR Part 261. Test methods to collect representative samples of wastes are described in Appendix I of 40 CFR Part 261. The samples should then be tested using the referenced testing protocols (e.g., ASTM Standard D-93-79 or D-93-80 for the Pensky-Martens Closed Cup Ignitability Test). EPA's testing requirements are reproduced in Appendix II of this guidance. It should be noted that on June 13, 1986, EPA proposed a modification to the EP Toxicity testing requirements to include organic constituents.

If LLW contains a listed hazardous waste or non-AEA materials that cause the LLW to exhibit any of the hazardous waste characteristics, the waste is Mixed LLW and must, therefore, be managed and disposed of in compliance with EPA's Subtitle C hazardous waste regulations in 40 CFR Parts 124, and 260 through 270, and NRC's regulations in 10 CFR Parts 20, 30, 40, 61, and 70.

Management and disposal of Mixed LLW must be conducted in compliance with state requirements in states with EPA-authorized regulatory programs for the hazardous components of such waste and NRC agreement state radiation control programs for LLW.

Questions and Answers

As a supplement to the Guidance on the Definition and Identification of Commercial Mixed Low-Level Radioactive and Hazardous Waste (Mixed LLW), answers to anticipated questions are included to clarify obscure points and to respond to public comments.

1. Are my low-level radioactive wastes exempt from RCRA because they are source, special nuclear, or byproduct materials as defined under the AEA?

Except for certain ores containing source material, which are defined as source material in 10 CFR 40.4(h), and uranium and thorium mill tailings or wastes, NRC and EPA consider that only the radionuclides themselves are exempt from RCRA. Section 1004(27) of RCRA excludes source, special nuclear, and byproduct material from the definition of "solid waste." RCRA defines solid waste as:

"any garbage, refuse, sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility and other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, or from community activities, but does not include solid or dissolved materials in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Federal Water Pollution Control Act, as amended (86 Stat. 880), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954, as amended (68 Stat. 923)." [emphasis added]

Since "hazardous waste" is a subset of "solid waste," RCRA also excludes source, special nuclear, and byproduct materials from the definition of hazardous waste and, therefore, from regulation under EPA's RCRA Subtitle C program. Section 11 of the Atomic Energy Act, as amended, defines these radioactive materials as follows:

Source material means (1) uranium, thorium, or any other material which is determined by the Atomic Energy Commission (AEC) pursuant to the provisions of section 61 of the AEA to be source material, or (2) ores containing one or more of the foregoing materials, in such concentration as the AEC may by regulation determine from time to time.

Special nuclear material means (1) plutonium, uranium enriched in the isotope 233 or in the isotope 235, and any other material which the AEC, pursuant to the provisions of Section 51 of the AEA, determines to be special nuclear material; or (2) any material artificially enriched by any of the foregoing, but does not include source material.

Byproduct material means (1) any radioactive material (except special nuclear material) yielded in or made radioactive by exposure to radiation incident to the process of producing or utilizing special nuclear material, and (2) the tailings or wastes produced by the extraction or concentration of uranium or thorium from any ore processed primarily for its source material content.

Source, special nuclear, and byproduct materials, however, may be mixed with other radioactive or non-radioactive materials that are not source, special nuclear, or byproduct materials. For example, tritium may be contained in toluene, a nonhalogenated aromatic solvent. Consistent with the definition of byproduct material, the tritium may be considered a byproduct material, while the toluene that contains the tritium would not be byproduct material. Mixtures of toluene and tritium could satisfy the definition of Mixed LLW because they contain listed hazardous waste (spent toluene) and tritium that may qualify as LLW if it has been produced by activities regulated by NRC under the AEA.

2. What are some examples of Mixed LLW?

A preliminary survey performed for the NRC identified two potential types of Mixed LLW:

- o LLW containing organic liquids, such as scintillation liquids and vials; organic lab liquids; sludges; and cleaning, degreasing, and miscellaneous solvents.
- o LLW containing heavy metals, such as discarded lead shielding, discarded lined containers, and lead oxide dross containing uranium oxide; light water reactor (LWR) process wastes containing chromate and LWR decontamination resins containing chromium; and mercury amalgam in trash.

The preliminary survey concluded that potential Mixed LLW comprises a small percentage of all LLW. For example, LLW containing organic liquids accounted for approximately 2.3% by volume of LLW reported in the preliminary survey (Bowerman, et al., 1985).

An earlier survey identified a more diverse universe of potential Mixed LLW including wastes that contained aldehydes, aliphatic halogenated hydrocarbons, alkanes, alkenes, amino acids, aromatic hydrocarbons, chelating agents, esters, ethers, ketones, nitrosamines, nucleotides, pesticides, phenolic compounds, purines, resins, steroids, and vitamins (General Research Corporation, 1980). NRC also anticipates that additional LLW may be identified as Mixed LLW in the future, as generators implement the definition of Mixed LLW and as EPA revises the definition of hazardous waste.

3. Could some "below regulatory concern" wastes be considered Mixed LLW?

A determination that radioactive wastes are below regulatory concern (BRC) for radioactivity may affect how the wastes are managed or discarded, but it does not affect the legal status of the wastes. Specifically, their status with respect to the definition of Mixed LLW does not change. BRC waste is still LLW because it satisfies the definition of LLW in the LLRWPA and is within the NRC's jurisdictional authority under the AEA.

When radioactive waste contains sufficiently low concentrations or quantities of radionuclides, NRC may find that they do not need to be managed or disposed of as radioactive wastes. For NRC to make such a finding, management and disposal of the waste must not pose an undue radiological risk to the public and the environment. However, NRC's determination that the radioactive content of the wastes is below NRC regulatory concern does not relieve licensees from compliance with applicable rules of other agencies governing non-radiological hazards (e.g., regulations of EPA or the Department of Transportation).

Therefore, some BRC wastes may still be considered Mixed LLW if they contain hazardous wastes that have been listed in Subpart D of 40 CFR Part 261 or that cause the LLW to exhibit any of the hazardous characteristics described in Subpart C of 40 CFR Part 261. BRC Mixed LLW may be managed without regard to its radioactivity (but it must still be managed as a hazardous waste in compliance with EPA's regulations for hazardous waste generation, storage, transportation, treatment, and disposal (cf. 40 CFR Parts 262 through 266)).

4. If I use chemicals in my process that are identified by EPA as hazardous constituents, should I assume that my LLW is Mixed LLW?

No. Low-level radioactive waste that contains hazardous constituents may not necessarily be Mixed LLW. As defined above, Mixed LLW is LLW that contains a known hazardous waste (i.e., a listed hazardous waste) or that exhibits one or more of the hazardous characteristics because it contains non-AEA materials. For wastes that are not listed in Subpart D of 40 CFR Part 261, testing is not necessarily required to "determine" whether the LLW exhibits any of the hazardous characteristics. A generator may be able to determine whether the LLW is Mixed LLW based on knowledge of the waste characteristics or the process that generates the LLW.

Furthermore, if the generator normally segregates LLW from hazardous and other types of wastes, there is no need to assume that hazardous wastes may have been inadvertently mixed with LLW or to inspect each container or receptacle to ensure that inadvertent mixing has not occurred. Although the generator is subject to RCRA inspections and must follow the manifest, pre-transport, and other requirements of

40 CFR Part 262, the generator is not required to demonstrate that every LLW container does not contain hazardous waste.

5. How can I obtain representative samples of heterogeneous trash included in LLW to perform the hazardous characteristics tests?

Before discussing the collection of representative samples of waste, generators are reminded that they are not required to test LLW to determine if the waste contains hazardous wastes. Generators and handlers of mixed waste and hazardous waste can declare their wastes hazardous or nonhazardous based on knowledge of the process/production of the waste, in lieu of testing for a characteristic.

Representative samples of waste should be collected for testing in accordance with EPA's regulations in 40 CFR 261.20(c), which state that waste samples collected using applicable methods specified in Appendix I of Part 261 will be considered as representative samples for hazardous characteristics testing. This appendix has been included in its entirety in Appendix II of this guidance. The sampling techniques described in Appendix I of Part 261 apply to extremely viscous liquids, fly ash-like material, containerized liquid wastes, and liquid wastes in pits, ponds, lagoons, and similar reservoirs. In the absence of guidance about sampling heterogeneous wastes, generators should use appropriate portions of the sampling methods described in Appendix I of Part 261 and EPA's manual entitled "Test Methods for Evaluating Solid Waste, Third Edition (i.e., SW-846) in combination with other methods to collect, to the maximum extent practicable, representative samples of the waste to be tested.

6. Are lead containers whose primary use is for shielding in disposal operations, hazardous waste under RCRA?

No. While lead containers and lead container liners may exhibit the hazardous characteristic for lead, those containers whose primary use is for shielding in low-level waste disposal operations are not considered wastes and thus, are not subject to the hazardous waste rules. These same containers and liners if disposed of or discarded would be considered wastes and if they exhibit the hazardous characteristic, would be subject to the hazardous waste rules.

It should be noted that EPA recognizes that all lead containers and liners may be equally hazardous to human health and the environment when placed in the ground independent of its legal classification as a waste or container. Therefore, EPA recommends that all lead containers and lead liners be managed in an environmentally safe manner (e.g., managed in a permitted hazardous waste facility or treated such that it no longer exhibits its characteristic).

Encapsulation may be a viable mechanism to mitigate lead migration from these containers and liners. The EPA has not evaluated specific containers or encapsulation methodologies using the EP Toxicity test.

7. If a waste contains any of the constituents listed on Appendix VIII of Part 261, is it a hazardous under RCRA?

No. Under RCRA, a waste is hazardous if it is a "listed" waste or it exhibits a hazardous characteristic. Wastes are listed by EPA if they contain significant amounts of toxic constituents identified in Appendix VIII, and the Agency has determined that these toxic constituents are persistent and mobile to some degree such that they pose a potential and substantial threat to human health and the environment. (Factors outlined in 40 CFR 261.11(a)(3)(i)-(xi), which include nature of the toxicity present and potential degradation products, may be considered when determining whether or not a waste should be listed). However, until the Agency lists the wastes in Subpart D of Part 261, they would not be considered hazardous by EPA (even if the waste contains one or more of the hazardous constituents listed on Appendix VIII) unless the waste would exhibit one or more of the hazardous waste characteristics.

References

Bowerman, B. S., Kempf, C. R., MacKenzie, D. R., Siskind, B. and P. L. Piciulo, 1985, "An Analysis of Low-Level Wastes: Review of Hazardous Waste Regulations and Identification of Radioactive Mixed Wastes," NUREG/CR-4406, U.S. Nuclear Regulatory Commission.

General Research Corporation, 1980, "Study of Chemical Toxicity of Low-Level Wastes," NUREG/CR-1793, U.S. Nuclear Regulatory Commission.

Appendix I

Subpart D—Lists of Hazardous Wastes

§ 261.30 General.

(a) A solid waste is a hazardous waste if it is listed in this subpart, unless it has been excluded from this list under §§ 260.20 and 260.22.

(b) The Administrator will indicate his basis for listing the classes or types of wastes listed in this Subpart by employing one or more of the following Hazard Codes:

Ignitable Waste _____	(I)
Corrosive Waste _____	(C)
Reactive Waste _____	(R)
EP Toxic Waste _____	(E)
Acute Hazardous Waste _____	(A)
Toxic Waste _____	(T)

Appendix VII identifies the constituent which caused the Administrator to list the waste as an EP Toxic Waste (E) or Toxic Waste (T) in §§ 261.31 and 261.32.

(c) Each hazardous waste listed in this subpart is assigned an EPA Hazardous Waste Number which precedes the name of the waste. This number must be used in complying with the notification requirements of Section 3010 of the Act and certain record-keeping and reporting requirements under Parts 262 through 265 and Part 270 of this chapter.

(d) The following hazardous wastes listed in § 261.31 or § 261.32 are subject to the exclusion limits for acutely hazardous wastes established in § 261.5: EPA Hazardous Wastes Nos. FO20, FO21, FO22, FO23, FO26, and FO27.

[45 FR 22119, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983; 50 FR 2000, Jan. 14, 1985]

§ 261.31 Hazardous wastes from non-specific sources.

The following solid wastes are listed hazardous wastes from non-specific sources unless they are excluded under §§ 260.20 and 260.22 and listed in Appendix IX.

Industry and EPA Hazardous Waste No.	Hazardous Waste	Exclusion Code
Generic	The following spent halogenated solvents used in degreasing: trichloroethylene, tetrachloroethylene, perchloroethylene, 1,1,1-trichloroethane, carbon tetrachloride and chloroform. Before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or these solvents listed in P002, P004 and P006, and all bottoms from the recovery of these spent solvents and spent solvent mixtures.	(7)
P001	The following spent halogenated solvents: trichloroethylene, perchloroethylene, 1,1,1-trichloroethane, 1,1,2-trichloroethane, 1,1,2-dichloroethane, 1,1,2-dichloroethane, 1,1,1-trichloroethane, 1,1,2-dichloroethane, and 1,1,2-trichloroethane. Before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those listed in P001, P004, or P006, and all bottoms from the recovery of these spent solvents and spent solvent mixtures.	(7)
P002	The following spent non-halogenated solvents: xylene, acetone, ethyl acetate, ethyl benzoate, ethyl ether, methyl ethyl ketone, n-butyl acetate, cyclohexane, and methanol. Before use, a total of ten percent or more (by volume) of one or more of the above spent non-halogenated solvents, and all spent solvent mixtures containing, before use, one or more of the above non-halogenated solvents, and a total of ten percent or more (by volume) of one or more of these solvents listed in P001, P002, P004, and P006, and all bottoms from the recovery of these spent solvents and spent solvent mixtures.	(7)
P003	The following spent non-halogenated solvents: creosote and creosote acid, and kerosene. Before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those listed in P001, P002, and P003, and all bottoms from the recovery of these spent solvents and spent solvent mixtures.	(7)
P004	The following spent non-halogenated solvents: toluene, methyl ethyl ketone, carbon disulfide, acetone, pyridine, benzene, 2-propanol, and 2-butanol. Before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those listed in P001, P002, or P004, and all bottoms from the recovery of these spent solvents and spent solvent mixtures.	(7)
P005	Wastewater treatment sludge from electroplating operations except from the following processes: (1) Sulfur acid etching of aluminum; (2) tin plating on carbon steel; (3) zinc plating (sacrificial anode) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin and aluminum plating on carbon steel; and (6) chromic etching and rinsing of aluminum.	(7)
P006	Wastewater treatment sludge from the chemical conversion etching of aluminum.	(7)
P007	Spent cyanide bearing bath solutions from electroplating operations.	(A) (7)
P008	Plating bath residues from the bottom of plating baths from electroplating operations where cyanide are used in the process.	(A) (7)
P009	Spent stripping and cleaning bath solutions from electroplating operations where cyanide are used in the process.	(A) (7)
P010	Cyaniding bath residues from all baths from metal heat treating operations where cyanide are used in the process.	(A) (7)
P011	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.	(A) (7)
P012	Wastes, including but not limited to sludge, residues, heavy ends, etc., and spent chemical wastes from the production of compressed natural gas, liquefied petroleum gas, and other gas processing operations. (This listing does not include light ends, spent flare and flare gas, spent condensate, wastewater treatment sludge, spent catalysts and wastes listed in § 261.32.)	(7)
P020	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P021	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P022	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P023	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P024	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P025	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P026	Wastes (except wastewater) and spent carbon from hydrogen cyanide purification from the production of methacrylate or component in a formulating process of 2- and 4-methoxyacrylates or of methacrylates used to produce 60 carboxylates.	(A) (7)
P027	Organic liquid formulations containing 2,4-dinitrophenol or 2,4,6-dinitrophenol or other organic liquid formulations containing compounds derived from these dinitrophenols. (This listing does not include formulations containing hexachlorocyclopentadiene or other compounds listed in 2,4-dinitrophenol as the base component.)	(7)
P028	Residues resulting from the treatment of chemical wastes or air contaminated with EPA Hazardous Waste Nos. P001, P002, P003, P004, P005, and P027.	(7)

(7) should be used to identify residues containing cyanide and toxic constituents.

[46 FR 4617, Jan. 16, 1981, as amended at 46 FR 37477, May 20, 1981; 46 FR 5312, Feb. 10, 1981; 49 FR 37070, Sept. 21, 1984; 50 FR 685, Jan. 4, 1985; 50 FR 2090, Jan. 14, 1985; 50 FR 5319, Dec. 31, 1985; 51 FR 3702, Jan. 21, 1986; 51 FR 4541, Feb. 25, 1986]

§ 261.32 Hazardous wastes from specific sources.

The following solid wastes are listed hazardous wastes from specific sources unless they are excluded under §§ 260.20 and 260.22 and listed in Appendix IX.

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
Wood preservatives: K001	Bottom sediment sludge from the treatment of wastewater from wood preserving processes that use creosote and/or pentachlorophenol.	U
Inorganic pigments: K002	Wastewater treatment sludge from the production of chrome yellow and orange pigments.	U
K003	Wastewater treatment sludge from the production of molybdate orange pigments.	U
K004	Wastewater treatment sludge from the production of zinc yellow pigments.	U
K005	Wastewater treatment sludge from the production of chrome green pigments.	U
K006	Wastewater treatment sludge from the production of chrome azo green pigments (anhydrous and hydrated).	U
K007	Wastewater treatment sludge from the production of iron blue pigments.	U
K008	Oven residue from the production of chrome azo green pigments.	U
Organic chemicals: K009	Distillation bottoms from the production of acetaldehyde from ethylene.	U
K010	Distillation side cuts from the production of acetaldehyde from ethylene.	U
K011	Bottom stream from the wastewater stripper in the production of acrylonitrile.	U
K012	Bottom stream from the acetonitrile column in the production of acrylonitrile.	U
K013	Bottoms from the acetonitrile purification column in the production of acrylonitrile.	U
K014	Sill bottoms from the distillation of benzyl chloride.	U
K015	Heavy ends or distillation residues from the production of carbon tetrachloride.	U
K016	Heavy ends (sill bottoms) from the purification column in the production of perchloroethylene.	U
K017	Heavy ends from the fractionation column in ethyl chloride production.	U
K018	Heavy ends from the distillation of ethylene dichloride in ethylene dichloride production.	U
K019	Heavy ends from the distillation of vinyl chloride in vinyl chloride monomer production.	U
K020	Aqueous spent antimony catalyst waste from fluoromethane production.	U
K021	Distillation bottom cuts from the production of phenol/acetylene from cumene.	U
K022	Distillation light ends from the production of phthalic anhydride from naphthalene.	U
K023	Distillation bottoms from the production of phthalic anhydride from naphthalene.	U
K024	Distillation light ends from the production of phthalic anhydride from ortho-xylene.	U
K025	Distillation bottoms from the production of phthalic anhydride from ortho-xylene.	U
K026	Distillation bottoms from the production of nitrobenzene by the nitration of benzene.	U
K027	Stripping still tails from the production of methyl ethyl pyridine.	U
K028	Cartridge and distillation residues from toluene diisocyanate production.	U
K029	Spent catalyst from the hydrogenation reactor in the production of 1,1,1-trichloroethane.	U
K030	Waste from the product steam stripper in the production of 1,1,1-trichloroethane.	U
K031	Distillation bottoms from the production of 1,1,1-trichloroethane.	U
K032	Heavy ends from the heavy ends column from the production of 1,1,1-trichloroethane.	U
K033	Column bottoms or heavy ends from the combined production of trichloroethylene and perchloroethylene.	U
K034	Distillation bottoms from aniline production.	U
K103	Process residues from aniline extraction from the production of aniline.	U
K104	Condensed wastewater off-ends generated from nitrobenzene/aniline production.	U
K035	Distillation or fractionation column bottoms from the production of chlorobenzene.	U
K105	Separated aqueous stream from the reactor product washing step in the production of chlorobenzene.	U
Inorganic chemicals: K071	Silica purification muds from the mercury cell process in chlorine production, where separately scrubbed brine is not used.	U
K072	Chlorinated hydrocarbon waste from the purification step of the diaphragm cell process using grafted diaphragms in chlorine production.	U
K106	Wastewater treatment sludge from the mercury cell process in chlorine production.	U
Polymers: K031	By-product cuts generated in the production of MMA and acrylate acid.	U
K032	Wastewater treatment sludge from the production of styrene.	U
K033	Wastewater and scrub water from the distillation of cyclohexanone in the production of styrene.	U
K034	Fiber ends from the filtration of hexamethylenetetramine in the production of styrene.	U
K037	Vacuum stripper discharge from the styrene distiller in the production of styrene.	U
K038	Wastewater treatment sludge generated in the production of creosote.	U
K039	Sill bottoms from toluene reformation distillation in the production of toluene.	U
K037	Wastewater treatment sludge from the production of toluene.	U
K038	Wastewater from the washing and stripping of phenol production.	U
K039	Fiber ends from the filtration of dihydroxyacetone and in the production of phenol.	U
K040	Wastewater treatment sludge from the production of phenol.	U
K041	Wastewater treatment sludge from the production of isophthalic acid.	U
K042	Untreated process wastewater from the production of isophthalic acid.	U

Industry and EPA Hazardous waste No.	Hazardous waste	Hazard code
K042	Heavy ends or distillation residues from the distillation of tetrachlorobenzene in the production of 2,4,5-T.	(3)
K043	2,6-Dichlorophenol waste from the production of 2,4-D	(3)
K044	Untreated wastewater from the production of 2,4-D	(3)
Explosives:		
K044	Wastewater treatment sludges from the manufacturing and processing of explosives	(3)
K045	Spent carbon from the treatment of wastewater containing explosives	(3)
K046	Wastewater treatment sludges from the manufacturing, formulation and loading of lead-based blasting compounds	(3)
K047	Pool/water from TNT operations	(3)
Petroleum refining:		
K048	Quenched air fraction (DAF) flux from the petroleum refining industry	(3)
K049	Slip oil emulsion solids from the petroleum refining industry	(3)
K050	Heat exchanger bundle cleaning sludge from the petroleum refining industry	(3)
K051	API separator sludge from the petroleum refining industry	(3)
K052	Tank bottoms (residue) from the petroleum refining industry	(3)
Iron and steel:		
K051	Emission control dust/sludge from the primary production of steel in electric furnaces	(3)
K052	Spent pickle liquor generated by steel finishing operations of plants that produce iron or steel	(K,T)
Secondary lead:		
K053	Emission control dust/sludge from secondary lead smelting	(3)
K100	Waste leaching solution from and leaching of emission control dust/sludge from secondary lead smelting	(3)
Veterinary pharmaceutical:		
K054	Wastewater treatment sludges generated during the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds	(3)
K101	Distillation by residues from the distillation of arsenic-based compounds in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds	(3)
K102	Residue from the use of activated carbon for decolorization in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds	(3)
Ink formulation: K055	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning lines and equipment used in the formulation of ink from pigments, dyes, colors, and stabilizers containing chromium and lead	(3)
Casting:		
K056	Ammonia still line sludge from casting operations	(3)
K057	Decanter tank top sludge from casting operations	(3)

(48 FR 4812, Jan. 18, 1983, as amended at 48 FR 27476-27477, May 20, 1983; 49 FR 27070, Sept. 21, 1984; 50 FR 42942, Oct. 22, 1985; 51 FR 5330, Feb. 13, 1986; 51 FR 15332, May 28, 1986)

Effective Date Note: At 51 FR 5330, Feb. 13, 1986, in § 261.32, waste streams "K117, K118, and K124" in the subgroup "Organic Chemicals" were added, effective August 13, 1986.

§ 261.32 Discarded commercial chemical products, off-specification species, container residues, and spill residues thereof.

The following materials or items are hazardous wastes if and when they are discarded or intended to be discarded, when they are mixed with waste oil or used oil or other material and applied to the land for dust suppression or road treatment, or when, in lieu of their original intended use, they are produced for use as (or as a component of) a fuel, distributed for use as a fuel, or burned as a fuel.

(a) Any commercial chemical product, or manufacturing chemical inter-

mediate having the generic name listed in paragraph (e) or (f) of this section.

(b) Any off-specification commercial chemical product or manufacturing chemical intermediate which, if it met specifications, would have the generic name listed in paragraph (e) or (f) of this section.

(c) Any container or inner liner removed from a container that has been used to hold any commercial chemical product or manufacturing chemical intermediate having the generic names listed in paragraph (e) of this section, or any container or inner liner removed from a container that has been

used to hold any off-specification chemical product and manufacturing chemical intermediate which, if it met specifications, would have the generic name listed in paragraph (e) of this section, unless the container is empty as defined in § 261.7(b)(3) of this chapter.

[Comment: Unless the residue is being beneficially used or reused, or legitimately recycled, stored, transported or treated prior to such use, re-use, recycling or reclamation, EPA considers the residue to be intended for discard, and thus a hazardous waste. An example of a legitimate re-use of the residue would be where the residue remains in the container and the container is used to hold the same commercial chemical product or manufacturing chemical product or manufacturing chemical intermediate it previously held. An example of the discard of the residue would be where the drum is sent to a drum reconditioner who reconditions the drum but discards the residue.]

(d) Any residue or contaminated soil, water or other debris resulting from the cleanup of a spill into or on any land or water of any commercial chemical product or manufacturing chemical intermediate having the generic name listed in paragraph (e) or (f) of this section, or any residue or contaminated soil, water or other debris resulting from the cleanup of a spill, into or on any land or water, of any off-specification chemical product and manufacturing chemical intermediate which, if it met specifications, would have the generic name listed in paragraph (e) or (f) of this section.

[Comment: The phrase "commercial chemical product or manufacturing chemical intermediate having the generic name listed in . . ." refers to a chemical substance which is manufactured or formulated for commercial or manufacturing use which consists of the commercially pure grade of the chemical, any technical grades of the chemical that are produced or marketed, and all formulations in which the chemical is the sole active ingredient. It does not refer to a material, such as a manufacturing process waste, that contains any of the substances listed in paragraph (e) or (f). Where a manufacturing process waste is deemed to be a hazardous waste because it contains a substance listed in paragraph (e) or (f), such waste will be listed in either § 261.31 or § 261.32 or will be identified as a hazardous waste by the characteristics set forth in Subpart C of this part.]

(e) The commercial chemical products, manufacturing chemical intermediates or off-specification commercial chemical products or manufacturing chemical intermediates referred to in paragraphs (a) through (d) of this section, are identified as acute hazardous wastes (H) and are subject to be the small quantity exclusion defined in § 261.6(e).

[Comment: For the convenience of the regulated community the primary hazardous properties of these materials have been indicated by the letters T (Toxicity), and R (Reactivity). Absence of a letter indicates that the compound only is listed for acute toxicity.]

These wastes and their corresponding EPA Hazardous Waste Numbers are:

Hazardous waste No.	Substance
P023	Acetic anhydride, chloro-
P022	Acetic anhydride, N-(acetylacetyl)-
P027	Acetic anhydride, 2-bromo-
P024	Acetic acid, 2-bromo-, anhydrous salt
P025	Acetamide, anhydrous, N-(1-methyl-2-hydroxyethyl)-, methyl ester
P021	2-(4-hydroxyphenyl)-4-hydroxyacetamide and salts, when present at concentrations greater than 0.5%
P028	1-Acetyl-2-ethanol
P029	Acetone
P070	Alkylates
P026	Alkyl alcohols
P028	Allyl alcohol
P025	Aluminum phosphide
P027	5-(Acetylamino)-2-thiourea
P028	4-Aminopyridine
P028	Ammonium fluoride (F)
P110	Ammonium cyanide
P010	Aracis acid
P012	Aracis (R) oxide
P011	Aracis (V) oxide
P011	Aracis peroxide
P012	Aracis trioxide
P028	Asarone, diethyl-
P028	Asarone
P013	Barium cyanide
P024	Benzene, 4-ortho-
P077	Benzene, 4-ortho-
P028	Benzene, (para-methyl)-
P042	1,2-Dibromobenzene, 4-(1-hydroxy-2-propyl)-
P014	Benzonitrile
P028	Benzyl chloride
P015	Beryllium acid
P015	Bis(chloromethyl) ether
P017	Bisoxetane
P016	Bromo
P021	Calcium cyanide
P122	Camphor, camphore-
P122	Carbon disulfide and
P022	Carbon disulfide
P022	Carbon disulfide
P022	Carbon disulfide

Hazardous waste No.	Substance:
P001	Chloro cyanide
P002	Chloroacetylene
P003	p-Chloroanisole
P004	1,4-Dichlorobenzene
P005	3-Chloropropene
P006	Copper cyanide
P007	Cyanide (alkali cyanide salt), not else-where specified
P008	Cyanogen
P009	Cyanogen chloride
P010	Dichlorophenylene
P011	Dioxin
P012	Dithyranone
P013	O,O-Dialkyl S-(2-mercaptoethyl) phosphorothioate
P014	Dialkyl phosphonate
P015	O,O-Dialkyl O-arylmethyl phosphorothioate
P016	Diisopropyl fluorophosphate
P017	Diisocyanate
P018	2,2-Dimethyl-1-hydroxyethyl-2-propanone, O-(methylmercaptomethyl) ester
P019	O,O-Dimethyl O-p-nitrophenyl phosphorothioate
P020	Dinitroacetone
P021	Diethyl phosphonate
P022	Diethyl phosphorothioate
P023	Diethyl phosphorodithioate
P024	Diethyl phosphorotriester
P025	Diethyl phosphorotrithioate
P026	Diethyl phosphorotetrathioate
P027	Diethyl phosphorotriester
P028	Diethyl phosphorotriester
P029	Diethyl phosphorotriester
P030	Diethyl phosphorotriester
P031	Diethyl phosphorotriester
P032	Diethyl phosphorotriester
P033	Diethyl phosphorotriester
P034	Diethyl phosphorotriester
P035	Diethyl phosphorotriester
P036	Diethyl phosphorotriester
P037	Diethyl phosphorotriester
P038	Diethyl phosphorotriester
P039	Diethyl phosphorotriester
P040	Diethyl phosphorotriester
P041	Diethyl phosphorotriester
P042	Diethyl phosphorotriester
P043	Diethyl phosphorotriester
P044	Diethyl phosphorotriester
P045	Diethyl phosphorotriester
P046	Diethyl phosphorotriester
P047	Diethyl phosphorotriester
P048	Diethyl phosphorotriester
P049	Diethyl phosphorotriester
P050	Diethyl phosphorotriester
P051	Diethyl phosphorotriester
P052	Diethyl phosphorotriester
P053	Diethyl phosphorotriester
P054	Diethyl phosphorotriester
P055	Diethyl phosphorotriester
P056	Diethyl phosphorotriester
P057	Diethyl phosphorotriester
P058	Diethyl phosphorotriester
P059	Diethyl phosphorotriester
P060	Diethyl phosphorotriester
P061	Diethyl phosphorotriester
P062	Diethyl phosphorotriester
P063	Diethyl phosphorotriester
P064	Diethyl phosphorotriester
P065	Diethyl phosphorotriester
P066	Diethyl phosphorotriester
P067	Diethyl phosphorotriester
P068	Diethyl phosphorotriester
P069	Diethyl phosphorotriester
P070	Diethyl phosphorotriester
P071	Diethyl phosphorotriester
P072	Diethyl phosphorotriester
P073	Diethyl phosphorotriester
P074	Diethyl phosphorotriester
P075	Diethyl phosphorotriester
P076	Diethyl phosphorotriester
P077	Diethyl phosphorotriester
P078	Diethyl phosphorotriester
P079	Diethyl phosphorotriester
P080	Diethyl phosphorotriester
P081	Diethyl phosphorotriester
P082	Diethyl phosphorotriester
P083	Diethyl phosphorotriester
P084	Diethyl phosphorotriester
P085	Diethyl phosphorotriester
P086	Diethyl phosphorotriester
P087	Diethyl phosphorotriester
P088	Diethyl phosphorotriester
P089	Diethyl phosphorotriester
P090	Diethyl phosphorotriester
P091	Diethyl phosphorotriester
P092	Diethyl phosphorotriester
P093	Diethyl phosphorotriester
P094	Diethyl phosphorotriester
P095	Diethyl phosphorotriester
P096	Diethyl phosphorotriester
P097	Diethyl phosphorotriester
P098	Diethyl phosphorotriester
P099	Diethyl phosphorotriester
P100	Diethyl phosphorotriester
P101	Diethyl phosphorotriester
P102	Diethyl phosphorotriester
P103	Diethyl phosphorotriester
P104	Diethyl phosphorotriester
P105	Diethyl phosphorotriester
P106	Diethyl phosphorotriester
P107	Diethyl phosphorotriester
P108	Diethyl phosphorotriester
P109	Diethyl phosphorotriester
P110	Diethyl phosphorotriester
P111	Diethyl phosphorotriester
P112	Diethyl phosphorotriester
P113	Diethyl phosphorotriester
P114	Diethyl phosphorotriester
P115	Diethyl phosphorotriester
P116	Diethyl phosphorotriester
P117	Diethyl phosphorotriester
P118	Diethyl phosphorotriester
P119	Diethyl phosphorotriester
P120	Diethyl phosphorotriester
P121	Diethyl phosphorotriester
P122	Diethyl phosphorotriester
P123	Diethyl phosphorotriester
P124	Diethyl phosphorotriester
P125	Diethyl phosphorotriester
P126	Diethyl phosphorotriester
P127	Diethyl phosphorotriester
P128	Diethyl phosphorotriester
P129	Diethyl phosphorotriester
P130	Diethyl phosphorotriester
P131	Diethyl phosphorotriester
P132	Diethyl phosphorotriester
P133	Diethyl phosphorotriester
P134	Diethyl phosphorotriester
P135	Diethyl phosphorotriester
P136	Diethyl phosphorotriester
P137	Diethyl phosphorotriester
P138	Diethyl phosphorotriester
P139	Diethyl phosphorotriester
P140	Diethyl phosphorotriester
P141	Diethyl phosphorotriester
P142	Diethyl phosphorotriester
P143	Diethyl phosphorotriester
P144	Diethyl phosphorotriester
P145	Diethyl phosphorotriester
P146	Diethyl phosphorotriester
P147	Diethyl phosphorotriester
P148	Diethyl phosphorotriester
P149	Diethyl phosphorotriester
P150	Diethyl phosphorotriester
P151	Diethyl phosphorotriester
P152	Diethyl phosphorotriester
P153	Diethyl phosphorotriester
P154	Diethyl phosphorotriester
P155	Diethyl phosphorotriester
P156	Diethyl phosphorotriester
P157	Diethyl phosphorotriester
P158	Diethyl phosphorotriester
P159	Diethyl phosphorotriester
P160	Diethyl phosphorotriester
P161	Diethyl phosphorotriester
P162	Diethyl phosphorotriester
P163	Diethyl phosphorotriester
P164	Diethyl phosphorotriester
P165	Diethyl phosphorotriester
P166	Diethyl phosphorotriester
P167	Diethyl phosphorotriester
P168	Diethyl phosphorotriester
P169	Diethyl phosphorotriester
P170	Diethyl phosphorotriester
P171	Diethyl phosphorotriester
P172	Diethyl phosphorotriester
P173	Diethyl phosphorotriester
P174	Diethyl phosphorotriester
P175	Diethyl phosphorotriester
P176	Diethyl phosphorotriester
P177	Diethyl phosphorotriester
P178	Diethyl phosphorotriester
P179	Diethyl phosphorotriester
P180	Diethyl phosphorotriester
P181	Diethyl phosphorotriester
P182	Diethyl phosphorotriester
P183	Diethyl phosphorotriester
P184	Diethyl phosphorotriester
P185	Diethyl phosphorotriester
P186	Diethyl phosphorotriester
P187	Diethyl phosphorotriester
P188	Diethyl phosphorotriester
P189	Diethyl phosphorotriester
P190	Diethyl phosphorotriester
P191	Diethyl phosphorotriester
P192	Diethyl phosphorotriester
P193	Diethyl phosphorotriester
P194	Diethyl phosphorotriester
P195	Diethyl phosphorotriester
P196	Diethyl phosphorotriester
P197	Diethyl phosphorotriester
P198	Diethyl phosphorotriester
P199	Diethyl phosphorotriester
P200	Diethyl phosphorotriester

Hazardous waste No.	Substance:
P112	Methane, tetra- (R)
P113	Methane, tetra- (R)
P088	4,7-Methano-1H-indole, 1,4,5,6,7,8-hexahydro-3a,4,7,7a-tetrahydro-
P089	Methylamine
P090	2-Methylazirane
P091	Methyl cyanide
P092	Methyl cyclopropane
P093	2-Methylcyclopropane
P094	Methyl parathion
P095	alpha-Naphthylamine
P096	Nitral cyanide
P097	Nitral cyanide
P098	Nitral cyanide
P099	Nitral cyanide
P100	Nitral cyanide
P101	Nitral cyanide
P102	Nitral cyanide
P103	Nitral cyanide
P104	Nitral cyanide
P105	Nitral cyanide
P106	Nitral cyanide
P107	Nitral cyanide
P108	Nitral cyanide
P109	Nitral cyanide
P110	Nitral cyanide
P111	Nitral cyanide
P112	Nitral cyanide
P113	Nitral cyanide
P114	Nitral cyanide
P115	Nitral cyanide
P116	Nitral cyanide
P117	Nitral cyanide
P118	Nitral cyanide
P119	Nitral cyanide
P120	Nitral cyanide
P121	Nitral cyanide
P122	Nitral cyanide
P123	Nitral cyanide
P124	Nitral cyanide
P125	Nitral cyanide
P126	Nitral cyanide
P127	Nitral cyanide
P128	Nitral cyanide
P129	Nitral cyanide
P130	Nitral cyanide
P131	Nitral cyanide
P132	Nitral cyanide
P133	Nitral cyanide
P134	Nitral cyanide
P135	Nitral cyanide
P136	Nitral cyanide
P137	Nitral cyanide
P138	Nitral cyanide
P139	Nitral cyanide
P140	Nitral cyanide
P141	Nitral cyanide
P142	Nitral cyanide
P143	Nitral cyanide
P144	Nitral cyanide
P145	Nitral cyanide
P146	Nitral cyanide
P147	Nitral cyanide
P148	Nitral cyanide
P149	Nitral cyanide
P150	Nitral cyanide
P151	Nitral cyanide
P152	Nitral cyanide
P153	Nitral cyanide
P154	Nitral cyanide
P155	Nitral cyanide
P156	Nitral cyanide
P157	Nitral cyanide
P158	Nitral cyanide
P159	Nitral cyanide
P160	Nitral cyanide
P161	Nitral cyanide
P162	Nitral cyanide
P163	Nitral cyanide
P164	Nitral cyanide
P165	Nitral cyanide
P166	Nitral cyanide
P167	Nitral cyanide
P168	Nitral cyanide
P169	Nitral cyanide
P170	Nitral cyanide
P171	Nitral cyanide
P172	Nitral cyanide
P173	Nitral cyanide
P174	Nitral cyanide
P175	Nitral cyanide
P176	Nitral cyanide
P177	Nitral cyanide
P178	Nitral cyanide
P179	Nitral cyanide
P180	Nitral cyanide
P181	Nitral cyanide
P182	Nitral cyanide
P183	Nitral cyanide
P184	Nitral cyanide
P185	Nitral cyanide
P186	Nitral cyanide
P187	Nitral cyanide
P188	Nitral cyanide
P189	Nitral cyanide
P190	Nitral cyanide
P191	Nitral cyanide
P192	Nitral cyanide
P193	Nitral cyanide
P194	Nitral cyanide
P195	Nitral cyanide
P196	Nitral cyanide
P197	Nitral cyanide
P198	Nitral cyanide
P199	Nitral cyanide
P200	Nitral cyanide

Hazardous Waste No.	Substance
P075	Pyrene, (E)-3-(1-methyl-2-pyrrolyl)-, and salts
P111	Pyrophosphoric acid, tetraethyl ester
P102	Selenic acid
P104	Silver cyanide
P105	Sodium azide
P106	Sodium cyanide
P107	Selenium sulfide
P109	Styrene-10-one, and salts
P110	Styrene-10-one, 2,3-dimethoxy-
P108	Styrene and salts
P115	Sulfuric acid, tetraethyl salt
P109	Tetrahydroarsopyrophosphate
P110	Tetraethyl lead
P111	Tetraethylphosphate
P112	Tetraethoxyarsine (R)
P082	Tetraethoxyarsine acid, hexaethyl ester
P113	Thiolic acids
P113	Thiourea(s) oxide
P114	Thiourea(s) oxides
P115	Thiourea(s) sulfide
P048	Thiourea
P049	Thioureasulfonic chloride
P014	Thioether
P116	Thioetheroxide
P026	Thiourea, (2-chlorophenyl)-
P072	Thiourea, 1-naphthyl-
P083	Thiourea, phenyl-
P122	Thiophene
P118	Thiochromanethiol
P119	Thioic acid, ammonium salt
P120	Thioic acid, sodium salt
P120	Thioic acid, sodium salt
F001	Water, when present at concentrations greater than 0.5%
P121	Zinc cyanide
P122	Zinc phosphide (R,T)
P122	Zinc phosphide, when present at concentrations greater than 10%

(f) The commercial chemical products, manufacturing chemical intermediates, or off-specification commercial chemical products referred to in paragraphs (a) through (d) of this section, are identified as toxic wastes (T), unless otherwise designated and are subject to the small quantity generator exclusion defined in § 261.5 (a) and (g).

[Comment: For the convenience of the regulated community, the primary hazardous properties of these materials have been indicated by the letters T (Toxicity), R (Reactivity), I (Ignitability) and C (Corrosivity). Absence of a letter indicates that the compound is only listed for toxicity.]

These wastes and their corresponding EPA Hazardous Waste Numbers are:

Hazardous Waste No.	Substance
U001	Acetacrylonitrile (I)
U004	Acetacrylonitrile, isomers
U167	Acetamide, N-(4-chlorophenyl)-
U006	Acetamide, N,N'-bis(2-ethyl-5-hydroxy-2-pentyl)-
U112	Acetic acid, ethyl ester (I)
U144	Acetic acid, lead salt
U214	Acetic acid, tetraethyl salt
U002	Acetone (I)
U003	Acetone (I,T)
U248	2-(alpha-Acetylbenzyl)-4-hydroxycumaron and salts, when present at concentrations of 0.5% or less
U004	Acetophenone
U005	2-Acetylaminofluorene
U006	Acetyl chloride (C,R,T)
U007	Acrylamide
U008	Acrylic acid (I)
U009	Acrylonitrile
U180	Alarins, 2-(p-bis(2-chloroethyl)amino)phenyl-, L-
U009	2-Amino-4-methylbenzene
U009	4-Amino-4-methylbenzene
U011	Amino
U012	Amino (I,T)
U014	Auramine
U015	Azobenzene
U010	Azobis(2,2,4,4-tetramethyl-1,3-dioxane-6-one-5-(1,1-dimethyl-2-oxoethyl)amino)-1,1,1,1-tetraethyl-2-hydroxy-2-methyl-2-methyl-
U167	Benz(D)acrylonitrile, 1,3-dihydro-2-methyl-
U016	Benz(c)anthracene
U016	3,4-Benzanthracene
U017	Benz(a)anthracene
U016	Benz(a)anthracene
U016	1,2-Benzanthracene
U004	1,2-Benzanthracene, 7,12-dimethyl-
U012	Benzene (I,T)
U014	Benzene, 4,4'-carbonylbis(1,1-dimethyl-2-methyl-2-methyl-
U049	Benzene, 4-chloro-2-methyl-
U053	Benzene, N,N-dimethyl-4-phenylazo-
U188	Benzene, 4,4'-methylbis(2-chloro-
U222	Benzene, 2-methyl-, hydrochloride
U181	Benzene, 2-methyl-5-nitro
U019	Benzene (I,T)
U009	Benzene, 4-chloro-2-methyl-4-chloro-2-methyl-2-methyl-2-methyl-
U030	Benzene, 1-bromo-4-phenyl-
U037	Benzene, chloro-
U180	1,2-Benzene dicarbonyl acid anhydride
U028	1,2-Benzene dicarbonyl acid, (bis(2-ethyl-hexyl) ester
U069	1,2-Benzene dicarbonyl acid, ethyl ester
U069	1,2-Benzene dicarbonyl acid, isopropyl ester
U102	1,2-Benzene dicarbonyl acid, dimethyl ester
U107	1,2-Benzene dicarbonyl acid, n-octyl ester
U070	Benzene, 1,2-dichloro-
U071	Benzene, 1,3-dichloro-
U072	Benzene, 1,4-dichloro-
U017	Benzene, dichloromethyl-
U223	Benzene, 1,3-dimethyl-2-methyl- (R,T)
U228	Benzene, dimethyl-(I,T)
U201	1,3-Benzene diol
U127	Benzene, hexachloro-
U056	Benzene, hexahydro- (I)
U188	Benzene, hydro-
U220	Benzene, methyl-
U105	Benzene, 1-methyl-1,2-dichloro-
U105	Benzene, 1-methyl-2,6-dichloro-
U223	Benzene, 1,2-methylbis(2-ethyl-
U141	Benzene, 1,2-methylbis(2-propyl-

Hazardous Waste No.	Substance	Hazardous Waste No.	Substance
U076	Ethene, 1,1-dichloro-	U140	Isobutyl acetate (L,T)
U077	Ethene, 1,2-dichloro-	U141	Isocaproic
U114	1,2-Ethanedithiocarbonylthioic acid	U142	Kerosene
U121	Ethene, 1,1,1,2,2,2-hexachloro-	U143	Leucosaphene
U024	Ethene, 1,1'-(methylenebis(oxy))bis(2-chloro-	U144	Lead acetate
U022	Ethenebis (L, T)	U145	Lead phosphate
U117	Ethene, 1,1'-oxybis (O)	U146	Lead subacetate
U025	Ethene, 1,1'-oxybis(2-chloro-	U129	Lindane
U184	Ethene, perchloro-	U147	Maleic anhydride
U206	Ethene, 1,1,1,2-tetrachloro-	U148	Maleic hydrazide
U209	Ethene, 1,1,2,2-tetrachloro-	U149	Melantranite
U218	Ethenebisoxime	U180	Methacrylonitrile
U247	Ethene, 1,1,1-trichloro-2,2-bis(methoxy-	U181	Mercury
	phenyl)	U182	Methacrylonitrile (L,T)
U227	Ethene, 1,1,2-trichloro-	U082	Methanamine, N-methyl (O)
U043	Ethene, chloro-	U029	Methane, bromo-
U042	Ethene, 2-chloroethoxy-	U045	Methane, chloro (L,T)
U078	Ethene, 1,1-dichloro-	U046	Methane, chloromethyl-
U079	Ethene, trans-1,2-dichloro-	U048	Methane, chloro-
U210	Ethene, 1,1,2,2-tetrachloro-	U050	Methane, chloro-
U173	Ethene, 2,2'-dichloroethane-	U072	Methane, dichloroethoxy-
U054	Ethene, 1-phenyl-	U189	Methane, dode-
U056	Ethene, ethene (C,R,T)	U119	Methanediol acid, ethyl ester
U049	2-Ethoxyethanol	U211	Methane, tetrachloro-
U112	Ethyl acetate (O)	U121	Methane, trichloro-
U113	Ethyl acetate (O)	U183	Methanethiol (L,T)
U226	Ethyl acetate (acetic)	U225	Methane, trichloro-
U028	Ethyl 4,4'-dichlorobiphenyl	U044	Methane, trichloro-
U059	Ethylene glycol monoethyl ether	U121	Methane, trichloro-
U114	Ethylenebis(dithiocarbonyl acid)	U122	Methane, acid (C,T)
U067	Ethylene tartrate	U026	4,7-Methanediol, 1,2,4,6,7,8,9-oxy-
U077	Ethylene tartrate		ether-2a,4,7,7a-tetrahydro-
U116	Ethylene oxide (L,T)	U184	Methanol (O)
U118	Ethylene thioether	U185	Methoxyethane
U117	Ethyl ether (O)	U047	Methoxyethane
U076	Ethylene thioether	U184	Methyl acetate (O)
U118	Ethylmethacrylate	U029	Methyl bromide
U118	Ethyl methacrylate	U106	1-Methylbutanone (O)
U126	Formaldehyde	U045	Methyl chloride (L,T)
U120	Formaldehyde	U186	Methyl chloroacetate (L,T)
U122	Formic acid (C,T)	U226	Methylchloroform
U124	Furan (O)	U187	2-Methylbutanone
U125	2-Furancarboxaldehyde (O)	U188	4,4'-Methylenebis(2-chloroaniline)
U147	2,5-Furandione	U122	2,2'-Methylenebis(2,4,6-trichlorophenol)
U213	Furan, tetrahydro- (O)	U058	Methylene bromide
U126	Furfural (O)	U050	Methylene chloride
U124	Furfural (O)	U122	Methylene oxide
U204	O-Chloroacetone, 2-dimethyl-5-oxo-	U120	Methyl ethyl ketone (L,T)
	chloro-	U120	Methyl ethyl ketone peroxide (R,T)
U126	Chloroacetylene	U126	Methyl iodide
U183	Chloroethane, N-nitroso-N-methyl-N-nitro-	U181	Methyl isobutyl ketone (O)
U127	Hexachlorocyclopentadiene	U182	Methyl methacrylate (L,T)
U128	Hexachlorocyclopentadiene	U188	N-Methyl-N'-nitro-N-nitrosopiperidine
U129	Hexachlorocyclopentadiene (gamma isomer)	U181	4-Methyl-2-pentanone (O)
U130	Hexachlorocyclopentadiene	U184	Methylisocyanide
U131	Hexachlorocyclopentadiene	U010	Methylan C
U132	Hexachlorocyclopentadiene	U029	2,1,2-Naphthoquinone, (2S)-2-(2-oxo-10-
U243	Hexachlorocyclopentadiene		[2,6-dimethyl-2,5-dimethyl-2,5-dimethyl-2,5-
U123	Hydrazine (L,T)		hexamethylene(7,7,8,8-tetrahydro-
U066	Hydrazine, 1,2-dimethyl-		6,6,11-tetrahydro-1-methyl-
U066	Hydrazine, 1,1-dimethyl-	U185	Naphthalene
U066	Hydrazine, 1,2-dimethyl-	U047	Naphthalene, 2-chloro-
U109	Hydrazine, 1,2-dimethyl-	U188	1,4-Naphthoquinone
U134	Hydrofluoric acid (C,T)	U226	2,7-Naphthoquinone, acid, 2,7-(1,2,3,4-
U134	Hydrogen fluoride (C,T)		oxy)-(1,1'-oxybis(4,4'-oxy)-bis
U126	Hydrogen sulfide		(2,2,6,6-tetra-4-hydroxy-2,2,6,6-tetra-
U068	Hydroperoxide, 1-methyl-1-phenylethyl (O)	U188	1,4-Naphthoquinone
U126	Hydroperoxyacetone	U187	1-Naphtholamine
U116	2-Hydroxyacetone	U188	2-Naphtholamine
U127	Isobutyl 1,2,3-oxipyrone	U187	ortho-Naphtholamine
U129	Vanillin	U188	para-Naphtholamine

Hazardous Waste No.	Substance
U028	2-Naphthylamine, N,N-bis(2-chloroethyl)-
U189	Nitrobenzene (L,T)
U170	p-Nitrophenol
U171	2-Nitropropane (L,T)
U172	N-Nitroso-N-butylamine
U173	N-Nitrosodimethylamine
U174	N-Nitrosodipropylamine
U111	N-Nitroso-N-propylamine
U176	N-Nitroso-N-propylamine
U177	N-Nitroso-N-methylurea
U178	N-Nitroso-N-methylurethane
U179	N-Nitrosopyrrolone
U180	N-Nitrosopyrrolone
U181	2-Nitro-6-iodoanisole
U182	1,5-Octadiene, 2,5-diene
U029	2H-1,2,3-Oxadiazaphosphine, 2-bis(2-chloroethylamino)nitrohydro-, and 2-
U118	Octane (L,T)
U041	Octane, 2-chloromethyl-
U182	Octylamine
U183	Octylamine
U184	Octylamine
U185	Octylamine
See P027	Octylamine
U186	1,3-Octadecane (I)
U187	Octanone
U188	Octanol
U048	Octanol, 2-chloro-
U029	Octanol, 4-chloro-2-methyl-
U081	Octanol, 2,4-dichloro-
U082	Octanol, 2,6-dichloro-
U191	Octanol, 2,4-dimethyl-
U170	Octanol, 4-nitro-
See P027	Octanol, para-chloro-
Do	Octanol, 2,3,4,6-tetrahydro-
Do	Octanol, 2,4,6-trihydro-
Do	Octanol, 2,4,8-trihydro-
U137	1,10-(1,2-phenylene)pyrene
U148	Phosphoric acid, Lead salt
U027	Phosphoric acid, 0,0-dimethyl, 9-methyl ester
U189	Phosphoric acid (I)
U190	Phthalic anhydride
U191	Phthalic acid
U192	Phthalic acid
U193	Phthalic acid
U110	1-Propanamine (L,T)
U026	1-Propanamine, N-propyl- (I)
U149	Propene, 1,3-dichloro-2-chloro-
U175	Propene
U176	Propene, 2-nitro- (L,T)
U027	Propene, 2,2-dimethyl-2-chloro-
U185	1,3-Propanediol
U025	1-Propanol, 2,3-dichloro-, phosphate (2:1)
U128	1-Propanol, 2,3-dimethyl- (L,T)
U002	3-Propanone (I)
U007	3-Propanone
U043	Propane, 1,3-dichloro-
U044	1-Propane, 1,1,2,2,3,3-hexachloro-
U009	3-Propanone
U182	3-Propanone, 2-methyl- (L,T)
U008	3-Propanone acid (I)
U113	3-Propanone acid, ethyl ester (I)
U110	3-Propanone acid, 2-methyl-, ethyl ester
U182	3-Propanone acid, 2-methyl-, methyl ester (L,T)
See P027	Propionic acid, 2-(2,4,6-trichlorophenyl)-
U184	Propylene carbonate
U023	Propylene carbonate
U185	Pyridine
U186	Pyridine, 2-(2-dimethylamino)-2-ethyl-
U179	Pyridine, bis(hydro-N-nitroso-

Hazardous Waste No.	Substance
U191	Pyridine, 2-methyl-
U184	4(1H)-Pyrimidone, 2,5-dihydro-6-methyl-2-
U189	Pyrene
U009	Pyrene, bis(hydro-N-nitroso-
U009	Pyrene
U001	Pyrene
U002	Pyrene and salts
U003	Pyrene
U004	Pyrene and
U004	Pyrene and
U006	Pyrene dication (R,T)
U015	1-Pyrene, dibenzene (near)
See P027	Pyrene
U009	4,4'-Bibenzol, alpha,alpha'-dimethyl-
U008	Quinazolinone
U138	Sulfur hydride
U103	Sulfur acid, dimethyl ester
U189	Sulfur phosphite (I)
U008	Sulfur sesquioxide (R,T)
See P027	2,4,4-T
U027	1,2,4,5-Tetrahydrocarbazole
U008	1,1,1,2-Tetrahydrocarbazole
U009	1,1,2,3-Tetrahydrocarbazole
U010	Tetrahydrocarbazole
See P027	2,3,4,5-Tetrahydrocarbazole
U013	Tetrahydrocarbazole (I)
U014	Thallium(I) acetate
U015	Thallium(I) carbonate
U016	Thallium(I) chloride
U017	Thallium(I) nitrate
U018	Thallium(I) nitrate
U189	Thallium(I) nitrate (L,T)
U019	Thallium
U044	Thallium
U020	Thallium
U021	Thallium
U022	Thallium dicyanide (R,T)
U023	alpha-Thallium
U024	beta-Thallium hydroxide
U025	beta-Thallium
U011	1H-1,2,4-Triazol-5-one
U026	1,1,1-Triazolo[4,5-b]pyridine
U027	1,1,2-Triazolo[4,5-b]pyridine
U028	Triazolo[4,5-b]pyridine
U029	Triazolo[4,5-b]pyridine
U121	Triazolo[4,5-b]pyridine
See P027	2,4,5-Triazolo[4,5-b]pyridine
Do	2,4,5-Triazolo[4,5-b]pyridine
Do	2,4,5-Triazolo[4,5-b]pyridine acid
U034	alpha-Triazolo[4,5-b]pyridine (R,T)
U182	1,2,3-Triazolo[4,5-b]pyridine, 2,4,5-trimethyl-
U026	Tri(2,3-dichlorophenyl) phosphate
U028	Trypan blue
U027	Urea, N,N-bis(2-chloroethyl)amino-
U027	Urea mustard
U043	Vinyl chloride
U040	Various, when present at concentrations of 0.2% or less
U029	Xylene (I)
U030	Yanban-10-carboxylic acid, 11,17-dimethyl-18-(2,4,5-trimethyl-phenylamino)-, methyl ester
U040	Zinc phosphate, when present at concentrations of 10% or less.

(Approved by the Office of Management and Budget under control number 2050-0047)

[45 FR 78429, 78441, Nov. 25, 1980, as amended at 45 FR 27477, May 20, 1981; 49

Appendix II

Subpart C—Characteristics of Hazardous Waste

§ 261.20 General.

(a) A solid waste, as defined in § 261.2, which is not excluded from regulation as a hazardous waste under § 261.4(b), is a hazardous waste if it exhibits any of the characteristics identified in this subpart.

[Comment: § 262.11 of this chapter sets forth the generator's responsibility to determine whether his waste exhibits one or more of the characteristics identified in this subpart.]

(b) A hazardous waste which is identified by a characteristic in this subpart, but is not listed as a hazardous waste in Subpart D, is assigned the EPA Hazardous Waste Number set forth in the respective characteristic in this subpart. This number must be used in complying with the notification requirements of section 3010 of the Act and certain recordkeeping and reporting requirements under Parts 262 through 265 and Part 270 of this chapter.

(c) For purposes of this subpart, the Administrator will consider a sample obtained using any of the applicable sampling methods specified in Appendix I to be a representative sample within the meaning of Part 260 of this chapter.

[Comment: Since the Appendix I sampling methods are not being formally adopted by the Administrator, a person who desires to employ an alternative sampling method is not required to demonstrate the equivalency of his method under the procedures set forth in §§ 260.20 and 260.21.]

(45 FR 33119, May 19, 1980, as amended at 45 FR 14394, Apr. 1, 1983)

§ 261.21 Characteristic of ignitability.

(a) A solid waste exhibits the characteristic of ignitability if a representative sample of the waste has any of the following properties:

(1) It is a liquid, other than an aqueous solution containing less than 24 percent alcohol by volume and has flash point less than 60°C (140°F), as determined by a Pensky-Martens Closed Cup Tester, using the test method specified in ASTM Standard D-69-79 or D-69-80 (incorporated by reference, see § 260.11), or a Setafash Closed Cup Tester, using the test method specified in ASTM Standard D-3278-78 (incorporated by reference, see § 260.11), or as determined by an equivalent test method approved by the Administrator under procedures set forth in §§ 260.20 and 260.21.

(2) It is not a liquid and is capable, under standard temperature and pressure, of causing fire through friction, absorption of moisture or spontaneous chemical changes and, when ignited, burns so vigorously and persistently that it creates a hazard.

(3) It is an ignitable compressed gas as defined in 49 CFR 173.300 and as determined by the test methods described in that regulation or equivalent test methods approved by the Administrator under §§ 260.20 and 260.21.

(4) It is an oxidizer as defined in 49 CFR 173.151.

(b) A solid waste that exhibits the characteristic of ignitability, but is not listed as a hazardous waste in Subpart D, has the EPA Hazardous Waste Number of D001.

(45 FR 33119, May 19, 1980, as amended at 45 FR 38247, July 7, 1981)

§ 261.22 Characteristic of corrosivity.

(a) A solid waste exhibits the characteristic of corrosivity if a representative sample of the waste has either of the following properties:

(1) It is aqueous and has a pH less than or equal to 2 or greater than or equal to 12.5, as determined by a pH meter using either an EPA test method or an equivalent test method approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21. The EPA test method for pH is specified as Method 5.2 in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11).

(2) It is a liquid and corrodes steel (SAE 1020) at a rate greater than 6.35 mm (0.250 inch) per year at a test temperature of 55°C (130°F) as determined by the test method specified in NACE (National Association of Corrosion Engineers) Standard TM-01-69 as standardized in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11) or an equivalent test method approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21.

(b) A solid waste that exhibits the characteristic of corrosivity, but is not listed as a hazardous waste in Subpart D, has the EPA Hazardous Waste Number of D002.

(45 FR 33119, May 19, 1980, as amended at 45 FR 38247, July 7, 1981)

§ 261.23 Characteristic of reactivity.

(a) A solid waste exhibits the characteristic of reactivity if a representative sample of the waste has any of the following properties:

(1) It is normally unstable and readily undergoes violent change without detonating.

(2) It reacts violently with water.

(3) It forms potentially explosive mixtures with water.

(4) When mixed with water, it generates toxic gases, vapors or fumes in a quantity sufficient to present a danger to human health or the environment.

(5) It is a cyanide or sulfide bearing waste which, when exposed to pH conditions between 2 and 12.5, can generate toxic gases, vapors or fumes in a quantity sufficient to present a danger to human health or the environment.

(6) It is capable of detonation or explosive reaction if it is subjected to a strong initiating source or if heated under confinement.

(7) It is readily capable of detonation or explosive decomposition or reaction at standard temperature and pressure.

(8) It is a forbidden explosive as defined in 49 CFR 173.51, or a Class A explosive as defined in 49 CFR 173.53 or a Class B explosive as defined in 49 CFR 173.55.

(b) A solid waste that exhibits the characteristic of reactivity, but is not listed as a hazardous waste in Subpart D, has the EPA Hazardous Waste Number of D003.

§ 261.24 Characteristic of EP toxicity.

(a) A solid waste exhibits the characteristic of EP toxicity if, using the test methods described in Appendix II or equivalent methods approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21, the extract from a representative sample of the waste contains any of the contaminants listed in Table I at a concentration equal to or greater than the respective value given in that Table. Where the waste contains less than 0.5 percent filterable solids, the waste itself, after filtering, is considered to be the extract for the purposes of this section.

(b) A solid waste that exhibits the characteristic of EP toxicity, but is not listed as a hazardous waste in Subpart D, has the EPA Hazardous Waste Number specified in Table I which corresponds to the toxic contaminant causing it to be hazardous.

TABLE I—MAXIMUM CONCENTRATION OF CONTAMINANTS FOR CHARACTERISTIC OF EP TOXICITY

EPA hazardous waste number	Contaminant	Maximum concentration (micrograms per liter)
D004	Arsenic	5.0
D005	Barium	100.0
D006	Cadmium	1.0
D007	Chromium	5.0
D008	Lead	5.0
D009	Mercury	0.2
D010	Selenium	1.0
D011	Silver	5.0

APPENDIX I—REPRESENTATIVE SAMPLING METHODS

The methods and equipment used for sampling waste materials will vary with the form and consistency of the waste materials to be sampled. Samples collected using the sampling protocols listed below, for sampling waste with properties similar to the indicated materials, will be considered by the Agency to be representative of the waste.

Extremely viscous liquid—ASTM Standard D140-70
Crushed or powdered material—ASTM Standard D344-75
Soil or rock-like material—ASTM Standard D420-69
Soil-like material—ASTM Standard D1482-69
Fly Ash-like material—ASTM Standard D3294-76 (ASTM Standards are available from ASTM, 1916 Race St., Philadelphia, PA 19103)

Containerized liquid wastes—"COLTWASA" described in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods," U.S. Environmental Protection Agency, Office of Solid Waste, Washington, D.C. 20460. (Copies may be obtained from Solid Waste Information, U.S. Environmental Protection Agency, 38 W. St. Clair St., Cincinnati, Ohio 45261)

Liquid waste in pits, ponds, lagoons, and similar reservoirs—"Pond Sampler" described in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods."

This manual also contains additional information on application of these protocols.

APPENDIX II—EP TOXICITY TEST PROCEDURES

A. Extraction Procedure (EP)

1. A representative sample of the waste to be tested (minimum size 100 grams) shall be obtained using the methods specified in Appendix I or any other method capable of yielding a representative sample within the meaning of Part 260. (For detailed guidance on conducting the various aspects of the EP see "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.111.)

2. The sample shall be separated into its component liquid and solid phases using the method described in "Separation Procedure" below. If the solid residue obtained using this method totals less than 0.5% of the original weight of the waste, the residue can be discarded and the operator shall treat the liquid phase as the extract and proceed immediately to Step 3.

3. The solid material obtained from the Separation Procedure shall be evaluated for its particle size. If the solid material has a surface area per gram of material equal to, or greater than, 2.1 cm² or passes through a 9.5 mm (0.375 inch) standard sieve, the operator shall proceed to Step 4. If the surface area is smaller or the particle size larger than specified above, the solid material shall be prepared for extraction by crushing, cutting or grinding the material so that it passes through a 9.5 mm (0.375 inch) sieve or, if the material is in a single piece, by subjecting the material to the "Structural Integrity Procedure" described below.

4. The solid material obtained in Step 3 shall be weighed and placed in an extractor with 16 times its weight of deionized water. Do not allow the material to dry prior to weighing. For purposes of this test, an acceptable extractor is one which will impart sufficient agitation to the mixture to not only prevent stratification of the sample and extraction fluid but also insure that all sample surfaces are continuously brought into contact with well mixed extraction fluid.

5. After the solid material and deionized water are placed in the extractor, the operator shall begin agitation and measure the pH of the solution in the extractor. If the pH is greater than 5.0, the pH of the solution shall be decreased to 5.0 ± 0.2 by adding 0.5 N acetic acid. If the pH is equal to or less than 5.0, no acetic acid should be added. The pH of the solution shall be monitored, as described below, during the course

of the extraction and if the pH rises above 5.2, 0.5N acetic acid shall be added to bring the pH down to 5.0 ± 0.2. However, in no event shall the aggregate amount of acid added to the solution exceed 4 ml of acid per gram of solid. The mixture shall be agitated for 24 hours and maintained at 20°-40°C (68°-104°F) during this time. It is recommended that the operator monitor and adjust the pH during the course of the extraction with a device such as the Type 48-A pH Controller manufactured by Chemtrix, Inc., Hillsboro, Oregon 97123 or its equivalent, in conjunction with a metering pump and reservoir of 0.5N acetic acid. If such a system is not available, the following manual procedure shall be employed:

(a) A pH meter shall be calibrated in accordance with the manufacturer's specifications.

(b) The pH of the solution shall be checked and, if necessary, 0.5N acetic acid shall be manually added to the extractor until the pH reaches 5.0 ± 0.2. The pH of the solution shall be adjusted at 15, 30 and 60 minute intervals, moving to the next longer interval if the pH does not have to be adjusted more than 0.5N pH units.

(c) The adjustment procedure shall be continued for at least 6 hours.

(d) If at the end of the 24-hour extraction period, the pH of the solution is not below 5.2 and the maximum amount of acid (4 ml per gram of solids) has not been added, the pH shall be adjusted to 5.0 ± 0.2 and the extraction continued for an additional four hours, during which the pH shall be adjusted at one hour intervals.

6. At the end of the 24 hour extraction period, deionized water shall be added to the extractor in an amount determined by the following equation:

$$V = (20 \times W) - 16(A) - A$$

V = ml deionized water to be added

W = weight in grams of solid charged to extractor

A = ml of 0.5N acetic acid added during extraction

7. The material in the extractor shall be separated into its component liquid and solid phases as described under "Separation Procedure."

8. The liquids resulting from Steps 3 and 7 shall be combined. This combined liquid (or the waste itself if it has less than 4 percent solids, as noted in Step 2) is the extract and shall be analyzed for the presence of any of the contaminants specified in Table 1 of § 261.24 using the Analytical Procedures designated below.

Separation Procedure

Equipment: A filter holder, designed for filtration media having a nominal pore size of 0.45 micrometers and capable of applying a 8.3 kg/cm² (75 psi) hydrostatic pressure to the solution being filtered, shall be used. For mixtures containing nonabsorptive solids, where separation can be effected without imposing a 8.3 kg/cm² pressure differential, vacuum filters employing a 0.45 micrometers filter media can be used. (For

"Hazardous Waste Streams," EPA 600/3-80-012, January 1980.

*The percent solids is determined by drying the filter pad at 80°C until it reaches constant weight and then calculating the percent solids using the following equation:

Percent solids =

$$\frac{\text{weight of pad + solids} - \text{dried weight of pad}}{\text{total weight of sample}} \times 100$$

further guidance on filtration equipment or procedures see "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods" incorporated by reference, see § 260.11). Procedure:

(i) Following manufacturer's directions, the filter unit shall be assembled with a filter bed consisting of a 0.45 micrometer filter membrane. For difficult or slow to filter mixtures a prefilter bed consisting of the following prefilters in increasing pore size (0.55 micrometer membrane, fine glass fiber prefilter, and coarse glass fiber prefilter) can be used.

(ii) The waste shall be poured into the filtration unit.

(iii) The reservoir shall be slowly pressurized until liquid begins to flow from the filtrate outlet at which point the pressure in the filter shall be immediately lowered to 10-15 psig. Filtration shall be continued until liquid flow ceases.

(iv) The pressure shall be increased stepwise in 10 psi increments to 75 psig and filtration continued until flow ceases or the pressurizing gas begins to exit from the filtrate outlet.

(v) The filter unit shall be depressurized, the solid material removed and weighed and then transferred to the extraction apparatus, or, in the case of final filtration prior to analysis, discarded. Do not allow the materi-

*This procedure is intended to result in separation of the "free" liquid portion of the waste from any solid matter having a particle size $>0.45 \mu\text{m}$. If the sample will not filter, various other separation techniques can be used to aid in the filtration. As described above, pressure filtration is employed to speed up the filtration process. This does not alter the nature of the separation. If liquid does not separate during filtration, the waste can be centrifuged. If separation occurs during centrifugation, the liquid portion (centrifugate) is filtered through the 0.45 μm filter prior to becoming mixed with the liquid portion of the waste obtained from the initial filtration. Any material that will not pass through the filter after centrifugation is considered a solid and is extracted.

al retained on the filter pad to dry prior to weighing.

(vi) The liquid phase shall be stored at 4°C for subsequent use in Step 5.

B. Structural Integrity Procedure

Equipment: A Structural Integrity Tester having a 3.18 cm (1.25 in.) diameter hammer weighing 0.33 kg (0.73 lbs.) and having a free fall of 18.34 cm (6 in.) shall be used. This device is available from Associated Design and Manufacturing Company, Alexandria, VA 22314, as Part No. 125, or it may be fabricated to meet the specifications shown in Figure 1.

Procedure

1. The sample holder shall be filled with the material to be tested. If the sample of waste is a large monolithic block, a portion shall be cut from the block having the dimensions of a 3.3 cm (1.3 in.) diameter x 7.1 cm (2.8 in.) cylinder. For a fixated waste, samples may be cast in the form of a 3.3 cm (1.3 in.) diameter x 7.1 cm (2.8 in.) cylinder for purposes of conducting this test. In such cases, the waste may be allowed to cure for 30 days prior to further testing.

2. The sample holder shall be placed into the Structural Integrity Tester, then the hammer shall be raised to its maximum height and dropped. This shall be repeated fifteen times.

3. The material shall be removed from the sample holder, weighed, and transferred to the extraction apparatus for extraction.

Analytical Procedures for Analyzing Extract Contaminants

The test methods for analyzing the extract are as follows:

1. For arsenic, barium, cadmium, chromium, lead, mercury, selenium, silver, cadmium, lindane, methoxychlor, toxaphene, 2,4-D(2,4-dichlorophenoxyacetic acid) or 2,4,5-TP (2,4,5-trichlorophenoxypropionic acid): "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11).

2. (Reserved)

For all analytes, the methods of standard addition shall be used for quantification of species concentration.