

US EPA ARCHIVE DOCUMENT

MERCURY EMISSIONS FROM THE DISPOSAL OF FLUORESCENT LAMPS

REVISED MODEL

FINAL REPORT

Post-OMB Review

Office of Solid Waste
U.S. Environmental Protection Agency

March 31, 1998

ACKNOWLEDGMENTS

The Agency recognizes ICF Incorporated for the overall organization and development of this report. ICF developed the database and analytical model that allowed for the comprehensive analyses discussed in this report. Lyn D. Luben, Gary L. Ballard, and W. Barnes Johnson, all of the United States Environmental Protection Agency, Office of Solid Waste, provided guidance and review.

[Note: No changes were made to this document in response to OMB review.]

LIST OF ACRONYMS

ANSI	American National Standards Institute
CE	Conditional Exclusion
CESQG	Conditionally Exempt Small Quantity Generator
EPRI	Electric Power Research Institute
EIA	Energy Information Administration
kg	Kilogram
kwh	Kilowatt Hour
LDRs	Land Disposal Restrictions
Mg/yr	Megagrams Per Year
MWC	Municipal Waste Combustor
OAQPS	Office of Air Quality Planning and Standards
RTI	Research Triangle Institute
RCRA	Resource Conservation and Recovery Act of 1976
TC	Toxicity Characteristic
UW	Universal Waste

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGMENTS	i
LIST OF ACRONYMS	ii
EXECUTIVE SUMMARY	ES-1
BACKGROUND AND PURPOSE OF REPORT	ES-1
Background	ES-1
Purpose of Report	ES-2
MODEL APPROACH	ES-3
Mercury Input	ES-3
Emissions from Management and Disposal of Lamps	ES-3
Mercury Emissions Avoided from Utility Boilers	ES-3
CONCLUSIONS	ES-4
PUBLIC COMMENTS AND AGENCY PEER REVIEW	ES-4
Public Comments	ES-4
Agency Peer Review	ES-5
1. INTRODUCTION	1-1
1.1 BACKGROUND	1-1
1.2 PURPOSE OF REPORT	1-2
2. MODEL APPROACH	2-1
2.1 MERCURY INPUT	2-1
2.1.1 Commercial Building Space Growth Rates	2-1
2.1.2 Lamp Properties	2-2
2.1.3 Results	2-5
2.1.4 Relationship of T8 populations to Policy Options	2-8
2.2 UTILITY BOILER MERCURY EMISSIONS SAVINGS	2-8
2.3 LAMP DISPOSAL EMISSIONS	2-11
2.3.1 Emissions Factors	2-11
2.3.2 Waste Flows and Partitioning Coefficients	2-23
3. RESULTS	3-1
3.1 WASTE MANAGEMENT EMISSIONS	3-1
3.2 SENSITIVITY ANALYSES	3-4
3.3 CONCLUSION	3-15

LIST OF FIGURES

	<u>Page</u>
Figure 2-1. Baseline/CESQG Waste Flow/Disposal Tree	2-12
Figure 2-2. CE/CESQG Waste Flow/Disposal Tree	2-13
Figure 2-3. UW/CESQG Waste Flow/Disposal Tree	2-14

LIST OF TABLES

	<u>Page</u>
Table 2-1. Building Categories	2-2
Table 2-2. Mercury Content of T12 Lamps (milligrams per lamp)	2-4
Table 2-3. Mercury Content of T8 Lamps (milligrams per lamp)	2-4
Table 2-4. Lamp Populations (percent)	2-6
Table 2-5. Annual Number of Lamps Disposed (millions)	2-7
Table 2-6. Electric Utility Mercury Emissions Avoided (kg)	2-10
Table 2-7. Emissions Factors for Subtitle D and Similar Transport per Lamp	2-16
Table 2-8. Emissions Factors for Transport to Recycling and Subtitle C Facilities	2-17
Table 2-9. Emissions Factors for Crushing Operations	2-18
Table 2-10. Emissions Factors for Primary Recycling Emissions	2-19
Table 2-11. Emissions Factors for Secondary Recycling Emissions	2-20
Table 2-12. Total Emissions Factors for Primary and Secondary Recycling Emissions	2-20
Table 2-13. Emissions Factors for MWC	2-22
Table 2-14. Emissions Factors for Subtitle D Landfills	2-23
Table 2-15. Annual Percentage of CESQG Lamps Discarded	2-24
Table 3-1. Annual Mercury Disposal Emissions from Lamps (1998-2007) (kg)	3-2
Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg)	3-5
Table 3-3. Sensitivity Analysis for Lamp Breakage and Compliance under CE	3-10
Table 3-4. Net Mercury Emissions from Lamps (kg)	3-12

EXECUTIVE SUMMARY

BACKGROUND AND PURPOSE OF REPORT

BACKGROUND

Most fluorescent lamps contain quantities of mercury sufficient to fail the Toxicity Characteristic (TC) and are subject to the hazardous waste regulations under the Resource Conservation and Recovery Act (RCRA) when discarded.¹ (See 40 CFR 261.24.) However, many generators do not realize that their spent mercury-containing lamps are hazardous waste and thus do not manage them in compliance with the RCRA hazardous waste regulations. On July 27, 1994, the U.S. Environmental Protection Agency (EPA) published a proposed rule addressing the management of spent mercury-containing lamps (59 FR 39288). In the proposal, the Agency presented two options for changing the regulations governing spent mercury-containing lamps:

- Add mercury-containing lamps to the universal waste regulations (UW option).
 - ◆ Under this option, spent mercury-containing lamps that failed the TC would be subject to universal waste regulations. (See 40 CFR Part 273 for existing universal waste regulations applicable to specified types of spent batteries, pesticides, and thermostats.) The proposed standards for generators and consolidation points of spent lamps include procedures for maintaining the condition of lamps (e.g., proper packaging), and storing the lamps (e.g., storage time limits, labeling), notifying EPA as specified, and responding to releases. The proposed standards for transporters of spent lamps include procedures for proper packaging of broken/unbroken lamps, storing and treating lamps (e.g., dilution prohibition), and responding to releases. Destination sites (e.g., landfills and recyclers) receiving spent lamps would be subject to the RCRA hazardous waste regulations at 40 CFR Part 264-270 and 124, as applicable.
- Conditionally exclude mercury-containing lamps from regulation as hazardous waste (CE option).
 - ◆ Under this option, generators would qualify for the exclusion if they satisfy two conditions:
 - Generators would be required to either dispose of these lamps in a municipal landfill that is permitted by a State/Tribe with an EPA-approved municipal solid waste permitting program, or
 - If generators do not send these lamps to a municipal solid waste landfill, they would send them to a State permitted, licensed, or registered mercury reclamation facility; and
 - Generators must keep records of the lamps shipped to management facilities.
 - ◆ Generators would be able to ship their lamps as part of their municipal waste stream, avoiding the RCRA hazardous waste generator standards (e.g., manifesting, record keeping), and ship the lamps to either a Subtitle C or D landfill, or a reclamation facility.

¹ Some data suggest that despite results of the Toxicity Characteristic Leaching Procedure, very little mercury leaches to groundwater from lamp disposal in landfills.

Note that the proposed options would apply only to generators generating more than 100 kg/month of hazardous waste or more than one kg/month of acute hazardous waste. That is, neither option would apply to RCRA conditionally exempt small quantity generators (CESQGs), which are generators generating quantities of hazardous waste below these thresholds. Although they too generate spent mercury-containing lamps, CESQGs are free under RCRA to send their hazardous waste (including spent mercury-containing lamps) to an approved Subtitle C or D landfill, or a reclamation facility.

In the 1994 proposal, the Agency identified uncertainties regarding the amount of mercury released from spent fluorescent lamps in the waste management system. The Agency requested information on, among other things, the amount of mercury released from broken mercury-containing lamps and the air transport of mercury from lamps. The Agency has also requested comment on best management practices and controls that might best prevent releases of mercury to the environment under both options. Since the proposal, EPA has continued to compile and analyze information provided by industry and other interested parties on mercury emissions from spent fluorescent lamps.

In June 1997, the Agency finalized development of the draft Mercury Emissions Model. The purpose of the model is to assist interested parties in examining the amounts and sources of mercury emissions that might be produced in managing and disposing of spent lamps under the options. The model provides emissions estimates for a modeling period extending from 1998 to 2007. Emissions estimates include both disposal emissions and net emissions. Installation of energy-efficient T8 lamps will reduce demand for electricity, which in turn reduces mercury emissions from utility boilers (in particular, coal-fired boilers). Net mercury emissions are defined as the difference between disposal emissions and the emissions avoided from energy savings.

In July 1997, EPA made available to the public the draft Mercury Emissions Model, a user guide entitled A User's Guide to the Mercury Emissions Model, and this report. The Agency accepted public comments during the 45-day comment period, plus an extension. In total, 35 comment letters were received by EPA's RCRA docket. After the close of the comment period, EPA reviewed all letters received; revised the model, user guide and report as appropriate; and prepared a Response-to-Comment Document. These materials are available in EPA's RCRA docket established for this action.

PURPOSE OF REPORT

The purpose of this report is to discuss the methodology, data and assumptions used in developing the final Mercury Emissions Model, with the objective of allowing users to understand its function and results. The report describes inputs into the model for estimating mercury emissions during waste management and disposal activities (e.g., lamp properties, lamp disposal rates, and lamp mercury emissions rates from specific waste management practices). It also discusses inputs for estimating the energy savings from using high-efficiency T8 lamps, and the effects on mercury emissions from electric utilities. It then presents the model's estimates for lamp mercury emissions under the baseline and options, including annual and cumulative mercury lamp disposal emissions, and net mercury emissions. In the revised model, EPA refers to the baseline, CE option, and UW option as Baseline/CESQG, CE/CESQG, and UW/CESQG, respectively. In addition, the report presents sensitivity runs conducted to evaluate the extent to which the model's data and assumptions on mercury emissions during transport of spent lamps affect the mercury disposal emissions estimates under the CE option. The report also discusses key model limitations.

MODEL APPROACH

The model uses three basic elements to estimate mercury emissions from the management and disposal of lamps: mercury input into the waste management system; mercury emissions from the management and disposal of lamps; and the mercury emissions avoided from coal-fired utility boilers as a result of replacing T12 lamps with higher efficiency T8 lamps.

MERCURY INPUT

The mercury input into the model is a function of the number of lamp types entering the system and the quantity of mercury in the lamps. The number of lamps entering the waste management system is a function of the overall lamp population, which in turn depends on the following factors:

- The operating life and hours of operation for the types of lamps;
- The amount of floorspace lit with fluorescent lamps; and
- The relative population and mix of lamp types. (Please note that the model is designed to estimate total mercury emissions from the management and disposal of spent fluorescent lamps. Therefore, the model includes lamp populations from all generators, including generators subject to RCRA as well as CESQGs. Users of the model, however, should not conclude that CESQG lamps would be regulated under the options.)

EMISSIONS FROM MANAGEMENT AND DISPOSAL OF LAMPS

Mercury emissions from spent lamps are a function of the types and emissions rates of the waste management and disposal activities undertaken by waste handlers. Because of the scarcity of data, the model examines possible emissions outcomes based on low, central, and high estimates of emissions factors. The model estimates mercury emissions produced from the following waste management and disposal activities:

- Transport under RCRA Subtitles C and D. (Please note that the model defines transportation to include all activities from the time the lamp is spent until it is received at the first facility away from the site of generation);
- Crushing (i.e., as used as a volume reduction technique);
- Landfilling under RCRA Subtitles C and D;
- Combustion at Municipal Waste Combustors (MWCs); and
- Recycling.

MERCURY EMISSIONS AVOIDED FROM UTILITY BOILERS

Installation of high-efficiency T8 lamps will reduce the demand for electricity, which will in turn reduce the amount of mercury emissions from utility boilers, particularly coal-fired boilers. The model calculates energy savings based on the estimated energy savings per T8 lamp, total T8 population, delamping rates, and energy consumption of T12 lamps. From this, the model calculates mercury emissions avoided based on emissions factors for elemental, divalent, and particle species of mercury. The

model also estimates net mercury emissions by calculating the difference between mercury emissions from lamp disposal and mercury emissions from coal-fired boilers that are avoided by using T8 lamps.

CONCLUSIONS

Based on the model's results, a number of observations and conclusions can be drawn. First, the Mercury Report to Congress estimates mercury emissions at about 144,000 kg in 1994. The model estimates total annual lamp disposal emissions to range from a high of about 1,814 kg (CE/CESQG High in 1998) to a low of 298 kg (UW/CESQG Low in 2005). Excluding CESQG lamp emissions, total annual mercury emissions would range from a high of 225 kg (CE/CESQG in 2007) to a low of 11 kg (UW/CESQG in 2005). Further, the results suggest that Subtitle D landfilling, in particular, would account for minimal lamp mercury emissions under either option. This is largely because, based on the data, the model assumes that most lamps are broken before being landfilled. Second, transportation emissions are an important contributor to total mercury emissions, particularly under the CE option. We believe that virtually all lamps would be broken during transport under the CE option unless conditions are added to address releases. (Transportation, as used here, covers all handling from the time the lamp becomes spent until its receipt at the destination facility.) Third, energy savings from the use of T8 lamps and the resultant decrease in mercury emissions from utility boilers appear to be independent of the policy options; that is, the Agency believes that the mix of T12 and T8 lamps purchased by commercial establishments would be independent of the policy established. Taken collectively, these observations suggest that, to reduce lamp mercury emissions under either option, procedures should be established that minimize emissions during transport and/or processing (e.g., crushing) of spent lamps.

PUBLIC COMMENTS AND AGENCY PEER REVIEW

PUBLIC COMMENTS

In the following paragraphs, the Agency summarizes the primary comments received during the public comment period. We also identify where revisions to the model have been made.

- Many commenters raised concerns about the model's Subtitle D landfill emissions rates. Several commenters believed that EPA should not have rounded the high emissions rate of 0.8 percent to one percent. EPA believes this is a valid concern and has revised the model to include the original 0.8 percent emissions factor. EPA has retained the original central and low emissions rates for Subtitle D landfills.
- Several commenters also raised concerns that EPA had misinterpreted data from the State of Florida on its recycling emissions estimates. EPA has carefully reviewed available recycling emissions data and revised the model's central and low emissions factors for divalent mercury emissions. EPA revised the central estimate from three percent to 1.09 percent and the low estimate from one percent to 0.07 percent.
- Many commenters believed that the model should clearly distinguish between CESQG and non-CESQG lamp mercury emissions. They pointed out that CESQG lamp emissions are outside the scope of the rulemaking effort and thus interfere with the model's results. EPA agrees with this concern and has revised the model to segregate non-CESQG from CESQG lamp emissions.
- A number of commenters believe that the higher compliance costs under the UW option would be a disincentive for certain building owners from conducting lighting upgrades.

These commenters believe that the CE option would expedite upgrades and are concerned that the model assumes that upgrades are independent of the policy option. In response to the comments, EPA revisited its assumptions and performed a number of additional calculations on the impact of disposal costs on a lighting upgrade's internal rate of return (IRR). The Agency has found that, holding all other lamp operating costs constant, the cost of lamp disposal had minimal impacts on an upgrading project's IRR. At a \$0.50/lamp transportation and recycling cost, the IRR for a typical project over ten years was 51 percent. At a \$1.00/lamp transportation and recycling cost, the IRR was 50 percent — only a slight decrease in IRR despite a 100 percent increase in waste management costs. Because of these reasons, EPA continues to believe that use of T8 lamps is independent of the policy options.

- A number of commenters indicated that the model underestimated lamp recycling rates under the baseline and overestimated the rate of Subtitle C landfilling. Commenters suggested that the national lamp recycling rate is approximately ten percent and that Subtitle C landfilling of lamps is near three percent. EPA agrees with these comments, and has revised the baseline's recycling rate to ten percent and reduced the Subtitle C disposal rate to about two percent.
- Based on its review of the model, EPA has also made its own revisions. First, the Agency has revised the rule effectiveness for municipal waste combustor (MWC) emissions from 80 to 95 percent. This revision has the effect of decreasing the MWC high emission factor for divalent mercury from 30 percent to 16 percent. Second, EPA revised the disposal trees under the baseline and options to account for the fact that some CESQGs voluntarily recycle their spent lamps.

AGENCY PEER REVIEW

A panel of experts reviewed the draft model, report and user guide independently of EPA and provided their comments to the Agency. The panel was comprised of three independent individuals with general and specialized expertise in mercury- and lamps-related issues. The Agency has reviewed their comments and revised the study as appropriate. The Agency also developed a Response-to-Comment Document for this peer review, which is available at the EPA RCRA docket. Following is a summary of the major comments received and the Agency response.

- Two of the reviewers noted that the model currently estimates elemental and divalent mercury emissions, but not particulate emissions. (The model includes a placeholder in its emissions tables in case a user wants to add particulate emissions to the model.) One of the reviewers believed that the model should be revised to estimate particulate emissions, believing that there is a strong possibility of fugitive dust emissions during bulb and waste transport/handling. The other reviewer believed that distinguishing between divalent and particulate mercury emissions is unnecessary and misleading, since "particulate" describes the physical form of the mercury only. The Agency notes that, when developing the model, the Agency encountered considerable uncertainty about the extent to which mercury particulates would be emitted. For example, the Mercury Study: Report to Congress (Volume III, December 1997) provides that there remains "considerable uncertainty as to the actual speciation factors for each point source type (p. 4-4)." At the same time, the Agency believes that mercury vapor emissions are of primary concern in the management and disposal of lamps and thus decided to focus on the vapor emissions. For these reasons, the Agency has decided against revising the speciation assumptions in the model.

- Two of the reviewers expressed concern that the model does not address mercury inter-species transformation. In particular, one of the reviewers indicated that inter-species transformation of mercury is well known to occur in many media and that, in particular, the oxidation of reduced Hg^0 to Hg^{2+} and vice versa, is widely recognized. The Agency agrees that inter-species transformation can occur in lamp waste management and disposal, particularly in Subtitle D landfills. However, for several reasons, the Agency has decided against revising the model to account for this possibility. First, the Agency notes that, even within the scientific community, uncertainty exists about the speciation of mercury. This belief is expressed in the final Mercury Study: Report to Congress (Volume III, December 1997). The Agency believes that trying to determine what the exact inter-species assumptions should be for each management and disposal activity could potentially increase the model's uncertainty and be too labor-intensive for the purposes of the model. Therefore, instead of integrating inter-species transformation into the model, the Agency has decided to retain the current speciation assumptions. The Agency also notes that a number of commenters on the NODA generally supported the model's assumptions.
- One reviewer expressed concern that the report does not discuss EPA's assumption that the use of T8 and T12 lamps is independent of the regulatory options. The reviewer believed that the report should discuss the increased disposal costs under the proposed UW and CE regulations (e.g., if used lamps must be handled to prevent breakage). The Agency agrees, and has revised the final report to discuss EPA's assumptions.
- Each of the reviewers raised questions about the reliability of the model's data and assumptions and generally believed that the model relies heavily upon its data and assumptions. EPA agrees that data on lamp mercury emissions are limited and a number of assumptions were made in developing the model when data were unavailable. The Agency notes that the model's data were obtained from what the Agency believes to be the best available and most reliable sources (e.g., government agencies, lamp waste handlers, and specially prepared reports reviewed and approved by government agencies).

1. INTRODUCTION

1.1 BACKGROUND

The disposal of mercury-containing fluorescent lamps and the status of these lamps under the Resource Conservation and Recovery Act (RCRA) is controversial. Most fluorescent lamps contain quantities of mercury sufficient to fail the Toxicity Characteristic (TC) and are, therefore, hazardous wastes under RCRA. However, many generators do not recognize that lamps can be hazardous waste, and do not manage lamps as hazardous waste. In addition, not all lamps are subject to hazardous waste regulations (i.e., household lamps and lamps generated by conditionally exempt small quantity generators).

On July 27, 1994, the U.S. Environmental Protection Agency (EPA) published a proposed rule addressing the management of spent mercury-containing lamps (59 FR 39288). In this proposal, EPA presented two options for changing the regulations governing mercury-containing lamps. One option was to add mercury-containing lamps to the universal waste regulations. Under the universal waste option, mercury-containing lamps that fail the TC would be subject to streamlined universal waste regulations. These would include, for example, less stringent transportation requirements that would make it easier for facilities to collect and send their wastes to hazardous waste management facilities.

The other option considered was to conditionally exclude mercury-containing lamps from regulation as hazardous waste. Under this option, mercury-containing lamps would not be considered hazardous provided they are disposed of in municipal solid waste landfills that meet certain criteria, or are recycled at mercury reclamation facilities that meet certain requirements. The Agency also asked for comment on a variety of additional conditions that might be beneficial under the conditional exclusion option.

Currently, the vast majority of the fluorescent lamp population consists of T12s, which contain on average 25 milligrams of mercury per lamp. T12s can be replaced with energy-saving T8s, which contain about 15 mg of mercury per lamp. Because utility boilers emit mercury, lamp manufacturers and utilities believe that the most effective means to reduce mercury emissions is to encourage the rapid transition from T12s to T8s through energy-savings programs.² It is contended that this transition would reduce mercury emissions by an amount greater than the emissions from the disposal process, and that the current status of lamps as a potential RCRA hazardous waste hinders this beneficial transition. Other parties believe mercury emissions from lamp disposal to be a significant and controllable source of mercury emissions. These parties believe that lamp disposal should be regulated as hazardous waste as a means to reduce emissions of mercury.

The Mercury Emissions Model was developed to address these and other issues regarding the management and disposal of fluorescent lamps. It is designed to answer questions regarding emissions from the disposal of fluorescent lamps under various policy options, and to be a flexible policy analysis tool allowing users to analyze the effects of various policy choices.

² The Mercury Report to Congress indicates that utility boilers using natural gas or oil emit only small amounts of mercury and that the use of coal is responsible for most of the mercury emissions.

1.2 PURPOSE OF REPORT

In this report, the Agency presents the methodology and assumptions used to develop the model, with the objective of allowing users to understand its structure, function and limitations. The report presents the overall structure of the model, data and assumptions underlying emissions estimates, and emissions results for selected policy options. In the course of developing the model, the Agency uncovered facts relevant to lamp disposal issues, and these are presented as well. While the model is sufficiently flexible to allow users to develop and analyze policy options under a variety of conditions, the Agency focuses on the following three policy options:

1. **Baseline Management** - Baseline management assumes that no action is taken by the Agency and that current trends in the management of fluorescent lamps continue. Under the baseline, generators and other handlers of spent lamps would be subject to the RCRA hazardous waste regulations, as applicable, for lamps that fail the Toxicity Characteristic (TC). (See 40 CFR 261.24.) Under RCRA, conditionally exempt small quantity generators (CESQGs) (i.e., generators generating 100 kg/month of hazardous waste or less, or one kg/month or less of acute hazardous waste) can send their waste to a hazardous waste facility, or may elect to send their waste to a landfill or other facility approved by the State for industrial or municipal non-hazardous wastes. CESQGs are not affected by either of the options. Generators above the CESQG thresholds are required to fully comply with the RCRA hazardous waste regulations as applicable (e.g., waste characterization, manifesting, record keeping). In addition, transporters and destination facilities must follow the hazardous waste regulations in managing lamps from these generators.
2. **Universal Waste (UW)** - Under this option, mercury-containing lamps that fail the TC would be subject to streamlined universal waste regulations. The proposed universal waste standards for generators and consolidation points of spent lamps include procedures for maintaining the condition of lamps (e.g., proper packaging), and storing the lamps (e.g., storage time limits, labeling), notifying EPA as specified, and responding to releases. The proposed standards for transporters of spent lamps establish procedures for proper packaging of broken/unbroken lamps, storing and treating lamps (e.g., dilution prohibition), and responding to releases. Destination sites (e.g., landfills and recyclers) receiving spent lamps would be subject to the RCRA hazardous waste regulations at 40 CFR Part 264-270 and 124, as applicable. The proposal also establishes limited exporter requirements.
3. **Conditional Exclusion (CE)** - Under this option, generators would qualify for the CE if they meet two conditions:
 - Generators would be required to either dispose of these lamps in a municipal landfill that is permitted by a State/Tribe with an EPA-approved municipal solid waste permitting program, or
 - If generators do not send these lamps to a municipal solid waste landfill, they would send them to a State permitted, licensed, or registered mercury reclamation facility; and
 - Generators must keep records of the lamps shipped to management facilities.

Under the CE option, generators would be able to ship their lamps as part of their municipal waste stream, avoiding the RCRA hazardous waste generator standards (e.g., manifesting, record keeping), and ship the lamps to a Subtitle D landfill or a reclamation facility. Under the CE, the Agency proposed to

limit the exclusion to spent lamps disposed in municipal solid waste landfills, rather than allowing disposal in any nonhazardous waste landfill or a municipal solid waste combustor.

For each of these options, the model estimates net emissions by considering three factors. First, the model estimates the total quantity of mercury entering the disposal system. This is accomplished by estimating the total number of 4-foot lamps entering the waste management system in conjunction with estimates of the quantity of mercury in the lamps. Second, emissions from the disposal operations are estimated as a fraction of the quantity of mercury entering a specific disposal operation. Third, the model then estimates net emissions from the disposal process by subtracting the emissions avoided as a result of the installation of energy-saving lighting (i.e., mercury emissions avoided as a result of not generating electric power).

Please note that the model refers to the baseline, CE option, and UW option as “Baseline/CESQG,” “CE/CESQG,” and “UW/CESQG,” respectively. Also note that the model can estimate lamp mercury emissions from all 4-foot fluorescent lamps (i.e., CESQG and non-CESQG). It can also distinguish mercury emissions from either CESQG or non-CESQG lamps.

As with all models, there are limitations to the Mercury Emissions Model. Important limitations include the following:

- A major obstacle in developing the model was the scarcity of reliable data on certain aspects of lamp management and disposal, lamp mercury emissions, and mercury emissions from utility boilers. Much of the data and assumptions in the model are based on the Agency's best professional judgment (e.g., partitioning coefficients) and conversations with industry and States (e.g., emissions factors). The model partly compensates for this limitation by allowing users to estimate lamp mercury emissions based on a range of lamp mercury emissions factors. The model also allows users to manipulate selected other data and assumptions (e.g., partitioning coefficients). Finally, the model allows users to conduct sensitivity analyses to isolate the effects that a particular assumption may have on the model's emissions estimates.
- As currently structured, the model only considers commercial floorspace as defined in the report. The model does not consider industrial or residential floorspace, and thus, the model's mercury emissions estimates do not include lamps discarded from these types of floorspace.
- The modeling period begins in 1992 and ends in 2007. Due to an assumed lamp life of four years, the model needs an initiation period, during which lamp populations are estimated. Therefore, the initial portions of the modeling period (1992-1996) are for this initiation. Policy options may begin in 1997 or any later year, and last for any specified duration that does not extend beyond 2007.
- The model does not consider the inter-species transformation of mercury during lamp waste management or disposal, e.g., the model does not take into account the possible transformation of mercury from elemental to divalent species. EPA is aware of studies that have suggested that mercury speciation could change based on environmental factors (e.g., moisture, sunlight), particularly in landfills. However, the Agency believes that there is uncertainty about what the model's assumptions should be and has left the model's assumptions unchanged. The Agency is confident that the model's assumptions are reasonable based on available data.

- The model calculates the number of CESQG and non-CESQG lamps under the baseline and options to estimate lamp mercury emissions attributable to both groups of lamps. Note that the model calculates the number of CESQG and non-CESQG lamps based on the simplifying assumption that lamp generators generate mercury-containing lamps as their only hazardous waste. The Agency recognizes that certain commercial buildings generate other types of hazardous waste; however, the Agency believes that the majority of commercial buildings (e.g., office buildings) do not generate large volumes of hazardous waste and that the model's assumption is therefore reasonable.
- The model's mercury emissions factors include two types of mercury species: elemental and divalent. The model does not include particulate mercury emissions. The Agency notes uncertainty among the scientific community about what the appropriate speciation assumptions should be and has decided to leave the model's assumptions unchanged. The Agency is confident that the model's assumptions are generally reasonable for purposes of the analyses conducted. Note also that the model has been designed to accommodate estimates of particulate emissions if the user desires to input such data.

2. MODEL APPROACH

To estimate mercury emissions from the disposal of 4-foot fluorescent lamps, the model estimates three basic elements:

1. Mercury inputs into the waste management system. The mercury input is a function of the number of each lamp type (i.e., T12 and T8) entering the waste management system and the quantity of mercury in the lamps. The number of lamps entering the waste management system is a function of the overall lamp population, which in turn depends upon the following factors:
 - The operating life and hours of operation for the types of lamps;
 - The amount of floorspace lit with fluorescent lamps; and
 - The relative population mix of T12s and T8s (i.e., quantity of T12s replaced with T8s as part of energy-efficiency programs and the relative fraction of new floorspace lit with each type of lamp).
2. Emissions from the disposal of lamps. Mercury emissions are a function of the type of management units used during the transport and disposal process, and the emissions estimates from each type of unit. For purposes of this analysis, the Agency examines possible emissions outcomes based on low, central, and high estimates of emissions factors. Because of the scarcity of reliable data, we do not believe that our estimates of mercury emissions under the central estimate are any more accurate than those of the low or high estimates. “Central estimate” is simply the estimate that falls somewhere between the low and high estimates, but not necessarily at the midpoint.
3. The mercury emissions avoided from coal-fired utility boilers as a result of replacing T12s with higher efficiency T8s.

2.1 MERCURY INPUT

To estimate the quantity of mercury entering the disposal system, the Agency estimated the amount of commercial floorspace lit with fluorescent lamps, the floorspace growth rate, the mercury content of lamps, the relative population of lamps, and lamp lifetimes. We use these basic factors as discussed in the following sections to estimate the mercury quantities.

2.1.1 COMMERCIAL BUILDING SPACE GROWTH RATES

We used data from the Energy Information Administration (EIA) on total floorspace by building size category to estimate how many fluorescent lamps are used each year.³ EIA estimates floorspace by type of lighting, but for the purposes of this report, the Agency used the “Total Fluorescent” value of 37,831,000,000 ft² as the 1986 starting point, as opposed to including unlit space, or space lit with either HID or incandescent lamps. We then updated this value to 1992 levels by assuming an annual growth rate of 2.4 percent. In total, the Agency estimates a total floorspace of 43,624,690,000 ft² for 1992. We categorized total floorspace into three building sizes shown in Table 2-1. The space allocation for 1992 is contained in the Commercial Building Allocation section of the model. Please note that the Agency

³ Energy Information Administration, Commercial Buildings Energy Consumption and Expenditures - 1992, DOE/EIA-0318(92), April 1995.

analyzes only commercial floorspace because we believe that the vast majority of users of fluorescent lamps are commercial establishments. We define a commercial establishment as a building with more than 50 percent of its floorspace used for commercial activities. Commercial establishments include, but are not limited to, stores, offices, schools, churches, gymnasiums, libraries, museums, hospitals, clinics, warehouses, and jails. Government buildings are also included, except for buildings on site with restricted access (e.g., some military installations). "Lighted commercial floorspace" is the total amount of floorspace within commercial buildings that was lighted electrically.

Table 2-1. Building Categories

Building Group	Size Range (ft²)	Median Size (ft²)	Percentage of "Total Fluorescent"
Small	0 - 100,000	36,000	66
Medium	100,000 - 500,000	220,000	25
Large	> 500,000	770,500	9

Because the overall demand for lighting changes with economic activity and with the construction of new buildings, we estimated a rate of increase in the demand for lighting, which translates into a greater total number of lamps used each year. The estimated increase in lighting demand of 2.4 percent annually is based on the average increase in commercial building floorspace recorded annually between 1989 and 1992.⁴

2.1.2 LAMP PROPERTIES

We used available data to determine lamp lifetimes, delamping rates, the fraction of lamps entering the waste management system, and mercury content of lamps.

2.1.2.1 Lamp Lifetimes

Fluorescent lamp life varies from three to six years based on annual hours of use. Assuming that lamps are operated between 4,000 and 5,000 hours each year, and have a typical life of 20,000 hours, their life span is between four and six years. However, because some lamps fail before their typical end of life, the Agency assumed that lamps will have to be replaced every four years. Thus, we used a spot relamping rate of 25 percent (i.e., one-fourth of all lamps are replaced each year). We further assumed that, during spot relamping, lamps are replaced with other lamps of the same type (T8 or T12).

2.1.2.2 Delamping Rates

New participants to the Green Lights Program, EPA's voluntary program that encourages lighting efficiency, will initially do group relamping (i.e., change all of their lamps at once) to upgrade to the more efficient lamps (from T12 to T8). Furthermore, based on professional judgment, EPA assumed that 60 percent of the participants in Green Lights will continue to do group relamping after they join the program because it is more economical than spot relamping.

Building owners and operators conducting lighting upgrade programs tend to "delamp," i.e., reduce the number of lamps lighting the space. Many older buildings contain unnecessarily high numbers of bulbs and/or fixtures per square ft. During upgrades, the bulbs and fixtures are redistributed to ensure more

⁴ Energy Information Administration, Commercial Buildings Characteristics - 1992, DOE/EIA-0246(92).

efficient lighting. This results in a decrease in the number of bulbs and/or fixtures in the building, thereby reducing the lamp population. Delamping rates vary, with some owners and operators choosing not to delamp and others making large changes. Therefore, in estimating the population of T8s, the Agency does not assume a one-to-one correspondence with T12s they replace. A one-to-one replacement rate is assumed for replacements of T12s with T12s, and T8s with T8s, but not for a transition from T12s to T8s. Based on experience with the Green Lights Program, we assumed a delamping rate of 0.85 (i.e., 85 T8s replace 100 T12s).

2.1.2.3 Lamps Entering Waste Management System

We used a binomial distribution to estimate the fraction of 4-foot lamps entering the waste management system. Based on professional judgment, we assumed an average life of four years and a maximum life of six years for both T12s and T8s. Thus, the portion of lamps entering the waste management system as a result of failure are:

$$\text{Fraction of Failed Lamps} = \frac{K!}{N!(K-N)!} P^N (1-P)^{(K-N)}$$

Where:

- N = cohort year, which ranges from 1 to 6,
- K = maximum lamplife (K = 6), and
- P = probability a lamp will not fail in each year (P = 0.75)

Thus, in any given year, the lamps entering the waste management system are the sum of:

- The number of failures in years 1, 2, 3, 4, 5, and 6 (note: by year 6 all of the lamps in a cohort have failed); and
- T12s replaced during group relamping operations.

2.1.2.4 Mercury Content of Lamps

The mercury content portion of the model contains information regarding the mercury content of each lamp type at the end of lamplife. Because the dummy lamp 'none' is unnecessary for this portion of the model, only five types of lamps are used. Information in the Mercury Report to Congress indicates that mercury deposition rates vary dramatically among species.⁵ Therefore, it was decided to track mercury content in lamps by species, i.e., elemental mercury, divalent mercury, and particulate mercury. Data on overall mercury content were provided to EPA at meetings with manufacturers during the summer of

⁵ United States Environmental Protection Agency, Mercury Study, Report To Congress. EPA-452/R-97-004. December 1997.

1996.^{6,7,8} See Table 2-2 and 2-3. Manufacturers provided estimates of current and future mercury content, which were aggregated into an estimate of total mercury content for T12s and T8s.

Apportionment into species is very uncertain and the Agency based its estimate on information from Sylvania, in conjunction with information provided by the National Electrical Manufacturers Association (NEMA).⁹ Sylvania presented a limited data set indicating that the vapor phase mercury was primarily elemental, while mercury incorporated into the phosphor was primarily divalent. Information supplied by NEMA indicates the vapor phase content of the mercury is estimated to be 0.2 percent. Therefore, EPA assumed the elemental portion of the mercury at 0.2 percent, with the remainder being divalent. (Please note we assumed no particulate mercury, but allow for this possibility in the model structure.)

The total mercury content of lamps depends upon the type of lamp as well as the year of manufacture. Information from lamp manufacturers indicates that substantial reductions in the mercury content of lamps have already occurred, and more reductions are anticipated. Our assumptions regarding the mercury content of lamps as a function of year of manufacture and lamp type are as follows:

**Table 2-2. Mercury Content of T12 Lamps
(milligrams per lamp)**

Year	Elemental	Divalent	Particulate	Total
pre-1992	0.082	40.9180	0	41
1992-1996	0.060	29.9400	0	30
1997 -2007	0.042	20.9580	0	21

**Table 2-3. Mercury Content of T8 Lamps
(milligrams per lamp)**

Year	Elemental	Divalent	Particulate	Total
pre-1996	0.06	29.94	0	30
1996-1999	0.03	14.97	0	15
2000-2007	0.02	9.98	0	10

It should be noted that the 10 mg Hg value for T8 lamps between 2000 and 2007 represents the upper bound. Manufacturers report "less than 10 mg Hg."

⁶ Paul Waltisky, Phillips Lighting Company to Ms. Kristina Meson, Environmental Protection Agency. Letter of September 30, 1996.

⁷ Joseph Howley, GE Lighting to M.s Kristina Meson and Ms. Yvette Hopkins, Environmental Protection Agency. Letter of August 20, 1996.

⁸Sylvania Corporation: Meeting notes and follow-up letter. Meeting between Ms. Kristina Meson, EPA technical staff, and personnel from Sylvania Corporation, August 21, 1996. Sylvania follow-up comments presented in letter dated September 18, 1996.

⁹ Overall, the Agency believes the results of the emissions analysis are better viewed in terms of total mercury, than by species.

2.1.3 RESULTS

The quantity of mercury is determined by calculating the number of lamps entering the waste management system, and the quantity of mercury in the lamps. To estimate lamp populations, the Agency estimated lamp densities for the three building size categories based on common building practices. Typically, one fluorescent fixture will cover 50 to 80 ft² of floorspace. In smaller private offices, one fixture is usually required for every 50 ft²; for large open areas, one fixture is required for approximately 80 ft². We assumed that the smaller the building size, the lesser the amount of open office area.

To provide a recommended 50 foot-candles of lighting in the office space, the Agency assumed a fluorescent fixture will typically have three (3) 4-foot lamps. Assigning a fixture density for each building size (i.e., 50 ft² fixture for small, 65 ft² fixture for medium, and 80 ft² fixture for large), and assuming that each fixture has three lamps, we calculated the following lamps per ft² for the three building sizes:

- Small - 0.06 lamps/ ft²
- Medium - 0.046 lamps/ ft²
- Large - 0.038 lamps/ ft²

The total number of lamps is then estimated based on total square footage in each building size category and average lamp per ft². This methodology provides “the effective T12” population, which represents the numbers of lamps if the population consisted solely of T12s. To estimate the actual population, EPA accounted for delamping by decreasing the effective T12 population with 0.85 T8s per T12. Thus, the 1992 lamp population is developed as follows:

- Estimate the effective T12 population using the floorspace, lighting density, and building groups described above; and
- Estimate the T8 population using data from the Department of Commerce for shipments of T8s shown below.¹⁰ Iterative runs of the model were performed until the 1992, 1993, and 1994 populations approximated the populations from these data. Domestic shipments of linear T8s between 1992 and 1994:
 - ◆ 1992: 27.1 million
 - ◆ 1993: 41.2 million
 - ◆ 1994: 53.3 million

Tables 2-4 and 2-5 present the resulting lamp populations and the numbers of lamps entering the waste management system.

¹⁰ U.S. Department of Commerce, Economics and Statistics Administration, Bureau of the Census, Current Industry Reports – Electric Lamps, Summary 1992, (MQ36B (92)-5), September 1993, and Current Industry Reports – Electric Lamps, Summary 1993 (MQ36B (94)-1), November 1994.

**Table 2-4. Lamp Populations (percent)
Baseline/CESQG**

Building Group	Lamp Types	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007
Large	T12	NON CESQG	49.0%	43.0%	37.8%	33.4%	29.7%	26.4%	23.7%	21.3%	19.3%	17.5%
	T12	CESQG	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
	T8	NON CESQG	42.3%	47.3%	51.6%	55.3%	58.4%	61.1%	63.4%	65.4%	67.0%	68.5%
	T8	CESQG	8.7%	9.7%	10.6%	11.3%	12.0%	12.5%	13.0%	13.4%	13.7%	14.0%
			100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%
Medium	T12	NON CESQG	1.6%	1.6%	1.5%	1.5%	1.4%	1.3%	1.3%	1.2%	1.2%	1.2%
	T12	CESQG	80.6%	77.3%	74.2%	71.2%	68.5%	65.8%	63.3%	61.0%	58.8%	56.7%
	T8	NON CESQG	10.7%	12.7%	14.6%	16.4%	18.1%	19.7%	21.2%	22.7%	24.0%	25.3%
	T8	CESQG	7.1%	8.5%	9.7%	10.9%	12.1%	13.1%	14.2%	15.1%	16.0%	16.9%
			100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%
Small	T12	NON CESQG	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
	T12	CESQG	87.6%	84.9%	82.2%	79.7%	77.2%	74.9%	72.7%	70.6%	68.6%	66.6%
	T8	NON CESQG	4.6%	5.6%	6.6%	7.5%	8.4%	9.3%	10.1%	10.9%	11.6%	12.4%
	T8	CESQG	7.8%	9.6%	11.2%	12.8%	14.4%	15.8%	17.2%	18.5%	19.8%	21.0%
			100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%	100.0%

Note: Lamp shares are calculated on lamp numbers after delamping.

**Table 2-5. Annual Number of Lamps Disposed (millions)
Baseline/CESQG**

Building	Lamp	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007
Large	T12	47.59	44.52	41.72	42.77	42.78	38.56	34.75	31.18	27.93	25.09	22.65	20.56	18.73	17.12	15.72	14.53
Large	T8	1.32	3.56	6.20	9.95	14.77	19.85	24.67	29.55	34.36	38.71	42.59	46.19	49.61	52.84	55.89	58.78
Medium	T12	133.95	131.86	129.98	131.34	133.45	135.89	134.78	132.52	129.79	127.25	125.04	123.14	121.22	119.26	117.46	115.85
Medium	T8	1.09	3.24	5.87	9.55	14.35	20.61	27.30	34.54	42.46	50.63	58.60	66.34	74.11	81.95	89.78	97.59
Small	T12	443.97	441.17	438.96	451.72	462.81	471.76	472.58	469.08	463.76	458.99	455.22	452.35	449.24	445.81	442.84	440.38
Small	T8	1.55	5.22	9.80	17.21	28.06	43.94	61.99	82.18	104.46	127.52	150.15	172.39	194.87	217.73	240.72	263.80
		629.5	629.6	632.5	662.5	696.2	730.6	756.1	779.1	802.8	828.2	854.2	881.0	907.8	934.7	962.4	990.9

2.1.4 RELATIONSHIP OF T8 POPULATIONS TO POLICY OPTIONS

In all scenarios we assume that T8 populations are independent of the policy option. This assumption is based on the following:

- Disposal costs are a small fraction of the upgrade to energy efficient lighting, generally accounting for less than 1 percent of the cost; and
- In a series of interviews with firms declining to participate in the Green Lights Program, lamp disposal costs and issues were never mentioned as a reason for not participating.

2.2 UTILITY BOILER MERCURY EMISSIONS SAVINGS

Installation of high efficiency lighting will reduce mercury emissions from coal-fired power plants. In this section the Agency provides an estimate of the mercury emissions avoided as a result. (Please note that neither oil-fired nor natural gas-fired plants emit significant amounts of mercury.) Therefore, EPA's focus is on coal-fired units.

Electrical Generation in the United States totaled 2,825,023,000,000 kilowatt hours (kwh) in 1991.¹¹ The draft Mercury Report To Congress estimated mercury emissions from coal-fired utility boilers as 46.3 megagrams per year (Mg/yr) from 1990 through 1995.¹² We developed an emissions factor in milligrams per kwh by dividing the 46.3 Mg/yr of emissions by the electric generation of 2,825,023,000,000 kwh, which resulted in an emissions rate of 0.016 mg/kwh.

To estimate energy savings we estimate the energy consumption of typical T12 and T8 installations, and compare the energy usage. Most T12 lamps are used with "energy efficient (EE) magnetic ballasts" and there is a mix of 40-watt and 34-watt T12 lamps. The American National Standards Institute (ANSI) rated consumption for two 40-watt T12 lamps on a single EE magnetic ballast is approximately 88 watts.¹³ The consumption of two 34-watt T12 lamps on the same ballast is 72 watts. We used the average of 80 watts per ballast to estimate an average energy use of 40 watts per T12 lamp.

The calculation of watts per lamp for T8 lamps is based on the assumption that two T8 lamps operate on one electronic ballast. ANSI reports total wattage consumption per ballast of 62 watts. Thus, we estimate 31 watts per T8 lamp.

Based on Green Lights data, EPA assumed that, on average, the total hours of lighting per year are 4,000 for T8 lamps and 4,500 for T12 lamps.¹⁴ Thus, the Agency calculated energy use of 124 kwh/lamp/year for T8 lamps and 180 kwh/lamp/year for T12 lamps. Hence a per lamp energy savings of

¹¹ Energy Information Administration. Electric Power Annual 1995, Volume I. July 1996.

¹² The final Report to Congress estimated mercury emissions from coal-fired utility boilers as 47 Mg/yr from 1994 through 1995.

¹³ United States Environmental Protection Agency, Office of Air and Radiation, Lighting Upgrade Technologies, EPA 430-B-95-008, February 1997.

¹⁴ Typically, controls such as occupancy sensors are installed along with the more efficient lighting. These controls provide reduced hours of operation for T8s as compared to T12s.

56 kwh per lamp. Please note that because of delamping, actual energy savings are higher than the 56 kwh/lamp.

To estimate the energy savings per T8 lamps, EPA includes both the per lamp energy savings provided by a T8 and the delamping rate. The calculation procedure is as follows:

Energy Savings for a T8 population = $T8_pop(f * e_s + (1-f) * e_{T12})$; where:

- T8_pop = the population of T8s;
- f = the delamping rate, which is estimated as 0.85;
- e_s = the per lamp energy savings, which is estimated as 56 kwh per lamp per year; and
- e_{T12} = the energy use of a base T12, which is estimated as 180 kwh per year.

We then used data from the draft Mercury Report To Congress, Volume III, Table 5-2 to separate the utility boiler emissions into elemental, divalent, and particulate emissions. Data from Table 5-2 indicate that approximately 50 percent of utility boiler mercury emissions are elemental, approximately 30 percent of mercury emissions are divalent, and the remaining 20 percent are particulate.¹⁵ We then applied these percentages to the mercury emissions rate of 0.016 mg/kwh, which results in the following speciated emissions rates:

- Elemental - 0.00819 mg/kwh saved;
- Divalent - 0.00491 mg/kwh saved; and
- Particle -0.00328 mg/kwh saved.

Table 2-6 presents the net mercury emissions savings from the resulting T8 population for the CE/CESQG High case. Please note that a major limitation of EPA's estimate of mercury emissions savings is that we assume a direct relationship between energy saved from using T8 lamps and a reduction in coal-fired electricity for all types of utility boilers; that is, the Agency assumes that, as the demand for energy decreases, there would be a corresponding decrease in coal-fired electricity for all utilities and regions of the country. Yet, lamp manufacturers and utilities have indicated that, for many parts of the country, the marginal demand for electricity during business hours would be satisfied by gas and oil units, not necessarily coal-fired units. For such regions, a decrease in energy demand would not necessarily result in a decrease in coal-fired electricity. This issue has not been resolved in the analysis.

¹⁵ In the final report, these data are presented in Table 4-2.

Table 2-6. Electric Utility Mercury Emissions Avoided (kg)

Scenario Name	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007
Baseline/CESQG											
Unadjusted	NON CESQG	275.9	333.6	390.2	446.0	501.3	556.0	610.3	664.3	718.2	772.0
Unadjusted	CESQG	258.3	320.1	381.9	443.7	505.6	567.6	629.8	692.2	754.9	818.0
Base Savings	NON CESQG	-275.9	-333.6	-390.2	-446.0	-501.3	-556.0	-610.3	-664.3	-718.2	-772.0
Base Savings	CESQG	-258.3	-320.1	-381.9	-443.7	-505.6	-567.6	-629.8	-692.2	-754.9	-818.0
Net Savings		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
CE/CESQG T8 Growth											
Unadjusted	NON CESQG	355.4	444.3	528.2	608.1	684.7	758.8	830.7	900.9	969.6	1037.2
Unadjusted	CESQG	337.2	434.1	528.5	620.6	710.9	799.4	886.5	972.4	1057.1	1140.9
Base Savings	NON CESQG	-275.9	-333.6	-390.2	-446.0	-501.3	-556.0	-610.3	-664.3	-718.2	-772.0
Base Savings	CESQG	-258.3	-320.1	-381.9	-443.7	-505.6	567.6	-629.8	-692.2	-754.9	-818.0
Net Savings		158.4	224.7	284.5	338.9	388.7	434.6	477.1	516.7	553.6	588.2

2.3 LAMP DISPOSAL EMISSIONS

In this section the Agency presents emissions rates for waste management units, and the flow of discarded lamps through waste management systems representing the policy options. Figures 2-1, 2-2, and 2-3 present ‘waste management trees’ for the policy options. Management trees consist of management units or steps (e.g., landfilling, recycling, crushing, transport, etc.) and partitioning coefficients. Partitioning coefficients are the percentages of the lamp population flowing from one unit to the next (e.g., in Figure 2-1, we have partitioned the flow of lamps so that 20 percent of non-CESQG lamps flow into Subtitle C management). Functionally, the model performs as follows:


- The amount of mercury entering a disposal tree is estimated as discussed in Section 2.2.
- We track mercury by building group (i.e., large, medium, and small buildings) and lamp type (i.e., T12 and T8).
- We use “Partitioning Coefficients” to direct the flow of discarded lamps, and hence mercury, through the disposal tree. Partitioning coefficients are determined by:
 - ◆ Building group;
 - ◆ Lamp type; and
 - ◆ Year.
- We use emissions factors for each management step to estimate the emissions from each step. Emissions factors are by species. Again, emissions from each step are tracked by building group, by lamp type, and by year.
- We subtract the emissions from the quantity of mercury entering the step and the remaining mercury is transferred to the next steps as specified by the partitioning coefficients.

In the sections below, we describe first the emissions factors, followed by the partitioning coefficients.

2.3.1 EMISSIONS FACTORS


We applied available data and professional estimates to develop a range of mercury emissions for the unit operations comprising the lamp disposal system. For each management unit the Agency developed a low emissions estimate, a high emissions estimate, and a central estimate. Emissions rates are developed by species of mercury, and by year (i.e., the model has the capability to vary the emissions rates of disposal units by species by year, although this was not used as part of the analysis). The emissions rates are expressed as a percentage of the mercury emitted during the activity or unit, as a function of mercury species.

Figure 2-1. Baseline/CESQG Waste Flow/Disposal Tree

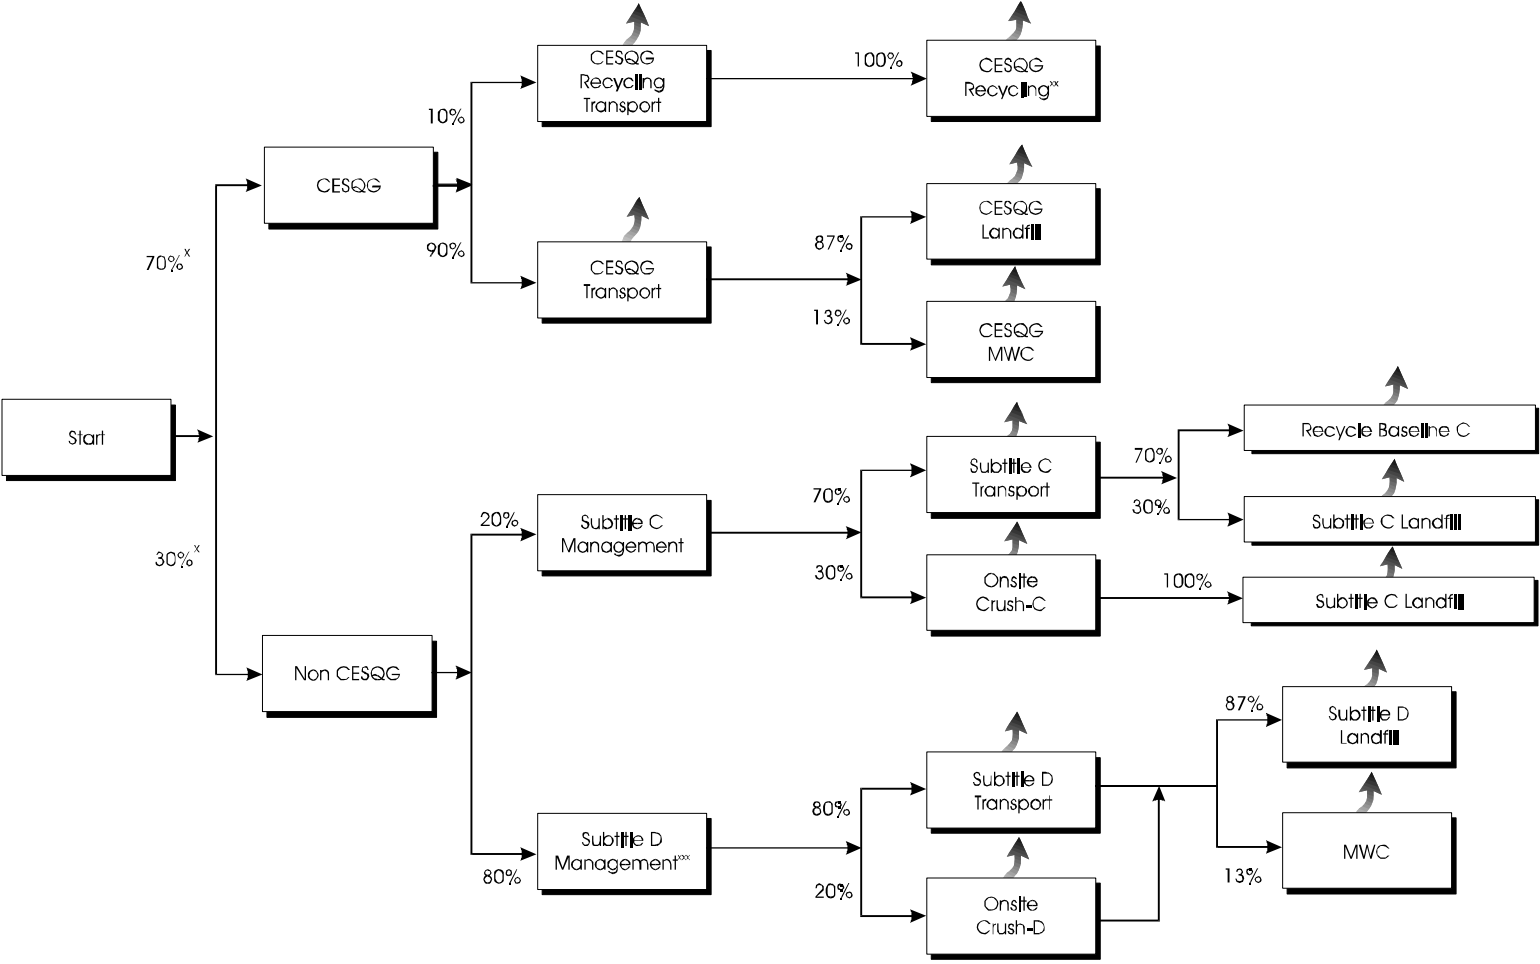

^x Varies by year, 1998 partitioning coefficients are shown.
^{**} Voluntary recycling.
^{***} Represents non-compliant lamp management.


Figure 2-2. CE/CESQG Waste Flow/Disposal Tree

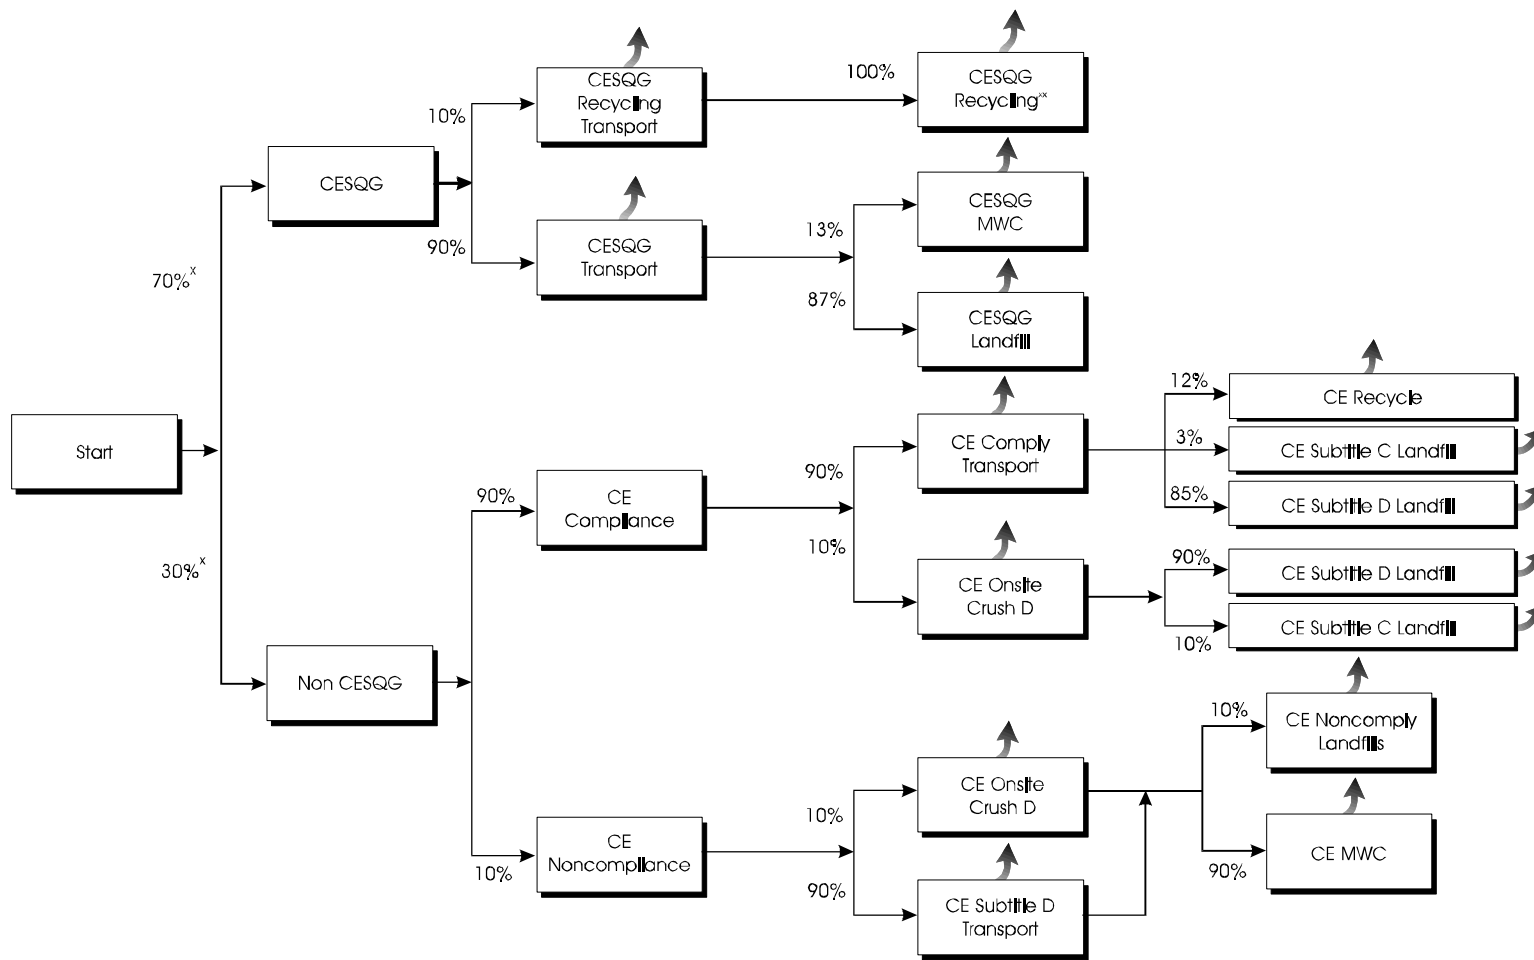

* Varies by year, 1998 partitioning coefficients are shown.

** Voluntary recycling.

Figure 2-3. UW/CESQG Waste Flow/Disposal Tree

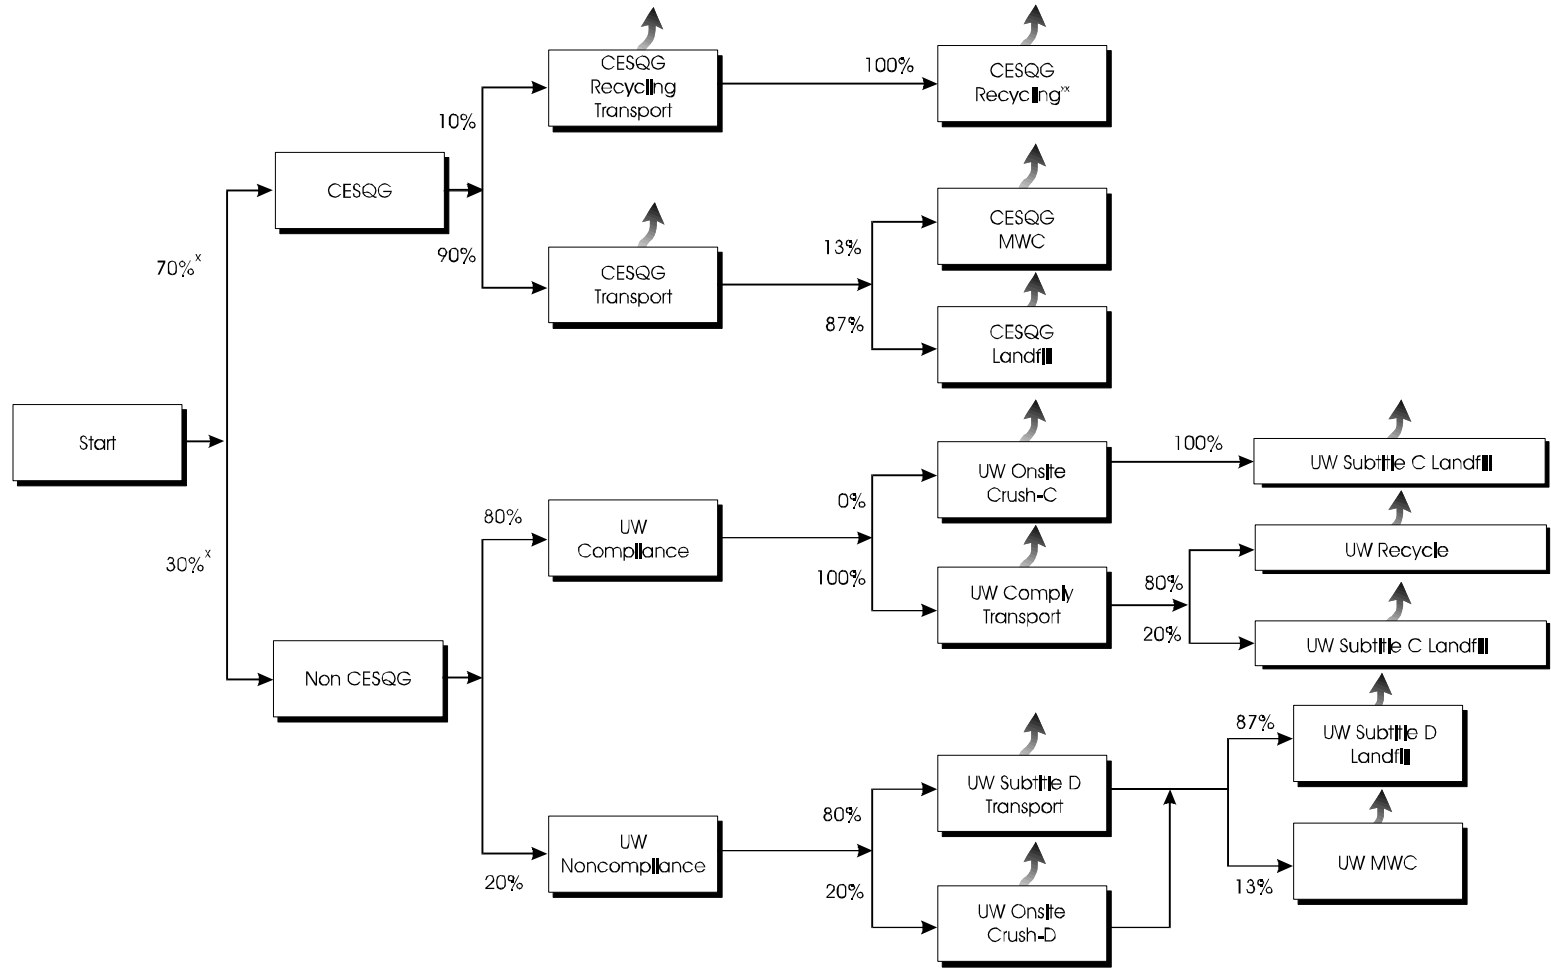

^x Varies by year, 1998 partitioning coefficients are shown.
^{**} Voluntary recycling.

2.3.1.1 Transportation Emissions Rates

Transportation emissions arise from the breakage of the lamp between the point of generation and the final disposal operation. Emissions are a function of the mercury content of the lamp, the ability of the mercury to be emitted after breakage of the lamp, and the breakage rate (i.e., the fraction of lamps broken during the transportation operation). The first two factors represent an overall per lamp emissions rate, which when multiplied by the breakage rate, yields a mass emissions rate.

Some of the mercury in lamps is in the vapor phase, in which case it is assumed to be emitted immediately upon lamp breakage. Mercury is also incorporated into the components of the lamp (i.e., the phosphor powder, end caps, and glass). After breakage, the mercury may be emitted from the phosphor, end caps, or glass. For the purposes of estimating transportation emissions, the Agency assumes that the mercury incorporated into the glass and end caps is sufficiently bound that it will not be released without heat. Therefore, for the purposes of estimating unit emissions from lamps broken during the disposal process, the issues are:

- The quantity of mercury in the vapor phase;
- The quantity of mercury in the phosphor powder; and
- The quantity of mercury in the phosphor powder released after breakage.

Three sources of information addressing these issues were found. These are:

- Information contained in the "RTI report;"
- Information submitted by the manufacturers; and
- Information contained in the "Tetra Tech Report."

Research Triangle Institute (RTI), under contract to EPA, developed emissions estimates from lamp breakage.¹ Overall, RTI estimates emissions from lamps after breakage to be about 6.8 percent of the total mercury content per lamp. In part, this estimate was derived from an estimate of the mercury content of the phosphor powder of about 5,000 ppm. RTI also used EPA emissions models such as CHEMDAT 7 to estimate migration of the mercury from the powder into the air. It should be noted that the 5,000 ppm estimate is based on 12 samples ranging from 868 ppm to 10,200 ppm. No explicit estimate of the vapor phase mercury is presented in the report.

NEMA presents emissions estimates that are somewhat lower. NEMA estimates that vapor phase mercury in non-operating lamps ranges from 0.06 to 0.2 percent of total mercury. Additionally, NEMA presents estimates that mercury emissions from broken lamps are at about 1 percent of total mercury. Thus, NEMA estimates emissions from lamp breakage in the range of 1 percent to 1.2 percent.² A report prepared for the Electric Power Research Institute (EPRI) by Tetra Tech Inc., measured mercury emissions from broken

¹ Truesdale, Robert S., et al., Research Triangle Institute, Management of Used Fluorescent Lamps: Preliminary Risk Assessment, October 1992 (Revised May 14, 1993).

² National Electrical Manufacturers Association, Environmental Risk Analysis: Spent Mercury-Containing Lamps, A Summary of Current Studies, (second edition) February 20, 1995.

lamps with no cover, and soil and gravel covers of various depths. For the uncovered broken lamp, emissions over a 20-day period totaled 1.28 mg out of the estimated total lamp content of 42 mg, or about three percent of the total mercury content of the lamp.³

Thus, estimates of overall emissions rates from broken lamps range from a low of about 1.2 percent of total mercury to a high of about 6.8 percent of total mercury (i.e., the range spans a factor of six). We used the RTI value as the high estimate, the NEMA value as the low estimate, and assumed a central estimate of three percent of total mercury. We assumed that 100 percent of the elemental mercury is in the vapor phase, and that this mercury accounts for 0.2 percent of the total mercury in the lamp at the end of lamplife.

In addition, crucial to the emissions from the transportation of discarded bulbs is the issue of breakage during transportation. Sources of information on this point include the RTI report and State environmental agencies. RTI assumes a breakage rate of 100 percent for lamps discarded in standard municipal waste. We believe this assumption to be reasonable for the following reasons:

- As part of a mercury control program, the State of Florida counted intact lamps on the tipping floor of a municipal waste combustor in the Tampa area over a six-month period.⁴ Only a comparatively small percentage of intact lamps were observed. This tends to confirm the RTI assumption of 100 percent breakage.
- It is not unreasonable to believe that lamps arriving intact at a Municipal Solid Waste landfill or transfer station will be broken during the handling operations or the landfill crush phase.

Therefore, a 100 percent breakage rate is assumed for lamps discarded as part of the non-hazardous solid waste stream.

Thus, for all activities associated with transport resembling Subtitle D management, the final emissions rate is simply the per bulb emissions rate multiplied by the assumed breakage rate of 100 percent. These emissions rates are shown below:

Table 2-7. Emissions Factors for Subtitle D and Similar Transport per Lamp

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
100%	2.8%	100%	6.8%	100%	1.1%

It should be noted that the 100 percent emissions rate for elemental mercury, again, results from the following:

- Vapor phase mercury is elemental;
- About 0.2 percent of the mercury content of the lamp will be vapor phase; and

³ TetraTech Inc. and Frontier Geosciences Inc., Information on Fate of Mercury-Containing Lamps Disposed in Landfills. November 1994.

⁴ State of Florida, Florida Department of Environmental Protection, 1995 Florida Mercury-Containing Lamp Recycling and 1996 Florida Mercury-Containing Lamp Recycling, May 20, 1997.

- All (100 percent) of the vapor phase mercury will be emitted during breakage.

We applied these emissions factors to the following units:

- Baseline/CESQG Waste Flow/Disposal - Subtitle D Transport and CESQG Transport (see Figure 2-1);
- CE/CESQG Waste Flow/Disposal - CE Subtitle D Transport, CE Comply Transport, and CESQG Transport (see Figure 2-2); and
- UW/CESQG Waste Flow/Disposal - UW Subtitle D Transport and CESQG Transport (see Figure 2-3).

Available data indicate that breakage rates are lower than 100 percent during transport to recycling facilities. Information submitted by recycling facilities to the State of Florida indicate that breakage rates on shipments to recycling facilities averaged 0.2 percent during 1995. A recycling facility in the State of Maryland noted that breakage rates were significantly lower than one percent for properly packaged lamps, and as high as 25 percent for improperly packaged lamps. Facility personnel indicated that in an improperly packed box there was a strong tendency for the entire box to be broken. Overall, facility personnel seemed to believe that breakage rates on the order of one percent were typical of their operation. We also noted that some States (e.g., Minnesota) have regulations regarding breakage of shipments to recycling facilities. The regulations limit breakage to five percent beyond which point the shipment must be rejected.

The Agency developed emissions factors for transport to recycling facilities, and to Subtitle C landfills, by using the central tendency emissions factors in Table 2-7 (i.e., 100 percent for elemental and 2.8 percent for divalent) and varying the breakage rate. We used breakage rates of one percent for the central case, five percent for the high case, and 0.2 percent for the low case. The emissions factors are shown in Table 2-8.

Table 2-8. Emissions Factors for Transport to Recycling and Subtitle C Facilities

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
1%	0.03%	5%	0.14%	0.2%	0.01%

We applied these emissions factors to “Subtitle C Transport,” “UW Compliant Transport,” and “CESQG Recycling Transport,” which are used to represent transport to Subtitle C landfills and recycling.

2.3.1.2 Drum Top Crushing

Drum top crushing is a treatment technology providing volume reduction by crushing the lamps prior to transport. There are a wide variety of drum top crushers, ranging from simple devices with no emissions controls, to more complex systems with emissions controls. The more complex systems run under negative pressure, and are vented through a small carbon adsorber to reduce mercury emissions. Typically, such devices have counters that indicate when the carbon must be changed. Estimates of control efficiency provided by these devices vary from zero percent (for the uncontrolled case) to about 90 percent for the more complex devices. The 90 percent control level is based on a study by EPA's Control

Technology Center (CTC).⁵ It should be noted that the meaning of the CTC estimate is unclear, and appears to indicate a control efficiency of 90 percent for the vapor phase mercury, which is only a small fraction of the mercury content of the lamp. It should be noted that drum top crushers are under negative pressure only during operation. When the device is not being actively used, the lamp feeding tubes and other openings may act as emissions points for mercury migrating out of the glass, phosphor, and end caps. Operational difficulties have also been reported. Specifically, leaks at the seal between the drum and the crusher have been responsible for violations of the OSHA mercury standard, and at least one instance of an inoperative counter also exists. Overall, there is little basis for assigning a control efficiency to drum top crushers equipped with controls, and there are no data indicating the populations of various types of crushers. On-site crushing by lamp generators is officially prohibited under the UW standards, as promulgated by the Agency.

We developed a high emissions estimate by assuming no control, in which case the emissions rate should be about three percent of total mercury (i.e., identical to the 100 percent breakage case for Subtitle D transport). It should be noted, however, that emissions from an improperly operating crusher could be higher than emissions from the 100 percent breakage rate discussed above. This is because the crushing operation may eject the mercury containing phosphor powder into the air, thus forming a mercury-laden particulate.

We developed the central estimates as follows:

- Assume the Tetra Tech emissions estimate of three percent of total mercury is correct, the vapor phase mercury content of the lamp is 0.2 percent, and the emissions from the phosphor powder are 2.8 percent.
- Assume the carbon controls 90 percent of the estimated 0.2 percent of the mercury content that is estimated to be in the vapor phase (i.e., the post-control emissions are 0.02 percent).
- Assume no effective control on the remainder of the mercury (i.e., the emissions rate is 2.8 percent).
- Therefore, the central mercury emissions rate from crushing would be about 2.82 percent.

We developed the low emissions rate by assuming the carbon provides 90 percent control on both the vapor phase emissions and the mercury released by the phosphor. Table 2-9 presents the emissions rates for crushing operations.

Table 2-9. Emissions Factors for Crushing Operations

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
10%	2.8%	100%	2.8%	10%	0.28%

⁵ United States Environmental Protection Agency, Office of Air Quality Planning and Standards, Control Technology Center, Evaluation of Mercury Emissions from Fluorescent Lamp Crushing. EPA-453/D-94-018. February 1994.

2.3.1.3 Recycling Emissions

Some mercury-containing lamps are recycled. The mercury in the vapor phase and phosphor powder can be recovered, as can the glass and aluminum end caps. In the recycling process, the lamps are crushed and separated into glass, end caps, and phosphor powder. The phosphor contains the majority of the mercury, and mercury is recovered from the powder in a retorting or other process. The recovered glass is used in the manufacture of fiber glass or road products, and the aluminum end caps are recycled in typical secondary aluminum operations (e.g., smelting). For the purposes of this study, mercury recycling is meant to cover the crushing and separation operations as well as the retorting and recovery of mercury. We refer to the recycling of glass and end caps as secondary recycling operations. Emissions factors used in this analysis account for emissions at primary recycling facilities, as well as emissions from secondary recycling processes.

The primary recycling emissions rate is derived both from the efficiency of typical controls, and consideration of the overall recovery rates. The Agency believes that emissions of divalent mercury from a properly operating facility should be negligible. Because recycling operations are typically equipped with emissions control devices (typically a carbon adsorber), we assumed a 90 percent control efficiency on the vapor phase/elemental mercury for the central estimate, an 85 percent control efficiency for the high estimate, and no emissions for the low estimate. The emissions factors from primary recycling emissions are shown below:

Table 2-10. Emissions Factors for Primary Recycling Emissions

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
10%	0%	15%	0%	0%	0%

These emissions factors are based primarily on the control efficiency of the carbon absorber and particulate air pollution control devices (e.g., HEPA filters). While we assign no divalent mercury emissions to the primary process, we note that poorly operated facilities could have very high emissions rates, and there are examples of lamp recycling facilities causing widespread contamination.

In selecting an emissions rate for secondary recycling the Agency considered data from commenters, such as the State of Florida, and also considered both the quantity of mercury in the glass and end caps, and the fate of the recycled materials (e.g., fate of material recycled in a thermal process). Florida notes that an average recovery for facilities operating in their State is 98.5 percent, and it is reasonable to assume that the mercury content of the glass is 1.0 ppm, while the mercury content of the end caps is 2.0 ppm. A theoretical emissions rate can be derived as follows:

- Mass of lamp = 300 g (From RTI report)
- Mass of glass = 93 percent (From RTI report)
- Mass of end caps = 5 percent (From RTI report)
- Mercury content of glass = 1 ppm (From State of Florida)
- Mercury content of end caps = 2 ppm (From State of Florida)

- Mercury dose = 21mg (From State of Florida)

Using this information we are able to derive an overall emissions rate for the glass of 1.3 percent (based on the overall dose of 21 mg), and an emissions rate for the end caps of 0.07 percent, for an overall emissions rate of 1.4 percent.

Reports from recyclers reviewed by the State of Florida indicate that 77 percent of the glass was recycled and the remaining 23 percent was shipped to Subtitle D landfills. While an informal survey conducted by Florida reveals recycling alternatives for the glass that do not involve a thermal process (e.g., cold mix asphalt, cold process concrete, and landfill cover), Florida has no information on the relative volumes of glass treated in hot processes versus cold processes. It was conservatively assumed that all of the glass not shipped to Subtitle D landfills could be treated by a thermal process. Therefore, the 1.3 percent emission rate for the glass was adjusted to 1.02 percent. We should note that Florida believed the assumption of full end cap recycling in thermal processes was reasonable, and therefore the Agency has maintained the end cap emissions rate at 0.07 percent. The glass emissions rate was added to the end cap emissions rate to produce an overall central emissions rate of 1.09 percent, which is applied to the divalent fraction of the mercury.

The low emissions rate for divalent mercury was developed using the same approach, but assumed that none of the glass was exposed to thermal recycling process. The result is an emissions rate of 0.07 percent for the end caps and zero percent for the glass, for an overall emissions rate of 0.07 percent. Again, we apply this to the divalent portion of the mercury.

The high emissions rate for divalent mercury is six percent.

In conclusion, the overall emissions rates for secondary recycling emissions are shown in the table below:

Table 2-11. Emissions Factors for Secondary Recycling Emissions

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
0%	1.09%	0%	6%	0%	0.07%

Please note that all of the elemental mercury is assumed to be emitted during the primary recycling operations. Thus, the emissions factors for elemental mercury are zero.

EPA summarizes the total mercury emissions rate from primary and secondary lamp recycling in the table below:

Table 2-12. Total Emissions Factors for Primary and Secondary Recycling Emissions

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
10%	1.09%	15%	6%	0%	0.07%

2.3.1.4 Municipal Waste Combustor (MWC) Emissions

Management of mercury-containing lamps in MWCs will result in mercury emissions to the atmosphere. Evaluation of the available data led RTI to conclude that 90 percent of the mercury fed into a MWC not equipped with mercury controls (e.g., activated carbon BEPS) would be emitted as part of the flue gas, with the remaining mercury in the fly ash (5 percent) and the bottom ash (5 percent).⁶ These conclusions appear to be reasonable, and the 90 percent emissions rate was incorporated into the model for uncontrolled MWCs.

EPA's Office of Air Quality Planning and Standards (OAQPS) promulgated a series of emissions standards for new facilities and guidelines for existing MWCs.⁷ These regulations will require all MWC units located at MWC plants with capacities of 250 tons per day to reduce mercury emissions to 0.080 mg/dscm or by 85 percent by December 31, 2000.

The central emissions estimate was developed by assuming all of the vapor phase mercury, and therefore, all of elemental mercury has been emitted prior to reaching the MWC, and hence there is no elemental mercury left to emit. On this basis the Agency assigned a zero percent emissions rate for elemental mercury, and applied the 85 percent control efficiency to the divalent mercury.

Average control efficiencies are always better than those specified in a regulation. This occurs to achieve a specified minimum control level (e.g., 85 percent reduction), owners and operators must achieve an average control efficiency higher than the control efficiency specified in the regulation. In this way owners and operators protect themselves against minor operating problems and excursions from routine operations. Based on information from OAQPS, EPA developed the low emissions estimate by assuming that an average control efficiency of 92 percent would be achieved. Again, the Agency assumed zero emissions of elemental mercury and applied this control efficiency to the divalent portion of the mercury.

Control efficiencies can also be lower than those specified in regulations. In evaluating State Implementation Plans (SIPs), OAQPS generally assumes, and requires States to assume, that rules will be less than 100 percent effective. This assumption accounts for deliberate noncompliance, enforcement difficulties, control device failures, and other difficulties. This is typically expressed as "rule effectiveness," and OAQPS typically uses a rule effectiveness value of 95 percent.⁸ We applied a rule effectiveness value of 95 percent to both the low emissions case (resulting control efficiency of 87 percent) and the central efficiency case (resulting control efficiency of 81 percent) and used an 84 percent control efficiency to represent the high case. This equates to an emission rate of 16 percent, which we use as the high estimate.

Table 2-13 presents the emissions factors for MWCs. We applied these factors for all MWC units.

⁶ Truesdale, Robert S., et al., Research Triangle Institute, Management of Used Fluorescent Lamps: Preliminary Risk Assessment, October 1992 (Revised May 14, 1993).

⁷ United States Environmental Protection Agency, Standards of Performance for Municipal Waste Combustors — Direct Final Rule, Federal Register, Vol. 60, No. 243, December 19, 1995 and August 25, 1997, Vol. 62, No. 164.

⁸ For example, given a regulation that should reduce emissions by 1000 tons per year at 100 percent compliance, applying a rule effectiveness value of 95 percent will result in a reduction of 950 tons per year.

Table 2-13. Emissions Factors for MWC

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
0%	15%	0%	16%	0%	8%

2.3.1.5 Landfill Emissions

It is necessary to estimate lamp emissions rates for both Subtitle D Municipal Solid Waste Landfills (Subtitle D) and Subtitle C Hazardous Waste Landfills (Subtitle C). Information on Subtitle D emissions rates include RTI, NEMA, and the recent Fresh Kills Landfill Final Report.

RTI reviewed the available data on mercury releases from landfills, and concluded that the release rates for mercury in landfill gas leachates are very low. RTI calculated mercury landfill emissions of 0.8 kg/yr, nationwide. RTI used total mercury input of 643 Mg/yr to estimate that 0.001 percent of mercury input to the landfill is emitted. RTI provided a final estimate of less than 0.001 percent by assuming that mercury emissions from the bulbs is 3.8 percent (i.e., the percentage of mercury in municipal solid waste attributed to lamps). The data reviewed were taken mainly from Subtitle D facilities prior to 1990. Some commenters to the lamps rule have cautioned that the pre-1990 methods for measuring ambient mercury were imprecise and inaccurate. Thus, there is some doubt as to the validity of the low value reported by RTI.

Within the Tetra Tech study, mercury emissions from broken bulbs were measured under soil cover depths of 0.5 ft. and 1.0 ft. Results from the study indicate that releases from 0.5 ft. soil cover system averaged 0.8 percent of the total mercury content over a 20-day period, while the system with 1 ft. of cover averaged releases of 0.2 percent of total mercury content over a 20-day period. This study, performed in 1995, indicates emissions approximately three orders of magnitude higher than the RTI estimate.

Final estimates based on data from the Fresh Kills landfill in New York State are also available. Results of the report indicate that total mercury emissions from this landfill, which is among the largest in the United States, were about 2.4 pounds per year.⁹ The report provides no estimate of the mercury entering the landfill. We provide a rough estimate of the amount of mercury entering the landfill as follows. We estimate the total population of lamps entering the waste management system in 1996 as 597 million. The population of the United States is approximately 260 million. On average there are slightly more than two bulbs disposed per person. Assuming the population served by Fresh Kills is about seven million, approximately 14 million bulbs should be disposed in the landfill each year. Based on the mercury content of T12s, each bulb contains about 30 mg of mercury.

Using these assumptions the mercury input to the landfill would be about 420 kg, resulting in an emissions rate of about 0.2 percent. Because there are other sources of mercury entering the landfill, this estimate should be considered as a crude approximation of an upper bound.

We developed the range of emissions estimates by assuming that remaining vapor phase mercury would be emitted during breakage at the landfill. (Please note that EPA assumes all lamps arriving at a

⁹ McGaughey, James F., et al. Eastern Research Group. Mercury and Other Metals Testing at the GSF Energy Inc. Landfill Gas Recovery Plant at the Fresh Kills Landfill; Final Report. January 1997. See Tables 2-18 and 2-19.

Subtitle D landfill would have been broken during transport. However, later in this report, the Agency examines emissions scenarios assuming reduced breakage during transportation. In this case, lamps arriving at the Subtitle D landfill unbroken would be broken at the landfill and emit 100 percent of elemental mercury.) We used the Tetra Tech estimate of 0.8 percent as the upper bound estimate. We used the Fresh Kills 0.2 percent as the central estimate, and the RTI value of 0.001 percent as the low estimate. The factors are presented in Table 2-14.

Table 2-14. Emissions Factors for Subtitle D Landfills

Central Estimate		High Estimate		Low Estimate	
Elemental	Divalent	Elemental	Divalent	Elemental	Divalent
0%	0.2%	0%	0.8%	0%	0.001%

No studies specific to mercury emissions from Subtitle C landfills were found. We note that the Land Disposal Restrictions (LDRs) for hazardous wastes require stabilization prior to final disposal. Typical stabilization process for mercury involve incorporating the waste into a matrix such as cement or concrete. No estimates of emissions from the stabilization process or from the stabilized material are available. To estimate emissions from Subtitle C landfills, the following assumptions are made:

- Intact lamps received are crushed in the stabilization process; thus, any vapor phase mercury will be emptied during this process;
- Drums of crushed lamps undergo stabilization immediately after the container is opened; and
- Emissions from the stabilized material are zero.

Thus, the emissions factors for Subtitle C landfills are 100 percent for elemental mercury and zero percent for divalent mercury.

2.3.2 WASTE FLOWS AND PARTITIONING COEFFICIENTS

A critical issue in the development of the model is estimating the percentage of lamps undergoing the various management methods. Little data addressing the fate of lamps are available. Therefore, the approach taken is to use supplemental available data with assumptions to estimate waste flows within the policy options. Partitioning coefficients are estimates we developed for the flow schematics to represent the percentage of spent lamps being sent by generators of spent lamps into specific waste management processes under each of the options.

2.3.2.1 Baseline Management Waste Flows (referred to as Baseline/CESQG in the model)

There is general agreement that most existing lamps, when tested properly, fail the TC for mercury and are, therefore, hazardous waste under RCRA regulations. There is also a general consensus that comparatively few lamps are managed as hazardous waste. Many lamps are eligible to be disposed under 40 CFR 261.5 requirements, which allow generators of less than 100 kg/month of hazardous waste to dispose of this waste in Subtitle D landfills. As shown below, the Agency believes that most office buildings and commercial establishments generating lamps would fall within the CESQG provisions.

Based on the lamp weights reported by RTI, monthly generation of about 350 4-foot lamps per month would be necessary to exceed the 100 kg/month threshold for CESQGs, which equates to about

4,200 lamps discarded per year. Assuming spot relamping and an average lifetime of four years per lamp, we estimate a lamp population in the building of about 16,800 lamps. We may now use the lamp density to determine the size of the building necessary to generate 100 kg/month of spent lamps. Using the large building lamp density of 0.038 lamps/ ft², the Agency estimates that 442,000 ft² are necessary to generate 350 lamps per month.

Using the building size distribution in the EIA, lighting densities for T12 and T8s, lamp weight, and relamping practices, the Agency then estimated the percentage of T12 and T8 lamps that, when discarded, would fall above and below the CESQG threshold each year. The percentage of lamps below the threshold is shown in Table 2-15. These percentages were used in the model to generate CESQG and non-CESQG partitioning coefficients under the baseline and options. Please note that the partitioning coefficients for CESQGs and non-CESQGs vary by year because the relative percentages of T8 and T12 lamps being disposed of by large, medium, and small buildings vary by year (i.e., because of the group relamping and delamping rates).

Table 2-15. Annual Percentage of CESQG Lamps Discarded

Building Size	T12	T8
Large	0%	17%
Medium	98%	40%
Small	100%	63%

Next, based on conversations with Green Lights staff, the Agency estimated CESQG recycling at ten percent. The Agency estimates that the remaining 90 percent of lamps go to Subtitle D management. Of these lamps, Subtitle D landfilling accounts for 87 percent and municipal waste combustors account for 13 percent. Please note that the CESQG disposal flows do not vary among the baseline and options (i.e., the Agency assumes that CESQGs would continue to manage their lamp wastes independent of the options). See Figure 2-1, which illustrates the Baseline/CESQG waste flow/disposal tree.

Further, based on conversations with lamp generators and contractors, the Agency partitioned Subtitle C (i.e., compliance) and Subtitle D (i.e., noncompliance) at 20 and 80 percent, respectively, for non-CESQG lamps. For lamps under Subtitle C, the Agency assumed a 70 percent/30 percent split between Subtitle C transport and on-site crushing. For Subtitle C transport, the Agency assumed 70 percent are recycled and 30 percent are sent to Subtitle C landfills. For the 30 percent that are crushed, the Agency assumed that all are sent to Subtitle C landfills. The basis for this simplifying assumption is that crushing reduces transportation costs and that landfill operators prefer to receive crushed lamps, while recycling operators prefer intact lamps.

Under the Subtitle D flow, the Agency assumes an 80 percent/20 percent split between Subtitle D transport and crushing. Of these lamps, 87 percent are assumed to be landfilled and 13 percent incinerated.

2.3.2.2 Conditional Exclusion (CE) Waste Flows (referred to as CE/CESQG in the model)

In developing partitioning coefficients for CE/CESQG, we made the following assumptions:

- We assume a 90 percent compliance rate starting in 1998, which remains unchanged throughout the modeling period. We base this premise on the fact that compliance is a

relativity simple matter.

- Overall, the Agency assumes that crushing declines under the CE option. We base this assumption on the fact that it is very convenient to simply dispose of lamps as part of the routine trash. Therefore, we assumed crushing rates of 10 percent for both the compliant and noncompliant portion of the disposal tree. Please note that, while the central emissions estimates are approximately the same, the high and low emissions estimates differ with crushing having lower emissions (see Table 2-9).
- Within the noncompliant portion of the disposal tree, we assumed a partitioning between noncompliant landfills and MWCs of 10 percent and 90 percent. While the Agency believes the predominate noncompliant management would be transfer to MWCs, not all Subtitle D landfills comply with requirements in CE. Therefore, we assumed a small (10 percent) fraction of noncompliant landfills.
- Within the compliance portion of the disposal tree, we assume the majority of lamps undergo disposal via CE compliant transport (i.e., throwing the bulbs away in the trash) (90 percent). Of the lamps that undergo CE compliant transport, the predominant compliance technique is Subtitle D landfill disposal (85 percent), 12 percent are recycled, and three percent are sent to Subtitle C landfills.
- For crushed lamps, the Agency assumed that the predominate disposal technique is Subtitle D landfill disposal (90 percent), with the remainder being transferred to Subtitle C landfills. See Figure 2-2, which illustrates the CE/CESQG waste flow.

2.3.2.3 Universal Waste (UW) Waste Flows (referred to as UW/CESQG in the model)

We assume the UW option should increase recycling compared with Baseline and CE option, but there is uncertainty both in the timing and extent of this increase. Therefore, we examined three variants on the UW. In the absence of any predictions about waste flows within the system, we conducted a sensitivity analysis to determine how emissions would change, based on three variants of partitioning coefficients. The first, UW/CESQG Rapid, represents an almost instantaneous increase in compliance and recycling. The partitioning coefficients shown in Figure 2-3 begin in 1998 and remain constant throughout the modeling period. Thus, the Agency models a rapid change from a mainly Subtitle D Baseline to a highly compliant UW option. The second variant, UW/CESQG Moderate, begins with relatively low partitioning between UW Compliance (20 percent) and UW Noncompliance (80 percent) and smoothly rises to 80 percent compliance in 2005. Within this variant, the partitioning between UW recycling and Subtitle C landfilling is held at 80 percent and 20 percent, respectively, for the duration of the modeling period. Thus, while overall compliance increases steadily, the predominate compliance technique is recycling. The third variant, UW/CESQG Gradual, uses the same slow increase in compliance as the UW/CESQG Moderate, but adds a similar slow increase in recycling rates over the Baseline/CESQG; that is, the partitioning between recycling and Subtitle C landfilling begins at 20 percent and 80 percent in 1998, respectively, and shifts smoothly over to 80 percent recycling and 20 percent Subtitle C landfilling by 2005.

3. RESULTS

In this section the Agency presents disposal emissions, sensitivity analyses, and net emissions for the policy options. All of the scenarios modeled are constructed as follows:

- Growth Option - We used the 2.4 percent annual growth rate from EIA.
- Mercury Content Option - We used the values specified in Section 2.1.2 and shown below:

T12 Lamps

Pre 1992	41 mg total mercury
1992 - 1996	30 mg total mercury
Post 1996	21 mg total mercury

T8 Lamps

Pre 1996	30 mg total mercury
1996 - 2000	15 mg total mercury
Post 2000	10 mg total mercury

- Lamp Use Option - We used the replacement rules defined in Section 2.1.2.
- National Disposal Option - Each National Disposal Option consists of Baseline Management from 1992 through 1997. We assumed that 1998 is the first year that the policy would be adopted. In that year the waste management flows become either CE or UW, depending upon the policy being modeled. In the Baseline case, waste management flows remain unchanged.

3.1 WASTE MANAGEMENT EMISSIONS

Table 3-1 presents the emissions by year and cumulative emissions for each of the three policy options. The UW/CESQG variants sorted as expected, with UW/CESQG Moderate having the highest emissions and UW/CESQG Rapid the lowest. Because the emissions rate from recycling is higher than the emissions rate from Subtitle C landfills, the Agency expects that the increased recycling under UW/CESQG Moderate will result in increased emissions compared to UW/CESQG Gradual. Thus, we expect UW/CESQG Moderate to have higher emissions than UW/CESQG Gradual. Overall, we conclude that the absolute emissions from the disposal system are a stronger function of emissions factor estimates than policy options, while the relative difference among policy options is directly attributable to partitioning coefficients.

Table 3-1. Annual Mercury Disposal Emissions from Lamps (1998-2007) (kg)

Scenario Name	Estimate	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	Total
Baseline/CESQG	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
Baseline/CESQG	Central	Non CESQG	96	97	97	95	94	95	96	97	99	104	970
Baseline/CESQG	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
Baseline/CESQG	High	Non CESQG	189	190	191	186	184	186	188	189	195	205	1,903
Baseline/CESQG	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
Baseline/CESQG	Low	Non CESQG	39	39	39	38	38	38	39	39	40	42	392
CE/CESQG	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
CE/CESQG	Central	Non CESQG	101	102	102	99	99	100	100	101	104	109	1,019
CE/CESQG	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
CE/CESQG	High	Non CESQG	208	209	210	205	203	205	207	208	214	225	2,095
CE/CESQG	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
CE/CESQG	Low	Non CESQG	43	43	43	42	42	42	43	43	44	46	432
UW/CESQG Gradual	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
UW/CESQG Gradual	Central	Non CESQG	85	78	71	62	55	49	43	38	39	41	562
UW/CESQG Gradual	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
UW/CESQG Gradual	High	Non CESQG	162	152	144	133	127	125	125	127	131	138	1,365
UW/CESQG Gradual	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
UW/CESQG Gradual	Low	Non CESQG	41	37	33	28	23	19	15	11	12	12	231
UW/CESQG Moderate	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111

Table 3-1. Annual Mercury Disposal Emissions from Lamps (1998-2007) (kg) (continued)

Scenario Name	Estimate	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	Total
UW/CESQG Moderate	Central	Non CESQG	88	81	74	65	58	51	45	38	39	41	580
UW/CESQG Moderate	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
UW/CESQG Moderate	High	Non CESQG	178	172	165	154	145	140	133	127	131	138	1,483
UW/CESQG Moderate	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
UW/CESQG Moderate	Low	Non CESQG	41	37	33	28	23	20	15	11	12	12	232
UW/CESQG Rapid	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
UW/CESQG Rapid	Central	Non CESQG	66	65	63	58	53	49	43	38	39	41	514
UW/CESQG Rapid	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
UW/CESQG Rapid	High	Non CESQG	155	155	154	146	141	137	132	127	131	138	1,416
UW/CESQG Rapid	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
UW/CESQG Rapid	Low	Non CESQG	28	27	26	23	21	18	15	11	12	12	193

We note that emissions are small in comparison to other anthropogenic sources of mercury. For example, the Mercury Report to Congress estimates total anthropogenic mercury emissions at approximately 144,000 kg per year, with individual source categories emitting up to 47,200 kg per year. Our estimate of annual mercury emissions from lamp disposal in the Baseline/CESQG Central is on the order of 974 kg/yr in 1998.

Table 3-2 presents cumulative lamp emissions from waste management and disposal activities comprising each option. Table 3-2 shows that total cumulative lamp mercury disposal emissions ranged from a high of 15,101 kg (CE/CESQG High) to a low of 3,395 kg (UW/CESQG Rapid Low). Excluding CESQG lamp emissions, the total cumulative lamp mercury disposal emissions ranged from a high of 2,095 (CE/CESQG High) to a low of 193 kg (UW/CESQG Rapid Low).

Further analyzing non-CESQG lamp emissions, the Agency notes that the central emissions for MWCs and lamp transport account for 79 percent, 88 percent, and 68 percent of total non-CESQG lamp emissions under the Baseline/CESQG, CE/CESQG, UW/CESQG Rapid scenarios, respectively. Under the UW/CESQG scenarios, EPA notes that lamp recycling emissions account for a larger percentage of total non-CESQG lamp mercury emissions than the Baseline/CESQG and CE/CESQG scenarios. Under the Baseline/CESQG and CE/CESQG central estimates, lamp recycling emissions from non-CESQG lamps account for about 2.5 percent and two percent of total non-CESQG lamp emissions, respectively. Under the UW/CESQG-Gradual, -Moderate, and -Rapid scenarios, non-CESQG lamp recycling emissions account for about 16 percent, 19 percent, and 25 percent of total non-CESQG lamp mercury emissions, respectively. EPA expected this result, since non-CESQG recycling rates are expected to rise under the UW scenarios, while Baseline/CESQG and CE/CESQG recycling is expected to remain stable over the modeling period.

3.2 SENSITIVITY ANALYSES

Because of the lack of reliable data on lamp breakage rates during transport, the Agency performed a series of sensitivity runs to judge the extent to which the estimates of lamp breakage affect the overall mercury disposal emissions estimates under the CE option. Table 3-3 summarizes the annual mercury disposal emissions rates under the CE option based on a 10 percent, 25 percent, 50 percent, and 75 percent lamp breakage rate during transport. It also shows annual mercury disposal emissions under the CE option based on 100 percent compliance.

Table 3-3 shows that the model's annual disposal emissions estimates are greatly influenced by lamp breakage rates during transport under the CE option. For example, for CE/CESQG central, the model originally assumes a 100 percent breakage rate for lamps being transported under CE Subtitle D Transport, CE Comply Transport, and CESQG Transport. Based in part on this assumption, the model estimates mercury disposal emissions of 979 kg under CE/CESQG central in 1998, of which 101 kg, or about ten percent, are from non-CESQG lamps (as shown in Table 3-1). However, if we assumed that lamp breakage is ten percent (e.g., because best practices are being followed), the model estimates mercury disposal emissions under CE/CESQG central for 1998 to be about 934 kg, of which 56 kg, or six percent, are from non-CESQG lamps. This is a decrease of 45 kg (4.6 percent) from the model's original CE/CESQG central estimate.

The table also shows that, at 100 percent compliance, the central mercury disposal emissions under CE/CESQG are 951 kg in 1998, of which 73 kg, or about eight percent, are from non-CESQG lamps. The estimate of 951 kg of mercury is approximately 28 kg below the original CE/CESQG central estimate of

979 kg for 1998. (See Figure 2-2 for original compliance rates under CE/CESQG.)

Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg)*

Scenario Name	Disposal Activity	Designation	Central	Central Percent	High	High Percent	Low	Low Percent
Baseline/CESQG								
	Base Federal Start**	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CESQG	CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CESQG Landfill	CESQG	231.7	2.9%	896.1	6.0%	0.1	0.0%
	CESQG MWC	CESQG	2,596.2	32.1%	2,678.1	18.0%	1,408.9	39.2%
	CESQG Recycling	CESQG	168.9	2.1%	916.2	6.1%	10.7	0.3%
	CESQG Recycling Transport	CESQG	4.6	0.1%	22.8	0.2%	0.9	0.0%
	CESQG Transport	CESQG	4,109.8	50.9%	8,493.0	57.0%	1,781.2	49.6%
	MWC	NON CESQG	338.3	4.2%	346.6	2.3%	183.9	5.1%
	NON CESQG	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	Onsite Crush-C	NON CESQG	37.7	0.5%	83.0	0.6%	4.0	0.1%
	Onsite Crush-D	NON CESQG	100.7	1.2%	221.3	1.5%	10.7	0.3%
	Recycle Baseline C	NON CESQG	24.3	0.3%	131.6	0.9%	1.5	0.0%
	Subtitle C Landfill	NON CESQG	4.3	0.1%	0.0	0.0%	0.0	0.0%
	Subtitle C Management	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	Subtitle C Transport	NON CESQG	0.9	0.0%	4.7	0.0%	0.2	0.0%
	Subtitle D Landfill	NON CESQG	35.8	0.4%	116.0	0.8%	5.6	0.2%
	Subtitle D Management	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%

* Note: Mercury emissions are summed over the 10 year period: 1998-2007.

**The revised model allows users to partition non-CESQG lamps into a waste management flow under the Federal RCRA program (i.e., Base Federal Start) and/or individual State programs less stringent than the Federal program, many of which are UW programs (i.e., UW Start). For purposes of this report, the Agency chose not to partition lamps into individual State programs under Baseline/CESQG.

Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg) (continued)

Scenario Name	Disposal Activity	Designation	Central	Central Percent	High	High Percent	Low	Low Percent
	Subtitle D. Transport	NON CESQG	428.4	5.3%	999.5	6.7%	185.7	5.2%
			8,081.5	100.0%	14,909.1	100.0%	3,593.4	100.0%
CE/CESQG								
	CE Compliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CE Comply Transport	NON CESQG	542.2	6.7%	1,265.0	8.4%	235.0	6.5%
	CE Federal Start	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CE MWC	NON CESQG	292.7	3.6%	299.7	2.0%	159.0	4.4%
	CE Noncompliance/CESQG	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CE Noncomply Landfills	NON CESQG	0.5	0.0%	1.7	0.0%	0.0	0.0%
	CE Onsite Crush D	NON CESQG	56.6	0.7%	124.5	0.8%	6.0	0.2%
	CE Onsite Crush-D	NON CESQG	6.3	0.1%	13.8	0.1%	0.7	0.0%
	CE Recycle	NON CESQG	23.0	0.3%	121.3	0.8%	1.5	0.0%
	CE Subtitle C Landfill	NON CESQG	0.4	0.0%	0.0	0.0%	0.0	0.0%
	CE Subtitle D Landfill	NON CESQG	36.6	0.5%	128.1	0.8%	3.3	0.1%
	CE Subtitle D Transport	NON CESQG	60.2	0.7%	140.6	0.9%	26.1	0.7%
	CESQG	CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CESQG Landfill	CESQG	231.7	2.8%	896.1	5.9%	0.1	0.0%
	CESQG MWC	CESQG	2,596.2	31.9%	2,678.1	17.7%	1,408.9	38.8%
	CESQG Recycling	CESQG	168.9	2.1%	916.2	6.1%	10.7	0.3%
	CESQG Recycling Transport	CESQG	4.6	0.1%	22.8	0.2%	0.9	0.0%

Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg) (continued)

Scenario Name	Disposal Activity	Designation	Central	Central Percent	High	High Percent	Low	Low Percent
	CESQG Transport	CESQG	4,109.8	50.6%	8,493.0	56.2%	1,781.2	49.0%
	NON CESQG	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
			8,129.7	100.0%	15,101.0	100.0%	3,633.4	100.0%
UW/CESQG Gradual								
	CESQG	CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CESQG Landfill	CESQG	231.7	3.0%	896.1	6.2%	0.1	0.0%
	CESQG MWC	CESQG	2,596.2	33.8%	2,678.1	18.6%	1,408.9	41.0%
	CESQG Recycling	CESQG	168.9	2.2%	916.2	6.4%	10.7	0.3%
	CESQG Recycling Transport	CESQG	4.6	0.1%	22.8	0.2%	0.9	0.0%
	CESQG Transport	CESQG	4,109.8	53.6%	8,493.0	59.1%	1,781.2	51.9%
	NON CESQG	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Compliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Comply Transport	NON CESQG	3.8	0.0%	18.8	0.1%	0.8	0.0%
	UW MWC	NON CESQG	185.7	2.4%	190.9	1.3%	100.4	2.9%
	UW Noncompliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Onsite Crush-D	NON CESQG	19.9	0.3%	121.1	0.8%	19.5	0.6%
	UW Recycle	NON CESQG	89.6	1.2%	486.1	3.4%	5.7	0.2%

Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg) (continued)

Scenario Name	Disposal Activity	Designation	Central	Central Percent	High	High Percent	Low	Low Percent
	UW Subtitle C Landfill	NON CESQG	8.9	0.1%	0.0	0.0%	0.0	0.0%
	UW Subtitle D Landfill	NON CESQG	19.6	0.3%	63.9	0.4%	3.1	0.1%
	UW Subtitle D Transport	NON CESQG	234.3	3.1%	484.3	3.4%	101.6	3.0%
			7,673.0	100.0%	14,371.4	100.0%	3,432.8	100.0%
UW/CESQG Moderate								
	CESQG	CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CESQG Landfill	CESQG	231.7	3.0%	896.1	6.2%	0.1	0.0%
	CESQG MWC	CESQG	2,596.2	33.8%	2,678.1	18.5%	1,408.9	41.0%
	CESQG Recycling	CESQG	168.9	2.2%	916.2	6.3%	10.7	0.3%
	CESQG Recycling Transport	CESQG	4.6	0.1%	22.8	0.2%	0.9	0.0%
	CESQG Transport	CESQG	4,109.8	53.4%	8,493.0	58.6%	1,781.2	51.9%
	NON CESQG	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Compliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Comply Transport	NON CESQG	3.8	0.0%	18.8	0.1%	0.8	0.0%
	UW MWC	NON CESQG	185.7	2.4%	190.9	1.3%	100.4	2.9%
	UW Noncompliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%

Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg) (continued)

Scenario Name	Disposal Activity	Designation	Central	Central Percent	High	High Percent	Low	Low Percent
	UW Onsite Crush-D	NON CESQG	19.9	0.3%	121.1	0.8%	19.5	0.6%
	UW Recycle	NON CESQG	111.4	1.4%	604.3	4.2%	7.0	0.2%
	UW Subtitle C Landfill	NON CESQG	5.0	0.1%	0.0	0.0%	0.0	0.0%
	UW Subtitle D Landfill	NON CESQG	19.6	0.3%	63.9	0.4%	3.1	0.1%
	UW Subtitle D Transport	NON CESQG	234.3	3.0%	484.3	3.3%	101.6	3.0%
			7,690.9	100.0%	14,489.6	100.0%	3,434.2	100.0%
UW/CESQG Rapid								
	CESQG	CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	CESQG Landfill	CESQG	231.7	3.0%	896.1	6.2%	0.1	0.0%
	CESQG MWC	CESQG	2,596.2	34.0%	2,678.1	18.6%	1,408.9	41.5%
	CESQG Recycling	CESQG	168.9	2.2%	916.2	6.4%	10.7	0.3%
	CESQG Recycling Transport	CESQG	4.6	0.1%	22.8	0.2%	0.9	0.0%
	CESQG Transport	CESQG	4,109.8	53.9%	8,493.0	58.9%	1,781.2	52.5%
	NON CESQG	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Compliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%
	UW Comply Transport	NON CESQG	4.3	0.1%	21.5	0.1%	0.9	0.0%
	UW MWC	NON CESQG	152.3	2.0%	156.5	1.1%	82.4	2.4%
	UW Noncompliance	NON CESQG	0.0	0.0%	0.0	0.0%	0.0	0.0%

Table 3-2. Cumulative Mercury Lamp Disposal Emissions by Scenario and Activity (kg) (continued)

Scenario Name	Disposal Activity	Designation	Central	Central Percent	High	High Percent	Low	Low Percent
	UW Onsite Crush-D	NON CESQG	16.3	0.2%	99.3	0.7%	16.0	0.5%
	UW Recycle	NON CESQG	127.0	1.7%	688.9	4.8%	8.0	0.2%
	UW Subtitle C Landfill	NON CESQG	5.7	0.1%	0.0	0.0%	0.0	0.0%
	UW Subtitle D Landfill	NON CESQG	16.1	0.2%	52.4	0.4%	2.5	0.1%
	UW Subtitle D Transport	NON CESQG	192.2	2.5%	297.1	2.8%	83.3	2.5%
			7,624.9	100.0%	14,422.0	100.0%	3,394.8	100.0%

Table 3-3. Sensitivity Analysis for Lamp Breakage and Compliance under CE

Scenario Name	Estimate	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	Total
Baseline/CESQG	Central	NON CESQG	96	97	97	95	94	95	96	97	99	104	970
Baseline/CESQG	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
Baseline/CESQG	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
Baseline/CESQG	High	NON CESQG	189	190	191	186	184	186	188	189	195	205	1,903
Baseline/CESQG	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
Baseline/CESQG	Low	NON CESQG	39	39	39	38	38	38	39	39	40	42	392
CE/CESQG @ 10% breakage	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
CE/CESQG @ 10% breakage	Central	NON CESQG	56	56	56	55	54	55	55	56	57	60	561
CE/CESQG @ 10% breakage	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
CE/CESQG @ 10% breakage	High	NON CESQG	99	100	100	98	97	98	99	99	102	107	1,000
CE/CESQG @ 10% breakage	Low	NON CESQG	25	25	25	24	24	24	24	25	25	27	248
CE/CESQG @ 10% breakage	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
CE/CESQG @ 25% breakage	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
CE/CESQG @ 25% breakage	Central	NON CESQG	63	64	64	62	62	62	63	63	65	69	637
CE/CESQG @ 25% breakage	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
CE/CESQG @ 25% breakage	High	NON CESQG	117	118	119	115	115	116	117	118	121	127	1,182
CE/CESQG @ 25% breakage	Low	NON CESQG	28	28	28	27	27	27	27	28	29	30	278
CE/CESQG @ 25% breakage	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202

Table 3-3. Sensitivity Analysis for Lamp Breakage and Compliance under CE (continued)

Scenario Name	Estimate	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	Total
CE/CESQG @ 50% breakage	Central	NON CESQG	76	76	77	75	74	75	75	75	78	82	764
CE/CESQG @ 50% breakage	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
CE/CESQG @ 50% breakage	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
CE/CESQG @ 50% breakage	High	NON CESQG	148	148	149	145	144	146	147	148	152	160	1,486
CE/CESQG @ 50% breakage	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
CE/CESQG @ 50% breakage	Low	NON CESQG	33	33	33	32	32	32	32	33	34	35	330
CE/CESQG @ 75% breakage	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
CE/CESQG @ 75% breakage	Central	NON CESQG	89	89	90	87	86	87	88	89	91	96	891
CE/CESQG @ 75% breakage	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
CE/CESQG @ 75% breakage	High	NON CESQG	178	179	180	175	174	175	177	178	183	192	1,791
CE/CESQG @ 75% breakage	Low	NON CESQG	38	38	38	37	37	37	38	38	39	41	381
CE/CESQG @ 75% breakage	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202
CE/CESQG 100% compliance	Central	CESQG	878	854	799	720	660	641	640	638	639	643	7,111
CE/CESQG 100% compliance	Central	NON CESQG	73	73	73	72	71	72	72	73	75	79	732
CE/CESQG 100% compliance	High	CESQG	1,606	1,563	1,461	1,316	1,207	1,172	1,170	1,167	1,169	1,176	13,006
CE/CESQG 100% compliance	High	NON CESQG	181	182	183	178	177	178	180	181	186	196	1,821

Table 3-3. Sensitivity Analysis for Lamp Breakage and Compliance under CE (continued)

Scenario Name	Estimate	Designation	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	Total
CE/CESQG 100% compliance	Low	NON CESQG	27	27	27	27	26	27	27	27	28	29	273
CE/CESQG 100% compliance	Low	CESQG	395	385	360	324	297	289	288	287	288	289	3,202

Table 3-4. Net Mercury Emissions from Lamps (kg)

Scenario Name	Year	Lamp Disposal Emissions				Net Emissions		
		Utility Emissions Savings	Central Tendency	High Estimate	Low Estimate	Central Tendency	High Estimate	Low Estimate
Baseline/CESQG	1998	0	974	1,795	434	974	1,795	434
	1999	0	951	1,753	424	951	1,753	424
	2000	0	896	1,652	399	896	1,652	399
	2001	0	814	1,502	362	814	1,502	362
	2002	0	754	1,391	335	754	1,391	335
	2003	0	736	1,359	327	736	1,359	327
	2004	0	735	1,358	327	735	1,358	327
	2005	0	735	1,356	326	735	1,356	326
	2006	0	738	1,364	328	738	1,364	328
	2007	0	747	1,380	332	747	1,380	332
Total	0	8,081	14,909	3,593	8,081	14,909	3,593	
CE/CESQG	1998	0	979	1,814	438	979	1,814	438
	1999	0	956	1,772	428	956	1,772	428
	2000	0	901	1,672	403	901	1,672	403
	2001	0	819	1,521	366	819	1,521	366
	2002	0	759	1,410	339	759	1,410	339
	2003	0	741	1,377	331	741	1,377	331
	2004	0	740	1,376	331	740	1,376	331
	2005	0	739	1,375	330	739	1,375	330
	2006	0	743	1,383	332	743	1,383	332
	2007	0	752	1,401	336	752	1,401	336
Total	0	8,130	15,101	3,633	8,130	15,101	3,633	

Table 3-4. Net Mercury Emissions from Lamps (kg) (continued)

Scenario Name	Year	Lamp Disposal Emissions					Net Emissions	
		Utility Emissions Savings	Central Tendency	High Estimate	Low Estimate	Central Tendency	High Estimate	Low Estimate
UW/CESQG Gradual	1998	0	963	1,768	436	963	1,768	436
	1999	0	932	1,715	421	932	1,715	421
	2000	0	870	1,605	392	870	1,605	392
	2001	0	782	1,449	352	782	1,449	352
	2002	0	715	1,334	320	715	1,334	320
	2003	0	690	1,298	308	690	1,298	308
	2004	0	683	1,295	303	683	1,295	303
	2005	0	676	1,294	299	676	1,294	299
	2006	0	678	1,300	299	678	1,300	299
	2007	0	684	1,313	302	684	1,313	302
Total		0	7,673	14,371	3,433	7,673	14,371	3,433
UW/CESQG Moderate	1998	0	966	1,784	436	966	1,784	436
	1999	0	935	1,734	422	935	1,734	422
	2000	0	873	1,627	393	873	1,627	393
	2001	0	785	1,470	352	785	1,470	352
	2002	0	718	1,352	321	718	1,352	321
	2003	0	692	1,312	308	692	1,312	308
	2004	0	684	1,303	303	684	1,303	303
	2005	0	676	1,294	299	676	1,294	299
	2006	0	678	1,300	299	678	1,300	299
	2007	0	684	1,313	302	684	1,313	302
Total		0	7,691	14,490	3,434	7,691	14,490	3,434

Table 3-4. Net Mercury Emissions from Lamps (kg) (continued)

Scenario Name	Year	Lamp Disposal Emissions					Net Emissions	
		Utility Emissions Savings	Central Tendency	High Estimate	Low Estimate	Central Tendency	High Estimate	Low Estimate
UW/CESQG Rapid	1998	0	944	1,761	423	944	1,761	423
	1999	0	919	1,718	412	919	1,718	412
	2000	0	862	1,615	386	862	1,615	386
	2001	0	777	1,462	347	777	1,462	347
	2002	0	713	1,347	318	713	1,347	318
	2003	0	690	1,309	306	690	1,309	306
	2004	0	683	1,302	303	683	1,302	303
	2005	0	676	1,294	299	676	1,294	299
	2006	0	678	1,300	299	678	1,300	299
	2007	0	684	1,313	302	684	1,313	302
Total		0	7625	14,422	3,395	7,625	14,422	3,395

3.3 CONCLUSION

We define net mercury emissions as disposal emissions less emissions avoided from utility boilers. Prior to proceeding, it should be noted that the Agency believes this to be a reasonable metric for choosing among policy options only if emissions avoided vary among options. We believe T8 populations to be independent of the policy options. Therefore, energy savings and the resultant decrease in coal-fired emissions are believed to be independent of the policy options. Table 3-4 presents net mercury emissions over the baseline for the policy options. Further, we can conclude that Subtitle D landfilling would account for minimal lamp mercury emissions under either option. This is largely because the model assumes that most lamps are broken before being landfilled. On the other hand, transportation mercury emissions are an important contributor to total mercury emissions, particularly under the CE option. We believe that virtually all lamps would be broken during transport under the CE option unless conditions are added to address releases. (Transportation, as used here, covers all handling from the time the lamp becomes spent until its receipt at the destination facility.) Taken collectively, these observations suggest that, to reduce lamp mercury emissions under either option, procedures should be established that minimize emissions during transport and/or processing (e.g., crushing) of spent lamps.

