

US EPA ARCHIVE DOCUMENT

Environmental Justice Screening Method:

Integrating Indicators of Cumulative Impact into Regulatory Decision-making



Source: CBE



Source: David Woo



Rachel Morello-Frosch, UC Berkeley
Manuel Pastor, USC
Jim Sadd, Occidental College


Purpose of Screening Methodology

- Developed under research contract with California Air Resources Board (CARB) and Calif. Energy Commission to identify most impacted and most vulnerable communities
- Develop Indicators of cumulative impact that:
 - Reflect research on air pollution, environmental justice, and health
 - Transparent and relevant to policy-makers and communities
 - Reviewed by community EJ groups, California Air Resources Board (CARB), academic peers and other agencies
- Apply EJ “screening method” to multiple uses:
 - Regulatory decision-making and enforcement
 - Community outreach
 - Local land use planning
 - (e.g. Cites of Commerce, Richmond, Los Angeles,)



Focus of Screening Method

- Developed with specific reference to ambient air quality
 - Not screening for occupational, indoor, water, pesticides.
- Developed to incorporate land use information into environmental decision-making
 - Performs best with detailed, high resolution land use data.
- Uses secondary databases
 - This is screening not assessment
- First applied in So. California
 - high quality land use data
 - 7 Southern California counties – complete
 - Others in progress
- Map where people are exposed
 - Residential land use
 - Sensitive land use categories
(California ARB land use guidelines, 2005)

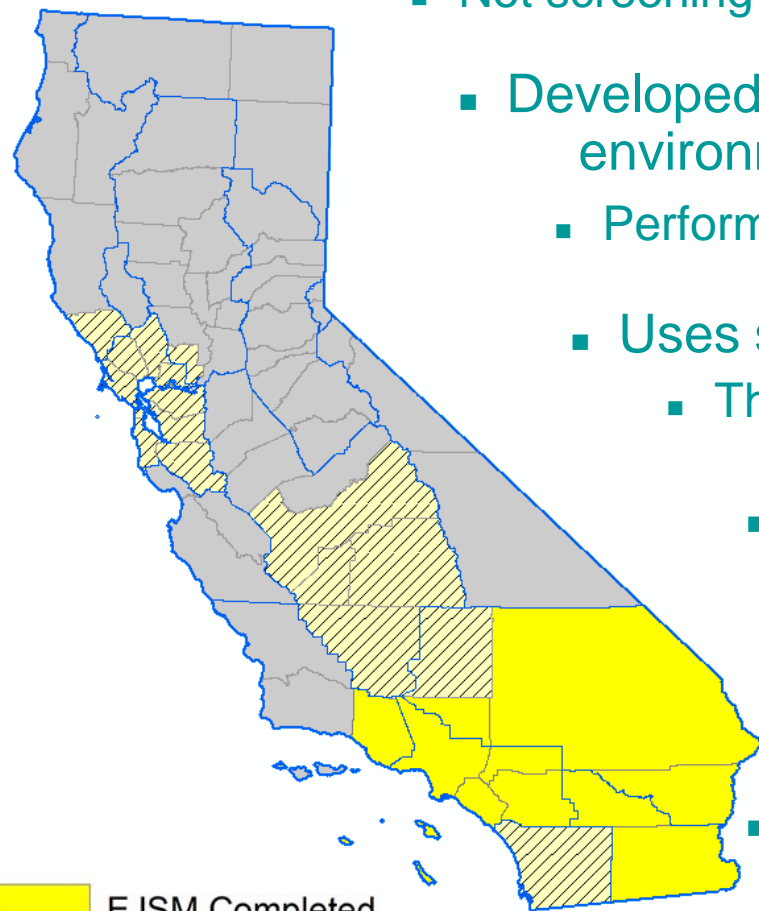

Categories of Impact & Vulnerability



- Proximity to hazards & sensitive land uses
 - Based on EJ literature
 - CARB land use guidelines (sensitive land uses)
 - State data on air quality hazards
- Health risk & exposure
 - Based on EJ and public health literature
 - Available state and national data
 - Modeling from emissions inventories
- Social & health vulnerability
 - Based on epidemiological literature on social determinants of health
 - Based on EJ literature on area-level measures of community vulnerability

Screening Method Architecture

Metrics & CI Scoring


QA/QC

Linking & Mapping


- **Step 1:** GIS Spatial Assessment
 - Derive land use layer
 - Create base map layer (CI polygons)
 - Identify land use and hazard proximity metrics
- **Step 2:** Programming (SPSS)
 - Data processing and cleaning
 - Derive CI scores
 - Analytics
- **Step 3:** GIS Mapping of Results
- Qa/QC essential to Steps 1 and 2:
 - Quality control of data layers
 - Document and verify metrics and scoring

GIS Spatial Assessment – Derive Land Use Spatial Layer

1. Isolate specific land uses from high quality spatial data (SCAG, 2005)
 - ◆ “Sensitive land uses” – daycare, schools, medical facilities, urban parks and playgrounds (CARB, 2005)
 - ◆ Residential
2. Intersect land use polygons with census blocks
3. Resulting Base Map - CI Polygons
 - ◆ Scoring System – each polygon receives “points” related to indicators
 - ◆ Final mapping also done using census tracts (discussed later)

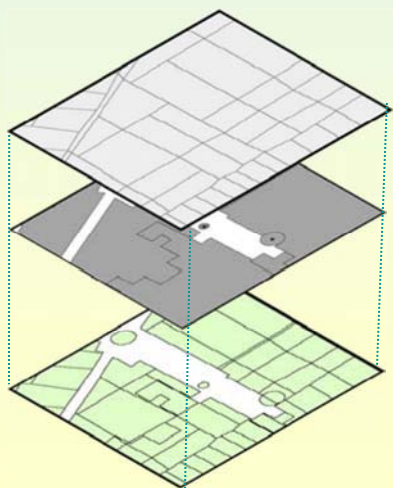


Intersect Land Use Polygons with Blocks

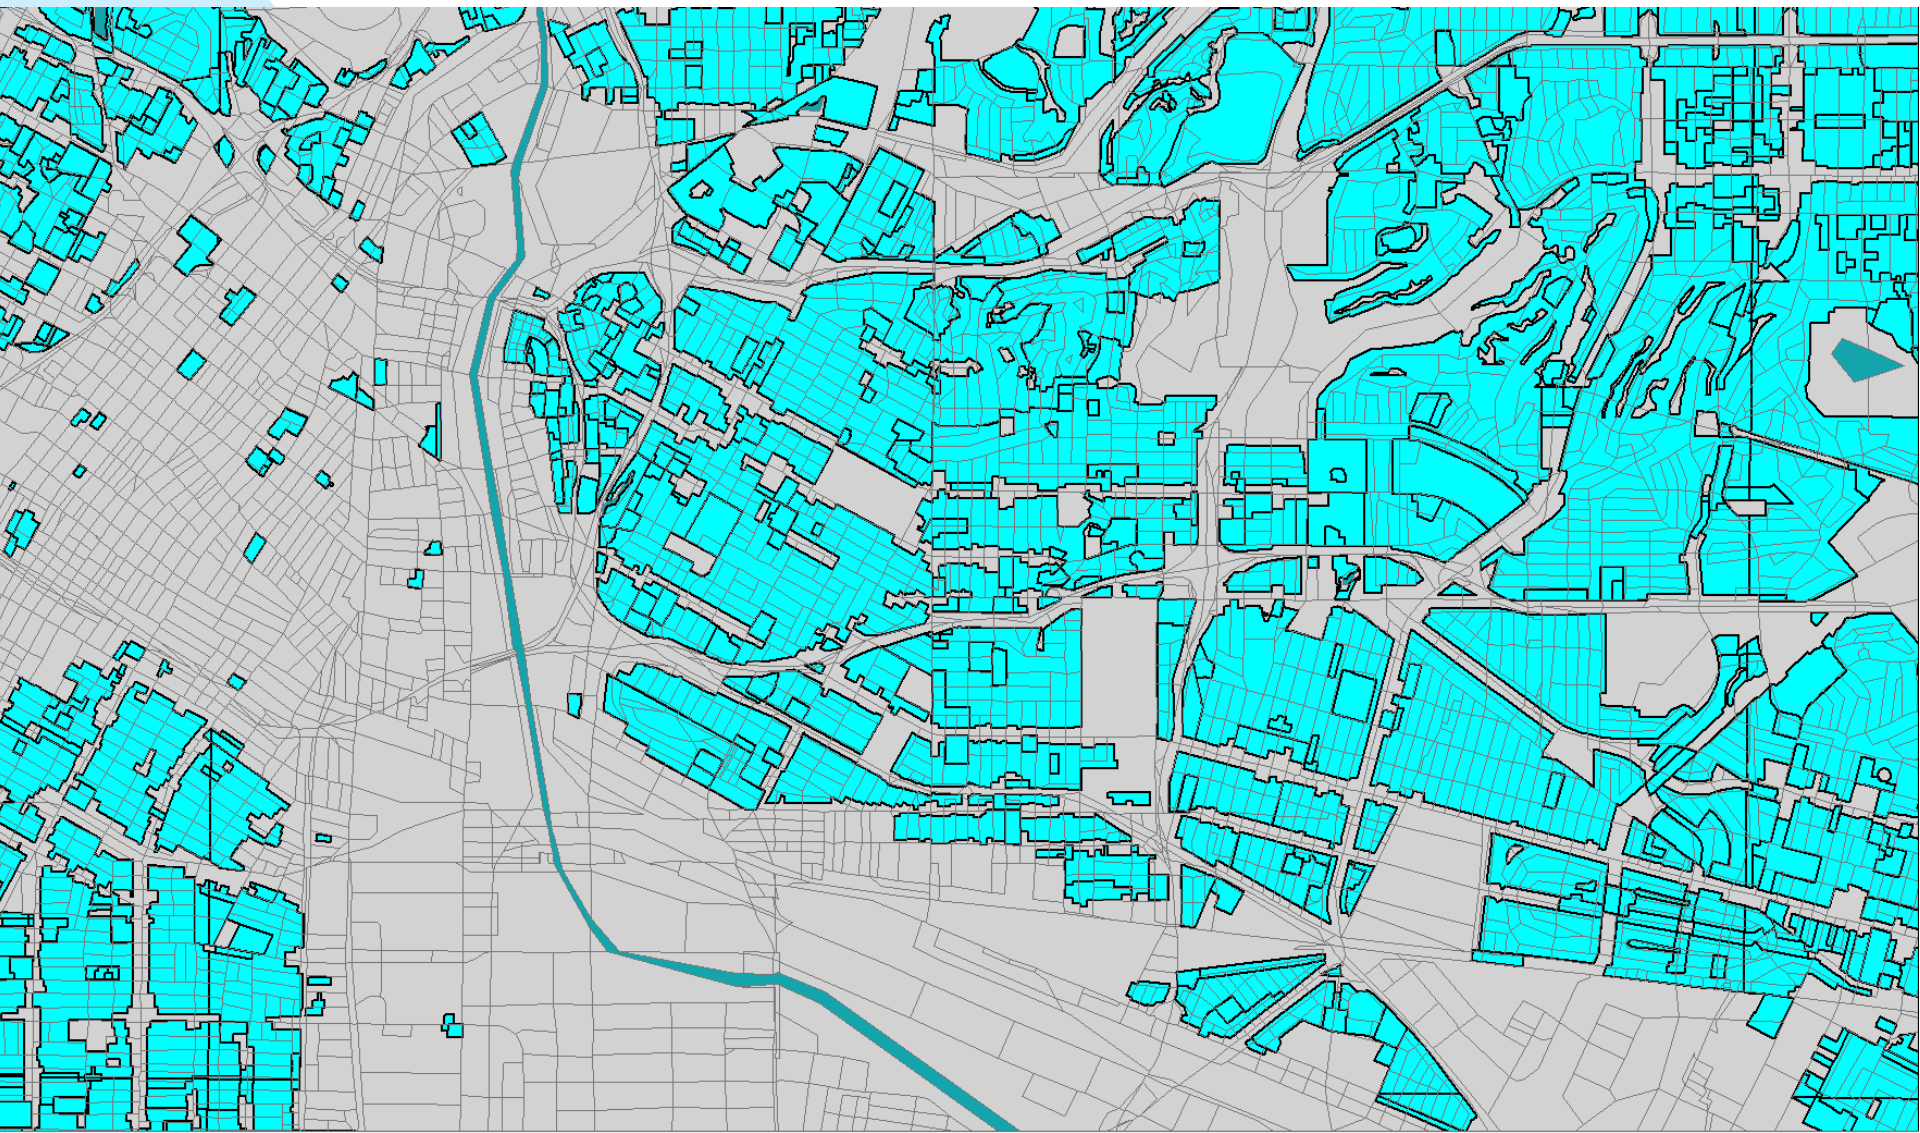


8

Result: Cumulative Impact (CI) Polygons, each associated with a specific block and land use

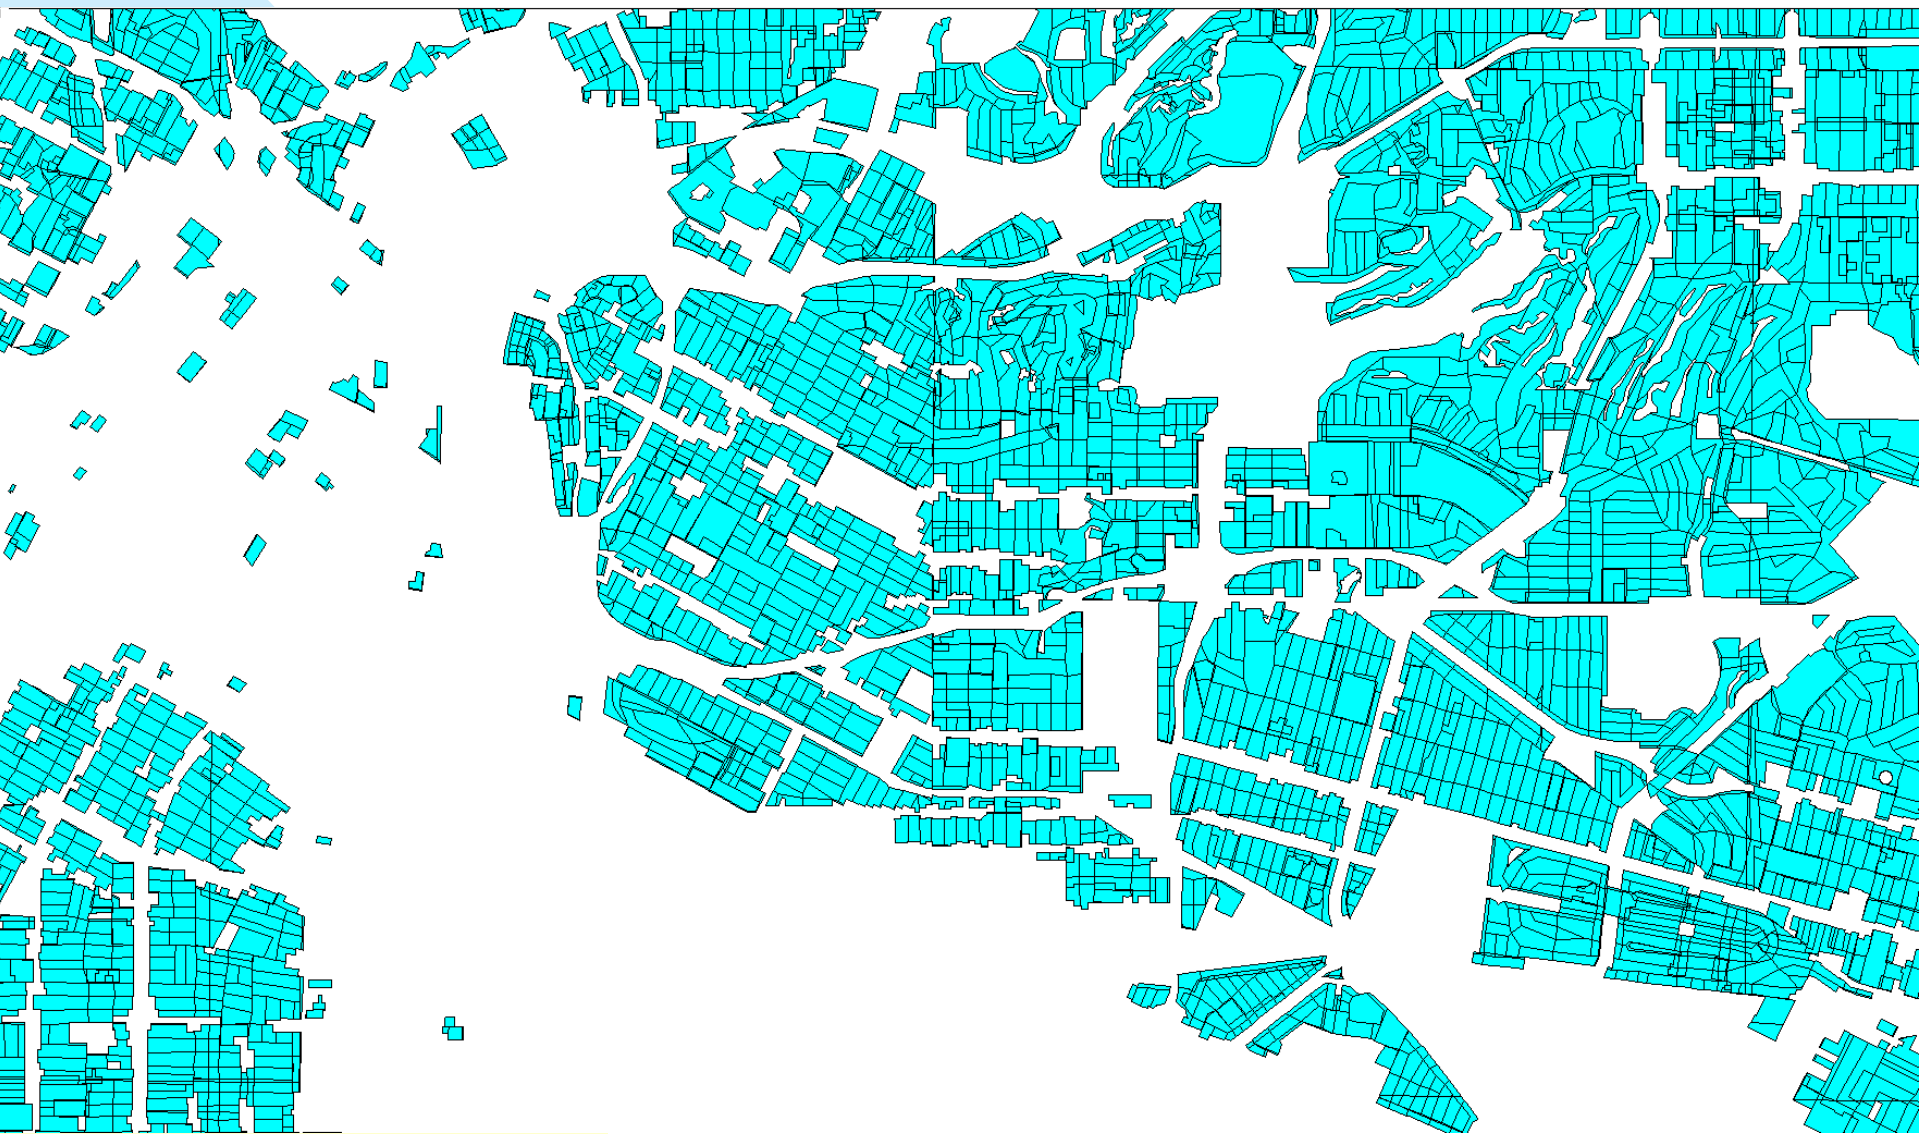

Each CI Polygon receives a Cumulative Impacts Score

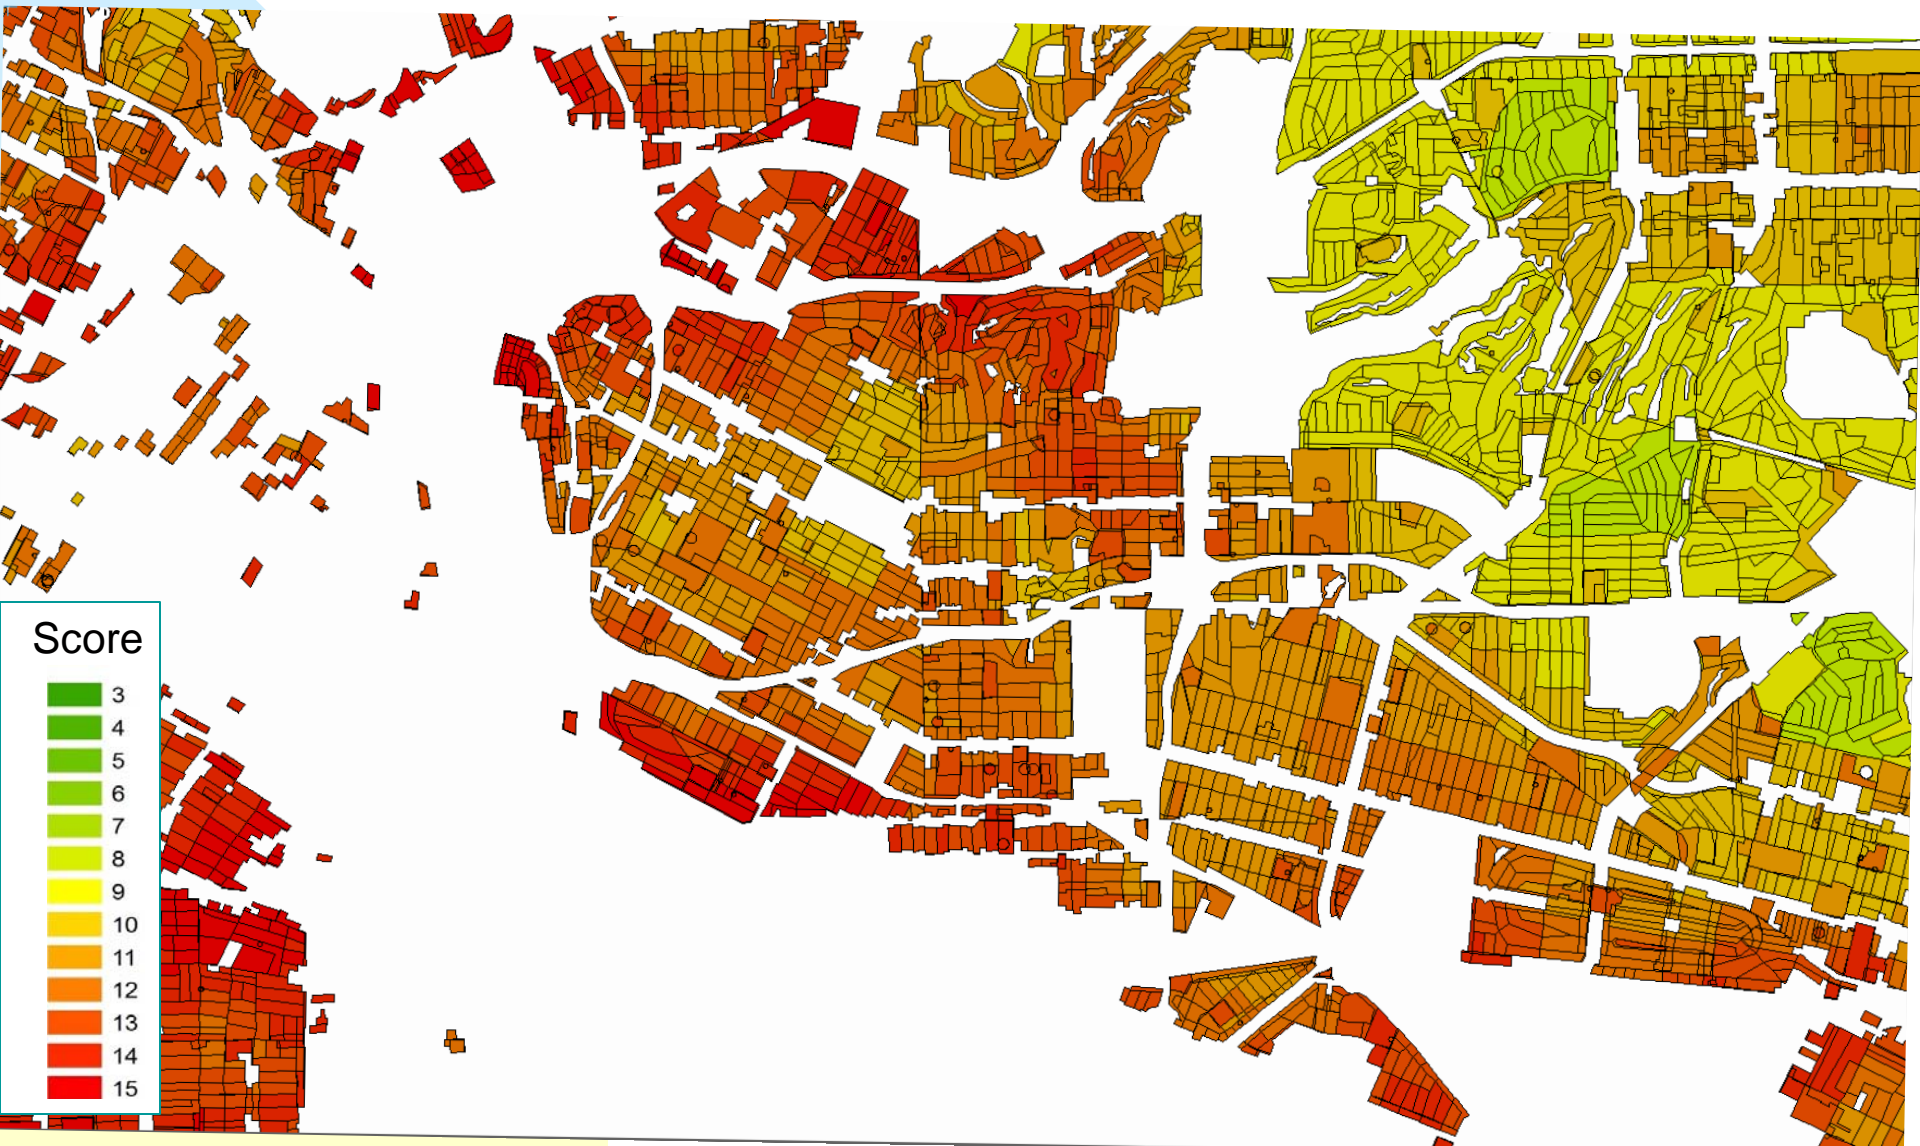

Scoring – Land Use and Hazard Proximity

Screening score is based on a “points” system


- CI polygons receive 1 “point” if they are a sensitive land use category
- Hazard proximity points
 - CHAPIS (Priority emitters from California emissions inventories)
 - Chrome Platers
 - Hazardous Waste TSDs
 - Land Uses associated with high levels of air pollution
 - Rail, Ports, Airports, Refineries, Intermodal Distribution Facilities
- Proximity analysis using CI polygons
 - Number of sites within distance of CI polygon boundary
 - Distance-weighted approach to address locational inaccuracy
 - Aggregate these counts to census tracts using a population-weighting procedure



Defining Hazard Proximity

Distance-weighted Approach - 1000 foot buffer


- Buffer CI polygon boundaries at different distances
- Hazard proximity based on number of facilities (point-sources) and hazardous land uses inside the buffer

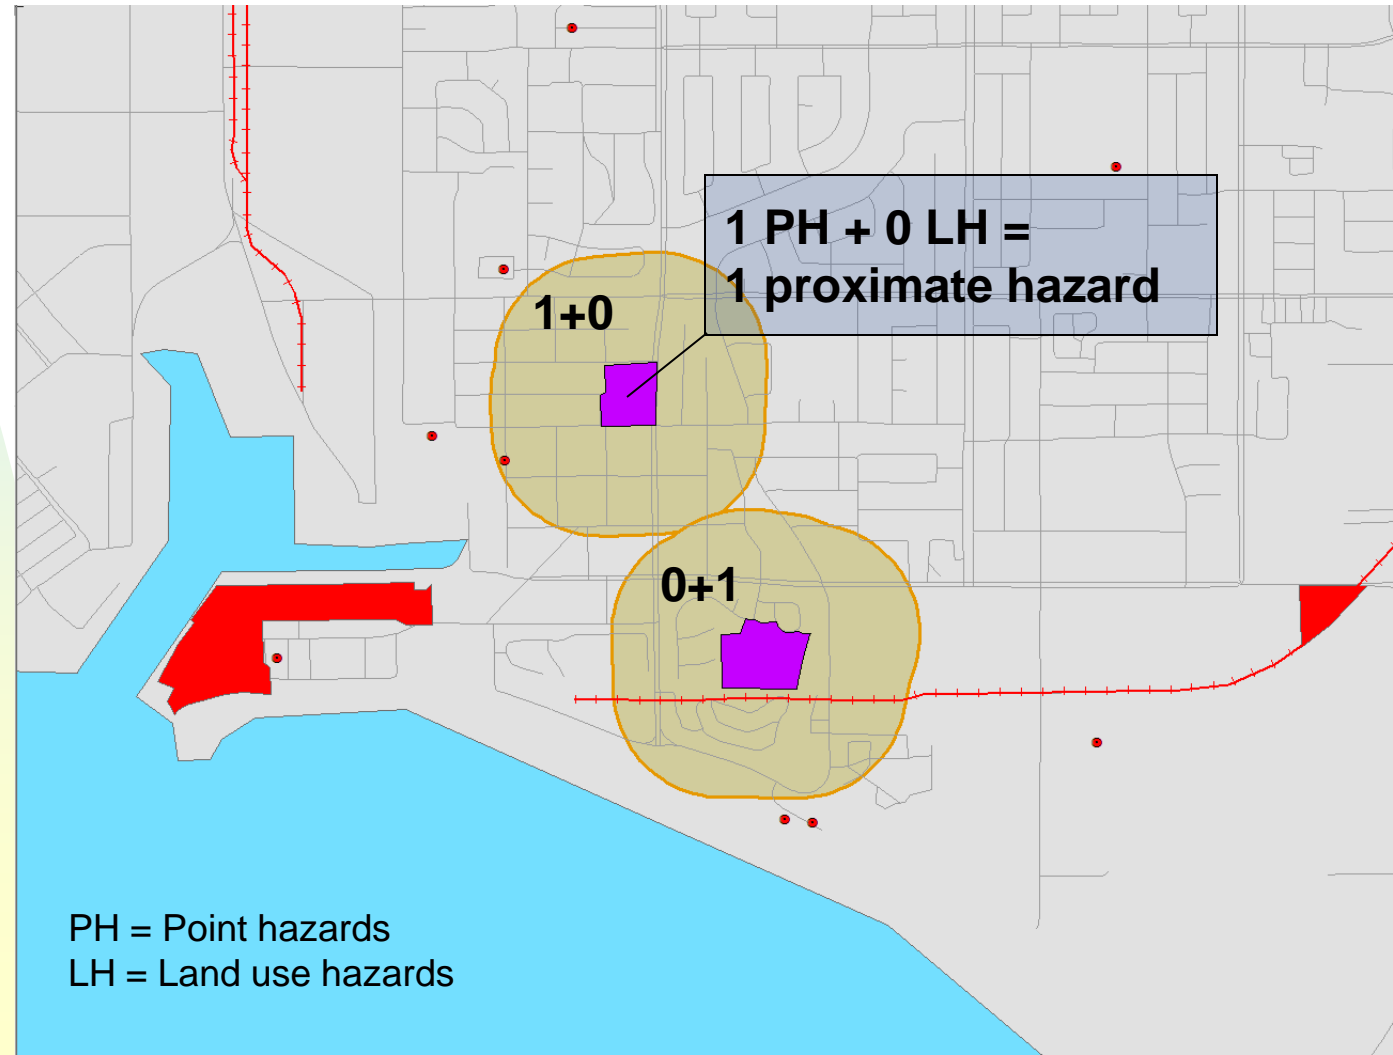

Defining Hazard Proximity – Distance Buffers

2000 Foot Buffer


- Buffer CI polygon boundaries at different distances
- Hazard proximity based on number of facilities (point-sources) and hazardous land uses inside the buffer

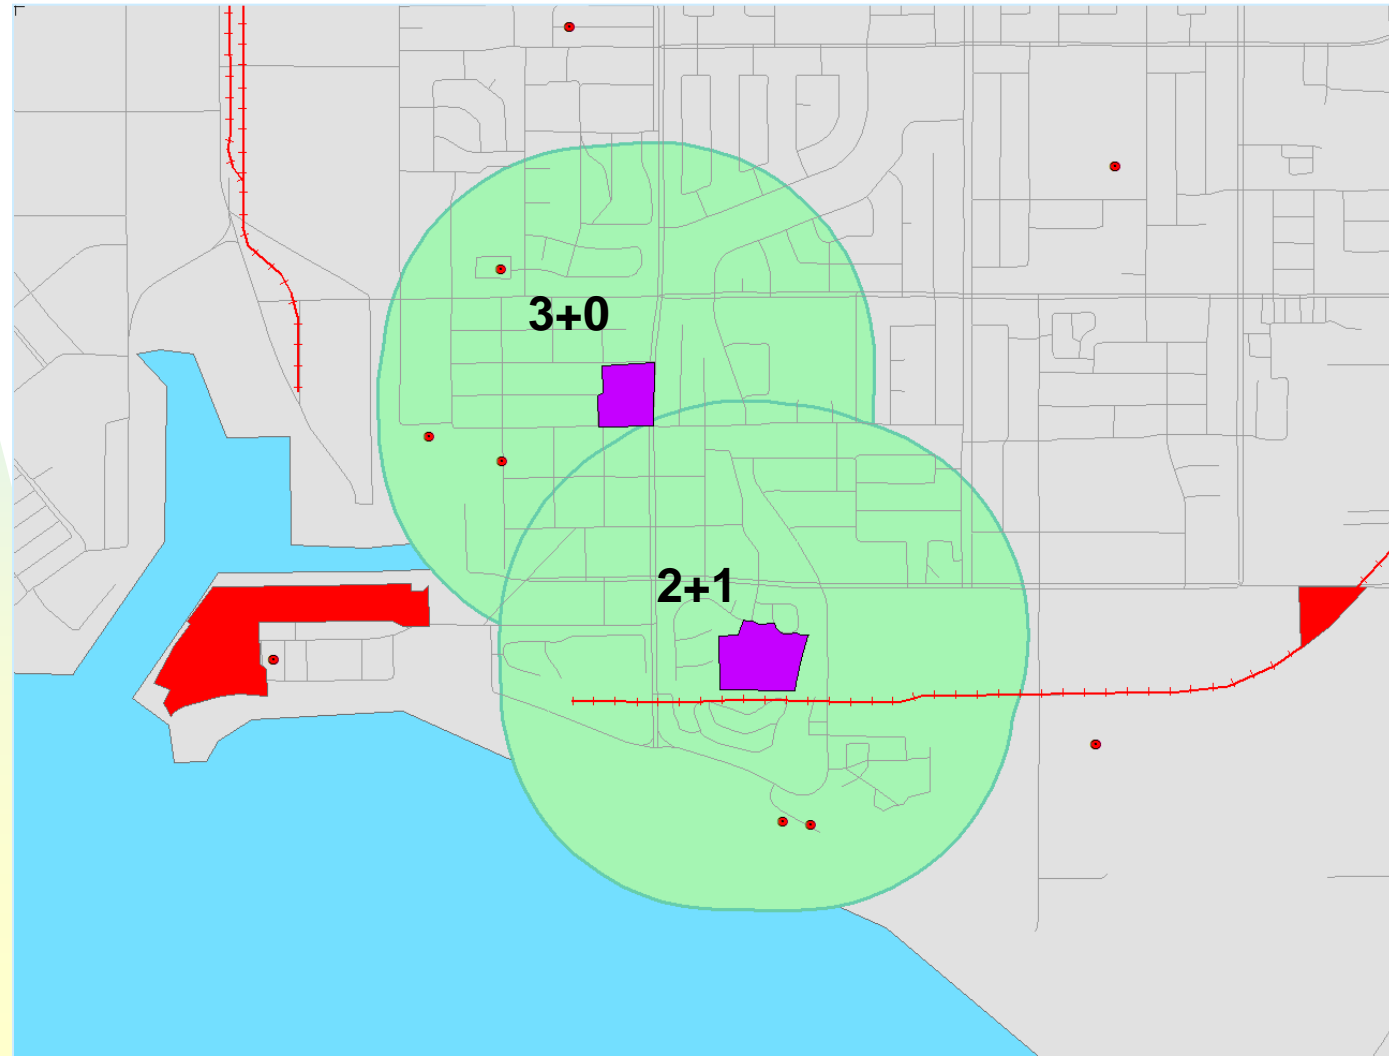

Defining Proximity – Distance Buffers

3000 Foot Buffer

- Buffers on CI polygon boundaries
- Hazard proximity based on number of facilities (point-sources) and hazardous land uses inside the buffer

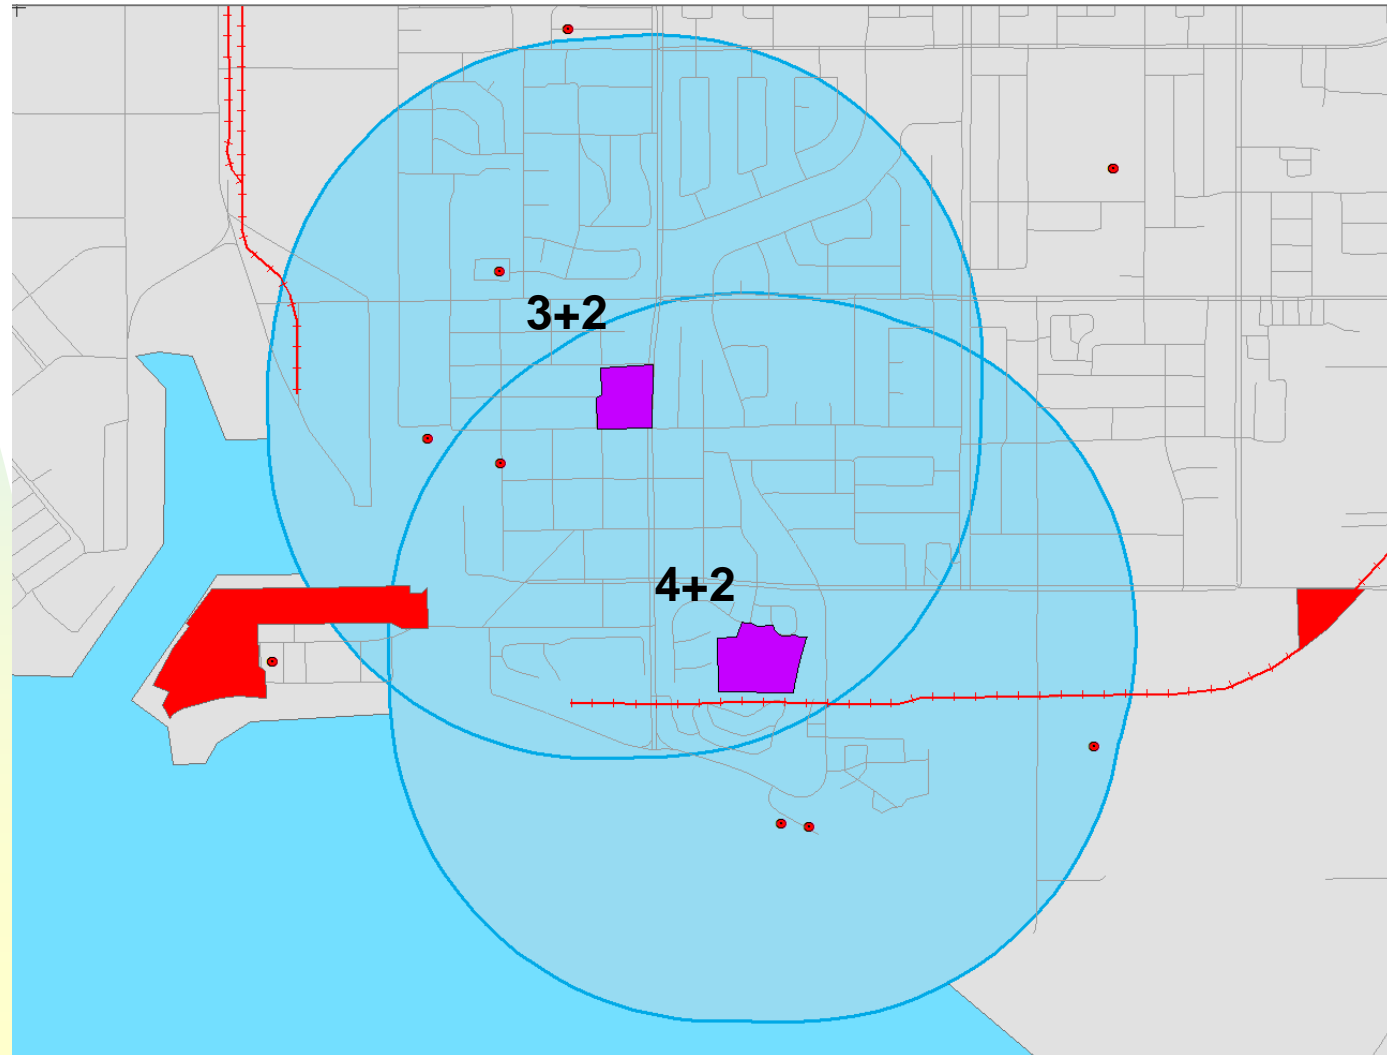

Distance Weighting the Hazard Count

Because of the potential for inaccurate hazard locations, a distance weighted approach is used to get the hazard count for each CI polygon:

Distance Weighted Hazard Count =


$(1 \times \text{\#Hazards within 1,000ft}) +$

$(\mathbf{0.5} \times \text{\#Hazards 1,000-2,000ft}) +$

$(\mathbf{0.1} \times \text{\#Hazards 2,000-3,000ft})$

** The above weights can be set to any desired value*

Distance weighted hazard count around CI Polygons (Jenks natural breaks)

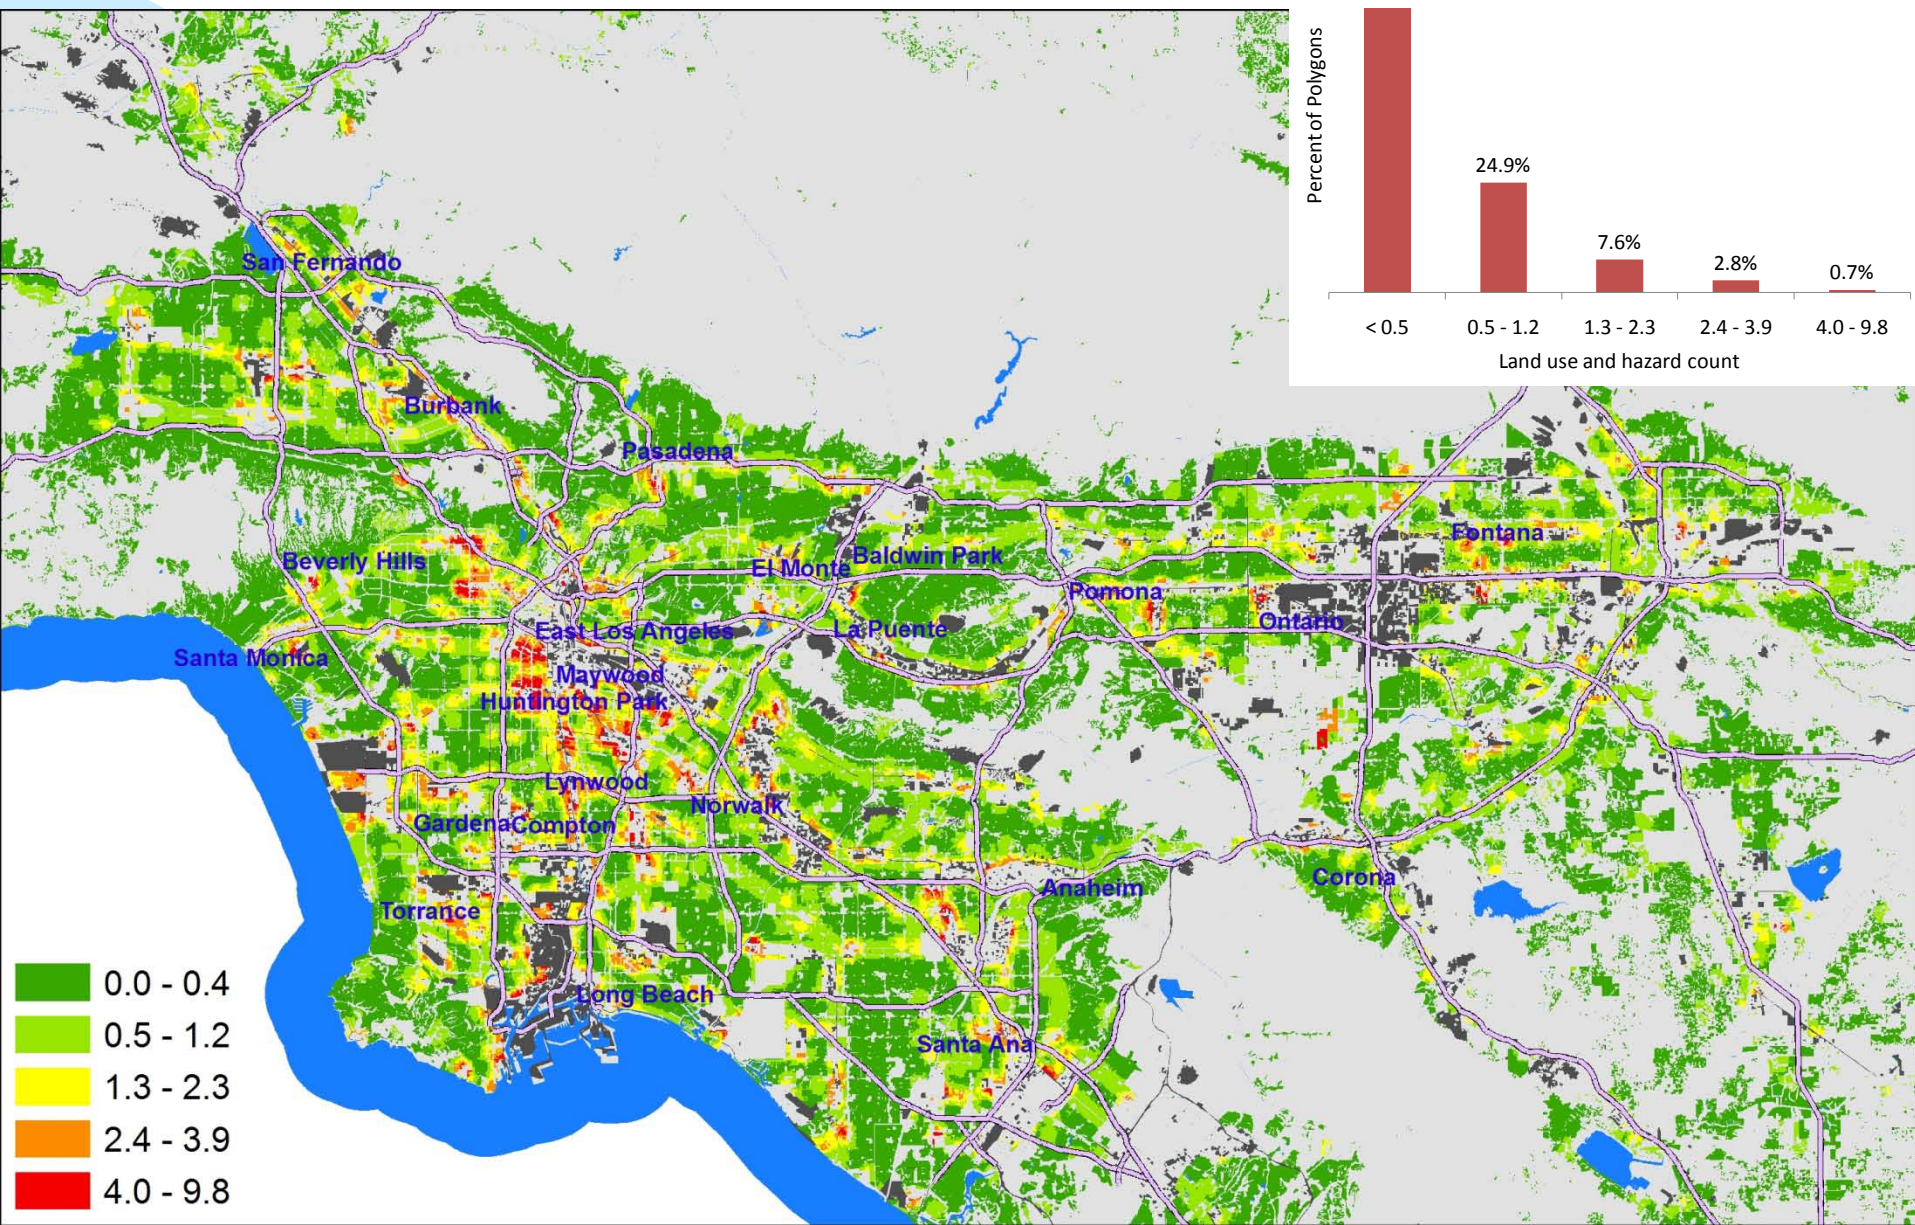

Calculating Hazard Proximity & Sensitive Land Counts at the Tract Level

Why?


- Tracts are a consistent level of geography for many sources of data; avoid misrepresenting precision
- All of the health risk and social vulnerability measures (discussed later) are available at the tract level

How Calculated:

- Estimate population in each CI polygon (area-weighting)
- Calculate population-weighted average of the hazard and sensitive land use counts across all CI Polygons within each census tract

17 Hazard Proximity & Sensitive Land Use Count at the Tract Level

Distance weighted hazard count (+1 if sensitive land use), population weighted to the tract level, mapped on CI Polygons (Jenks natural breaks)

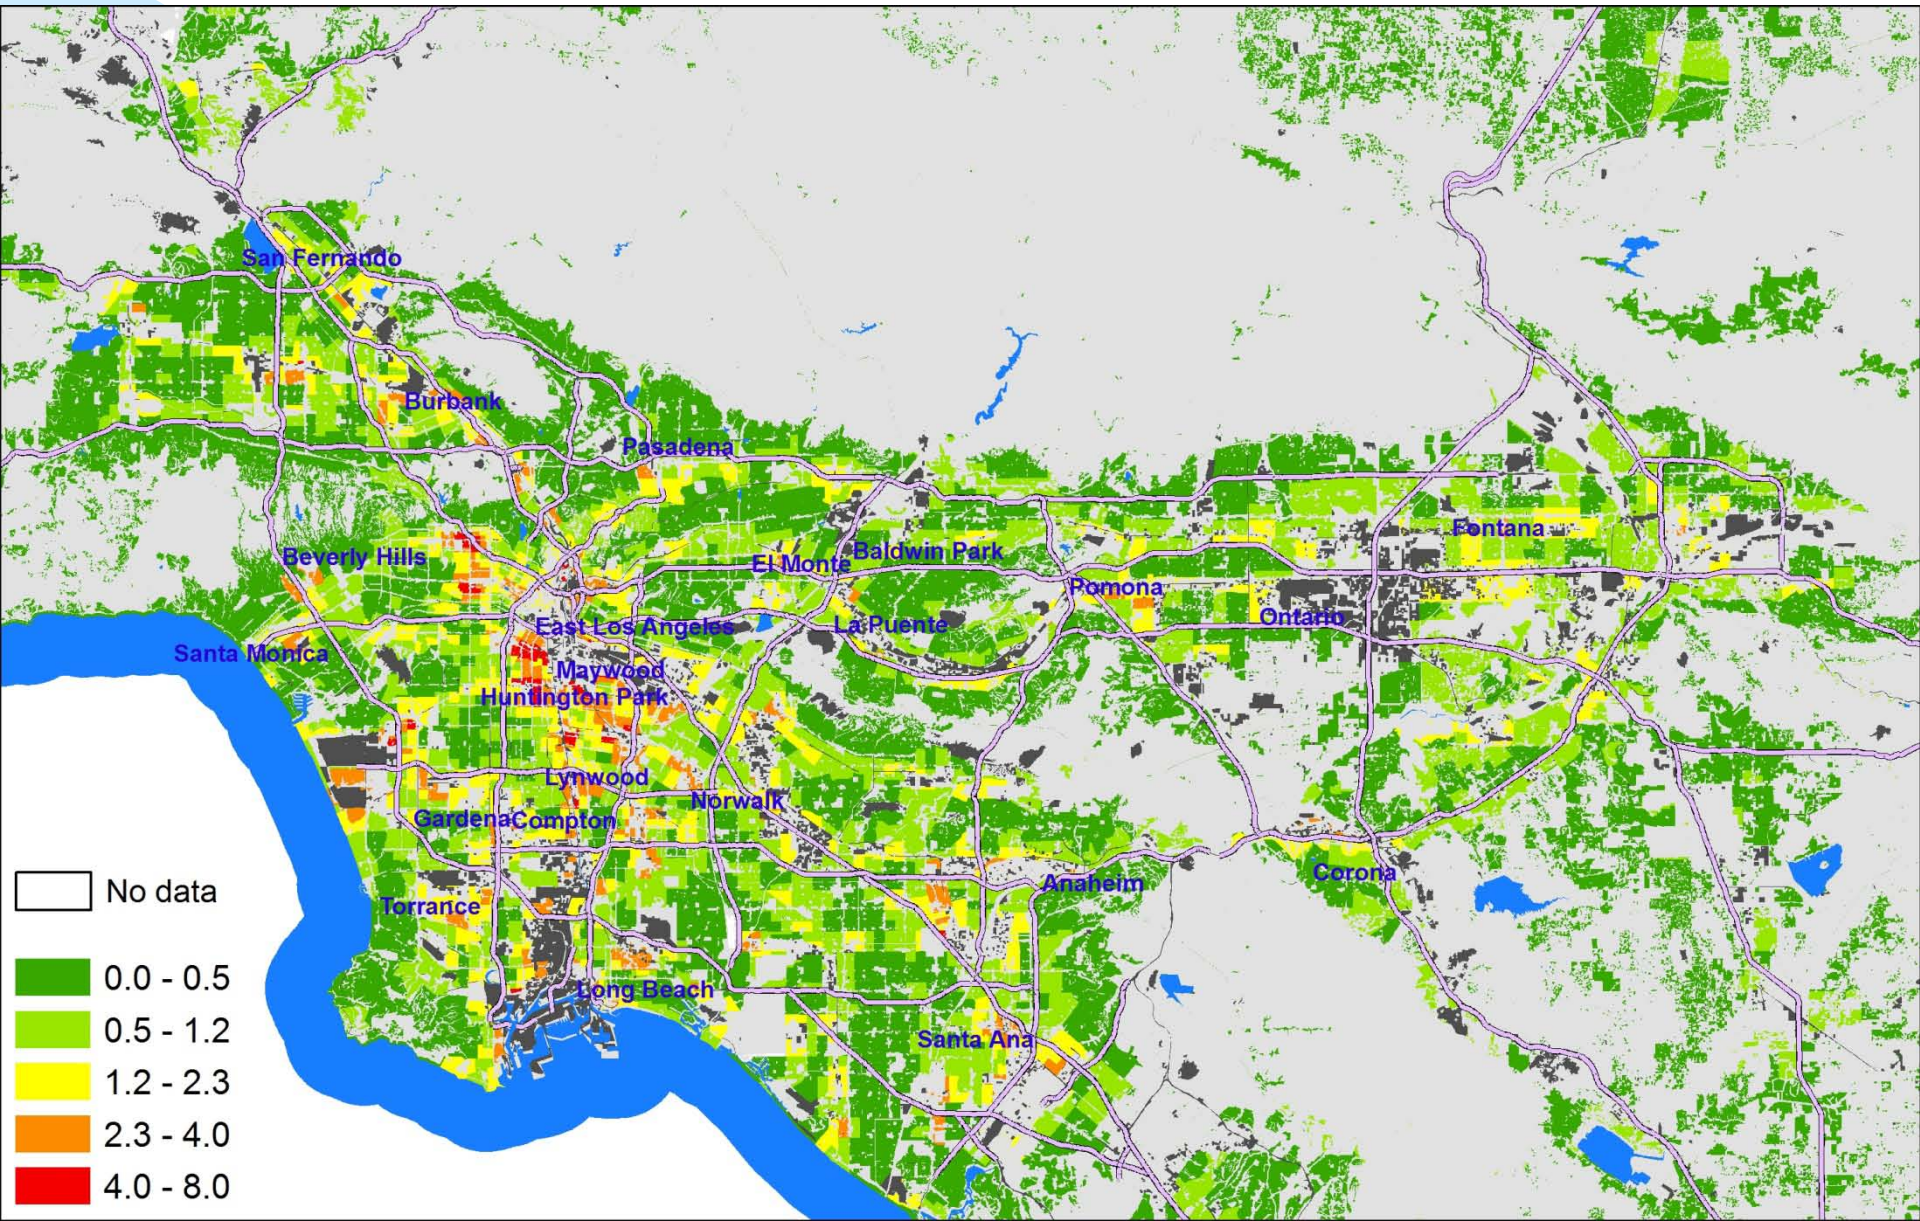

Scoring: Hazard Proximity & Sensitive Land Use

- Tract-level counts are ranked into quintiles (1-5) across all tracts in the region to produce the final hazard proximity and sensitive land use **score**
- Quintile distribution is used throughout the EJ Screening Method because it is an easily understood and normal ranking procedure
 - No “right” distribution to follow (magnitudes of hazards unknown)
 - Other distributions could easily be applied

Health Risk & Exposure Indicators

(Tract Level)

- RSEI (Risk Screening Environmental Indicators)
 - (2005) toxic conc. hazard scores from TRI facilities
- NATA 1999 (National Air Toxics Assessment)
 - Respiratory hazard from mobile & stationary sources
- CARB Estimated Inhalation Cancer Risk 2001
- CARB estimated PM_{2.5} concentration
- CARB estimated Ozone concentration



Scoring for Health Risk & Exposure

Scoring:

- Each indicator is ranked into quintiles (1-5) across all tracts in the region
- Quintile rank values are summed for each tract
- These sums are ranked into quintiles (1-5) across all tracts in the region
- The resulting quintile rank is the health risk and exposure score for each tract



Social & Health Vulnerability Indicators

Census Tract Level Metrics (2000)

- ◆ % residents of color (non-White)
- ◆ % residents below twice national poverty level
- ◆ Home ownership - % living in rented households
- ◆ Housing value – median housing value
- ◆ Educational attainment – % population > age 24 with less than high school education
- ◆ Age of residents (% <5)
- ◆ Age of residents (% >60)
- ◆ Linguistic isolation - % pop. >age 4 in households where no one >age 15 speaks English well
- ◆ Voter turnout - % votes cast among all registered voters in 2000 general election
- ◆ Birth outcomes – % preterm or SGA infants 1996-03



Social & Health Vulnerability Scores

- Each social and health vulnerability metric is ranked into quintiles (1-5) across all tracts in the region
- Final score is derived by taking average ranking (across all metrics) for each tract, and ranking the average once again into quintiles (1-5)



A note on missing values:

To help ensure that the social and health vulnerability scores are reliable, we exclude tracts with less than 50 people, and those with 5 or more missing values among the 10 metrics considered. To account for missing values in tracts with 1 to 4 missing metrics, the average quintile ranking is taken across only the non-missing metrics.

Final Cumulative Impact Score

Combine three categories of impact and vulnerability to derive final Cumulative Impact Score

Cumulative Impact Score =

Hazard Proximity and Sensitive Land Use Score (1-5) +


Health Risk and Exposure Score (1-5) +

Social and Health Vulnerability Score (1-5)

➤ *Final Cumulative Impact Score Ranges from 3-15*

Tract Level Cumulative Impact Score

Distance weighted hazard proximity, mapped on CI Polygons

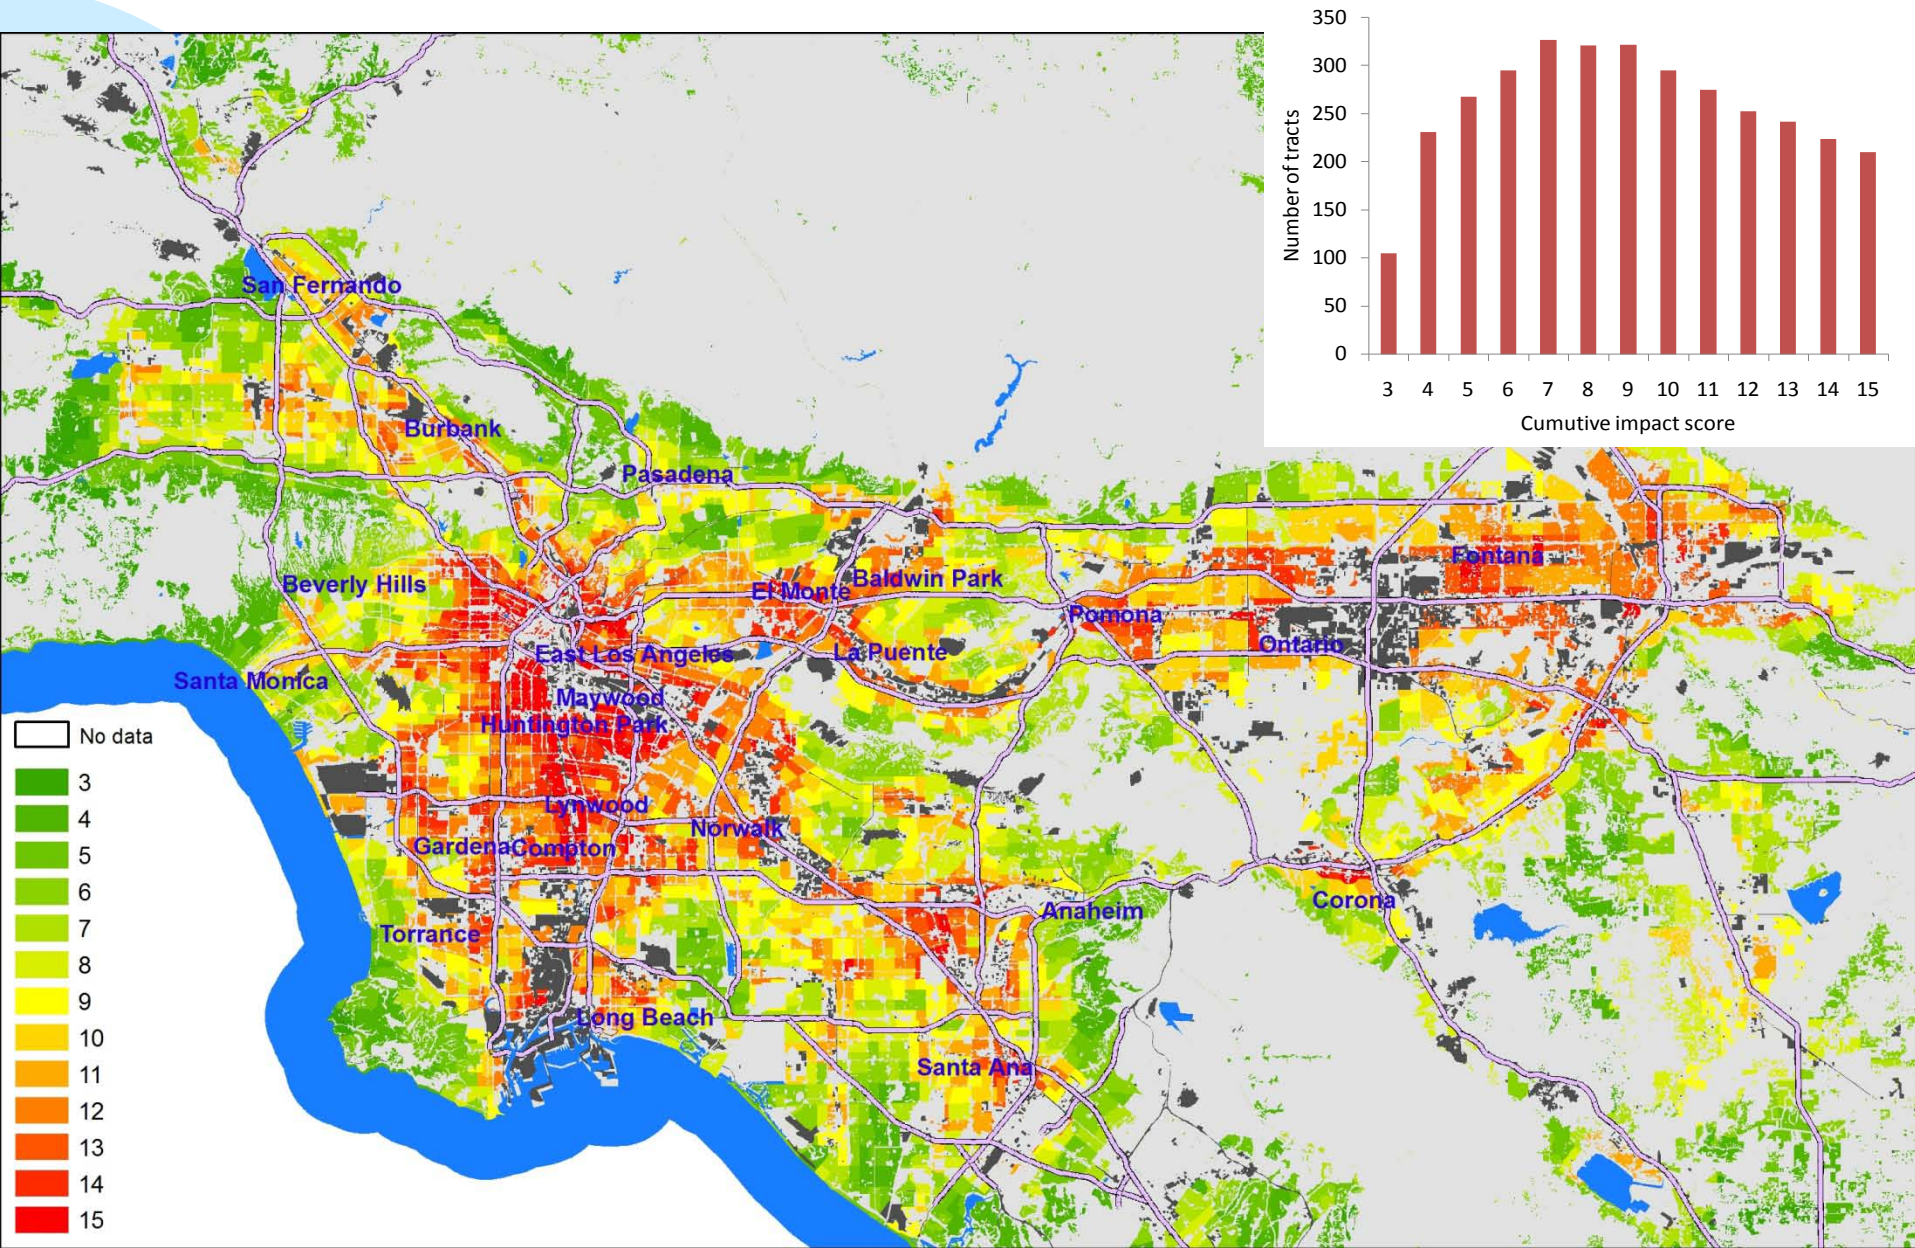

Important Caveats

- Method was developed with specific reference to air quality and does not screen for other concerns (such as water quality or pesticides)
- Performs best with well-classified, high spatial resolution land use data
 - Currently experimenting with other data types to apply the Screening Method more widely
- This is screening not assessment, so neighborhood monitoring and ground truth verification is needed.



Potential Contributions

- Screening provides a way to examine the geographic pattern of cumulative impact and vulnerability
 - Can be used to highlight communities of potential regulatory concern
 - Our approach is transparent and all metrics come from publicly available data, so it is not too difficult to implement & update
 - Open to modification by sophisticated users (change weights, indicators, scoring approaches)

