

US EPA ARCHIVE DOCUMENT

Proposed
Total Maximum Daily Loads
for
Nutrients
in
Tomoka River
WBID 2634A
June 2012



TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
2.0	PROBLEM DEFINITION	1
3.0	WATERSHED DESCRIPTION	2
3.1	CLIMATE	3
3.2	HYDROLOGIC CHARACTERISTICS	3
3.3	LAND USE	3
4.0	4. WATER QUALITY STANDARDS/TMDL TARGETS.....	7
4.1.	NUTRIENTS:.....	7
4.1.1	<i>Narrative Nutrient Criteria.....</i>	<i>8</i>
4.1.2	<i>Florida's adopted numeric nutrient criteria for streams</i>	<i>8</i>
4.2.	DISSOLVED OXYGEN CRITERIA:	9
4.3.	NATURAL CONDITIONS	10
4.4	BIOCHEMICAL OXYGEN DEMAND CRITERIA	10
5.0	WATER QUALITY ASSESSMENT.....	10
5.1	WATER QUALITY DATA	10
5.1.1	<i>Dissolved Oxygen</i>	<i>11</i>
5.1.2	<i>Biochemical Oxygen Demand.....</i>	<i>11</i>
5.1.3	<i>Nutrients</i>	<i>11</i>
5.1.3.1	Total Nitrogen	11
5.1.3.2	Total Phosphorus.....	12
5.1.3.3	Chlorophyll-a	12
6.0	SOURCE AND LOAD ASSESSMENT.....	17
6.1	POINT SOURCES	17
6.1.1	<i>Wastewater/Industrial Permitted Facilities</i>	<i>17</i>
6.1.2	<i>Stormwater Permitted Facilities/MS4s</i>	<i>18</i>
6.2	NONPOINT SOURCES	19
6.2.1	<i>Urban Areas.....</i>	<i>19</i>
6.2.2	<i>Pastures</i>	<i>21</i>
6.2.3	<i>Clear cut/Sparse</i>	<i>21</i>
6.2.4	<i>Forests</i>	<i>21</i>
6.2.5	<i>Water and Wetlands.....</i>	<i>21</i>
6.2.6	<i>Quarries/Strip mines.....</i>	<i>21</i>
7.0	ANALYTICAL APPROACH	21
7.1	MECHANISTIC MODELS.....	22

7.1.1 Loading Simulation Program C++ (LSPC)..... 22

7.1.2 Environmental Fluids Dynamic Code (EFDC)..... 23

7.1.3 Water Quality Analysis Simulation Program (WASP7)..... 24

7.1.4 Tomoka River Mechanistic Model 24

7.2 SCENARIOS..... 26

7.2.1 Current Condition..... 26

7.2.2 Natural Condition..... 33

8.0 TMDL DETERMINATION..... 40

8.1 CRITICAL CONDITIONS AND SEASONAL VARIATION 40

8.2 MARGIN OF SAFETY 41

8.3 WASTE LOAD ALLOCATIONS 41

8.3.1 Wastewater/Industrial Permitted Facilities 41

8.3.2 Municipal Separate Storm Sewer System Permits 41

8.4 LOAD ALLOCATIONS..... 42

9.0 RECOMMENDATIONS/IMPLEMENTATION..... 42

10.0 REFERENCES..... 43

US EPA ARCHIVE DOCUMENT

LIST OF FIGURES

Figure 2.1	Location of the impaired WBID in the Upper East Coast basin.....	2
Figure 3.1	Land use for the impaired WBID in the Upper East Coast basin	4
Figure 3.2	Aerial photograph showing contributing subwatersheds and impaired WBID boundary	6
Figure 5.1	Water quality monitoring station locations for impaired WBID 2634A in the Tomoka River basin.....	14
Figure 5.2	Dissolved oxygen concentrations for WBID 2634A	15
Figure 5.3	Biochemical oxygen demand concentrations for WBID 2634A.....	15
Figure 5.4	Total nitrogen concentrations for WBID 2634A	16
Figure 5.5	Total phosphorus concentrations for WBID 2634A	16
Figure 5.6	Corrected chlorophyll a concentrations for WBID 2634A	17
Figure 7.1	LSPC subwatershed boundaries and WASP model grid for the Tomoka River basin.....	25
Figure 7.2	Simulated temperature verse measured temperature in the TomokaRiver basin at station 21FLA 27010023	26
Figure 7.3	Simulated temperature verse measured temperature in the Tomoka River basin at station 21FLSJWM 27010024.....	27
Figure 7.4	Simulated temperature verse measured temperature in the Tomoka River basin at station 21FLVEMDVC-076.....	27
Figure 7.5	Simulated dissolved oxygen verse measured dissolved oxygen in the Tomoka River basin at station 21FLA 27010023	28
Figure 7.6	Simulated dissolved oxygen verse measured dissolved oxygen in the Tomoka River basin at station 21FLSJWM 27010024.....	28
Figure 7.7	Simulated dissolved oxygen verse measured dissolved oxygen in the Tomoka River basin at station 21FLVEMDVC-076	29
Figure 7.8	Simulated total nitrogen verse measured total nitrogen in the Tomoka River basin at station 21FLA 27010023	29
Figure 7.9	Simulated total nitrogen verse measured total nitrogen in the Tomoka River basin at station 21FLSJWM 27010024	30
Figure 7.10	Simulated total nitrogen verse measured total nitrogen in the Tomoka River basin at station 21FLVEMDVC-076.....	30
Figure 7.11	Simulated total phosphorus verse measured total phosphorus in the Tomoka River basin at station 21FLA 27010023	31
Figure 7.12	Simulated total phosphorus verse measured total phosphorus in the Tomoka River basin at station 21FLSJWM 27010024.....	31
Figure 7.13	Simulated total phosphorus verse measured total phosphorus in the Tomoka River basin at station 21FLVEMDVC-076	32

Figure 7.14 Natural condition temperature in the Tomoka River basin at existing calibration water quality station 21FLA 27010023 33

Figure 7.15 Natural condition temperature in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024 34

Figure 7.16 Natural condition temperature in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076..... 34

Figure 7.17 Natural condition dissolved oxygen in the Tomoka River basin at existing calibration water quality station 21FLA 27010023 35

Figure 7.18 Natural condition dissolved oxygen in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024 35

Figure 7.19 Natural condition dissolved oxygen in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076..... 36

Figure 7.20 Natural condition total nitrogen in the Tomoka River basin at existing calibration water quality station 21FLA 27010023 36

Figure 7.21 Natural condition total nitrogen in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024 37

Figure 7.22 Natural condition total nitrogen in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076..... 37

Figure 7.23 Natural condition total phosphorus in the Tomoka River basin at existing calibration water quality station 21FLA 27010023 38

Figure 7.24 Natural condition total phosphorus in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024 38

Figure 7.25 Natural condition total phosphorus in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076..... 39

US EPA ARCHIVE DOCUMENT

LIST OF TABLES

Table 3.1	Land use distribution for WBID 2634A in the Tomoka River basin.....	5
Table 3.2	Land use distribution for contributing subwatersheds in the Tomoka River basin.....	6
Table 5.1	Water quality stations in WBID2634A.....	12
Table 5.2	Water quality data for WBID2634A.....	13
Table 6.1	County estimates of Septic Tanks and Repair Permits.	20
Table 7.1	Current condition concentrations in WBID 2634,Tomoka River	32
Table 7.2	Current condition loadings in WBID 2634,Tomoka River.....	32
Table 7.3	Natural condition concentrations in WBID 2634,Tomoka River	39
Table 7.4	Natural condition loadings in WBID 2634,Tomoka River	39
Table 8.1	TMDL Load Allocations for the Tomoka River, WBID 2634A	40

SUMMARY SHEET for WBID 2634A**Total Maximum Daily Load (TMDL)****2009 303(d) Listed Waterbodies for TMDLs addressed in this report:**

WBID	Segment Name	Class and Waterbody Type	Major River Basin	HUC	County	State
2634A	Tomoka River	Class III Marine	Upper East Coast	3080201	Volusia	Florida

TMDL Endpoints/Targets:

Nutrients

TMDL Technical Approach:

The TMDL allocations were determined by analyzing TN and TP concentrations and loads in the waterbody. A watershed model and estuary model were used to predict delivery of pollutant loads to the waterbody and to evaluate the in-stream impacts of the pollutant loads.

TMDL Waste Load and Load Allocation

Constituent	Current Condition WLA (kg/yr)	Current Condition LA (kg/yr)	TMDL Condition WLA (kg/yr)	TMDL Condition LA (kg/yr)	Percent reduction WLA	Percent Reduction LA
Total Nitrogen	--	236,392	--	123,423	--	48%
Total Phosphorus	--	15,160	--	4,776	--	68%

Endangered Species Present (Yes or Blank): Yes**USEPA Lead TMDL (USEPA or Blank):** USEPA**TMDL Considers Point Source, Non-point Source, or Both:** Non-point**Major NPDES Discharges to surface waters addressed in USEPA TMDL:** None

1.0 INTRODUCTION

Section 303(d) of the Clean Water Act requires each state to list those waters within its boundaries for which technology based effluent limitations are not stringent enough to protect any water quality standard applicable to such waters. Listed waters are prioritized with respect to designated use classifications and the severity of pollution. In accordance with this prioritization, states are required to develop Total Maximum Daily Loads (TMDLs) for those water bodies that are not meeting water quality standards. The TMDL process establishes the allowable loadings of pollutants or other quantifiable parameters for a waterbody based on the relationship between pollution sources and in-stream water quality conditions, so that states can establish water quality based controls to reduce pollution from both point and nonpoint sources and restore and maintain the quality of their water resources (USEPA 1991).

The Florida Department of Environmental Protection (FDEP) developed a statewide, watershed-based approach to water resource management. Under the watershed management approach, water resources are managed on the basis of natural boundaries, such as river basins, rather than political boundaries. The watershed management approach is the framework FDEP uses for implementing TMDLs. The state's 52 basins are divided into five groups and water quality is assessed in each group on a rotating five-year cycle. FDEP also established five water management districts (WMD) responsible for managing ground and surface water supplies in the counties encompassing the districts.

For the purpose of planning and management, the WMDs divided the district into planning units defined as either an individual primary tributary basin or a group of adjacent primary tributary basins with similar characteristics. These planning units contain smaller, hydrological based units called drainage basins, which are further divided by FDEP into "water segments". A water segment usually contains only one unique waterbody type (stream, lake, canal, etc.) and is about 5 square miles. Unique numbers or waterbody identification (WBID) numbers are assigned to each water segment. The waterbody addressed in this report is WBID 2634A, located within the Upper East Coast watershed and managed by the St. Johns River Water Management District (SJRWMD). The WBID is a Group 5 waterbody and is part of the Halifax River Planning Unit.

2.0 PROBLEM DEFINITION

To determine the status of surface water quality in Florida, three categories of data – chemistry data, biological data, and fish consumption advisories – were evaluated to determine potential impairments. The level of impairment is defined in the Identification of Impaired Surface Waters Rule (IWR), Section 62-303 of the Florida Administrative Code (FAC). The IWR is FDEP's methodology for determining whether waters should be included on the state's planning list and verified list. Potential impairments are determined by assessing whether a waterbody meets the criteria for inclusion on the planning list. Once a waterbody is on the planning list, additional data and information will be collected and examined to determine if the water should be included on the verified list.

The TMDLs addressed in this document are being established pursuant to commitments made by the United States Environmental Protection Agency (USEPA) in the 1998 Consent Decree in the Florida TMDL lawsuit (Florida Wildlife Federation, et al. v. Carol Browner, et al., Civil Action No. 4: 98CV356-WS, 1998). That Consent Decree established a schedule for TMDL development for waters listed on Florida's USEPA approved 1998 section 303(d) list. The 2009 section 303(d) list identified numerous WBIDs in the Upper East Coast Basin as not meeting WQS. After assessing all readily available water quality data, USEPA is responsible for developing a TMDL for WBID 2634A, depicted in Figure 2.1.

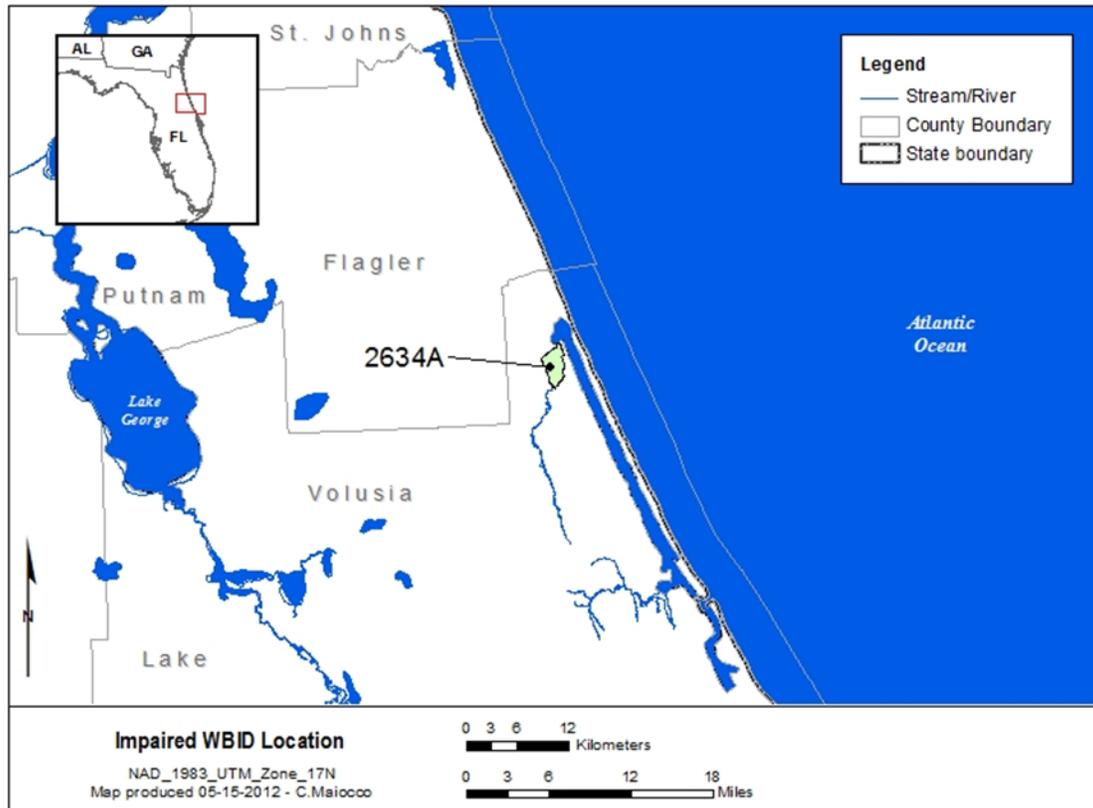


Figure 2.1 Location of the impaired WBID in the Upper East Coast basin.

3.0 WATERSHED DESCRIPTION

The Upper East Coast Watershed is located along the northeastern coast of Florida between St. Augustine and Jacksonville, and includes portions of the Atlantic Intracoastal Waterway (AICW). The size of the basin is approximately 467,195 acres (SJRWMD 2003), and is characterized by coastal lagoons, tidal flats, shallow bays, and numerous creeks. It is also the northernmost extent of mangrove habitat along the east coast (FDEP). Though separated from the ocean by barrier islands, all eventually drain to the Atlantic via one of three inlets; St. Augustine, Matanzas, and Ponce de Leon (FDEP 2005, SJRWMD 2003).

The watershed is composed of four Planning Units (PUs); the Tolomato River Planning Unit, the Matanzas River Planning Unit, the Pellicer Creek Planning Unit, and the Halifax River Planning Unit (SJRWMD 2003). The Halifax River Planning Unit covers approximately 208,000 acres between Flagler and Volusia counties, and encompasses the cities of Daytona Beach and Ormond Beach (FDEP 2005, SJRWMD 2003). Development is relatively dense on either side of the Halifax River. Circulation within the waterbody is minimal, limited either by six causeways, or because most circulation is tidal and/or wind-driven which tends to be limited to areas close to inlets (FDEP 2005).

The Tomoka River, located in Volusia County, originates in wetlands southwest of Daytona Beach and flows north until it turns northeast and enters the Halifax River north of Ormond Beach. The Tomoka River was divided into a freshwater and a marine segment. This TMDL addresses the marine portion of the Tomoka River. The freshwater segment of the Tomoka River is approximately 13.6 miles long with a watershed area of approximately 30 square miles, while the marine segment extends for approximately 4.2 miles and enters the northern end of the Halifax River. Most of the Tomoka River's marine watershed's 3.3 square miles is located east of U.S. Highway 1.

3.1 Climate

The Tomoka River Basin is located in Northeastern Florida and experiences a subtropical climate with hot, humid summers and mild, short winters. Temperatures in the summer can reach the low 90s (°F), and in the winter reach the low 40s (°F) (NWS 2009). An average of 53 inches of rain every year is received in northeast Florida, of which a greater percentage falls during the wet season (May to October), coinciding with hurricane season (NWS 2009).

3.2 Hydrologic characteristics

The headwaters of the Tomoka River originate just west of Daytona and flow north before turning north-northwest just past State Road 40, passing through the city of Ormond Beach. At the confluence of the Tomoka and Halifax Rivers is the Tomoka Basin, an area of marshland and mosquito impoundments that have not been actively managed since the late 1980s (FDEP 2005). An artificial channel connects the Halifax River to the Mantanzas River estuary via the AICW in the north, and to the Atlantic Ocean via the Ponce de Leon Inlet to the south (FDEP 2005). The Tomoka River, the Tomoka Marsh Aquatic Preserve, and the waters within the State Park, are all designated as 'Outstanding Florida Waters' (OFWs), and serve as important protected manatee sanctuaries, as well as nursery grounds and habitat for ecologically significant wildlife (FDEP 2005, 2012).

3.3 Land Use

Land use in WBID 2634A consists mainly of forested and non-forested wetlands, which comprises 51 percent of the total land use (Figure 3.1 and Table 3.1). A majority of the wetlands, as well as the combined forested areas, are located within both the Tomoka State Park and the Addison Blockhouse Historic State Park. Developed land use accounts for 20 percent of the total land use, and the majority of the developed land is classified as medium intensity development.

The actual drainage area for the Tomoka River varies from the WBID boundary (Figure 3.2 and Table 3.2). The United States Geological Survey National Hydrography Dataset was used to delineate the drainage area. Acreage and land use varied considerably between the drainage area and the WBID boundary. The drainage area is approximately 117,000 acres, although the distribution of land use did not vary greatly. The percentage of developed land is approximately 22 percent, and the majority of the developed land is classified as high intensity developments. Approximately 28 percent of the contributing subwatersheds are classified as forested and 24 percent as classified as wetlands.

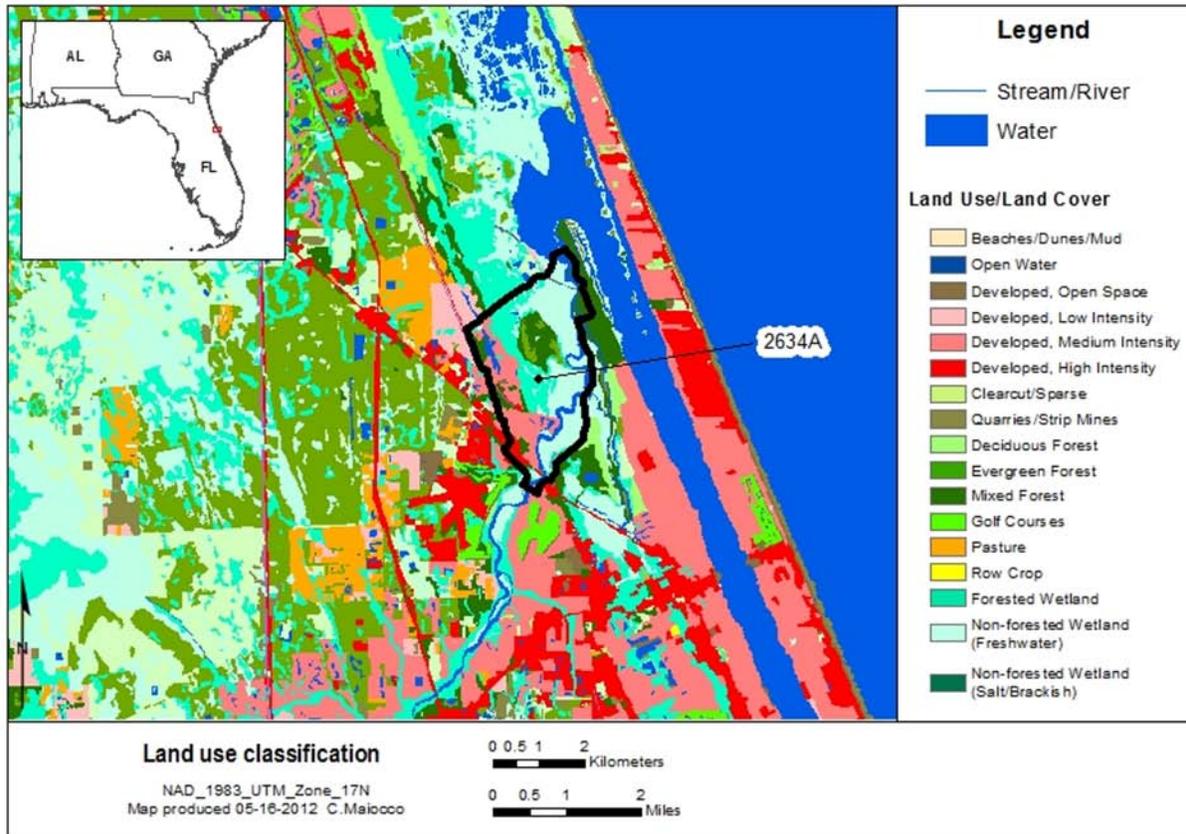


Figure 3.1 Land use for the impaired WBID in the Upper East Coast basin

Table 3.1 Land use distribution for WBID 2634A in the Tomoka River basin

Land Use Classification	WBID 2634A	
	Acres	%
Evergreen Forest	55	3
Deciduous Forest	12	1
Mixed Forest	304	15
Forested Wetland	376	18
Non-Forested Wetland (Freshwater)	692	33
Open Water	221	11
Pasture	0	0
Row Crop	0	0
Clear cut Sparse	0	0
Quarries Strip mines	8	0
Utility Swaths	7	0
Developed, Open Space	5	0
Developed, Low intensity	7	0
Developed, Medium intensity	352	17
Developed, High intensity	52	2
Golf Courses	0	0
Totals	2,091	100

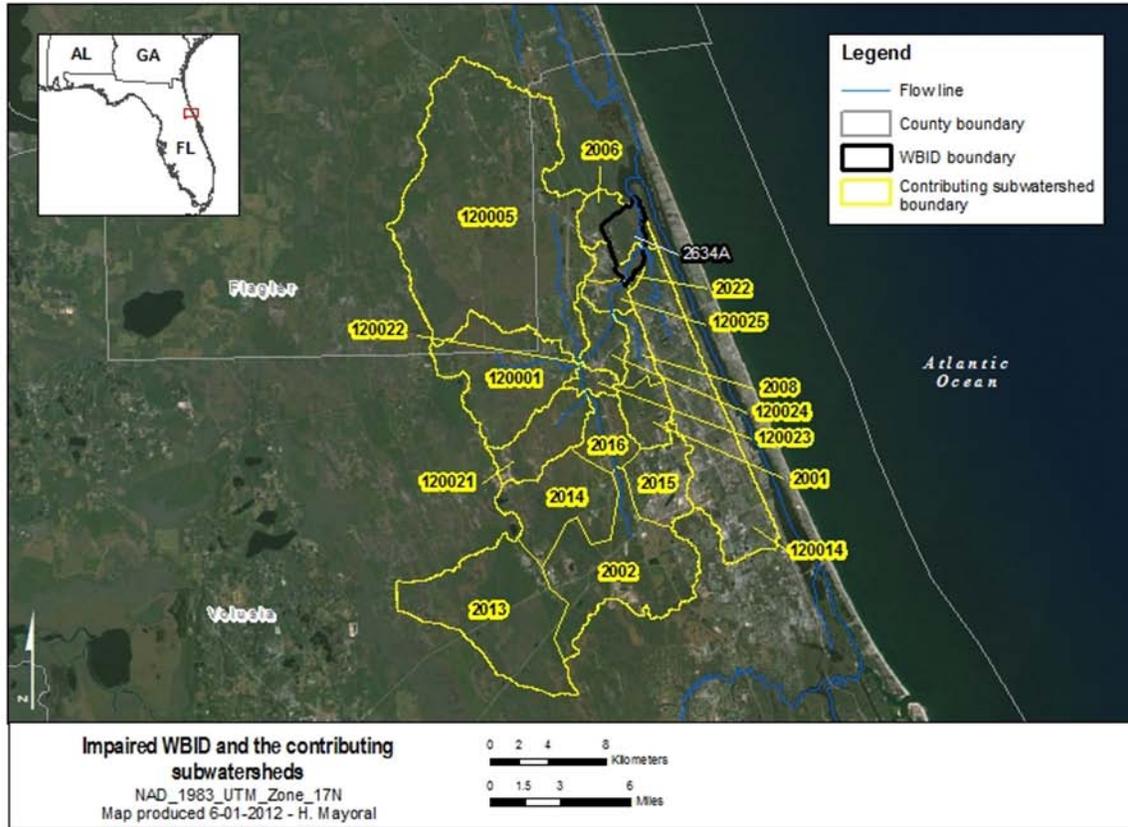


Figure 3.2 Aerial photograph showing contributing subwatersheds and impaired WBID boundary

Table 3.2 Land use distribution for contributing subwatersheds in the Tomoka River basin

Land Use Classification	Contributing subwatersheds	
	Acres	%
Evergreen Forest	30,096	26%
Deciduous Forest	308	0%
Mixed Forest	2,623	2%
Forested Wetland	24,242	21%
Non-Forested Wetland (Freshwater)	15,281	13%
Open Water	2,356	2%
Pasture	3,569	3%
Row Crop	225	0%

Land Use Classification	Contributing subwatersheds	
	Acres	%
Clear cut Sparse	8,672	7%
Quarries Strip mines	1,339	1%
Utility Swaths	777	1%
Developed, Open Space	1,330	1%
Developed, Low intensity	1,935	2%
Developed, Medium intensity	9,502	8%
Developed, High intensity	13,129	11%
Golf Courses	1,613	1%
Totals	116,997	100%

4.0 4. WATER QUALITY STANDARDS/TMDL TARGETS

The waterbodies in the Pithlachascotee River WBID are Class III Freshwater with a designated use of Recreation, Propagation and Maintenance of a Healthy, Well-Balanced Population of Fish and Wildlife. Designated use classifications are described in Florida's water quality standards. See Section 62-302.400, F.A.C. Water quality criteria for protection of all classes of waters are established in Section 62-302.530, F.A.C. Individual criteria should be considered in conjunction with other provisions in water quality standards, including Section 62-302.500 F.A.C., which established minimum criteria that apply to all waters unless alternative criteria are specified. Section 62-302.530, F.A.C. Several of the WBIDs addressed in this report were listed due to elevated concentrations of chlorophyll *a*. While FDEP does not have a streams water quality standard specifically for chlorophyll *a*, elevated levels of chlorophyll *a* are frequently associated with a violation of the narrative nutrient standard, which is described below.

4.1. *Nutrients:*

The designated use of Class III waters is recreation, propagation and maintenance of a healthy, well-balanced population of fish and wildlife. In 1979, FDEP adopted a narrative criterion for

nutrients. FDEP recently adopted numeric nutrient criteria for many Class III waters in the state, including streams, which numerically interprets part of the state narrative criterion for nutrients. While those criteria have been submitted to EPA for review pursuant to section 303(c) of the CWA, EPA has not completed that review. Therefore, for streams in Florida, the applicable nutrient water quality standard for CWA purposes remains the Class III narrative criterion.

As set out more fully below, should any new or revised state criteria for nutrients in streams in Florida become applicable for CWA purposes before this proposed TMDL is established, EPA will consider the impact of such criteria on the target selected for this TMDL.

Also, in November 2010, EPA promulgated numeric nutrient criteria for Class III inland waters in Florida, including streams. On February 18, 2012, the streams criteria were invalidated by the U.S. District Court for the Northern District of Florida and remanded back to EPA. Should a federally promulgated criteria become effective for CWA purposes before this proposed TMDL is established, EPA will consider the impact of such criteria on the target selected for this TMDL.

4.1.1 Narrative Nutrient Criteria

Florida's narrative nutrient criteria provides:

The discharge of nutrients shall continue to be limited as needed to prevent violations of other standards contained in this chapter. Man induced nutrient enrichment (total nitrogen and total phosphorus) shall be considered degradation in relation to the provisions of Sections 62-302.300, 62-302.700, and 62-4.242. Section 62-302.530(48)(a), F.A.C.

In no case shall nutrient concentrations of a body of water be altered so as to cause an imbalance in natural populations of aquatic flora or fauna. Section 62-302.530(48)(b), F.A.C.

Chlorophyll and dissolved oxygen (DO) levels are often used to indicate whether nutrients are present in excessive amounts. The target for this TMDL is based on levels of nutrients necessary to prevent violations of Florida's DO criterion, set out below.

4.1.2 Florida's adopted numeric nutrient criteria for streams

Florida's recently adopted numeric nutrient criteria interprets the narrative water quality criterion for nutrients in paragraph 62-302.530(48)(b), F.A.C. See section 62-302.531(2). The Florida rule provides that the narrative water quality criteria for nutrients in paragraph 62-302.530(47)(a), F.A.C., continues to apply to all Class III waters. See section 62-302.531(1).

Florida's recently adopted rule applies to streams, including (WBID in TMDL). For streams that do not have a site specific criteria, Florida's rule provides for biological information to be considered together with nutrient thresholds to determine whether a waterbody is attaining 62-302.531(2)(c), F.A.C. The rule provides that the nutrient criteria are attained in a stream segment where information on chlorophyll a levels, algal mats or blooms, nuisance macrophyte

growth, and changes in algal species composition indicates there are no imbalances in flora and either the average score of at least two temporally independent SCIs performed at representative locations and times is 40 or higher, with neither of the two most recent SCI scores less than 35, or the nutrient thresholds set forth in table [##] below are achieved. See section 62-302.531(2)(c).

Florida's rule provides that numeric nutrient criteria are expressed as a geometric mean, and concentrations are not to be exceeded more than once in any three calendar year period. Section 62-302.200 (25)(e), F.A.C.

Should FDEP's numeric nutrient criteria for streams become an applicable water quality standard for CWA purposes before this TMDL is established, EPA will consider the nutrient target necessary to attain section 62-302.531(2)(c), F.A.C. EPA will compare that target with the target necessary to attain paragraph 62-302.530(47)(a), F.A.C., to determine which target is more stringent.

Table 4.1 Inland numeric nutrient criteria

Nutrient Watershed Region	Total Phosphorus Nutrient Threshold	Total Nitrogen Nutrient Threshold
Panhandle West	0.06 mg/L	0.67 mg/L
Panhandle East	0.18 mg/L	1.03 mg/L
North Central	0.30 mg/L	1.87 mg/L
Peninsular	0.12 mg/L	1.54 mg/L
West Central	0.49 mg/L	1.65 mg/L
South Florida	No numeric nutrient threshold. The narrative criterion in paragraph 62-302.530(47)(b), F.A.C., applies.	No numeric nutrient threshold. The narrative criterion in paragraph 62-302.530(47)(b), F.A.C., applies.

4.2. Dissolved Oxygen Criteria:

Numeric criteria for DO are expressed in terms of minimum and daily average concentrations. Section 62-302(30), F.A.C., sets out the water quality criterion for the protection of Class III freshwater waters as:

Shall not be less than 5.0 mg/l. Normal daily and seasonal fluctuations above these levels shall be maintained.

4.3. Natural Conditions

In addition to the standards for nutrients, DO and BOD described above, Florida's standards include provisions that address waterbodies which do not meet the standards due to natural background conditions.

Florida's water quality standards provide a definition of natural background:

“Natural Background” shall mean the condition of waters in the absence of man-induced alterations based on the best scientific information available to the Department. The establishment of natural background for an altered waterbody may be based upon a similar unaltered waterbody or on historical pre-alteration data. 62-302.200(15), FAC.

Florida's water quality standards also provide that:

Pollution which causes or contributes to new violations of water quality standards or to continuation of existing violations is harmful to the waters of this State and shall not be allowed. Waters having water quality below the criteria established for them shall be protected and enhanced. However, the Department shall not strive to abate natural conditions. 62-302.300(15) FAC

4.4 Biochemical Oxygen Demand Criteria

Biochemical Oxygen Demand (BOD) shall not be increased to exceed values which would cause dissolved oxygen to be depressed below the limit established for each class and, in no case, shall it be great enough to produce nuisance conditions. [FAC 62-302.530 (11)]

5.0 WATER QUALITY ASSESSMENT

The WBID addressed in this report was listed as not attaining their designated use on Florida's 2009 303(d) list for dissolved oxygen and nutrients. To determine impairment, an assessment of available data was conducted. The source for current ambient monitoring data was the Impaired Waters Rule (IWR) data Run 44, using data ranging January 1, 2002 to December 31, 2010. The IWR database contains data from various sources within the state of Florida, including the WMDs and counties.

5.1 Water Quality Data

A complete list of water quality monitoring stations in WBID 2634A are listed in Table 5.1, and an analysis of water quality data is documented in Table 5.2. Figure 5.1 shows the locations of the water quality monitoring stations within the WBID. Water quality data for the WBID can be found below in Figure 5.2 through Figure 5.6, with the data from all water quality stations compiled in each figure.

5.1.1 Dissolved Oxygen

There are several factors that affect the concentration of dissolved oxygen (DO) in a waterbody. Oxygen can be introduced by wind, diffusion, photosynthesis, and additions of higher DO water (e.g. from tributaries). DO concentrations are lowered by processes that use up oxygen from the water, such as respiration and decomposition, and by additions of water with lower DO (e.g. swamp or groundwater). Natural DO levels are a function of water temperature, water depth and velocity, and relative contributions of groundwater. Decomposition of organic matter, such as dead plants and animals, also consume DO. The measured dissolved oxygen minimum concentration in WBID 2634A was 0.60 mg/L, while the maximum concentration was 11.10 mg/L. The mean concentration was 5.51 mg/L.

5.1.2 Biochemical Oxygen Demand

BOD is a measure of the amount of oxygen used by bacteria as they stabilize organic matter. The process can be accelerated when there is an overabundance of nutrients, increasing the aerobic bacterial activity in a waterbody. In turn, the levels of DO can become depleted, eliminating oxygen essential for biotic survival, and potentially causing extensive fish kills. Additionally, BOD is used as an indicator to determine the presence and magnitude of organic pollution from sources such as septic tank leakage, fertilizer runoff, and wastewater effluent. The mean BOD concentration for WBID 2634 was 1.82 mg/L. The maximum measured concentration was 3.0 mg/L and the minimum measured concentration was 0.85 mg/L.

5.1.3 Nutrients

Excessive nutrients in a waterbody can lead to overgrowth of algae and other aquatic plants such as phytoplankton, periphyton and macrophytes. This process can deplete oxygen in the water, adversely affecting aquatic life and potentially restricting recreational uses such as fishing and boating. For the nutrient assessment the monitoring data for total nitrogen, total phosphorus and chlorophyll a are presented. The current standards for nutrients are narrative criteria. The purpose of the nutrient assessment is to present the range, variability and average conditions for the WBID.

5.1.3.1 Total Nitrogen

Total Nitrogen (TN) is comprised of nitrate (NO₃), nitrite (NO₂), organic nitrogen and ammonia nitrogen (NH₄). Though nitrogen is a necessary nutrient required for the growth of most plants and animals, not all forms are readily used or metabolized. Increased levels of organic nitrogen can occur from the decomposition of aquatic life or from sewage, while inorganic forms are generally from erosion and fertilizers. Nitrates are components of industrial fertilizers, yet can also be naturally present in soil, and are converted to nitrite by microorganisms in the environment. Surface runoff from agricultural lands can increase the natural presence of nitrates in the environment and can lead to eutrophication. The total nitrogen minimum concentration was 0.39 mg/L, and the maximum concentration was 2.87 mg/L. The mean concentration of total nitrogen in WBID 2634A was 1.10 mg/L.

5.1.3.2 Total Phosphorus

In natural waters, total phosphorus exists in either soluble or particulate forms. Dissolved phosphorus includes inorganic and organic forms, while particulate phosphorus is made up of living and dead plankton, and adsorbed, amorphous, and precipitated forms. Inorganic forms of phosphorus include orthophosphate and polyphosphates, though polyphosphates are unstable and convert to orthophosphate over time. Orthophosphate is both stable and reactive, making it the form most used by plants. Excessive phosphorus can lead to overgrowth of algae and aquatic plants, the decomposition of which uses up oxygen from the water. The total phosphorus minimum concentration measured was 0.03 mg/L, and the maximum concentration was 0.28 mg/L. The mean total phosphorus concentration was 0.10 mg/L.

5.1.3.3 Chlorophyll-a

Chlorophyll is the green pigment in plants that allows them to create energy from light. In a water sample, chlorophyll is indicative of the presence of algae, and chlorophyll-*a* is a measure of the active portion of total chlorophyll. Corrected chlorophyll refers to chlorophyll-*a* measurements that are corrected for the presence of pheophytin, a natural degradation product of chlorophyll that can interfere with analysis because it has an absorption peak in the same spectral region. It is used as a proxy indicator of water quality because of its predictable response to nutrient availability. Increases in nutrients can potentially lead to blooms in phytoplankton biomass, affecting water quality and ecosystem health. The corrected chlorophyll a maximum concentration was 33.38 µg/L, and the mean concentration was 6.87 µg/L.

Table 5.1 Water quality stations in WBID2634A

WBID	Station Number
2634A	21FLA 27010023
	21FLA 27010024
	21FLA 27010925
	21FLCEN 27010023
	21FLCEN 27010024
	21FLCEN 27010113
	21FLCEN 27010114
	21FLCEN 27010569
	21FLGW 14277
	21FLSJWM27010024
	21FLVEMDVC-075

	21FLVEMDVC-076
--	----------------

Table 5.2 Water quality data for WBID2634A

Parameter	Stats	WBID
		2634A
BOD, 5 Day, 20°C (mg/L)	# of obs	42
	min	0.85
	max	3.00
	mean	1.82
	Geomean	1.76
DO, Analysis by Probe (mg/L)	# of obs	220
	min	0.60
	max	11.10
	mean	5.51
	Geomean	5.11
Nitrogen, Total (mg/L as N)	# of obs	83
	min	0.39
	max	2.87
	mean	1.10
	Geomean	1.04
Phosphorus, Total (mg/L as P)	# of obs	90
	min	0.03
	max	0.28
	mean	0.10
	Geomean	0.09

Parameter	Stats	WBID
		2634A
Chlorophyll-A-corrected (µg/L)	# of obs	119
	min	1.00
	max	33.38
	mean	6.87
	Geomean	5.23

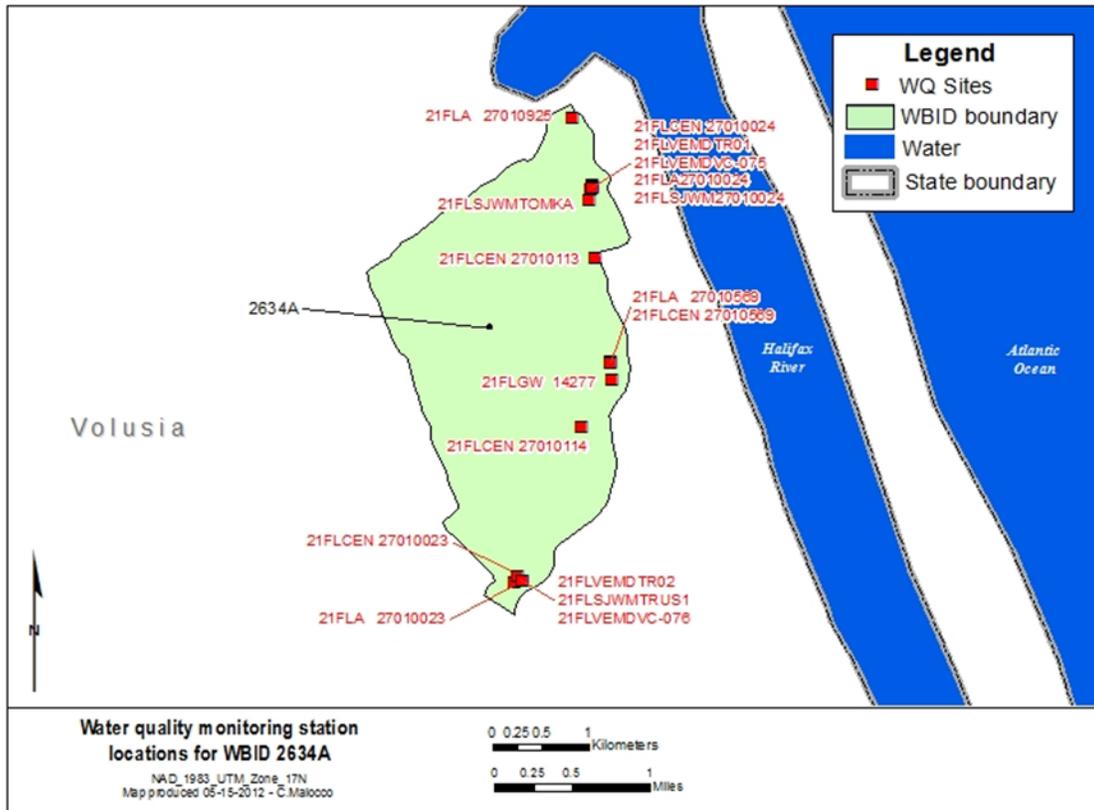


Figure 5.1 Water quality monitoring station locations for impaired WBID 2634A in the Tomoka River basin.

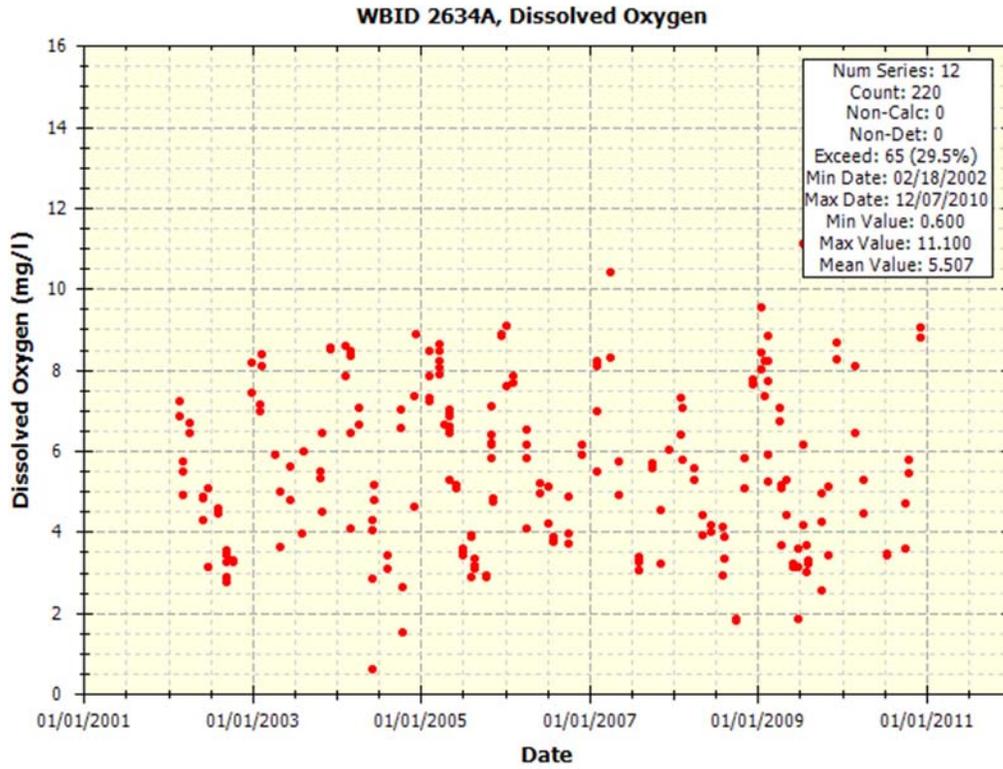


Figure 5.2 Dissolved oxygen concentrations for WBID 2634A

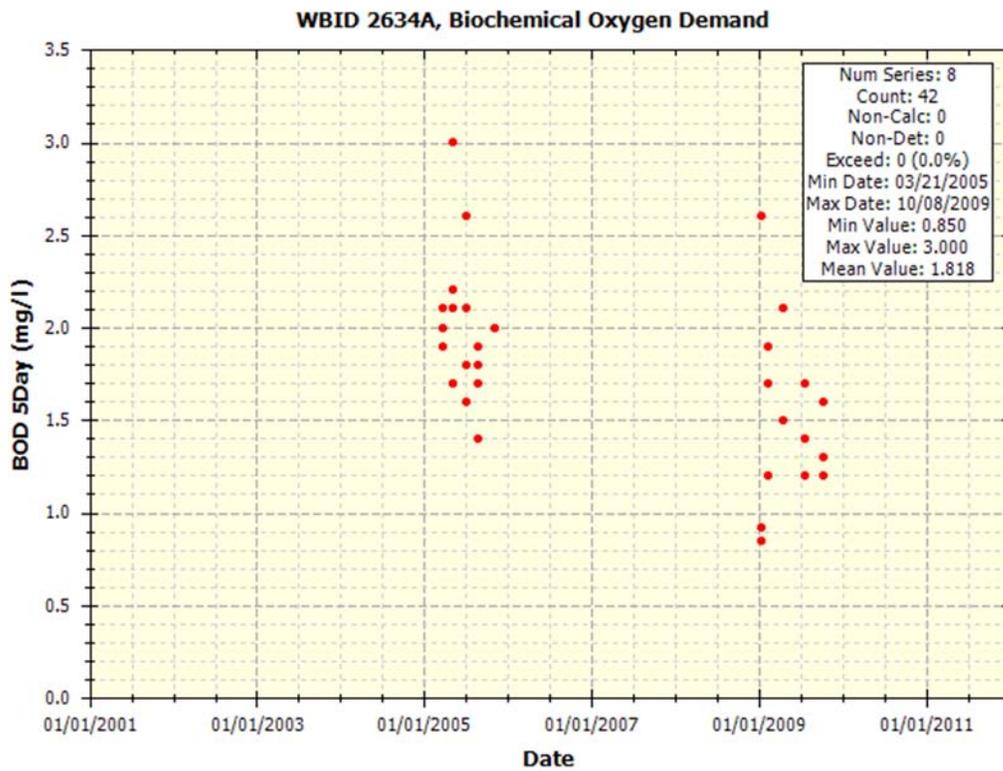


Figure 5.3 Biochemical oxygen demand concentrations for WBID 2634A

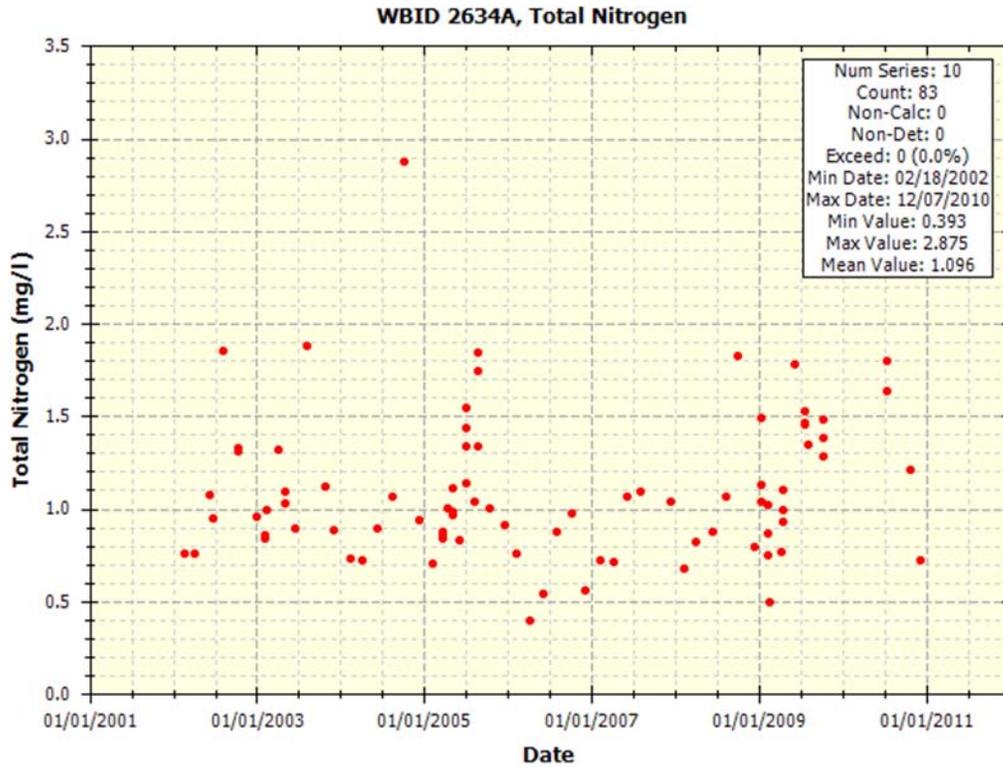


Figure 5.4 Total nitrogen concentrations for WBID 2634A

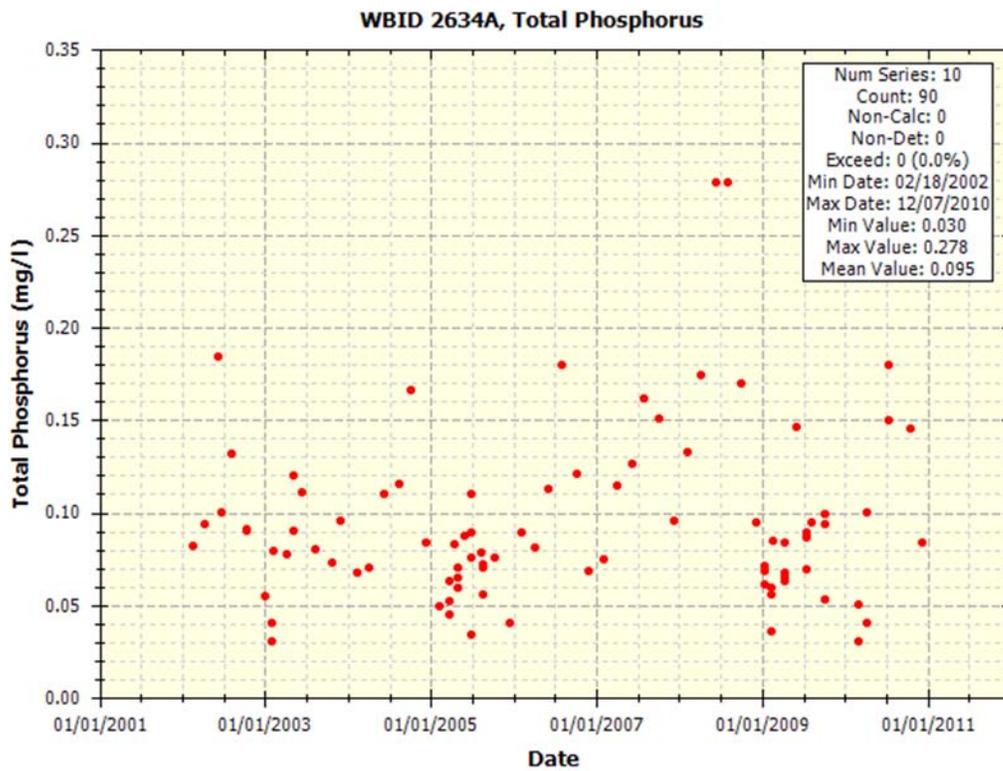


Figure 5.5 Total phosphorus concentrations for WBID 2634A

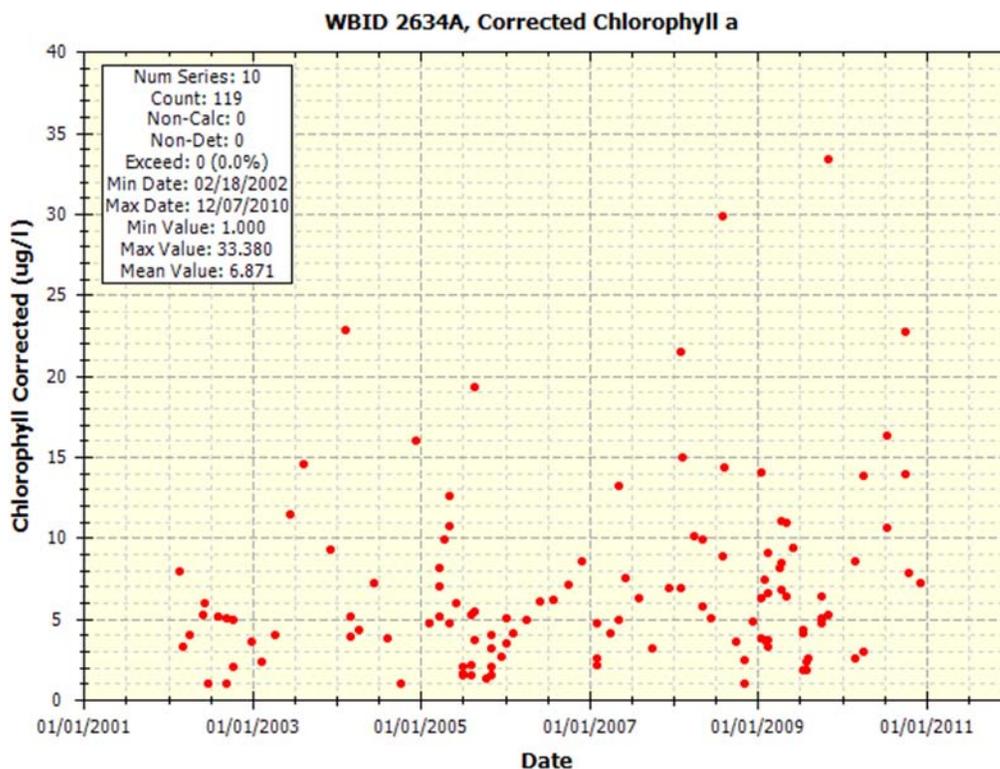


Figure 5.6 Corrected chlorophyll a concentrations for WBID 2634A

6.0 SOURCE AND LOAD ASSESSMENT

An important part of the TMDL analysis is the identification of source categories, source subcategories, or individual sources of pollutants in the watershed and the amount of loading contributed by each of these sources. Sources are broadly classified as either point or nonpoint sources. Nutrients can enter surface waters from both point and nonpoint sources.

6.1 Point Sources

A point source is defined as a discernable, confined, and discrete conveyance from which pollutants are or may be discharged to surface waters. Point source discharges of industrial wastewater and treated sanitary wastewater must be authorized by National Pollutant Discharge Elimination System (NPDES) permits. NPDES permitted discharges include continuous discharges such as wastewater treatment facilities as well as some stormwater driven sources such as municipal separate stormwater sewer systems (MS4s), certain industrial facilities, and construction sites over one acre.

6.1.1 Wastewater/Industrial Permitted Facilities

A TMDL wasteload allocation (WLA) is given to wastewater and industrial NPDES permitted facilities discharging to surface waters within an impaired watershed. There are no NPDES-permitted facilities in WBID 2634A.

6.1.2 Stormwater Permitted Facilities/MS4s

MS4s are point sources also regulated by the NPDES program. According to 40 CFR 122.26(b)(8), an MS4 is “a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains):

- (i) Owned or operated by a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law)...including special districts under State law such as a sewer district, flood control district or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the Clean Water Act that discharges into waters of the United States.
- (ii) Designed or used for collecting or conveying storm water;
- (iii) Which is not a combined sewer; and
- (iv) Which is not part of a Publicly Owned Treatment Works

MS4s may discharge nutrients and other pollutants to waterbodies in response to storm events. In 1990, USEPA developed rules establishing Phase I of the NPDES stormwater program, designed to prevent harmful pollutants from being washed by stormwater runoff into MS4s (or from being dumped directly into the MS4) and then discharged from the MS4 into local waterbodies. Phase I of the program required operators of “medium” and “large” MS4s (those generally serving populations of 100,000 or greater) to implement a stormwater management program as a means to control polluted discharges from MS4s. Approved stormwater management programs for medium and large MS4s are required to address a variety of water quality related issues including roadway runoff management, municipal owned operations, hazardous waste treatment, etc.

Phase II of the rule extends coverage of the NPDES stormwater program to certain “small” MS4s. Small MS4s are defined as any MS4 that is not a medium or large MS4 covered by Phase I of the NPDES stormwater program. Only a select subset of small MS4s, referred to as “regulated small MS4s”, requires an NPDES stormwater permit. Regulated small MS4s are defined as all small MS4s located in “urbanized areas” as defined by the Bureau of the Census, and those small MS4s located outside of “urbanized areas” that are designated by NPDES permitting authorities.

In October 2000, USEPA authorized FDEP to implement the NPDES stormwater program in all areas of Florida except Indian tribal lands. FDEP’s authority to administer the NPDES program is set forth in Section 403.0885, Florida Statutes (FS). The three major components of NPDES stormwater regulations are:

- MS4 permits that are issued to entities that own and operate master stormwater systems, primarily local governments. Permittees are required to implement comprehensive stormwater management programs designed to reduce the discharge of pollutants from the MS4 to the maximum extent practicable.
- Stormwater associated with industrial activities, which is regulated primarily by a multisector general permit that covers various types of industrial facilities. Regulated

industrial facilities must obtain NPDES stormwater permit coverage and implement appropriate pollution prevention techniques to reduce contamination of stormwater.

- Construction activity general permits for projects that ultimately disturb one or more acres of land and which require the implementation of stormwater pollution prevention plans to provide for erosion and sediment control during construction.

Stormwater discharges conveyed through the storm sewer system covered by the permit are subject to the WLA of the TMDL. Any newly designated MS4s will also be required to achieve the percent reduction allocation presented in this TMDL. There is one Phase II C MS4 associated with the impaired WBID, for Volusia County (FLR04E033), which also falls under the District III Florida Department of Transportation permit.

6.2 Nonpoint Sources

Nonpoint sources of pollution are diffuse sources that cannot be identified as entering a waterbody through a discrete conveyance at a single location. For nutrients, these sources include runoff of agricultural fields, golf courses, and lawns, septic tanks, and residential developments outside of MS4 areas. Nonpoint source pollution generally involves a buildup of pollutants on the land surface that wash off during rain events and as such, represent contributions from diffuse sources, rather than from a defined outlet. Potential nonpoint sources are commonly identified, and their loads estimated, based on land cover data. Most methods calculate nonpoint source loadings as the product of the water quality concentration and runoff water volume associated with certain land use practices. The mean concentration of pollutants in the runoff from a storm event is known as the event mean concentration. Figure 3.1 provides a map of the land use, while Table 3.1 lists the land use distribution in the WBID.

The following sections are organized by land use. Each section provides a description of the land use, the typical sources of nutrient loading (if applicable), and typical total nitrogen and total phosphorus event mean concentrations.

6.2.1 Urban Areas

Urban areas include land uses such as residential, industrial, extractive and commercial. Land uses in this category typically have somewhat high total nitrogen event mean concentrations and average total phosphorus event mean concentrations. Nutrient loading from MS4 and non-MS4 urban areas is attributable to multiple sources including stormwater runoff, leaks and overflows from sanitary sewer systems, illicit discharges of sanitary waste, runoff from improper disposal of waste materials, leaking septic systems, and domestic animals.

In 1982, Florida became the first state in the country to implement statewide regulations to address the issue of nonpoint source pollution by requiring new development and redevelopment to treat stormwater before it is discharged. The Stormwater Rule, as outlined in Chapter 403 FS, was established as a technology-based program that relies upon the implementation of Best Management Practices (BMPs) that are designed to achieve a specific level of treatment (i.e., performance standards) as set forth in Chapter 62-40, FAC.

Florida's stormwater program is unique in having a performance standard for older stormwater systems that were built before the implementation of the Stormwater Rule in 1982. This rule states: "the pollutant loading from older stormwater management systems shall be reduced as needed to restore or maintain the beneficial uses of water." [FAC 62-40-.432(2)(c)]

Nonstructural and structural BMPs are an integral part of the State's stormwater programs. Nonstructural BMPs, often referred to as "source controls", are those that can be used to prevent the generation of nonpoint source pollutants or to limit their transport off-site. Typical nonstructural BMPs include public education, land use management, preservation of wetlands and floodplains, and minimization of impervious surfaces. Technology-based structural BMPs are used to mitigate the increased stormwater peak discharge rate, volume, and pollutant loadings that accompany urbanization.

Urban, residential, and commercial developments are likely significant nonpoint sources of nutrients and oxygen-demanding substances in WBID 2634A because a large percentage of the land use is developed. Developed land use from the drainage area for WBID 2634A accounts for 22 percent of the total land use, of which half consists of high-intensity development.

Onsite Sewage Treatment and Disposal Systems (Septic Tanks)

As stated above leaking septic tanks or onsite sewage treatment and disposal systems (OSTDs) can contribute to nutrient loading in urban areas. Water from OSTDs is typically released to the ground through on-site, subsurface drain fields or boreholes that allow the water from the tank to percolate (usually into the surficial aquifers) and either transpire to the atmosphere through surface vegetation or add to the flow of shallow ground water. When properly sited, designed, constructed, maintained, and operated, OSTDs are a safe means of disposing of domestic waste. The effluent from a well-functioning OSTD receives natural biological treatment in the soil and is comparable to secondarily treated wastewater from a sewage treatment plant. When not functioning properly, OSTDs can be a source of nutrients, pathogens, and other pollutants to both ground water and surface water.

The State of Florida Department of Health publishes data on new septic tank installations and the number of septic tank repair permits issued for each county in Florida. Table 6.1 summarizes the cumulative number of septic systems installed in St. Johns County since the 1970 census and the total number of repair permits issued for the ten years between 1999-2000 and 2009-2010 (FDOH 2009). The data do not reflect septic tanks removed from service. Leaking septic systems could be a relevant source of organic and nutrient loading in the watershed.

Table 6.1 County estimates of Septic Tanks and Repair Permits.

County	Number of Septic Tanks (1970-2008)	Number of Repair Permits Issued (2000-2010)
Volusia	98,873	17,032

Note: Source: <http://www.doh.state.fl.us/environment/ostds/statistics/ostdsstatistics.htm>

6.2.2 Pastures

Pastures include cropland and improved and unimproved pasturelands, such as non-tilled grasses woodland pastures, feeding operations, nurseries and vineyards; as well as specialty farms. Agricultural activities, including runoff of fertilizers or animal wastes from pasture and cropland and direct animal access to streams, can generate nutrient loading to streams. High total nitrogen and total phosphorus event mean concentrations are associated with agricultural land uses. Pastures from contributing subwatersheds account for a small portion of land use, less than 3 percent of total land use is classified as pastures.

6.2.3 Clear cut/Sparse

The clear cut/sparse land use classification includes recent clear cuts, areas of sparse vegetation or herbaceous dry prairie, shrub and brushland, other early successional areas, and mixed rangeland. Event mean concentrations for clear cut/sparse are typically low for total nitrogen and total phosphorus. Clear cut/sparse consists of 7 percent of the total land use contributing to WBID 2634A.

6.2.4 Forests

Upland forests include flatwoods, oak, various types of hardwoods, conifers and tree plantations. Wildlife, located within forested areas, deposit their feces onto land surfaces where it can be transported to nearby streams during storm events. Generally, the pollutant load from wildlife is assumed to represent background concentrations. Event mean concentrations for upland forests are low for both total nitrogen and total phosphorus. Combined forested land use is the second largest land use type, and it accounts for 28 percent of the total land use contributing to WBID 2634A.

6.2.5 Water and Wetlands

Water and wetlands often have very low nutrient loadings, although decaying organic matter in wetlands can contribute to high organic nutrient concentrations. Open water accounts for only 2 percent of total land use contributing to WBID 2634A. Forested and non-forested wetlands combined account for the greatest land use classification, accounting for 34 percent of the total land use from contributing subwatersheds.

6.2.6 Quarries/Strip mines

Land use classification includes quarries, strip mines, exposed rock and soil, fill areas, reclaimed lands, and holding ponds. Event mean concentrations for some barren lands can be higher in total nitrogen. Less than one percent of total land use is classified as quarries/strip mines in WBID 2634A.

7.0 ANALYTICAL APPROACH

In the development of a TMDL there needs to be a method for relating current loadings to the observed water quality problem. This relationship could be: statistical (regression for a cause

and effect relationship), empirical (based on observations not necessarily from the waterbody in question) or mechanistic (physically and/or stochastically based) that inherently relate cause and effect using physical and biological relationships.

Mechanistic models were used in the development of the Tomoka River TMDL to relate the physical and biological relationships. A dynamic watershed model was used to predict the quantity of water and pollutants associated with runoff from rain events. The watershed model was linked to a hydrodynamic model that simulated tidal influences in the river. Both models were linked to a water quality simulation model that integrated the loadings and flow from the watershed model with flow from the hydrodynamic model to predict the water quality in the receiving waterbodies.

The period of simulation that was considered in the development of this TMDL is January 1, 2002 to December 31, 2009. The models were used to predict time series for water quality and nutrients. The models were calibrated to current conditions and were then used to predict improvements in water quality as function of reductions in loadings.

7.1 Mechanistic Models

7.1.1 Loading Simulation Program C++ (LSPC)

LSPC is the Loading Simulation Program in C++, a watershed modeling system that includes streamlined Hydrologic Simulation Program Fortran (HSPF) algorithms for simulating hydrology, sediment, and general water quality overland as well as a simplified stream fate and transport model. LSPC is derived from the Mining Data Analysis System (MDAS), which was originally developed by USEPA Region 3 (under contract with Tetra Tech) and has been widely used for TMDLs. In 2003, the USEPA Region 4 contracted with Tetra Tech to refine, streamline, and produce user documentation for the model for public distribution. LSPC was developed to serve as the primary watershed model for the USEPA TMDL Modeling Toolbox. LSPC was used to simulate runoff (flow, biochemical oxygen demand, total nitrogen, total phosphorus and dissolved oxygen) from the land surface using a daily timestep for current and natural conditions. LSPC provided tributary flows and temperature to the EFDC estuary models and tributary water quality concentrations to WASP7 estuary models.

In order to evaluate the contributing sources to a waterbody and to represent the spatial variability of these sources within the watershed model, the contributing drainage area was represented by a series of sub-watersheds. The subwatersheds were developed using the USGS 12-digit hydrologic unit code, USGS National Hydrographic Dataset.

The LSPC model is driven by precipitation and other climatological data (e.g., air temperature, evapotranspiration, dew point, cloud cover, wind speed, solar radiation), and data from nearby weather stations were used in the modeling effort. The subwatersheds were represented by the hydrologic soil group that had the highest percentage of coverage within the boundaries of the subwatershed.

The basis for distributing hydrologic and pollutant loading parameters throughout the watershed is correlated to soil characteristics and land use practices. The 2006 National Land Use Cover

Database (NLCD), 2006 St. Johns Water Management District Land Cover, and the soil survey geographic database (SSURGO) were used in the modeling effort and subsequent TMDL development.

The modeling assumptions are outlined in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C: Watershed Hydrology and Water Quality Modeling Report for 19 Florida Watersheds (USEPA 2012a). The calibration results for the Daytona Watershed are located in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C Attachment 12: The Daytona Watershed (USEPA 2012b).

7.1.2 Environmental Fluids Dynamic Code (EFDC)

The EFDC model is a part of the USEPA TMDL Modeling Toolbox due to its application in many TMDL-type projects. As such, the code has been peer reviewed and tested and has been freely distributed and supported by Tetra Tech. EFDC was developed by Dr. John Hamrick (Hamrick 1992) and is currently supported by Tetra Tech for USEPA Office of Research and Development (ORD), USEPA Region 4, and USEPA Headquarters. The models, tools, and databases in the TMDL Modeling Toolbox are continually updated and upgraded through TMDL development in Region 4. EFDC is a multifunctional, surface-water modeling system, which includes hydrodynamic, sediment contaminant, and eutrophication components. The EFDC model is capable of 1, 2, and 3-dimensional spatial resolution. The model employs a curvilinear-orthogonal horizontal grid and a sigma or terrain following vertical grid.

The EFDC hydrodynamic model can run independently of a water quality model. The EFDC model simulates the hydrodynamic and constituent transport and then writes a hydrodynamic linkage file for a water quality model such as the Water Quality Analysis Program (WASP7) model. This model linkage, from EFDC hydrodynamics to WASP water quality, has been applied on many USEPA Region 4 projects in support of TMDLs and has been well tested (Wool et al. 2003).

The bathymetry in the bay was used to create the grid for the EFDC model. Inland boundary grid cells received LSPC simulated watershed discharges and point source discharges. Hourly water surface elevation time series data from the National Oceanic and Atmospheric Administration (NOAA) tidal stations were initially used to simulate tides at the open boundary. Observed temperature data at water quality stations were used to simulate the temperature at the open boundaries, and average salinity in the bay was used to simulate salinity.

The modeling assumptions are outlined in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D: Hydrodynamic and Water Quality Modeling Report for Nutrient Criteria for 11 Florida Estuary Systems (USEPA 2012c).

7.1.3 Water Quality Analysis Simulation Program (WASP7)

The Water Quality Analysis Simulation Program Version 7.4.1 (WASP7) is an enhanced Windows version of the USEPA Water Quality Analysis Simulation Program (WASP) (Di Toro et al., 1983; Connolly and Winfield, 1984; Ambrose, R.B. et al., 1988), with upgrades to the user's interface and the model's capabilities. The major upgrades to WASP have been the addition of multiple BOD components, addition of sediment diagenesis routines, and addition of periphyton routines. The hydrodynamic file generated by EFDC is compatible with WASP7 and it transfers segment volumes, velocities, temperature and salinity, as well as flows between segments. The time step is set in WASP7 based on the hydrodynamic simulation.

WASP7 helps users interpret and predict water quality responses to natural phenomena and man-made pollution for various pollution management decisions. WASP7 is a dynamic compartment-modeling program for aquatic systems, including both the water column and the underlying benthos. The time-varying processes of advection, dispersion, point and diffuse mass loading and boundary exchange are represented in the basic program. Water quality processes are represented in special kinetic subroutines that are either chosen from a library or written by the user. WASP is structured to permit easy substitution of kinetic subroutines into the overall package to form problem-specific models. WASP7 comes with two such models, TOXI for toxicants and EUTRO for conventional water quality.

WASP7 utilized the same grid cells that were developed for the EFDC model. Water quality loads from point sources discharging into the estuary were obtained from DMR data from the PCS database. Water quality loading from the LSCP model was used to simulate loads coming from rivers and streams into the estuary. Offshore boundary conditions were calculated from water quality stations within the estuary.

The modeling assumptions are outlined in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D: Hydrodynamic and Water Quality Modeling Report for Nutrient Criteria for 11 Florida Estuary Systems (USEPA 2012c).

7.1.4 Tomoka River Mechanistic Model

To model the Tomoka River basin, the relatively large subwatersheds in the Daytona Watershed Model were re-delineated using the USGS NHD catchments. Only the subwatersheds draining to the Tomoka River were used in the Tomoka River model, and the re-delineated model used the same parameterization as the larger Daytona watershed model. The Tomoka River LSCP model outputs were used input into the inland cells.

The Tomoka River EFDC and WASP models are tidal throughout, starting from the downstream tidal boundary located at its confluence with the Halifax River at the Tomoka Basin, and extending southwest approximately 6 miles to the Route I-95 bridge. LSCP predicted stormwater and base flow inputs enter the river at 7 relatively evenly spaced points along its length, beginning at the upstream boundary.

Due to the lack of site-specific tide level data, tidal stage boundary conditions at the model ocean boundary were assumed to be the same as those observed near the mouth of the St. Marys River

(Fernandina Beach), approximately 60 miles north of Matanzas Inlet. The WASP and EFDC calibration parameters from the St. Marys River model were also used as the starting parameters for the Pellicer Creek EFDC and WASP models. The calibration results for the St. Marys Model, along with additional information on assumptions, are located in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D Attachment 3: The St. Marys and Nassau Hydrodynamic and Water Quality Model Calibration and Validation: Tables and Figures (USEPA 2012d).

Following re-delineation of the Tomoka River LSPC model and set-up of the WASP and EFDC model, the calibration was reviewed. The calibration and parameterization were then updated to better reflect the conditions occurring in the Tomoka River basin. EFDC was calibrated using salinity and temperature observations made at the Old Dixie Highway bridge (approximately 0.5 miles upstream from the downstream model tidal boundary) and at the Route 1 bridge (approximately 4 miles further upstream). WASP was also calibrated using water quality observations made at the Old Dixie Highway and Route 1 bridges.

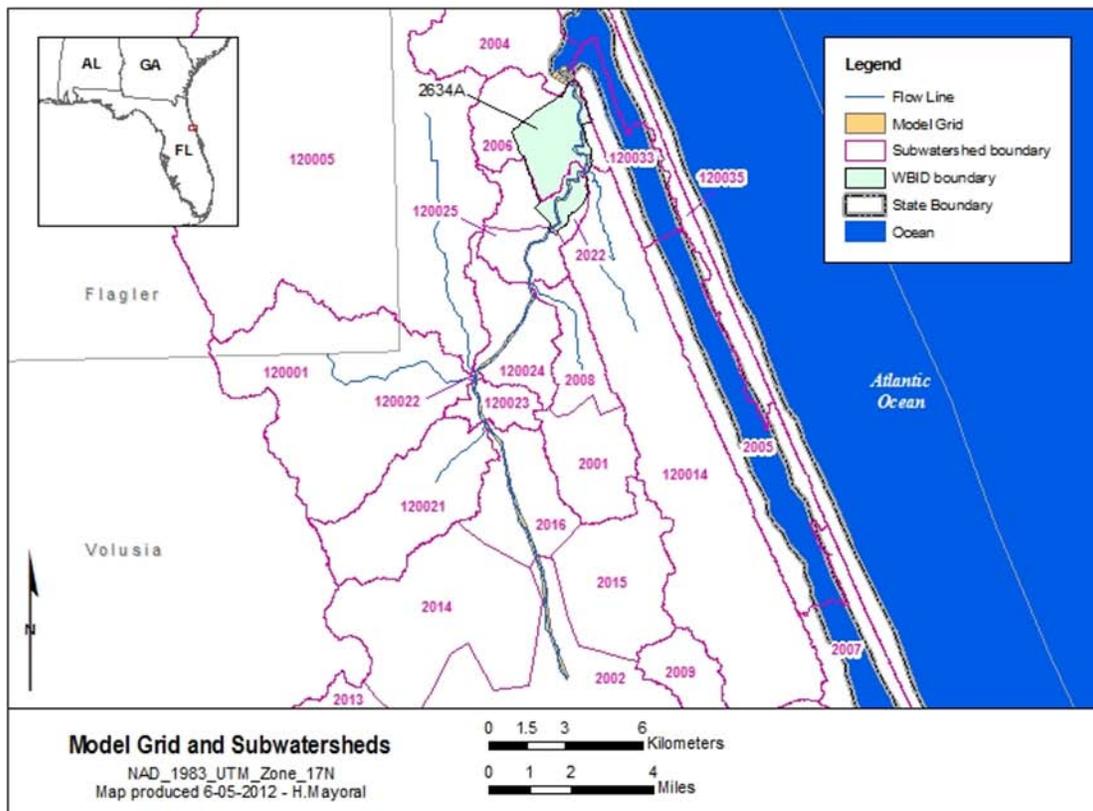


Figure 7.1 LSPC subwatershed boundaries and WASP model grid for the Tomoka River basin

7.2 Scenarios

Two modeling scenarios were developed and evaluated in this TMDL determination: a current condition and a natural condition scenario. Concentrations and loadings were evaluated in each scenario, and the results from the scenarios were used to develop the TMDL.

7.2.1 Current Condition

The current condition scenario evaluated current hydrologic and water quality conditions in the watershed, specifically water quality concentration and loadings at the outlet of WBID 2634A. The current condition annual average concentrations for the Tomoka River WBID are presented in Table 7.1. The current condition simulation was used to determine the base loadings for the WBID. These base loadings (Table 7.2), when compared with the TMDL scenarios, were used to determine the percent reduction in nutrient loads that will be needed to achieve water quality standards. Figure 7.2 through Figure 7.13 provide the calibrated current condition modeled parameters for WBID 2634A.

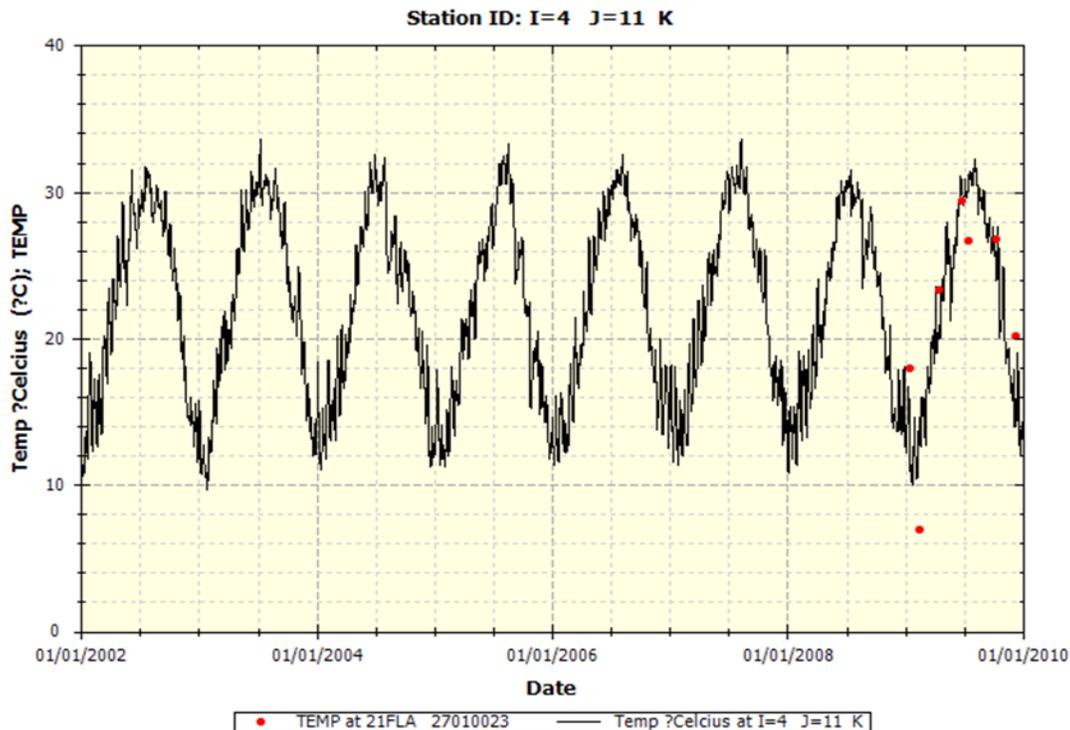


Figure 7.2 Simulated temperature verse measured temperature in the TomokaRiver basin at station 21FLA 27010023

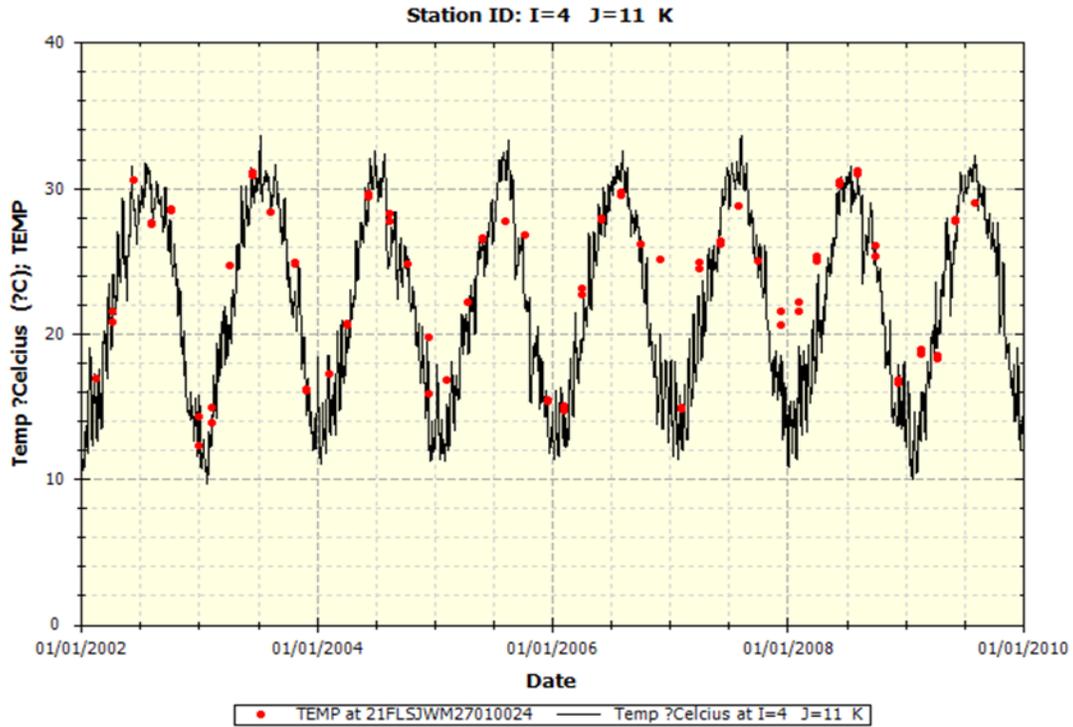


Figure 7.3 Simulated temperature verse measured temperature in the Tomoka River basin at station 21FLSJWM 27010024

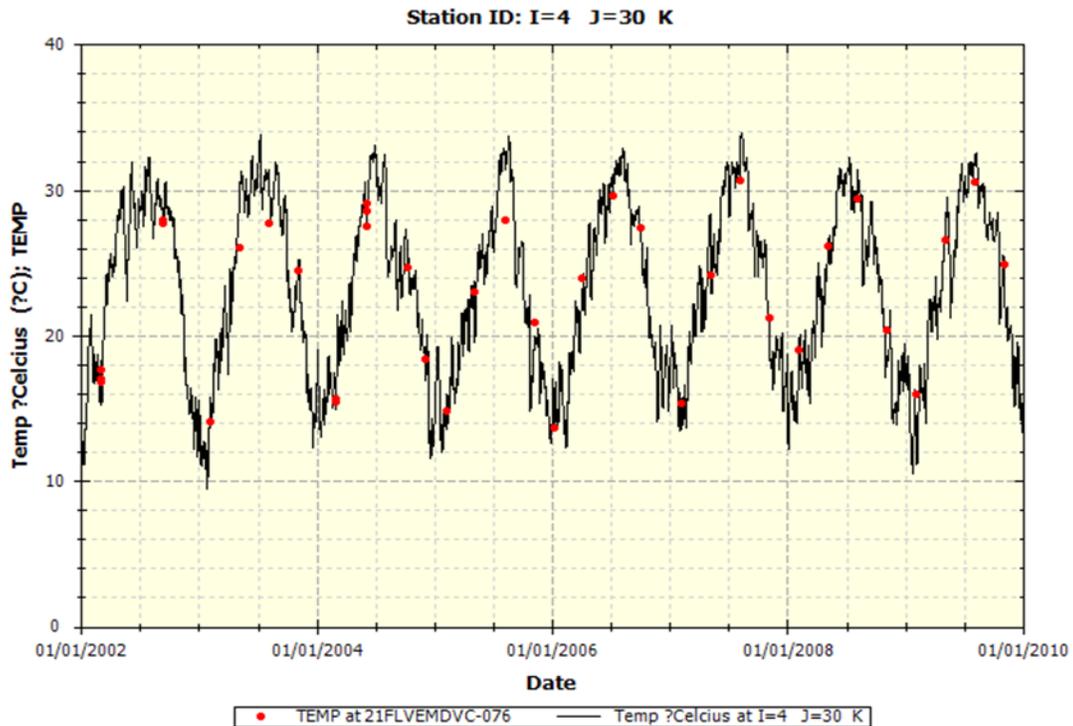


Figure 7.4 Simulated temperature verse measured temperature in the Tomoka River basin at station 21FLVEMDVC-076

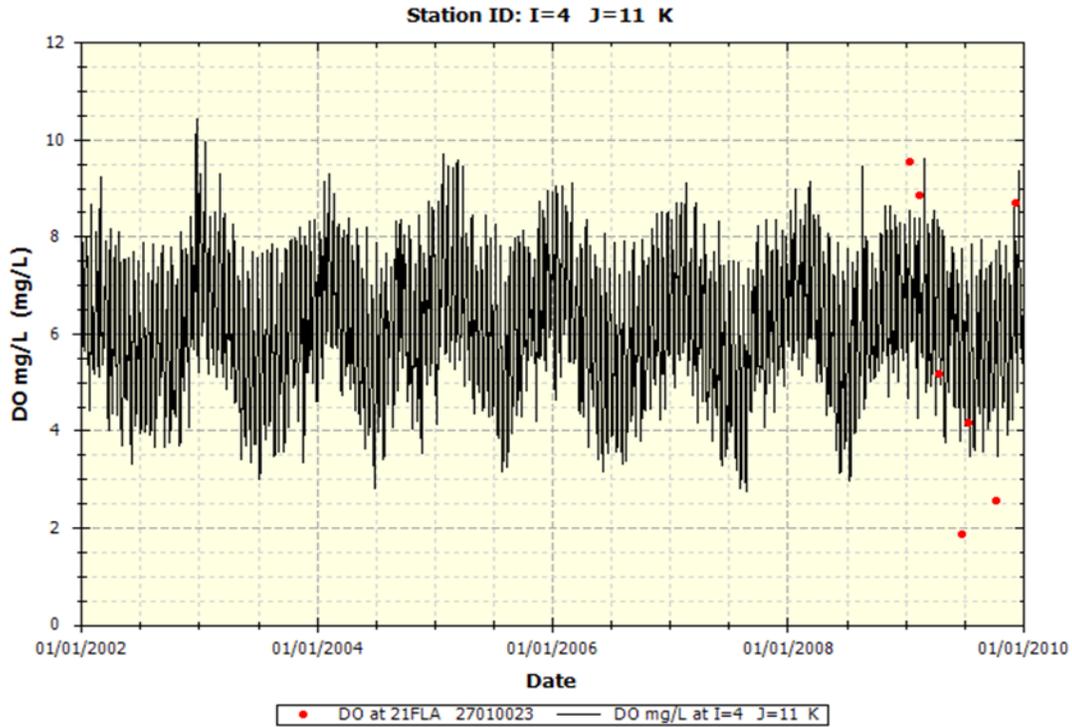


Figure 7.5 Simulated dissolved oxygen verse measured dissolved oxygen in the Tomoka River basin at station 21FLA 27010023

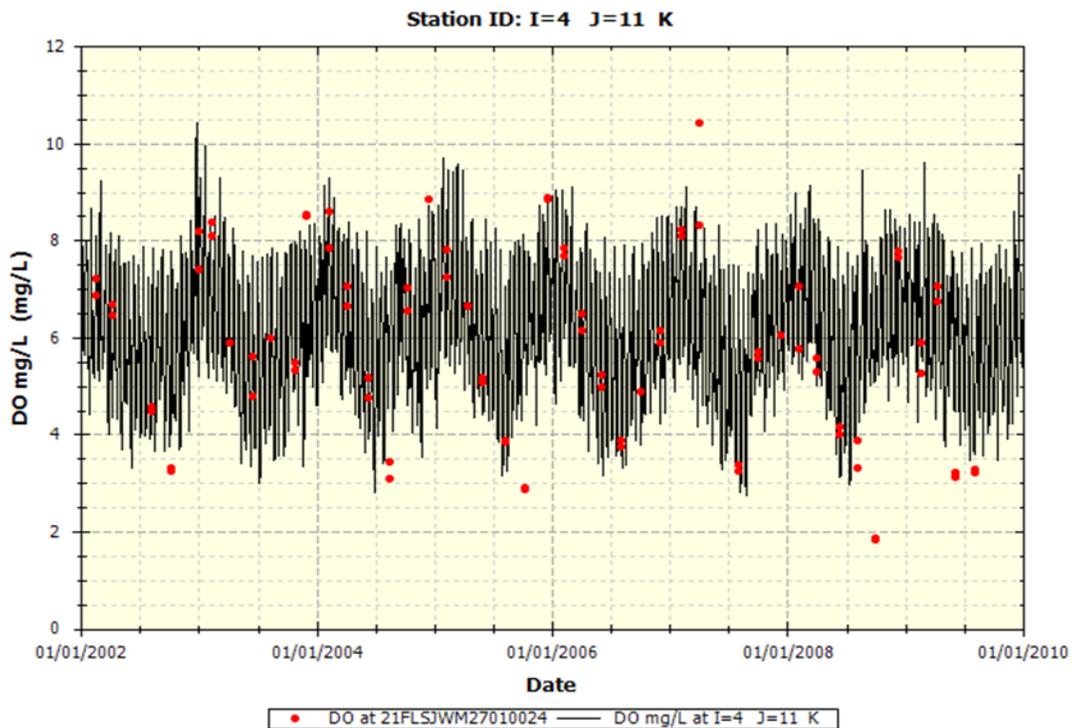


Figure 7.6 Simulated dissolved oxygen verse measured dissolved oxygen in the Tomoka River basin at station 21FLSJWM 27010024

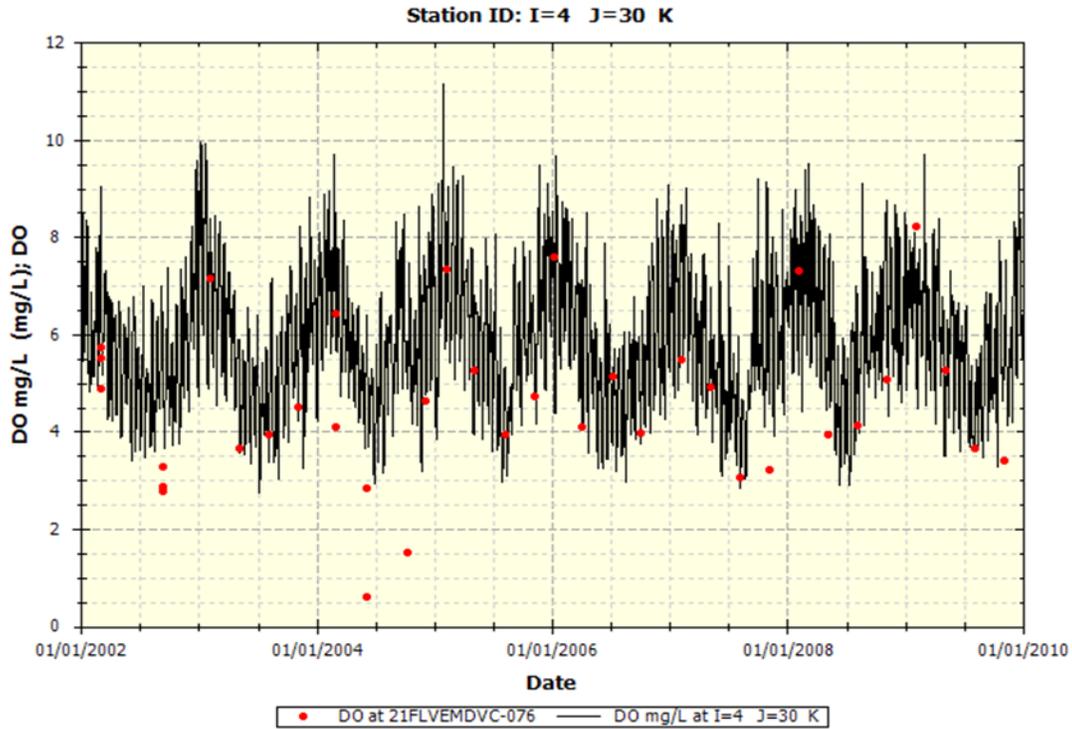


Figure 7.7 Simulated dissolved oxygen verse measured dissolved oxygen in the Tomoka River basin at station 21FLVEMDVC-076

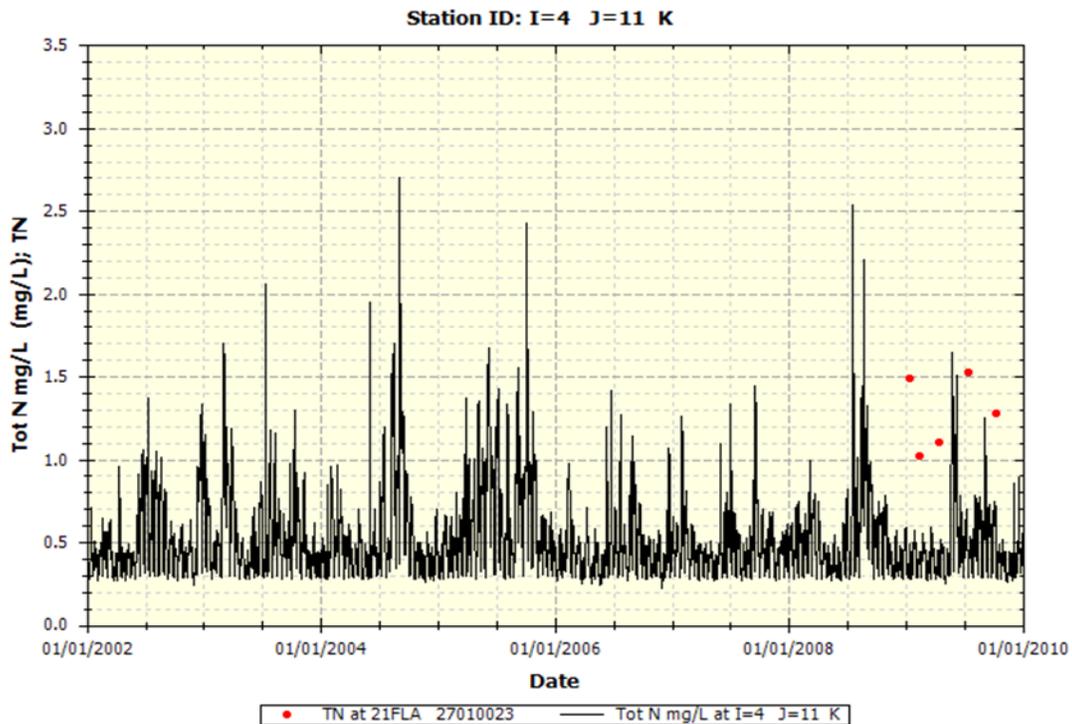


Figure 7.8 Simulated total nitrogen verse measured total nitrogen in the Tomoka River basin at station 21FLA 27010023

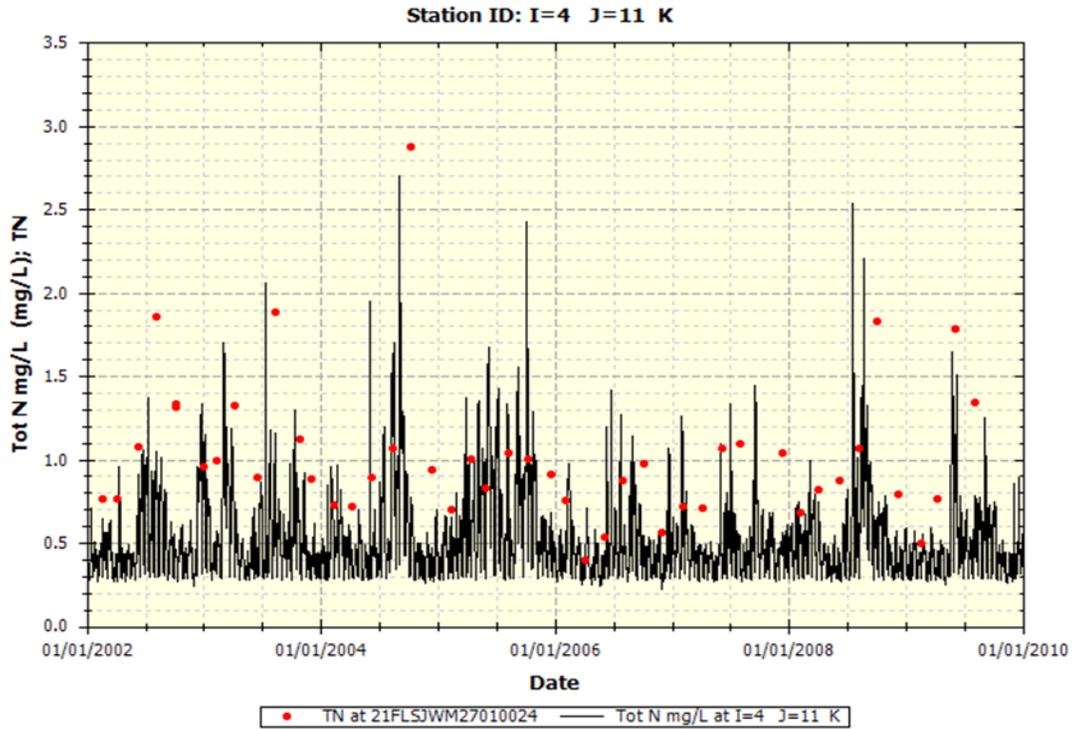


Figure 7.9 Simulated total nitrogen versus measured total nitrogen in the Tomoka River basin at station 21FLSJWM 27010024

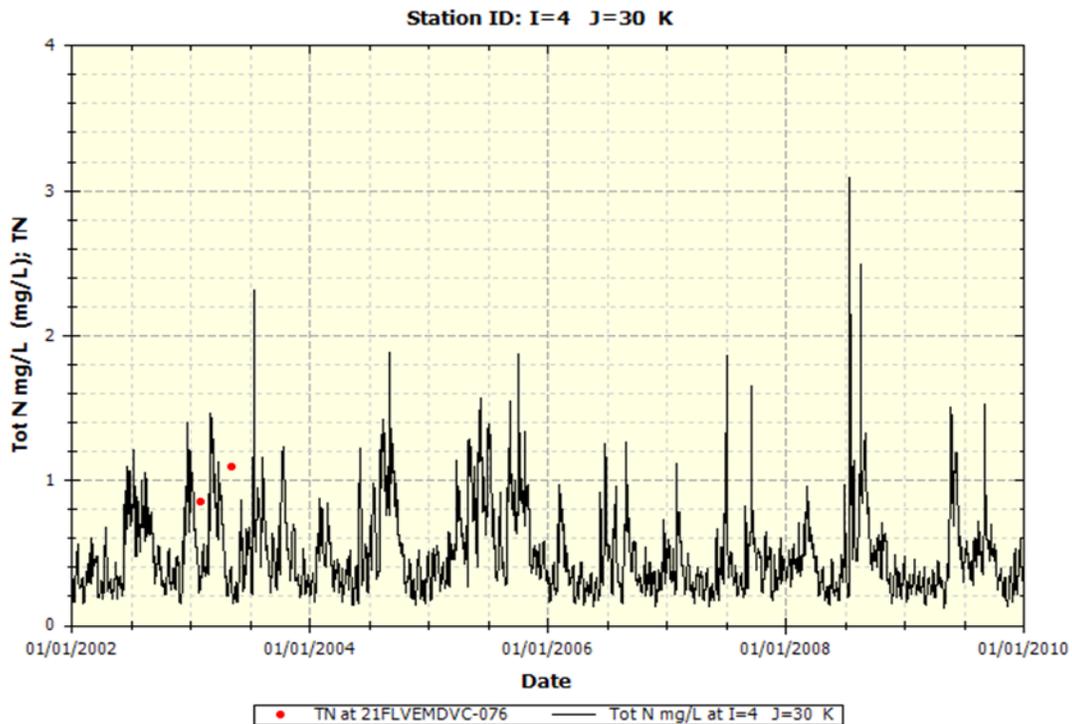


Figure 7.10 Simulated total nitrogen versus measured total nitrogen in the Tomoka River basin at station 21FLVEMDVC-076

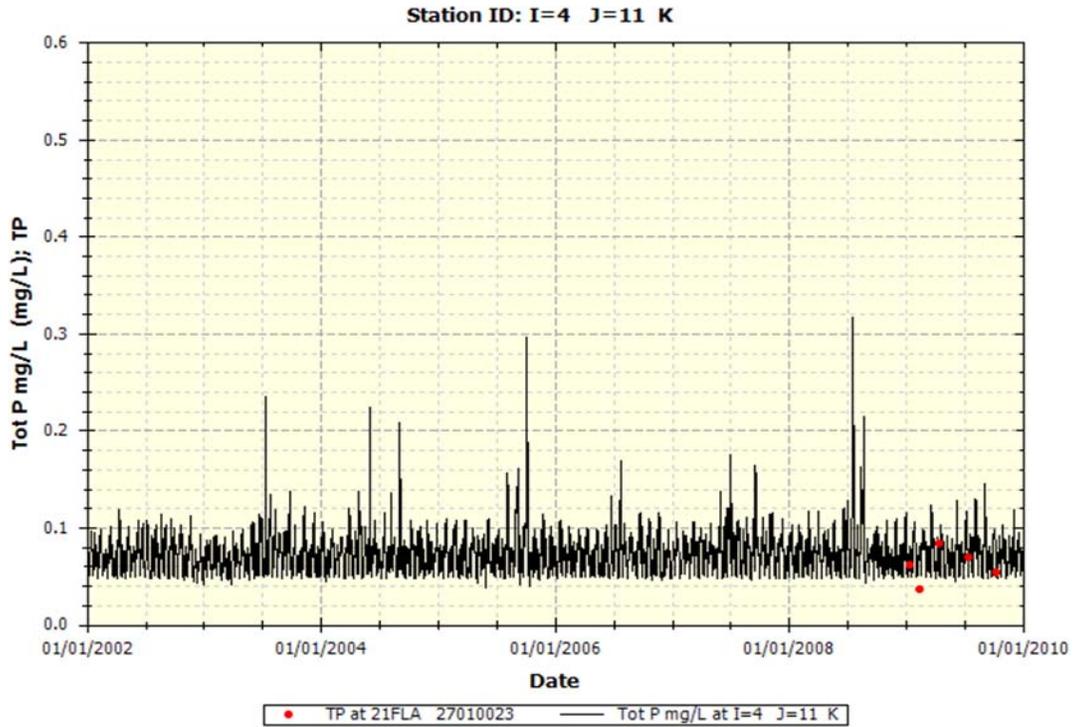


Figure 7.11 Simulated total phosphorus versus measured total phosphorus in the Tomoka River basin at station 21FLA 27010023

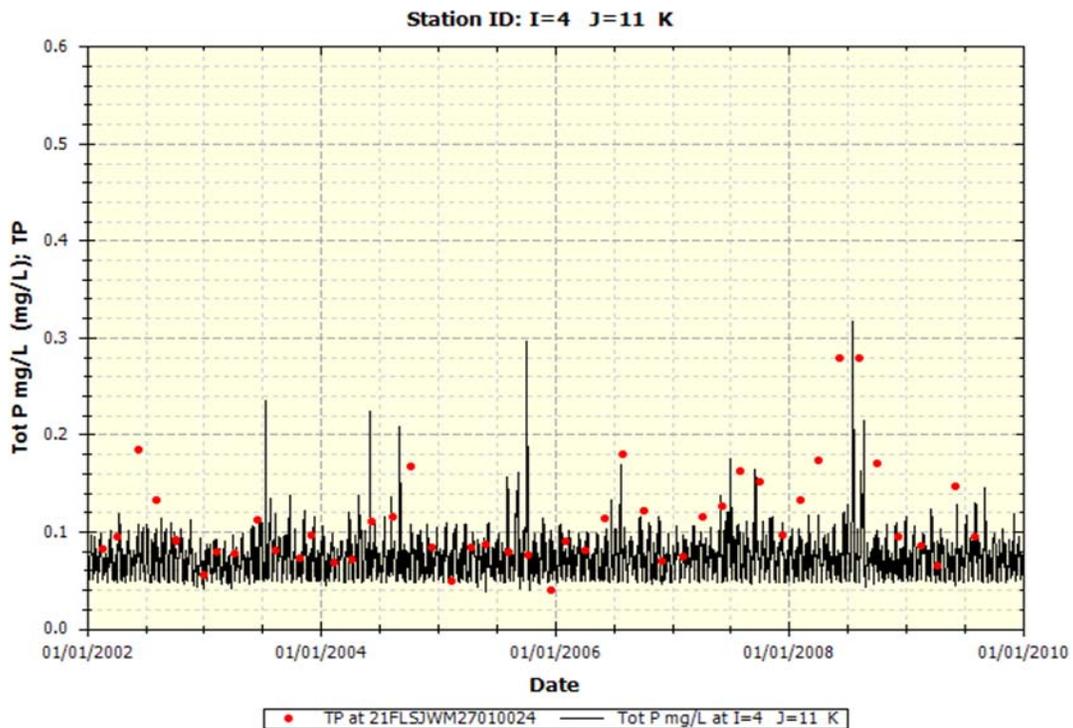


Figure 7.12 Simulated total phosphorus versus measured total phosphorus in the Tomoka River basin at station 21FLSJWM 27010024

US EPA ARCHIVE DOCUMENT

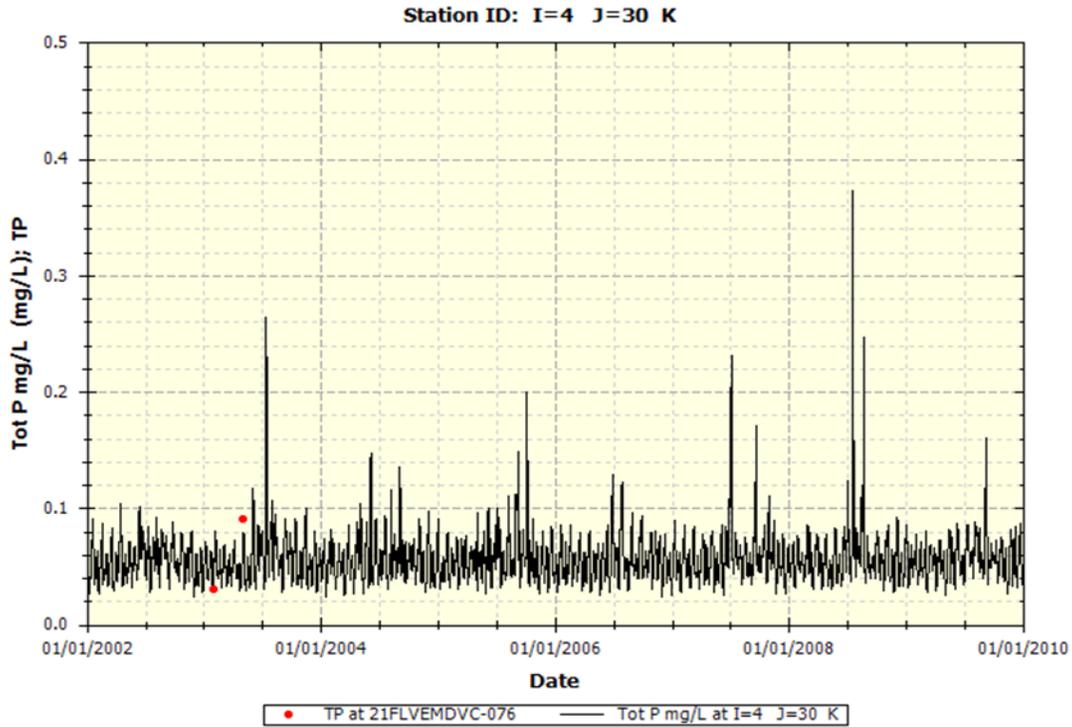


Figure 7.13 Simulated total phosphorus versus measured total phosphorus in the Tomoka River basin at station 21FLVEMDVC-076

Table 7.1 Current condition concentrations in WBID 2634, Tomoka River

Parameter	WBID 2634A
Total nitrogen (mg/L)	0.48
Total phosphorus (mg/L)	0.07
BOD (mg/L)	1.88

Table 7.2 Current condition loadings in WBID 2634, Tomoka River

Parameter	WBID 2634A	
	WLA (kg/yr)	LA (kg/yr)
Total nitrogen (mg/L)	--	236,392
Total phosphorus (mg/L)	--	15,160
BOD (mg/L)	--	210,602

7.2.2 Natural Condition

The natural condition scenario was developed to estimate water quality conditions if there was no impact from anthropogenic sources. The point sources located in the model were removed for the natural condition analysis. Land uses that were associated with anthropogenic activities (urban, agriculture, transportation, barren lands and rangeland) were converted to upland forests or forested wetlands based on the current ration of forest and wetland land uses in the model. The natural condition water quality predictions are presented in Table 7.3 and Table 7.4.

The purpose of the natural conditions scenario was to determine what the background natural conditions for nutrients were in the Tomoka River watershed. Figure 7.14 through Figure 7.25 provide the natural condition scenario modeled parameters for WBID 2634A.

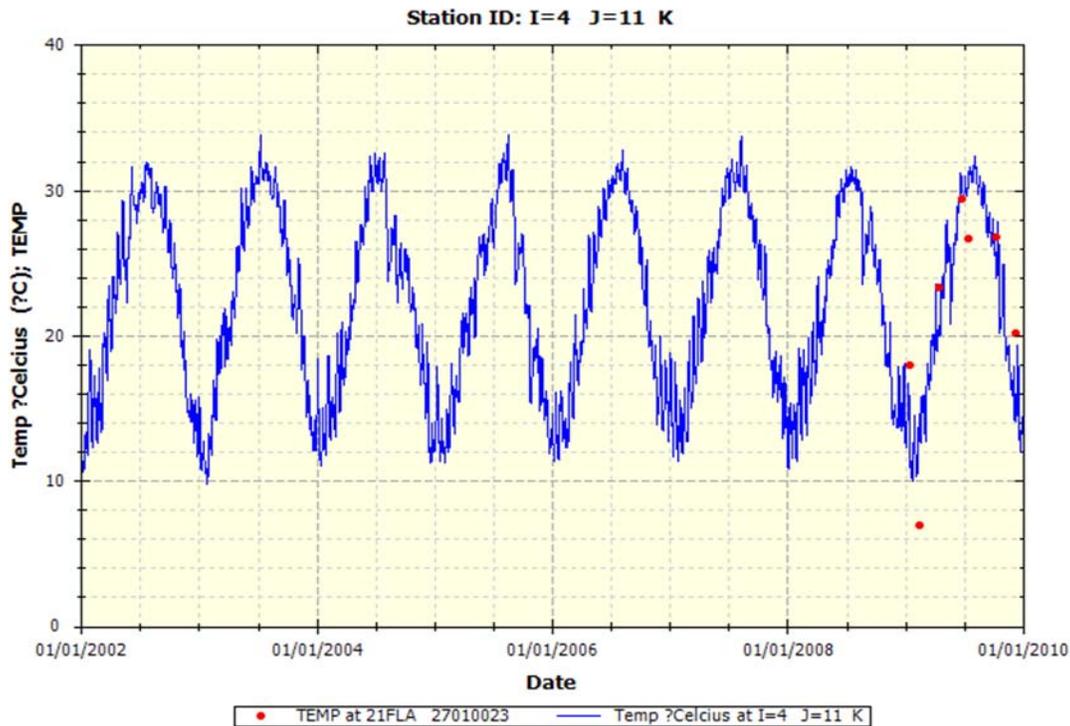


Figure 7.14 Natural condition temperature in the Tomoka River basin at existing calibration water quality station 21FLA 27010023

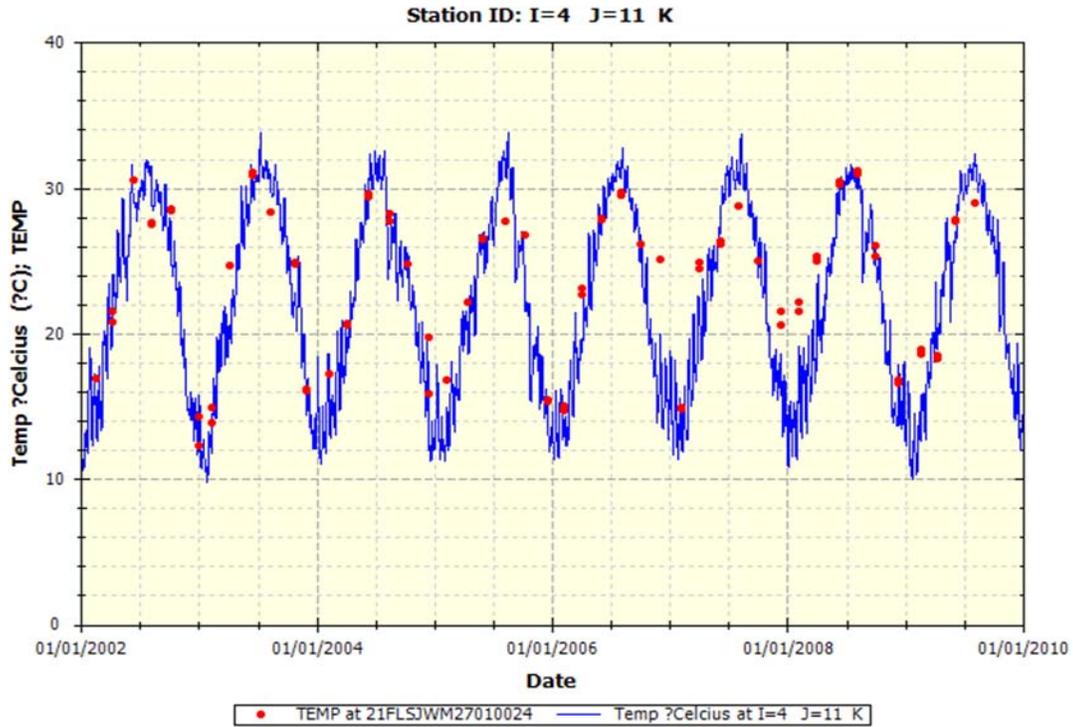


Figure 7.15 Natural condition temperature in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024

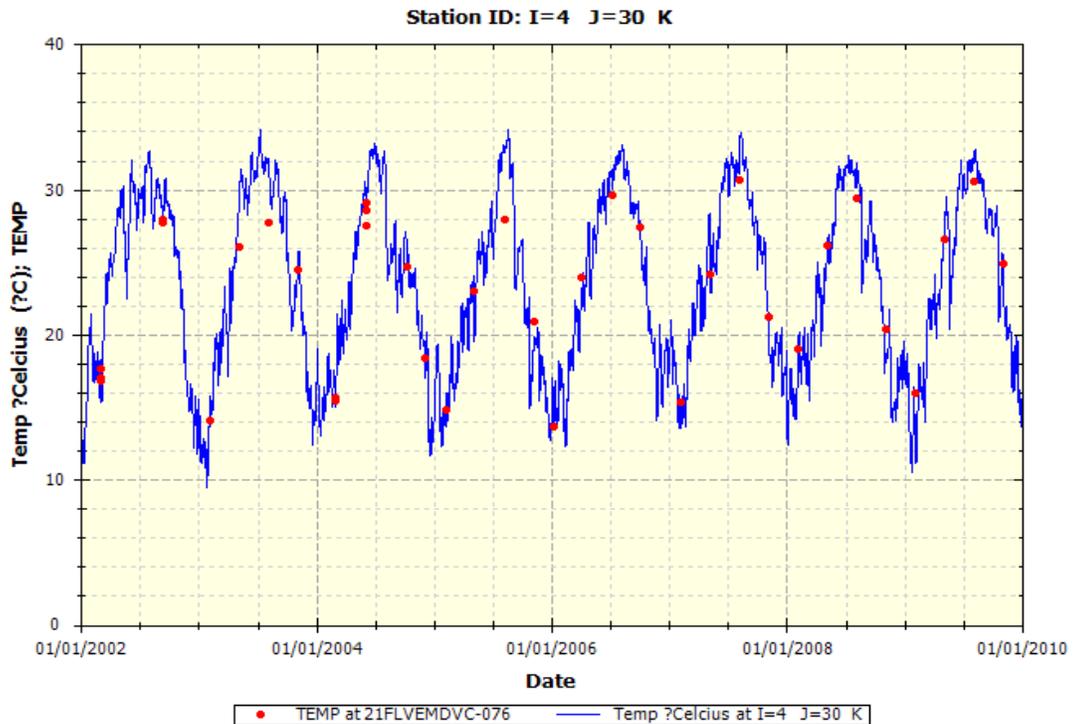


Figure 7.16 Natural condition temperature in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076

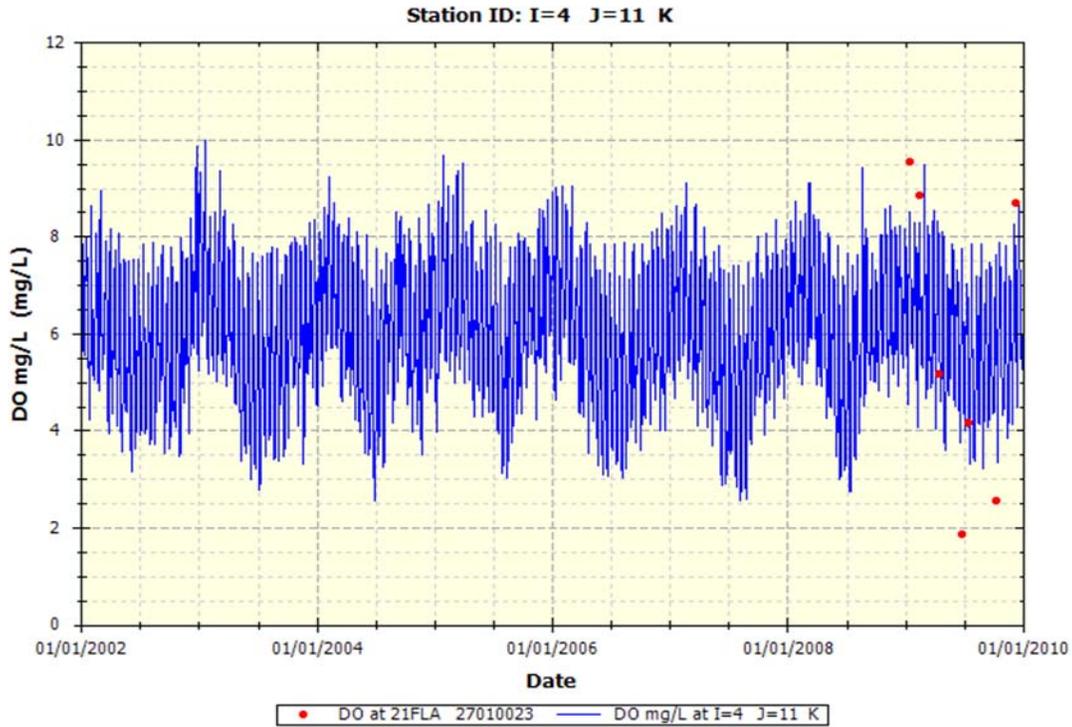


Figure 7.17 Natural condition dissolved oxygen in the Tomoka River basin at existing calibration water quality station 21FLA 27010023

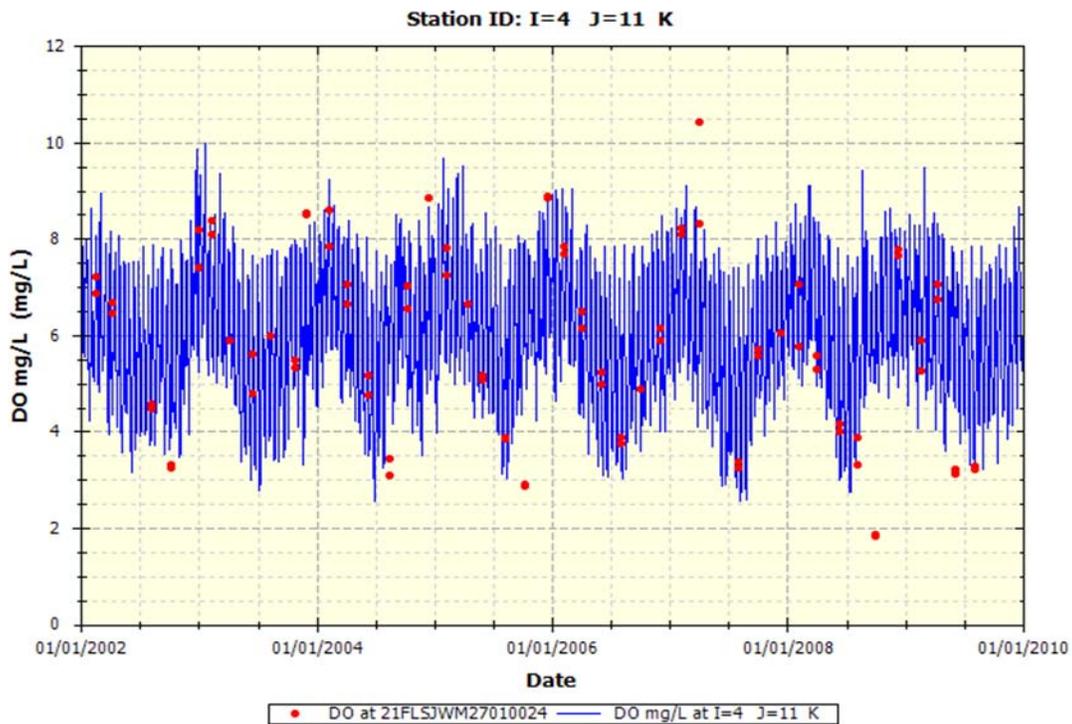


Figure 7.18 Natural condition dissolved oxygen in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024

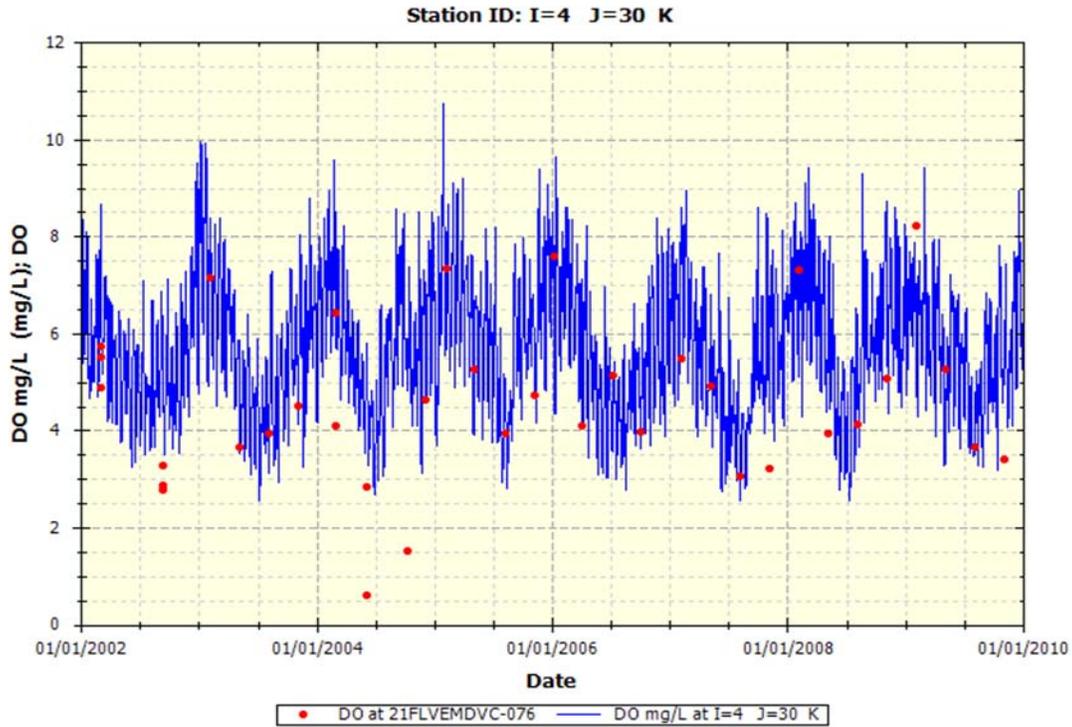


Figure 7.19 Natural condition dissolved oxygen in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076

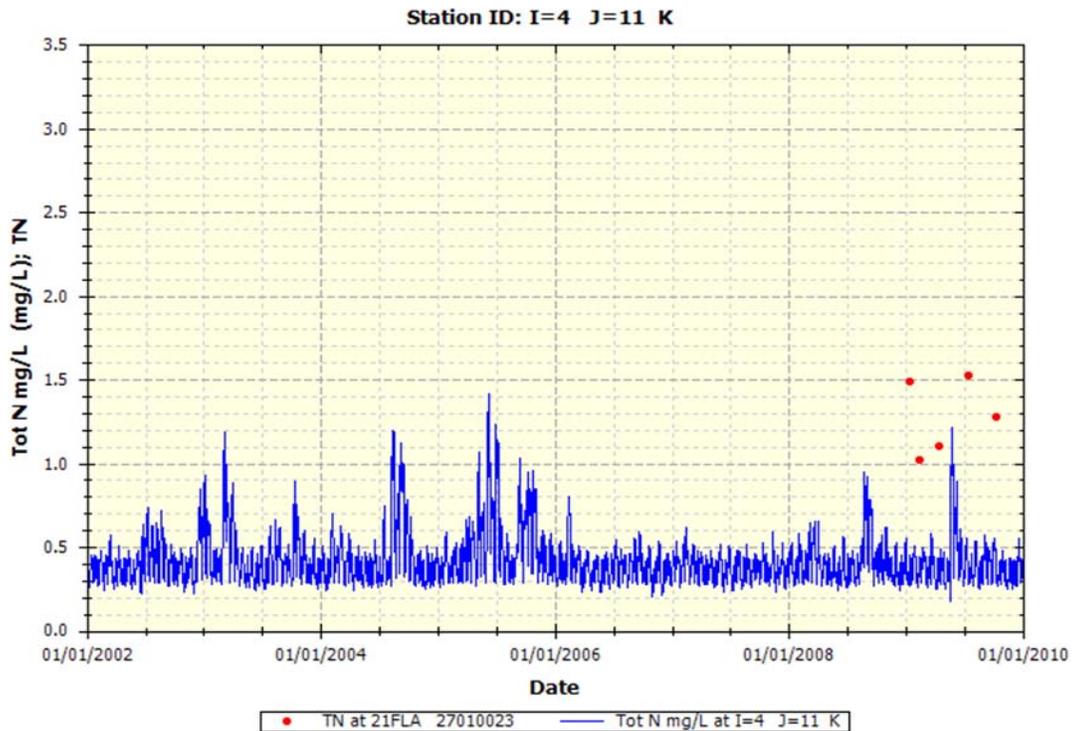


Figure 7.20 Natural condition total nitrogen in the Tomoka River basin at existing calibration water quality station 21FLA 27010023

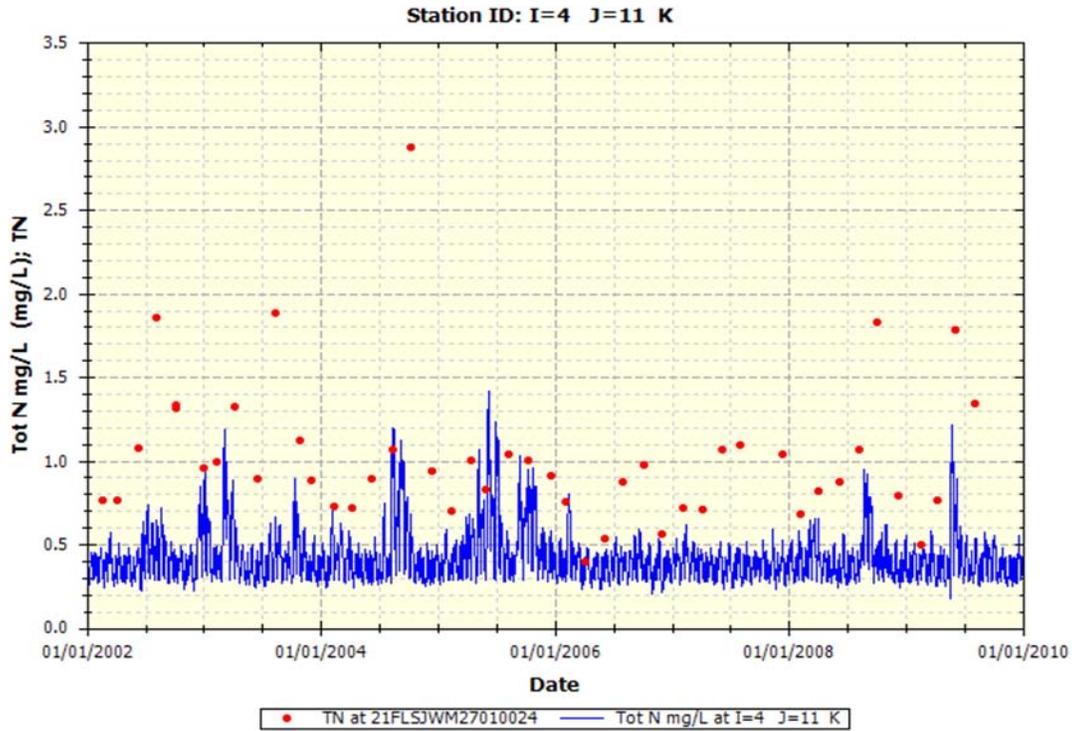


Figure 7.21 Natural condition total nitrogen in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024

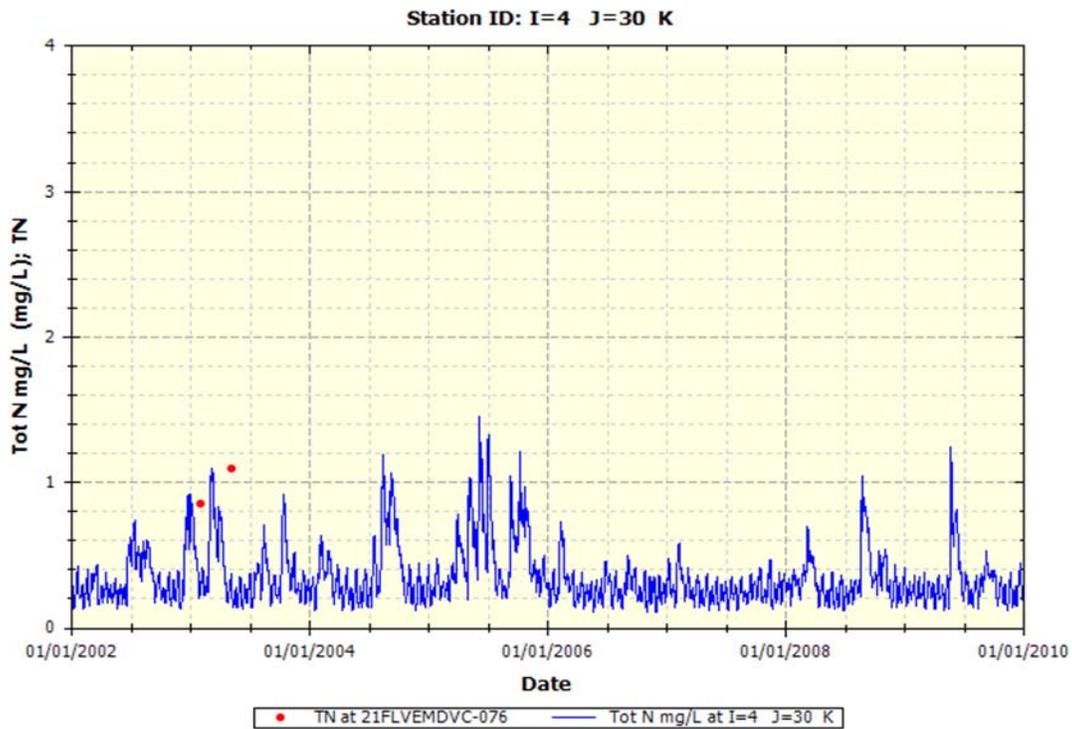


Figure 7.22 Natural condition total nitrogen in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076

US EPA ARCHIVE DOCUMENT

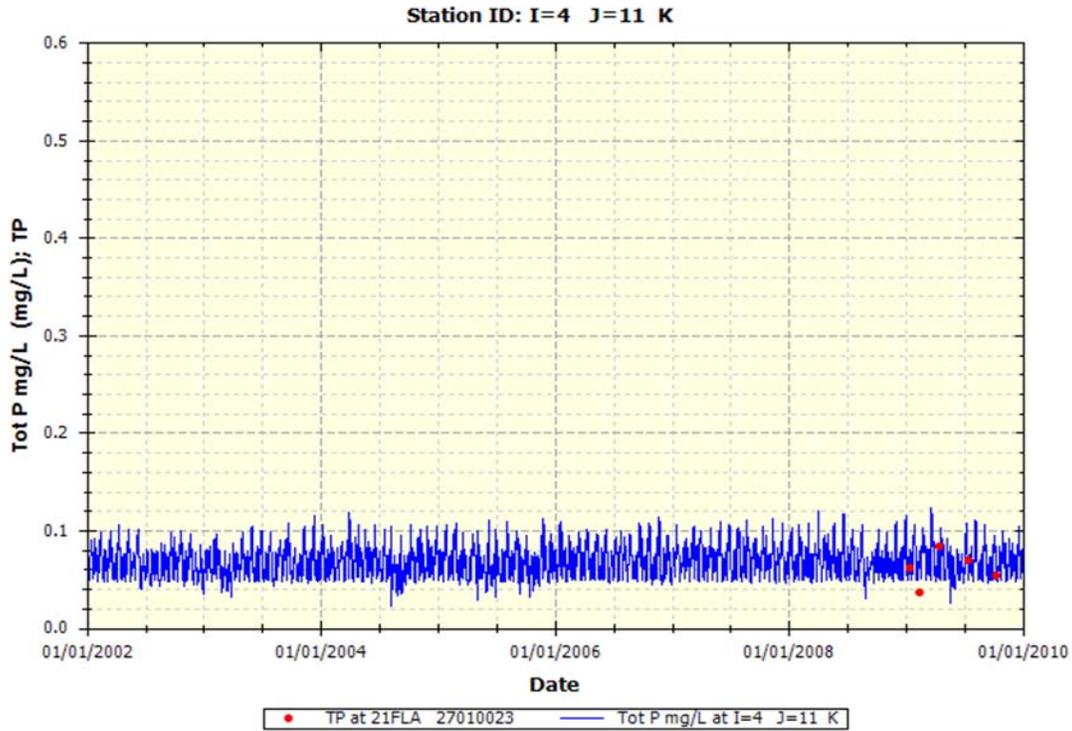


Figure 7.23 Natural condition total phosphorus in the Tomoka River basin at existing calibration water quality station 21FLA 27010023

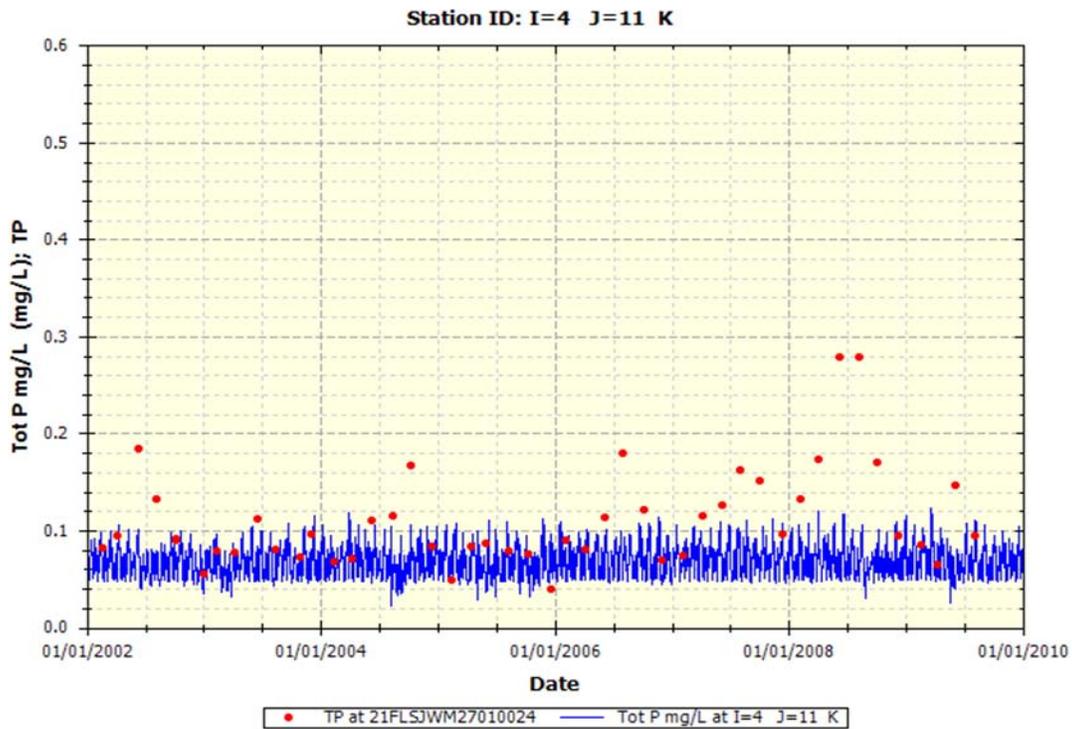


Figure 7.24 Natural condition total phosphorus in the Tomoka River basin at existing calibration water quality station 21FLSJWM27010024

US EPA ARCHIVE DOCUMENT

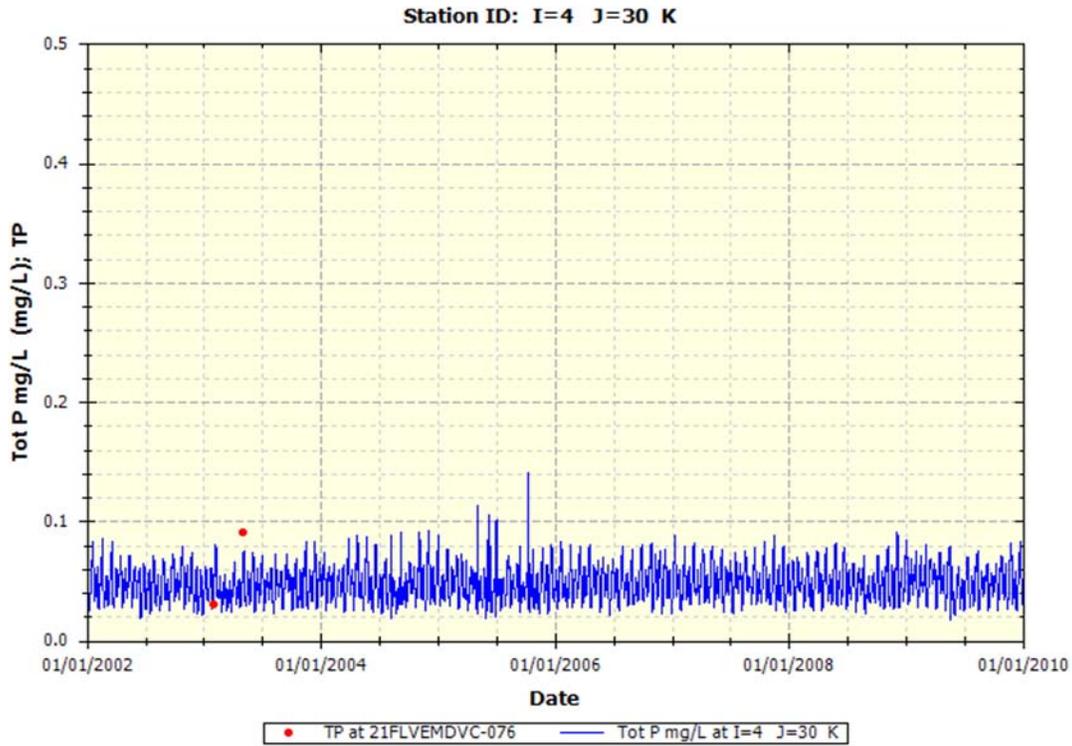


Figure 7.25 Natural condition total phosphorus in the Tomoka River basin at existing calibration water quality station 21FLVEMDVC-076

Table 7.3 Natural condition concentrations in WBID 2634, Tomoka River

Parameter	WBID 2634A
Total nitrogen (mg/L)	0.39
Total phosphorus (mg/L)	0.06
BOD (mg/L)	1.72

Table 7.4 Natural condition loadings in WBID 2634, Tomoka River

Parameter	WBID 2634A	
	WLA (kg/yr)	LA (kg/yr)
Total nitrogen (mg/L)	--	123,423
Total phosphorus (mg/L)	--	4,776
BOD (mg/L)	--	120,822

US EPA ARCHIVE DOCUMENT

8.0 TMDL DETERMINATION

The TMDL for a given pollutant and waterbody is comprised of the sum of individual wasteload allocations (WLAs) for point sources, and load allocations (LAs) for both nonpoint sources and natural background levels. In addition, the TMDL must include a margin of safety (MOS), either implicitly or explicitly, to account for the uncertainty in the relationship between pollutant loads and the quality of the receiving waterbody. Conceptually, this definition is represented by the equation:

$$\text{TMDL} = \sum \square \text{WLAs} + \sum \square \text{LAs} + \text{MOS}$$

The TMDL is the total amount of pollutant that can be assimilated by the receiving waterbody and still achieve water quality standards and the waterbody's designated use. In this TMDL development, allowable concentrations from all pollutant sources that cumulatively amount to no more than the TMDL must be set and thereby provide the basis to establish water quality-based controls. These TMDLs are expressed as annual geometric mean concentrations, since the approach used to determine the TMDL targets relied on geometric means. The TMDLs targets were determined to be the conditions needed to restore and maintain a balanced aquatic system. Furthermore, it is important to consider nutrient loading over time, since nutrients can accumulate in waterbodies.

The TMDL was determined for the concentrations and loadings at the outlet of WBID 2634A, and included all loadings from upstream sources and streams. During the development of this TMDL, it was determined that the natural condition scenario nutrient concentrations and loading were lower than the current condition nutrient concentrations and loadings. The natural condition scenario loadings were therefore used to determine the TMDL to prevent any further degradation of the watershed. The allocations for WBID 2634A for total nitrogen, total phosphorus, and biochemical oxygen demand are presented in Table 8.1.

Table 8.1 TMDL Load Allocations for the Tomoka River, WBID 2634A

Constituent	Current Condition WLA (kg/yr)	Current Condition LA (kg/yr)	TMDL Condition WLA (kg/yr)	TMDL Condition LA (kg/yr)	Percent reduction WLA	Percent Reduction LA
Total Nitrogen	--	236,392	--	123,423	--	48%
Total Phosphorus	--	15,160	--	4,776	--	68%

8.1 Critical Conditions and Seasonal Variation

EPA regulations at 40 CFR 130.7(c)(1) require TMDLs to take into account critical conditions for stream flow, loading, and water quality parameters. The critical condition is the combination of environmental factors creating the "worst case" scenario of water quality conditions in the

waterbody. By achieving the water quality standards at critical conditions, it is expected that water quality standards should be achieved during all other times. Seasonal variation must also be considered to ensure that water quality standards will be met during all seasons of the year, and that the TMDLs account for any seasonal change in flow or pollutant discharges, and any applicable water quality criteria or designated uses (such as swimming) that are expressed on a seasonal basis.

The critical condition for nonpoint source concentration and wet weather point source concentrations is typically an extended dry period followed by a rainfall runoff event. During the dry weather period, nutrients build up on the land surface, and are washed off by rainfall. The critical condition for continuous point source concentrations typically occurs during periods of low stream flow when dilution is minimized. Although loading of nonpoint source pollutants contributing to a nutrient impairment may occur during a runoff event, the expression of that nutrient impairment is more likely to occur during warmer months, and at times when the waterbody is poorly flushed.

8.2 Margin of Safety

The Margin of Safety accounts for uncertainty in the relationship between a pollutant load and the resultant condition of the waterbody. There are two methods for incorporating an MOS into TMDLs (USEPA 1991):

- Implicitly incorporate the MOS using conservative model assumptions to develop allocations
- Explicitly specify a portion of the total TMDL as the MOS and use the remainder for Allocations

This TMDL uses an implicit MOS since the TMDL targets for nutrients were set to natural background conditions.

8.3 Waste Load Allocations

Only MS4s and NPDES facilities discharging directly into lake segments (or upstream tributaries of those segments) are assigned a WLA. The WLAs, if applicable, are expressed separately for continuous discharge facilities (e.g., WWTPs) and MS4 areas, as the former discharges during all weather conditions whereas the later discharges in response to storm events.

8.3.1 Wastewater/Industrial Permitted Facilities

A TMDL wasteload allocation (WLA) is given to wastewater and industrial NPDES-permitted facilities discharging to surface waters within an impaired watershed. There are no continuous discharge NPDES-permitted point sources in WBID 2634A, therefore no WLA was calculated.

8.3.2 Municipal Separate Storm Sewer System Permits

The WLA for MS4s are expressed in terms of percent reductions equivalent to the reductions required for nonpoint sources. Given the available data, it is not possible to estimate concentrations coming exclusively from the MS4 areas. Although the aggregate concentration

allocations for stormwater discharges are expressed in numeric form, i.e., percent reduction, based on the information available today, it is infeasible to calculate numeric WLAs for individual stormwater outfalls because discharges from these sources can be highly intermittent, are usually characterized by very high flows occurring over relatively short time intervals, and carry a variety of pollutants whose nature and extent varies according to geography and local land use. For example, municipal sources such as those covered by this TMDL often include numerous individual outfalls spread over large areas. Water quality impacts, in turn, also depend on a wide range of factors, including the magnitude and duration of rainfall events, the time period between events, soil conditions, fraction of land that is impervious to rainfall, other land use activities, and the ratio of stormwater discharge to receiving water flow.

This TMDL assumes for the reasons stated above that it is infeasible to calculate numeric water quality-based effluent limitations for stormwater discharges. Therefore, in the absence of information presented to the permitting authority showing otherwise, this TMDL assumes that water quality-based effluent limitations for stormwater sources of nutrients derived from this TMDL can be expressed in narrative form (e.g., as best management practices), provided that: (1) the permitting authority explains in the permit fact sheet the reasons it expects the chosen BMPs to achieve the aggregate wasteload allocation for these stormwater discharges; and (2) the state will perform ambient water quality monitoring for nutrients for the purpose of determining whether the BMPs in fact are achieving such aggregate wasteload allocation.

All Phase 1 MS4 permits issued in Florida include a re-opener clause allowing permit revisions for implementing TMDLs once they are formally adopted by rule. Florida may designate an area as a regulated Phase II MS4 in accordance with Rule 62-620.800, FAC. Florida's Phase II MS4 Generic Permit has a "self-implementing" provision that requires MS4 permittees to update their stormwater management program as needed to meet their TMDL allocations once those TMDLs are adopted. Permitted MS4s will be responsible for reducing only the loads associated with stormwater outfalls which it owns, manages, or otherwise has responsible control. MS4s are not responsible for reducing other nonpoint source loads within its jurisdiction. All future MS4s permitted in the area are automatically prescribed a WLA equivalent to the percent reduction assigned to the LA. The MS4 service areas described in Section 6.1.2 of this report are required to meet the percent reduction prescribed in Table 8.1 through the implementation of BMPs.

8.4 Load Allocations

The load allocation for nonpoint sources was assigned a percent reduction in nutrient concentrations from the current concentrations coming into the WBID addressed in the TMDL report.

9.0 RECOMMENDATIONS/IMPLEMENTATION

The initial step in implementing a TMDL is to more specifically locate pollutant source(s) in the watershed. FDEP employs the Basin Management Action Plan (B-MAP) as the mechanism for developing strategies to accomplish the specified load reductions. Components of a B-MAP are:

- Allocations among stakeholders

- Listing of specific activities to achieve reductions
- Project initiation and completion timeliness
- Identification of funding opportunities
- Agreements
- Local ordinances
- Local water quality standards and permits
- Follow-up monitoring

10.0 REFERENCES

Ambrose, RB, TA Wool, JP Connolly and RW Schanz. 1988. WASP4, A Hydrodynamic and Water Quality Model – Model Theory, User’s Manual and Programmer’s Guide. U.S. Environmental Protection Agency, Athens, GA. EPA/600/3-87-039.

Di Toro, D.M., J.J. Fitzpatrick, and R.V. Thomann. 1983. Documentation for water quality analysis simulation program (WASP) and model verification program (MVP) No. EPA-600-3-81-044). U.S. EPA U.S Government Printing Office, Washington, DC.

Florida Administrative Code. Chapter 62-40, Water Resource Implementation Rule.

Florida Administrative Code. Chapter 62-302, Surface Water Quality Standards.

Florida Administrative Code. Chapter 62-303, Identification of Impaired Surface Waters.

Florida Department of Health (FDOH), 2009, Onsite Sewage Treatment and Disposal Systems Statistical Data, Bureau of Onsite Sewage Programs.
<<http://www.doh.state.fl.us/environment/ostds/statistics/ostdsstatistics.htm>>.

Florida Department of Environmental Protection (FDEP). No date. *Learn About Your Watershed: Upper East Coast Watershed*.
<http://www.protectingourwater.org/watersheds/map/upper_east_coast/>. Accessed May 2012.

FDEP. 2005. *Water Quality Status Report*. Florida Department of Environmental Protection.
<<http://waterwebprod.dep.state.fl.us/basin411/uppereast/status/UEC.pdf>>. Accessed May 2012.

FDEP. 2012. *About the Tomoka Marsh Aquatic Preserve*. Florida Department of Environmental Protection. <<http://www.dep.state.fl.us/coastal/sites/tomoka/info.htm>>. Accessed June 2012.

National Weather Service (NWS). 2009. *Jacksonville 1981-2010 Climate Normals*. National Weather Service, National Oceanic and Atmospheric Administration (NOAA).

<http://www.srh.noaa.gov/news/display_cmsstory.php?wfo=jax&storyid=71081&source=0>. Accessed June 2012.

St. Johns River Water Management District (SJRWMD). 2003. *Northern Coastal Basin Surface Water Improvement and Management Plan*. St. Johns River Water Management District. <http://www.sjrwmd.com/SWIMplans/2003_NCB_SWIM_plan.pdf>. Accessed June 2012.

United States Environmental Protection Agency (USEPA). 2012a. Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C: Watershed Hydrology and Water Quality Modeling Report for 19 Florida Watersheds. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.

United States Environmental Protection Agency (USEPA). 2012b. Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C Attachment 12: The Daytona Watershed. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.

United States Environmental Protection Agency (USEPA). 2012c. Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D: Hydrodynamic and Water Quality Modeling Report for Nutrient Criteria for 11 Florida Estuary Systems. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.

United States Environmental Protection Agency (USEPA). 2012d. Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D Attachment 9: The St. Marys and Nassau Hydrodynamic and Water Quality Model Calibration and Validation: Tables and Figures. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.

United States Environmental Protection Agency (USEPA). 1991. *Guidance for Water Quality – Based Decisions: The TMDL Process*. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. EPA-440/4-91-001, April 1991.

Wool, T. A., S. R. Davie, and H. N. Rodriguez, 2003: Development of three-dimensional hydrodynamic and water quality models to support TMDL decision process for the Neuse River estuary, North Carolina. *J. Water Resources Planning and Management*, 129, 295-306.