US EPA ARCHIVE DOCUMENT

SUPPLEMENTAL DOCUMENT

HISTORICAL WELL CONSTRUCTION DIAGRAMS

Part 2 of 5

This document relates to Doc ID
30284379-380 30284931 30284930

30284930

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator
Project Number: 72 - 44 - 0025.0000
Local Description: approximately 150 feet north of northeast corner of Garvey Elevator Building.
Ground Elevation: 1930
Top of Casing Elevation:

Well Identification: **RW-1**
Legal Description: NW 1/4, Sec 23, T. 7 N., R. 10 W.
Adams County, NE

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 154.0 ft. Borehole Diameter: 12.0 in.
Drilling Company: Layne-Western Inc.
Drilling Crew: Ted Thompson; Duane Trask, Mark Moon
Geologist: Logan Wang, Edwards Southwick
Rig & Drilling Method: AP 1000 Air Percussion/ 94 mm Mud Rotary Drill Rig
Drilling Fluid: City Water

Well Materials & Design

Casing: 8-inch Schedule 40 PVC w/threaded connectors, from 1.0 ft above grade to 138.0 ft depth.

Screen: 8-inch Stainless Steel machine slotted 0.040", from 138.0 to 153.0 ft depth.

Centralizers: None

Filter Material: CSSI gradation 8-14; clean washed silica sand from 142.0 ft. to 134.0 ft. depth.

Grout (tremie-placed): 3/8" bentonite pellets from 134.0 ft. to 130.0 ft.; neat cement/bentonite grout 2.0 ft. to 130.0 ft. depth.

Surface Seal: Above-grade locking steel cover in a concrete pad with 8" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	6/4/95	13:20	6/10/95	10:15
GeoPhys. Logging:				
Casing/Screen:	6/11/95	12:15	6/11/95	13:10
Filter Placement:	6/11/95	13:30	6/11/95	14:30
Bentonite and Grout:	6/11/95	14:30	6/11/95	19:27
Development:				
Other:				

Development Method: Bailing/3" Pump.

Comments: Decon by Hotsy with high pressure water.

Well Schematic (No Scale)

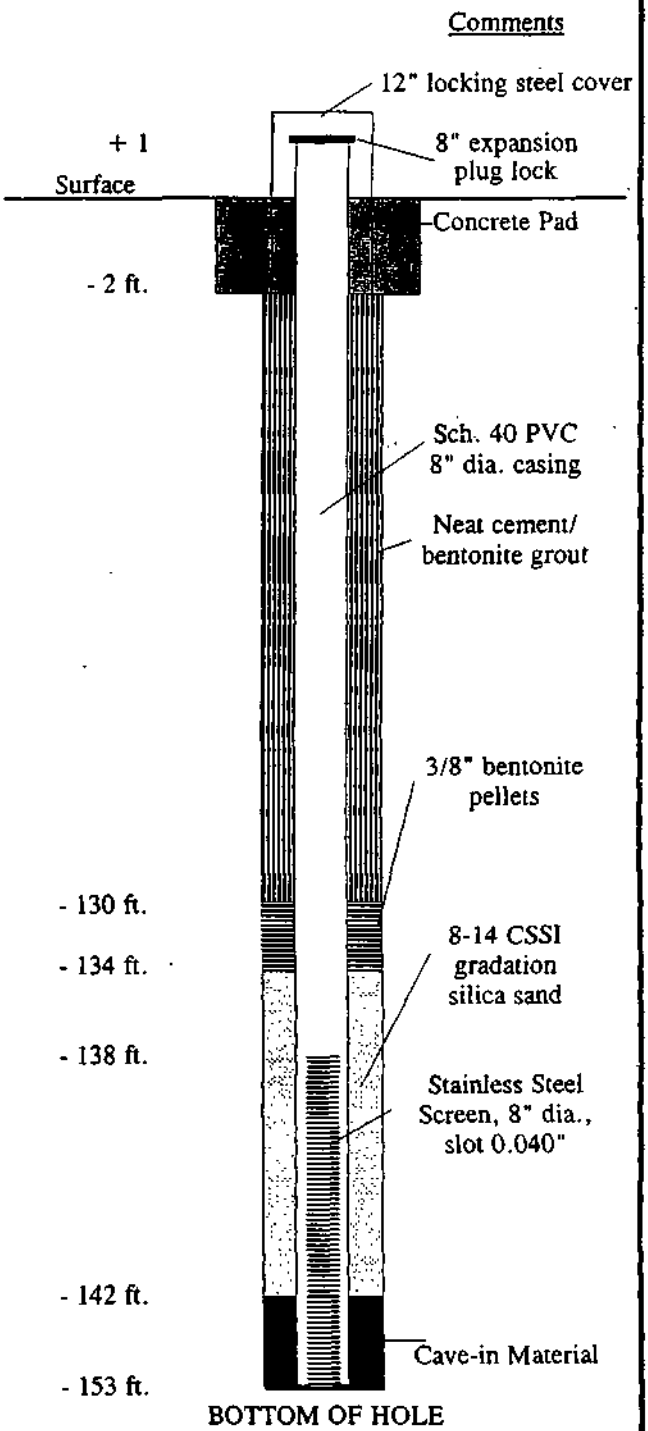

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Northwest of Grain Storages, in the corn field.

Well Identification: **MW-1A**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1924.9 ft. MSL
Top of Casing Elevation: 1926.34 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 125.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Lieghs, Lexington
Drilling Crew: Brian Freeman, Lenny.
Geologist: Logan Wang
Rig & Drilling Method: 61/4" I.D Hollow Stem auger w/drag bit.
Drilling Fluid: 250 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from 2.0 ft above grade to 102.0 ft depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 102.0 to 117.0 ft depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand from 100.0 ft to 118.0 ft. depth.

Grout (tremie-placed): 1/2" bentonite pellets from 100.0 ft. to 96.0 ft.; neat cement/bentonite grout from grade to 96.0 ft. dpth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	08/18/94	10:29	08/19/94	10:34
GeoPhys. Logging:				
Casing/Screen:	08/19/94	10:34	08/19/94	10:40
Filter Placement:	08/19/94	10:40	08/19/94	12:40
Bentonite	08/19/94	12:40	08/19/94	12:45
Grout:	08/19/94	14:26	08/19/94	14:35
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Well was reinstalled in the same hole due to fail of the first time.

Well Schematic (No Scale)

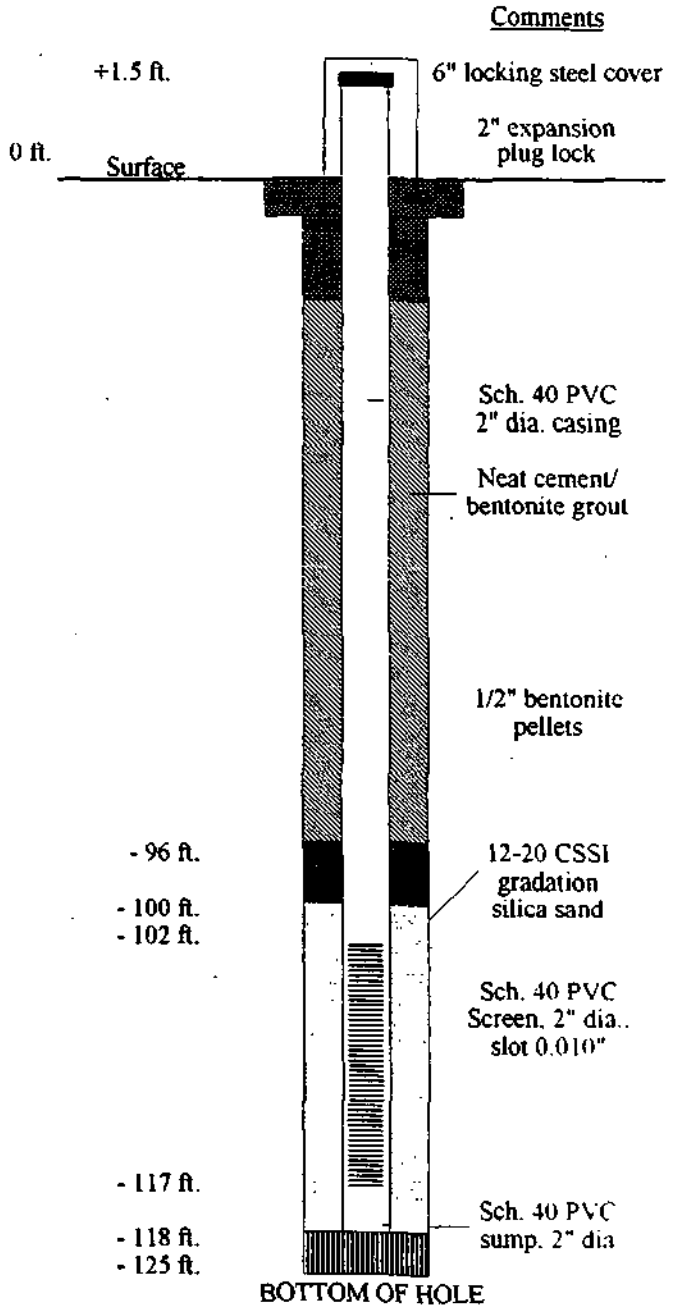

US EPA ARCHIVE DOCUMENT

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevators, Hastings, NE
Well Identification: MW-2A
Project Number: 72-44-0025
Legal Description: NW¼, Section 23, T. 7 N., R. 10 W.
Local Description: Approx. 300 ft. North and 150 ft. West of Water Well Pump House.
Adams County, Nebraska
Ground Elevation: 1926.6 ft. MSL
Located in: Upland
Top of Casing Elevation: 1929.51 ft. MSL
Depth to water after drilling: 109.1 ft.

Drilling Summary

Drilling Company: *HWS Consulting Group, Inc., Lincoln, NE*
Geologist: Ed Southwick
Drilling Crew: Tim Thomsen, Rob Wright, Dale Bixler
Drilling Rig: CME-75
Drilling Method: 10 in. od hollow stem auger
Total Depth: 118 feet
Borehole Diameter: 10 inches
Drilling Fluid: Water

Well Materials & Design

Casing:
2-inch Schedule 40 PVC w/threaded connectors, from 2.9 ft above grade to 103.0 ft depth. Threaded bottom-cone of same material attached to bottom of screen.

Screen:
2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 103.0 to 118.0 ft depth.

Centralizers:
None

Filter Material:
CSSI gradation 10-20; clean washed silica sand; tremie-placed from 97.0 to 118.0 ft. depth.

Grout:
⅜" bentonite pellets from 95.0 to 97.0 ft. depth.
Neat cement/bentonite grout from 4.0 to 95.0 ft. depth.

Surface Seal:
Concrete (road mix) placed from surface to 4.0 ft depth.
Well covered with 4" above-ground locking steel cover.
Top of casing fitted with 2" locking, expansion plug.

Other:
Surface finished with concrete pad into which well cover and four corner posts were embedded.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	6/16/94	7:12	6/16/94	12:50
Casing/Screen:	6/16/94		6/16/94	
Filter Placement:	6/16/94		6/16/94	
Bentonite Seal:	6/16/94		6/16/94	
Grout:	6/21/94	14:30	6/21/94	15:35
Development:	6/20/94		6/20/94	
Other:				

Comments: Decon by high-pressure, hot water washer. Elevations based on assumed benchmark elevation of 1930 MSL.

Well Schematic (not to scale)

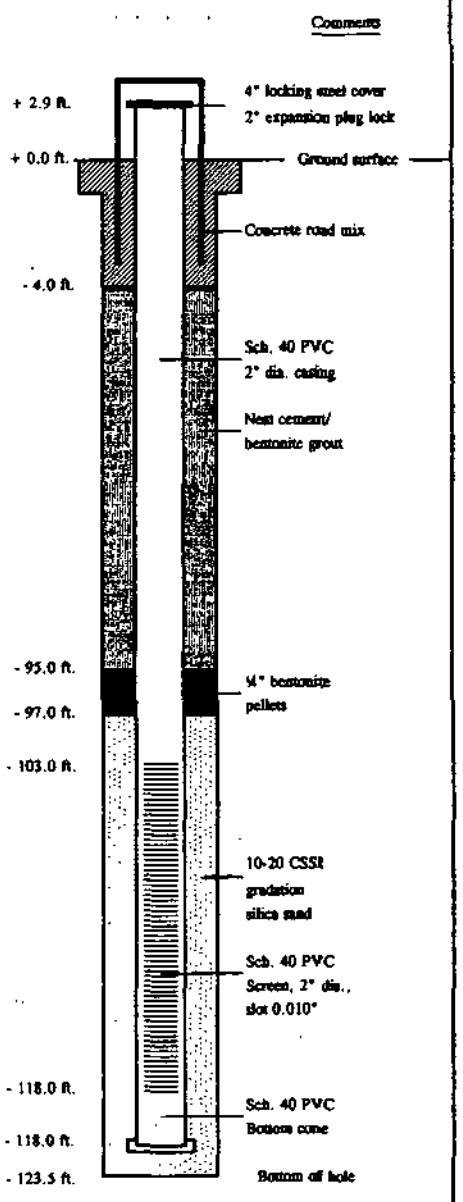

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevators, Hastings, NE
Project Number: 72-44-0025
Local Description: Approximately 150 ft. South, Southwest of Scales.

Well Identification: MW-3A
Legal Description: NW¼, Section 23, T. 7 N., R. 10 W. Adams County, Nebraska

Ground Elevation: 1930.2 ft. MSL
Top of Casing Elevation: 1933.61 ft. MSL

Located in: Upland
Depth to water after drilling: 113.0 ft.

Drilling Summary

Drilling Company: HWS Consulting Group, Inc., Lincoln, NE
Geologist: Ed Southwick
Drilling Crew: Tim Thomsen, Rob Wright, Dale Bixler
Drilling Rig: CME-75
Drilling Method: 10 in. od hollow stem auger
Total Depth: 123 feet
Borehole Diameter: 10 inches
Drilling Fluid: Water

Well Materials & Design

Casing:
2-inch Schedule 40 PVC w/threaded connectors, from 3.4 ft above grade to 108.0 ft depth. Threaded bottom-cone of same material attached to bottom of screen.

Screen:
2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 108.0 to 123.0 ft depth.

Centralizers:
None

Filter Material:
CSSI gradation 10-20; clean washed silica sand; tremie-placed from 103.0 to 123.0 ft. depth.

Grout:
¼" bentonite pellets from 101.0 to 103.0 ft. depth.
Neat cement/bentonite grout from 4.0 to 101.0 ft. depth.

Surface Seal:
Concrete (road mix) placed from surface to 4.0 ft depth.
Well covered with 4" above-ground locking steel cover.
Top of casing fitted with 2" locking, expansion plug.

Other:
Surface finished with concrete pad into which well cover and four corner posts were embedded.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	6/15/94	11:45	6/15/94	15:01
Casing/Screen:	6/15/94		6/15/94	
Filter Placement:	6/15/94		6/15/94	
Bentonite Seal:	6/15/94		6/15/94	
Grout:	6/21/94	14:30	6/21/94	15:35
Development:	6/20/94		6/20/94	
Other:				

Comments: Decon by high-pressure, hot water washer. Elevations based on assumed benchmark elevation of 1930 MSL

Well Schematic (not to scale)

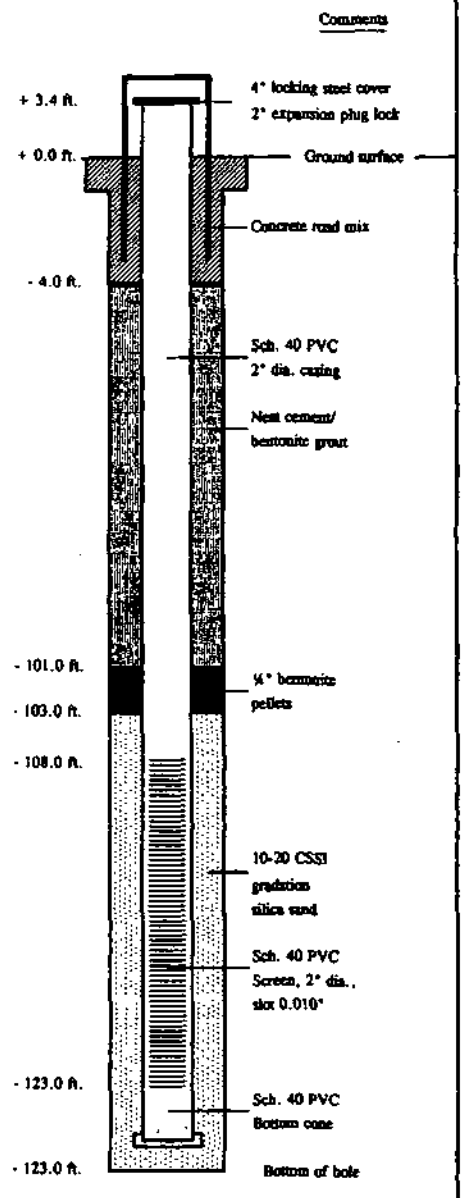

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Near Garvey truck scales.

Well Identification: MW-3B
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1930.4 ft. MSL
Top of Casing Elevation: 1932.11 ft. MSL

Located in (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 136 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liebs Drilling, Lexington, NE
Drilling Crew: Wess Lieb; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig.

Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.71 ft above grade to 136.4 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 130.6 to 133.5 ft depth; no sump.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 127.6 ft. to 134.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 122.3 ft. to 127.6 ft.; neat cement/bentonite grout from grade to 122.3 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: Bentonite Pellets from 134.0 to 136.0 ft. depth.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/9/94	10:00	11/9/94	14:15
GeoPhys. Logging:	none		none	
Casing/Screen:	11/9/94	16:00	11/9/94	16:30
Filter Placement:	11/9/94	16:30	11/9/94	16:45
Bentonite	11/9/94	17:15	11/9/94	17:30
Grout:	11/9/94	17:15	11/9/94	17:30
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 1,000 gallons of water was added during construction.

Well Schematic (No Scale)

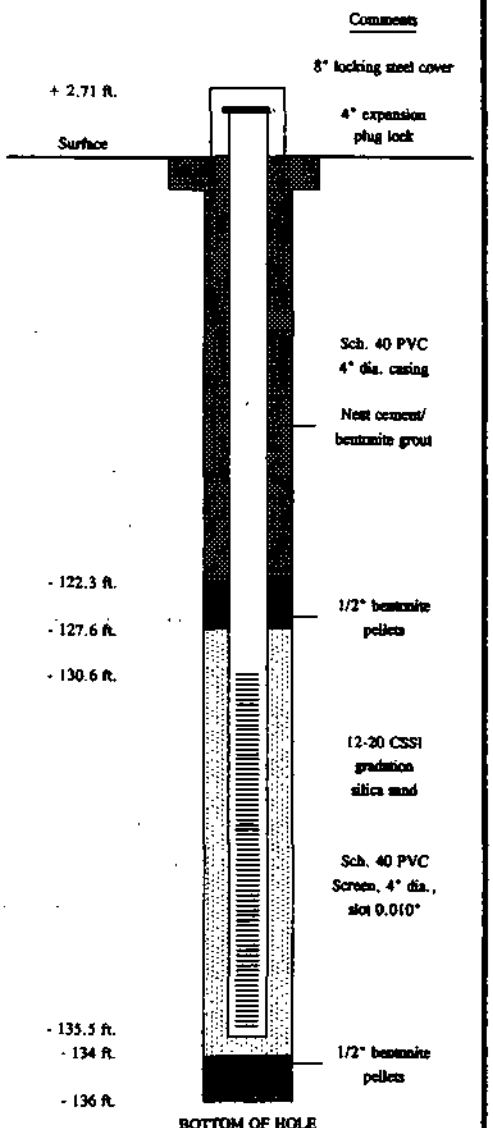

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: 10' west of MW-3A

Well Identification: **MW-3D**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1930.7 ft. MSL
Top of Casing Elevation: 1932.41 ft. MSL

Located In (circle one): Side Slope Sand Dunes
Bottomland (Upland) Ravine Terrace

Drilling Summary

Total Depth: 179.6 ft. Borehole Diameter: 8 1/4 in.
Drilling Company: Layne-West Drilling Co.
Drilling Crew: Ted Thomas, Mark, Rob.
Geologist: Logan Wang
Rig & Drilling Method: Air Percussion Hammer, AP 1000

Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 1.71 ft above grade to 178.5 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 171.0 to 176.0 ft depth.

Centralizers: None

Filter material: CSSI gradation 12-20; clean washed silica placed from 166.7 ft to 179.6 ft with minor cave in materials.
Grout: 26 x 50 lb. Wyoming-Environmental Bentonite Grout Powder from 166.7 ft. to 4.0 ft. below grade.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: approximately 500 gallons of water was used during drilling and well installation.

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	1/16/95	14:05	1/17/95	10:15
GeoPhys. Logging:				
Casing/Screen:	1/17/95	10:15	1/17/95	1:30
Filter Placement:	1/17/95	14:30	1/17/95	15:00
Bentonite	1/17/95	15:00	1/17/95	17:50
Grout:	1/17/95	15:00	1/17/95	17:50
Development:				
Other:				

Development Method 3" submercible pump

Comment Approximately 200 Gallons of water was used during drilling.

Well Schematic (No Scale)

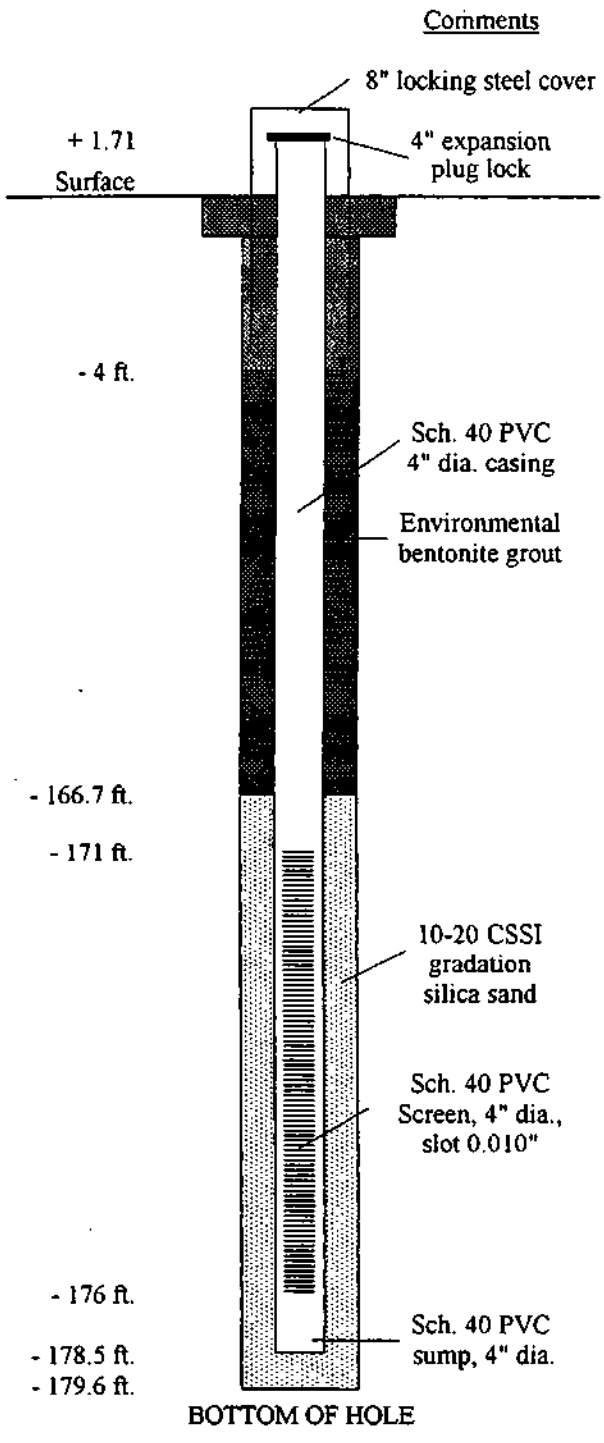

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Near Garvey truck scales.

Well Identification: MW-3E
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1930.3 ft. MSL
Top of Casing Elevation: 1931.62 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 243 ft. Borehole Diameter: 8.0 in.
Drilling Company: Layne-West Drilling Company
Drilling Crew: Ted
Geologist: Steve Holmes
Rig & Drilling Method: Air Percussion Hammer, AP 1000.

Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 80 PVC w/threaded connectors, from 1.32 ft above grade to 233.4 ft depth.

Screen: 4-inch Schedule 80 PVC w/threaded connectors; machine slotted 0.010", from 233.4 to 238.4 ft depth. The bottom cone of the same material from 238.4 to 243.7 ft..
Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 243.7 ft. to 229.0 ft. depth; blotter sand from 229.0 ft. to 227.0 ft..
Grout (tremie-placed): ½" bentonite pellets from 122.3 ft. to 127.6 ft.; neat cement/bentonite grout from grade to 122.3 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: Bentonite Pellets from 134.0 to 136.0 ft. depth.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	1/9/94	11:00	1/10/94	12:00
GeoPhys. Logging:	none		none	
Casing/Screen:	1/10/94	14:00	1/10/94	15:30
Filter Placement:	1/11/94	8:30	1/11/94	8:40
Bentonite	1/11/94	8:40	1/11/94	12:15
Grout:	1/11/94	8:40	1/11/94	12:15
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 300 gallons of water was added during construction.

Well Schematic (No Scale)

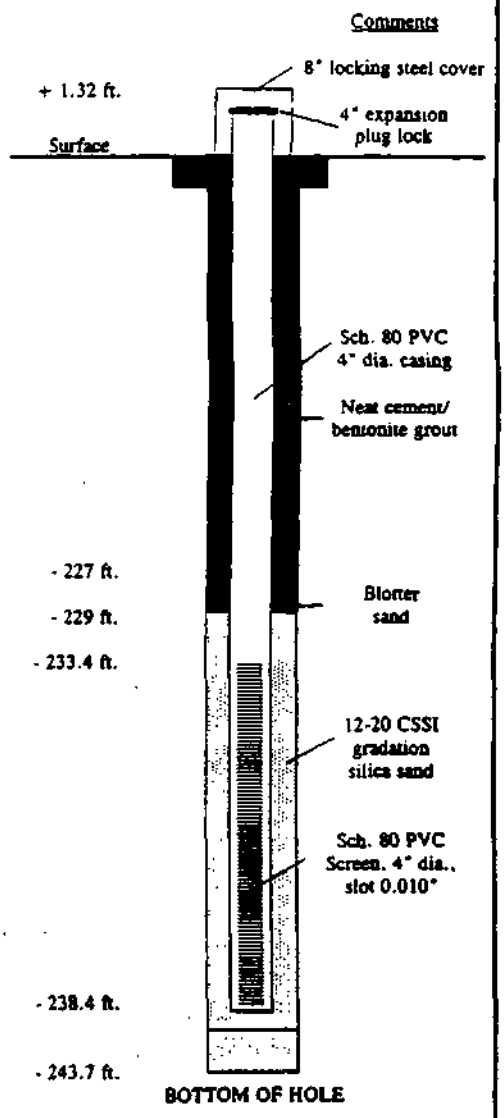

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevators, Hastings, NE
Project Number: 72-44-0025
Local Description: East side of grain storage facilities

Well Identification: MW-4A
Legal Description: NW¼, Section 23, T. 7 N., R. 10 W.
Adams County, Nebraska

Ground Elevation: 1931.2 ft. MSL
Top of Casing Elevation: 1930.97 ft. MSL

Located in: Upland
Depth to water after drilling: 113.5 ft.

Drilling Summary

Drilling Company: HWS Consulting Group, Inc., Lincoln, NE
Geologist: Gregg Brettmann
Drilling Crew: Tim Thomsen, Rob Wright, Dale Bixler
Drilling Rig: CME-75
Drilling Method: 10 in. od hollow stem auger
Total Depth: 123.5 feet
Borehole Diameter: 10 inches
Drilling Fluid: Water

Well Materials & Design

Casing:
2-inch Schedule 40 PVC w/threaded connectors, from 0.0 ft above grade to 108.5 ft depth. Threaded bottom-cone of same material attached to bottom of screen.

Screen:
2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 108.5 to 123.5 ft depth.

Centralizers:
None

Filter Material:
CSSI gradation 10-20; clean washed silica sand; tremie-placed from 103.5 to 123.5 ft. depth.

Grout:
½" bentonite pellets from 101.5 to 103.5 ft. depth.
Neat cement/bentonite grout from 4.0 to 101.5 ft. depth.

Surface Seal:
Concrete (road mix) placed from surface to 4.0 ft depth.
Well covered with 4" above-ground locking steel cover.
Top of casing fitted with 2" locking, expansion plug.

Other:
Surface finished with concrete pad into which well cover and four corner posts were embedded.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	6/21/94	8:55	6/21/94	12:55
Casing/Screen:	6/21/94		6/21/94	
Filter Placement:	6/21/94		6/21/94	
Bentonite Seal:	6/21/94		6/21/94	
Grout:	6/21/94	14:30	6/21/94	15:35
Development:	6/21/94	17:25	6/21/94	
Other:				

Comments: Decon by high-pressure, hot water washer. Elevations based on assumed benchmark elevation of 1930 MSL.

Well Schematic (not to scale)

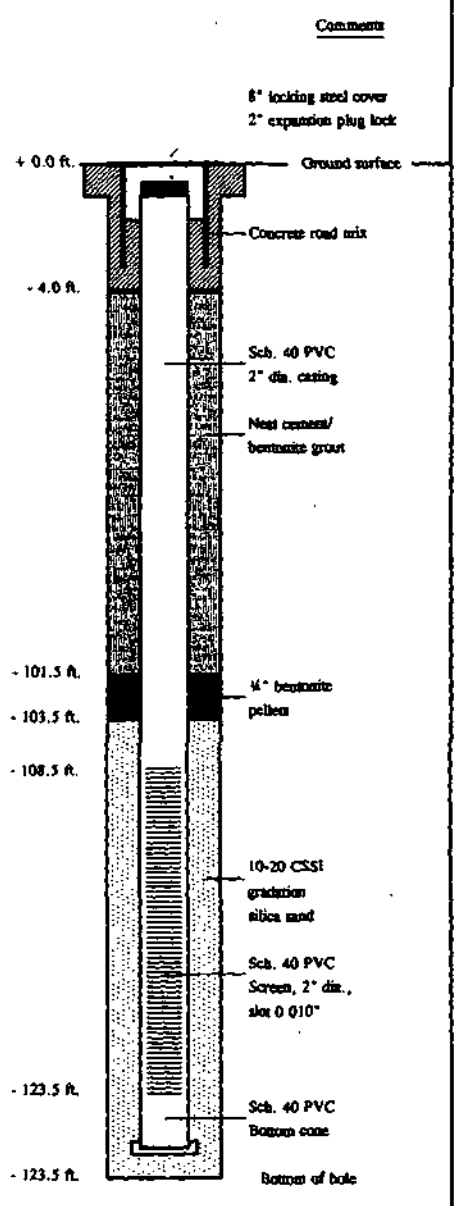

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: East side of grain storage facilities

Well Identification: MW-4B
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1931.1 ft. MSL
Top of Casing Elevation: 1930.81 ft. MSL

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 132 ft. Borehole Diameter: 8.0 in.
Drilling Company: Licha Drilling, Lexington, NE
Drilling Crew: Wess Lich; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig.

Drilling Fluid: City water, and 50 lb bentonite mixture.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from grade to 127.0 ft. depth; sump of same material from 132.0 to 134.0 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 127.0 to 132.0 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 120.0 ft. to 134.0 ft. depth.

Grout (tremie-placed): 1/2" bentonite pellets from 84.5 ft. to 120.0 ft. depth; neat cement/bentonite grout from grade to 84.5 ft. depth.
Surface Seal: Flush mount 6" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	11/11/94	2:10	11/11/94	3:07
GeoPhys. Logging:	none		none	
Casing/Screen:	11/11/94	3:07	11/11/94	3:40
Filter Placement:	11/11/94	3:40	11/11/94	3:50
Bentonite	11/11/94	3:50	11/11/94	4:00
Grout:				
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 500 Gallons of water was used during drilling.
This was a replacement well drilled in a new borehole.

Well Schematic (No Scale)

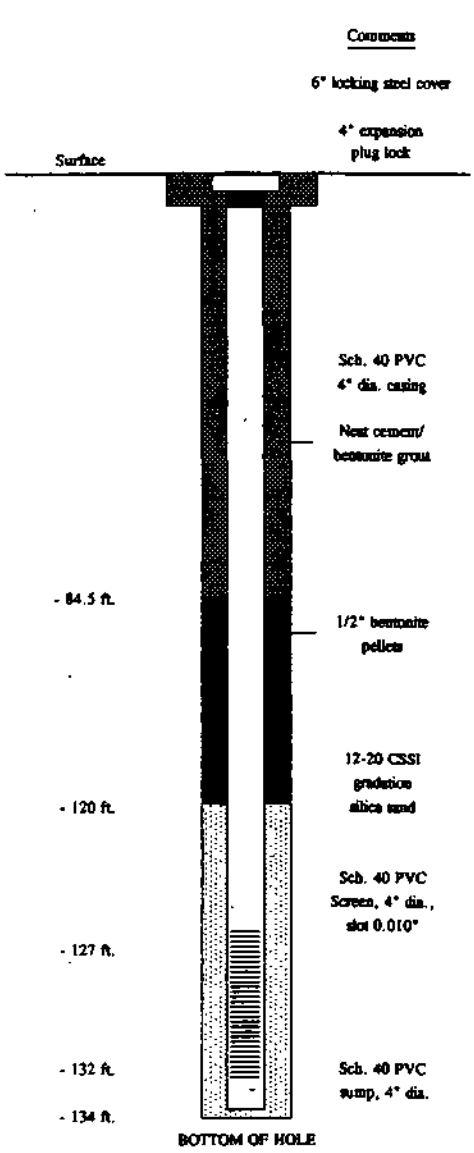

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevators, Hastings, NE
Project Number: 72-44-0025
Local Description: South of elevators, near railroad tracks.

Well Identification: **MW-5A**
Legal Description: NW¼, Section 23, T. 7 N., R. 10 W. Adams County, Nebraska

Ground Elevation: 1928.3 ft. MSL
Top of Casing Elevation: 1928.18 ft. MSL
Located in: Upland
Depth to water after drilling: 112.4 ft.

Drilling Summary

Drilling Company: HWS Consulting Group, Inc., Lincoln, NE
Geologist: Ed Southwick
Drilling Crew: Tim Thomssen, Rob Wright, Dale Bixler
Drilling Rig: CME-75
Drilling Method: 10 in. od hollow stem auger
Total Depth: 122.5 feet
Borehole Diameter: 10 inches
Drilling Fluid: Water

Well Materials & Design

Casing:
2-inch Schedule 40 PVC w/threaded connectors, from 0.0 ft above grade to 107.5 ft depth. Threaded bottom-cone of same material attached to bottom of screen.

Screen:
2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 107.5 to 122.5 ft depth.

Centralizers:
None

Filter Material:
CSSI gradation 10-20; clean washed silica sand; tremie-placed from 102.5 to 122.5 ft. depth.

Grout:
½" bentonite pellets from 100.5 to 102.5 ft. depth.
Neat cement/bentonite grout from 4.0 to 100.5 ft. depth.

Surface Seal:
Concrete (road mix) placed from surface to 4.0 ft depth. Well covered with 4" above-ground locking steel cover. Top of casing fitted with 2" locking, expansion plug.

Other:
Surface finished with concrete pad into which well cover and four corner posts were embedded.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	6/16/94	15:00	6/17/94	8:55
Casing/Screen:	6/17/94		6/17/94	
Filter Placement:	6/17/94		6/17/94	
Bentonite Seal:	6/17/94		6/17/94	
Grout:	6/21/94	14:30	6/21/94	15:35
Development:	6/21/94	16:20	6/21/94	17:20
Other:				

Comments: Decon by high-pressure, hot water washer. Elevations based on assumed benchmark elevation of 1930 MSL

Well Schematic (not to scale)

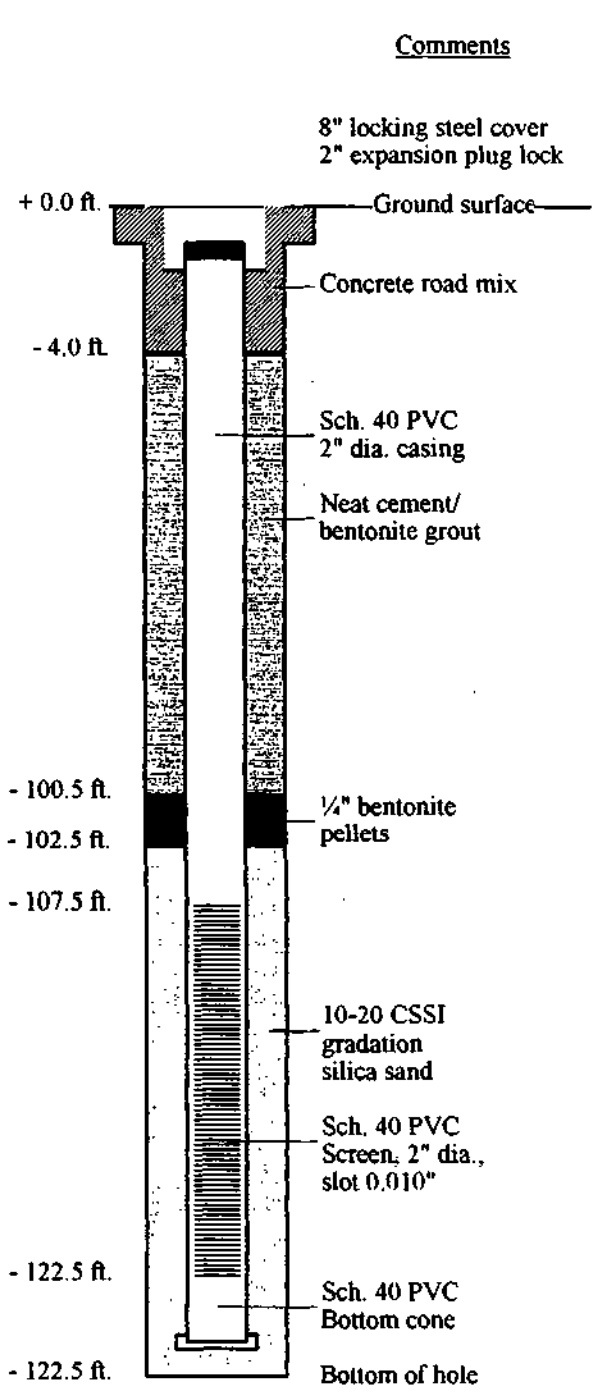

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: South of grain elevator buildings, near railroad tracks

Well Identification: **MW-5B**
Legal Description: NW¼, NW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Ground Elevation: 1929.2 ft. MSL
Top of Casing Elevation: 1930.81 ft. MSL

Located In (circle one): Side Slope Sand Dunes Bottomland (Upland) Ravine Terrace

Drilling Summary

Total Depth: 133.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Wess Lieh: Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 800 gallons of City water and 50 lb bentonite.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 1.61 ft. above-grade to 129.0 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 129.0 to 132.0 ft.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 124.7 ft. to 132.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 119.0 ft. to 124.7 ft. depth; neat cement/bentonite grout from grade to 119.0 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: Bentonite pellets from 132.0 to 133.0 ft. depth.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/10/94	7:45	11/10/94	10:30
GeoPhys. Logging:	none		none	
Casing/Screen:	11/10/94	10:30	11/10/94	12:00
Filter Placement:	11/10/94	12:00	11/10/94	12:15
Bentonite Grout:	11/10/94	13:15	11/10/94	13:30
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 800 gallons of water was used during drilling.

Well Schematic (No Scale)

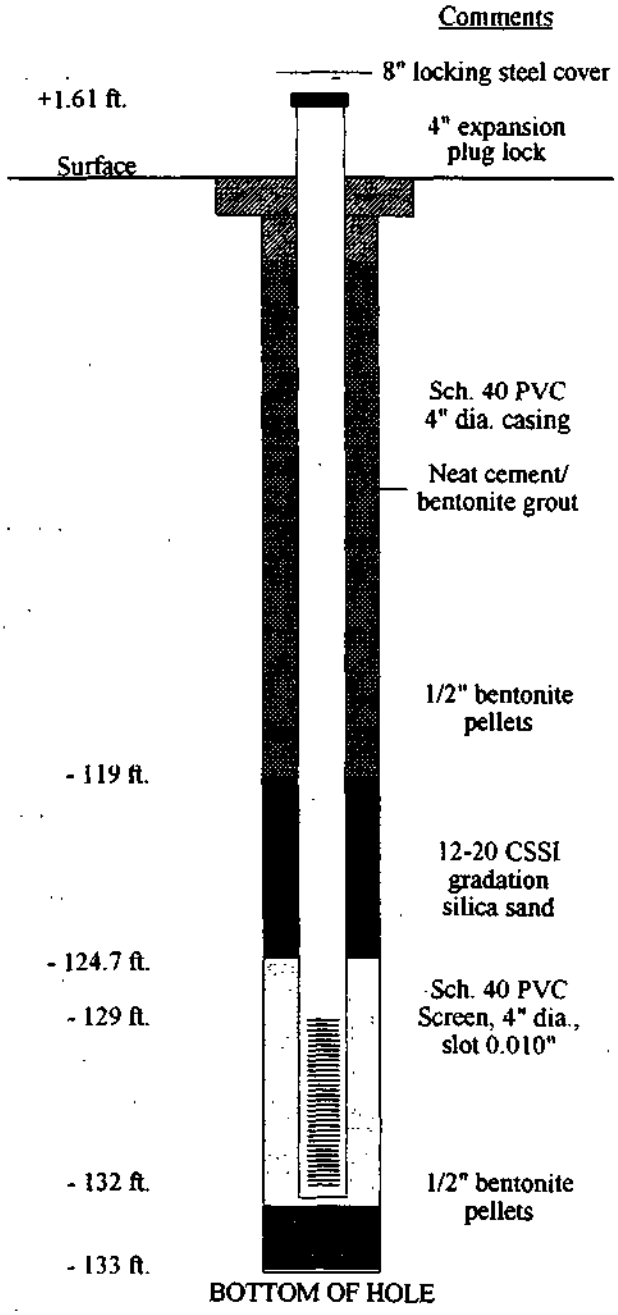

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: 10' south of MW-5A

Well Identification: **MW-5D**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1926.1 ft. MSL
Top of Casing Elevation: 1927.96 ft. MSL

Located In (circle one) Side Slope Sand Dunes
Bottomland (Upland) Ravine Terrace

Drilling Summary

Total Depth: 188 ft. Borehole Diameter: 8 1/4 in.
Drilling Company: Layne-West Drilling Co.
Drilling Crew: Ted Thomas, Mark, Rob.
Geologist: Logan Wang
Rig & Drilling Method: Air Percussion Hammer, AP 1000

Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 1.86 ft above grade to 162.0 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 162.0 to 167.0 ft depth.

Centralizers: None

Filter Material: CSSI gradation 10-20; clean washed silica sand; tremie-placed from 155.7 ft. to bottom of the hole with cave in materials.
Grout (tremie-placed): ½" bentonite pellets from 127.6 ft. 26 x 50 lb. Wyoming-Environmental Bentonite Grout Powder from 155.7 ft. to 5 ft. below grade.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	01/18/95	9:53	01/18/95	15:00
GeoPhys. Logging:				
Casing/Screen:	01/18/95	15:00	01/18/95	16:19
Filter Placement:	01/18/95	16:19	01/18/95	16:40
Bentonite	01/18/95	16:40	01/18/95	18:18
Grout:	01/18/95	16:40	01/18/95	18:18
Development:				
Other:				

Development Method 3" submercible pump

Comment Approximately 200 Gallons of water was used during drilling.

Well Schematic (No Scale)

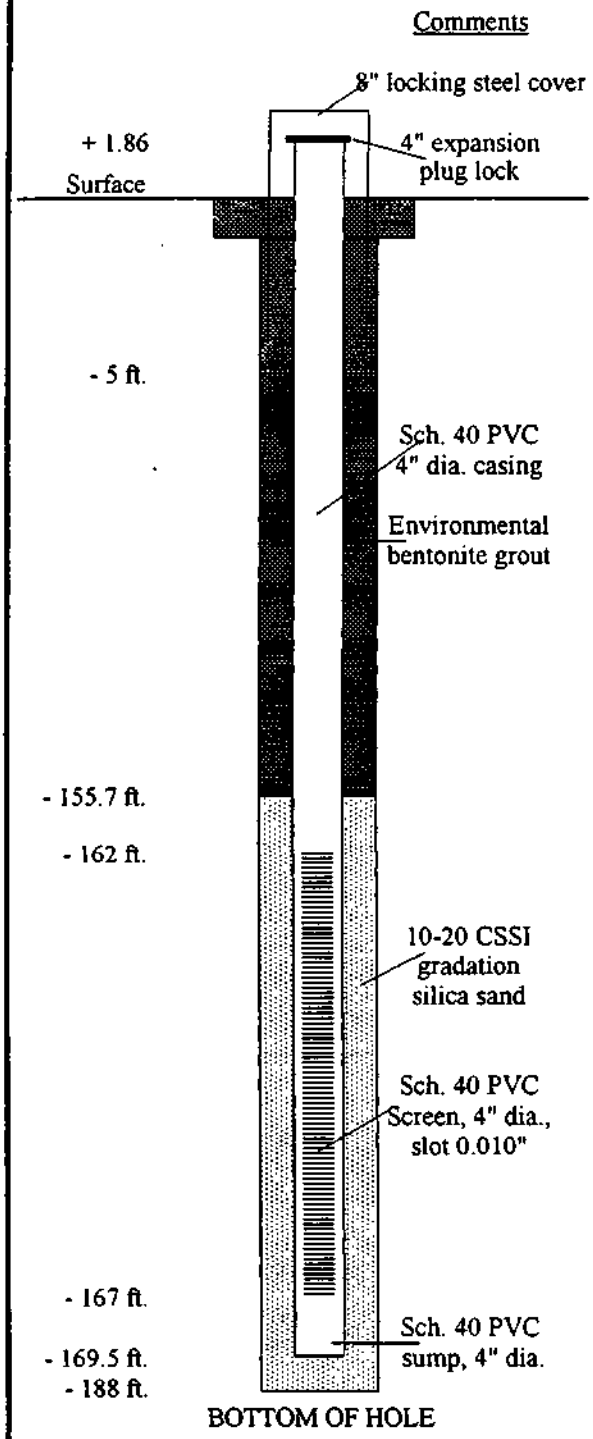

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevators, Hastings, NE
Well Identification: **MW-6A**
Project Number: 72-44-0025
Legal Description: NW¼, Section 23, T. 7 N., R. 10 W. Adams County, Nebraska
Local Description: Approx. 300 ft. North and 450 ft. East of Water Well Pump House.
Ground Elevation: 1928.8 ft. MSL
Located in: Upland
Top of Casing Elevation: 1931.30 ft. MSL
Depth to water after drilling: 112.5 ft.

Drilling Summary

Drilling Company: HWS Consulting Group, Inc., Lincoln, NE
Geologist: Ed Southwick
Drilling Crew: Tim Thomssen, Rob Wright, Dale Bixler
Drilling Rig: CME-75
Drilling Method: 4¼ in. od hollow stem auger
Total Depth: 123.5 feet
Borehole Diameter: 10 inches
Drilling Fluid: Water

Well Materials & Design

Casing:
2-inch Schedule 40 PVC w/threaded connectors, from 2.5 ft above grade to 107.5 ft depth. Threaded bottom-cone of same material attached to bottom of screen.

Screen:
2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 107.5 to 122.5 ft depth.

Centralizers:
None

Filter Material:
CSSI gradation 10-20; clean washed silica sand; tremie-placed from 113 to 122.5 ft. depth. Cave-in of sand formation from 80 to 113 ft. depth.

Grout:
½" bentonite pellets from 78.0 to 80.0 ft. depth.
Neat cement/bentonite grout from 4.0 to 78.0 ft. depth.

Surface Seal:
Concrete (road mix) placed from surface to 4.0 ft depth. Well covered with 4" above-ground locking steel cover. Top of casing fitted with 2" locking, expansion plug.

Other:
Surface finished with concrete pad into which well cover and four corner posts were embedded.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	6/14/94	14:19	6/15/94	8:23
Casing/Screen:	6/15/94		6/15/94	
Filter Placement:	6/15/94		6/15/94	
Bentonite Seal:	6/15/94		6/15/94	
Grout:	6/21/94	14:30	6/21/94	15:35
Development:	6/20/94		6/20/94	
Other:				

Comments: Decon by high-pressure, hot water washer. Elevations based on assumed benchmark elevation of 1930 MSL

Well Schematic (not to scale)

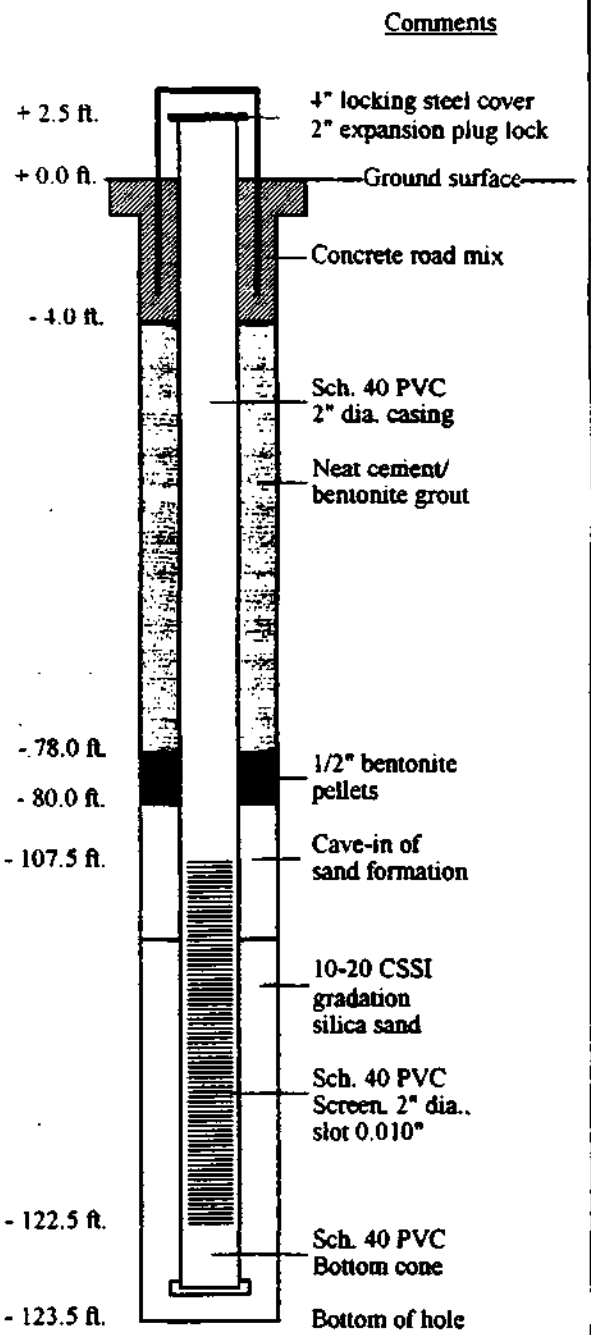

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Northeast corner of Garvey property, **south of Austine residence**
Ground Elevation: 1928.72
Top of Casing Elevation: 1930.45

Well Identification: **MW-6D**
Legal Description: NE¼, NW1/4, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska
Located In (circle on Side Slope Sand Dunes Bottomland (Upland) Ravine Terrace

Drilling Summary

Total Depth: 241.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Wess Lieh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 3000 gallons of City water and 100 lb bentonite.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.35 above grade to 163.5 ft. and from 173.5 ft. to 225.0 ft. depth; sump of same material from 235.0 to 237.0 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 235.0 ft. to 225.0 ft, and from 173.5 ft. to 163.5 ft. depth.
Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 241.0 ft. to 216.0 ft., and from 178.7 ft. to 153.6 ft. depth.
Grout (tremie-placed): ½" bentonite pellets from 216.0 ft. to 178.7 ft., and from 153.6 ft. to 138.4 ft. depth. neat cement/bentonite grout from grade to 138.4 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	11/8/94	7:30	11/8/94	15:00
GeoPhys. Logging:	none		none	
Casing/Screen:	11/8/94	16:00	11/8/94	17:00
Filter Placement:	11/8/94	17:00	11/8/94	18:30
Bentonite	11/8/94	19:15	11/9/94	9:30
Grout:				
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.

Well Schematic (No Scale)

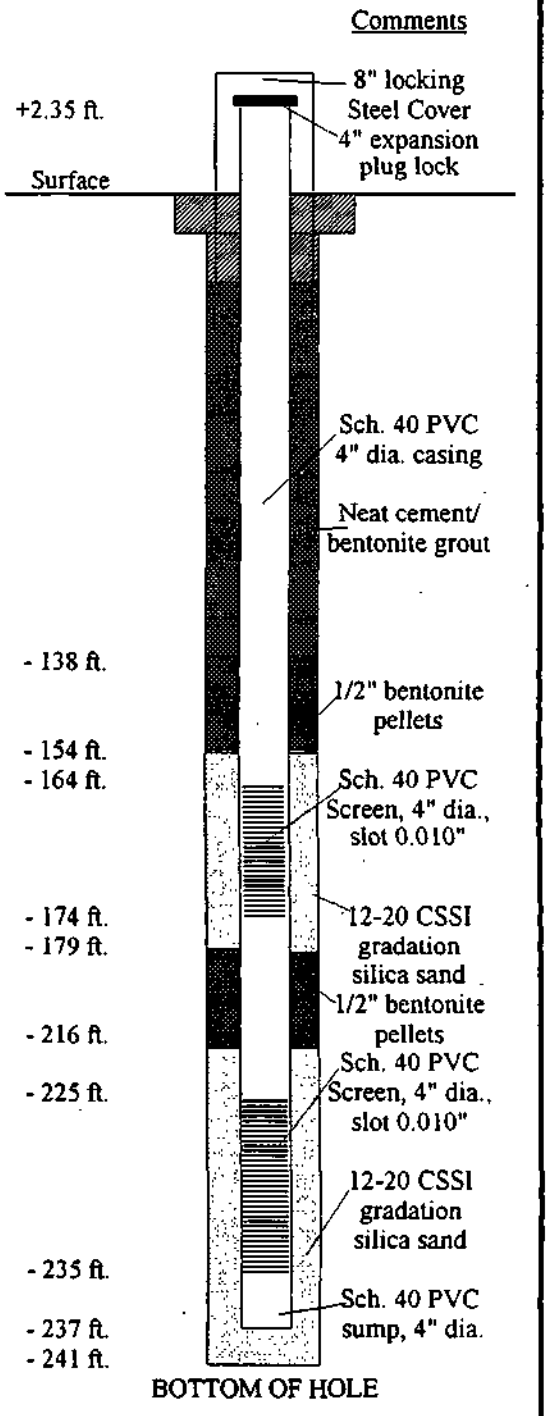

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Northeast corner of Garvey property, south of Austine residence

Well Identification: **MW-6E**
Legal Description: NE¼, NW1/4, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Ground Elevation: 1929.0 ft. MSL
Top of Casing Elevation: 1931.43 ft. MSL

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 241.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Wess Lieh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 3000 gallons of City water and 100 lb bentonite.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.43 above grade to 163.5 ft. and from 173.5 ft. to 225.0 ft. depth; sump of same material from 235.0 to 237.0 ft. depth.
Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 235.0 ft. to 225.0 ft. and from 173.5 ft. to 163.5 ft. depth.
Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 241.0 ft. to 216.0 ft., and from 178.7 ft. to 153.6 ft. depth.
Grout (tremie-placed): ½" bentonite pellets from 216.0 ft. to 178.7 ft., and from 153.6 ft. to 138.4 ft. depth. neat cement/bentonite grout from grade to 138.4 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/8/94	7:30	11/8/94	15:00
GeoPhys. Logging:	none		none	
Casing/Screen:	11/8/94	16:00	11/8/94	17:00
Filter Placement:	11/8/94	17:00	11/8/94	18:30
Bentonite Grout:	11/8/94	19:15	11/9/94	9:30
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.

Well Schematic (No Scale)

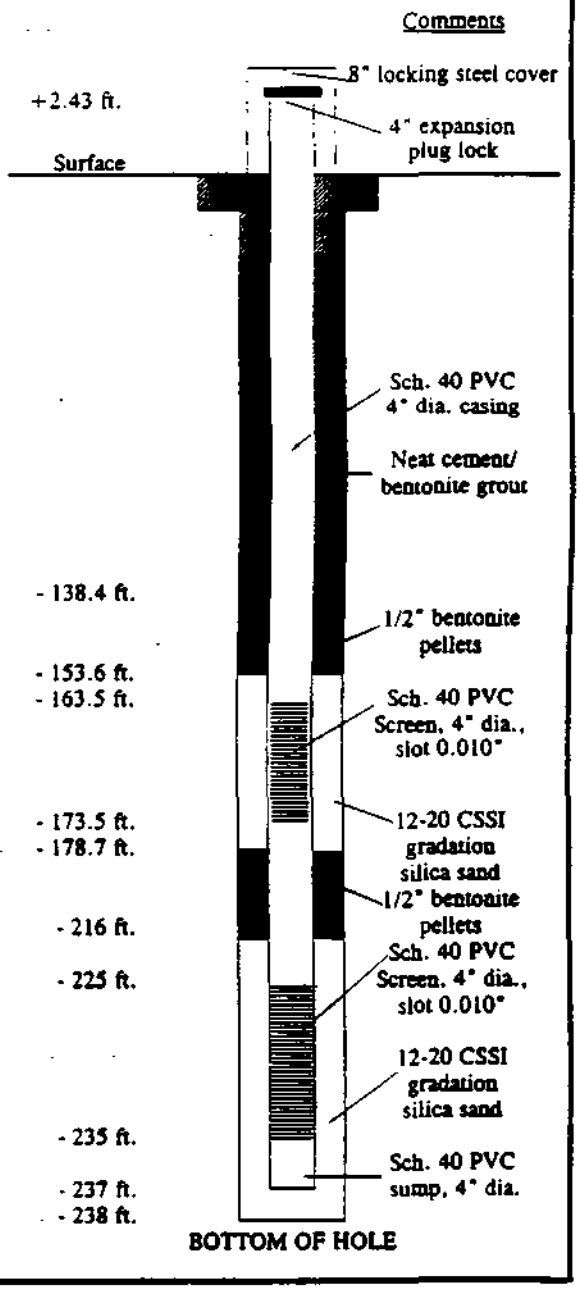

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Near southwestern corner of Garvey property.
Ground Elevation: 1920.2 ft. MSL
Top of Casing Elevation: 1922.68 ft. MSL

Well Identification: MW-7A
Legal Description: NW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 115.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liegha, Lexington
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: C. Cubbiace
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 500 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from grade to 98.0 ft depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 98.0 ft. to 113.0 ft depth.

Centralizers: None

Filter Material: CSSI gradation 16/30 clean washed silica sand; tremie-placed from 89.0 to 115.0 ft. depth.

Grout (tremie-placed): 1/2" bentonite pellets from 85.0 ft. to 89.0 ft.; neat cement/bentonite grout from grade to 85.0 ft. dpth.
Surface Seal: Above-grade 6" locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	10/26/94	12:00	11/27/94	9:40
GeoPhys. Logging:				
Casing/Screen:	11/27/94	10:20	11/27/94	10:30
Filter Placement:	11/27/94	10:40	11/27/94	11:25
Bentonite	11/27/94	11:25	11/27/94	11:30
Grout:				
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 500 Gallons of water was used during drilling.

Well Schematic (No Scale)

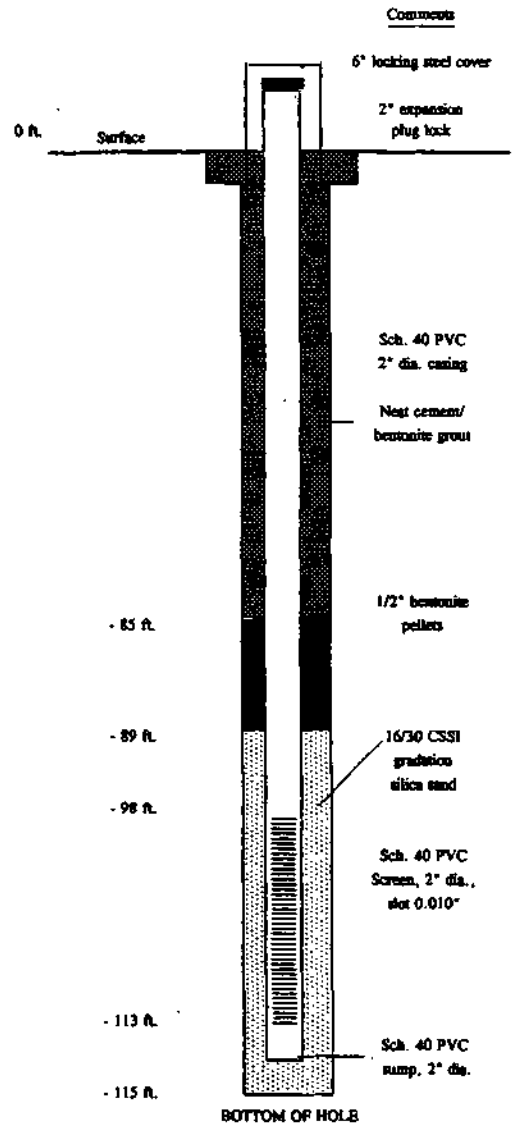

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description:

Ground Elevation: 1920.1
Top of Casing Elevation: 1923.05

Well Identification: **MW-7B**
Legal Description: NW¼, NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 133.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Wess Lieh; Hank.
Geologist: Bobby J. Sonnier
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 800 gallons of City water and 50 lb bentonite.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.95 ft. above-grade to 130.0 ft. depth. The bottom section of the same material from 135.5 ft. to 140.0 ft..

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 130.0 to 135.0 ft.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 126.4 ft. to 140.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 98.0 ft. to 126.4 ft. depth; neat cement/bentonite grout from grade to 98.0 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	1/3/95	10:30	1/3/95	13:00
GeoPhys. Logging:	none		none	
Casing/Screen:	1/3/95	13:45	1/3/95	14:00
Filter Placement:	1/3/95	14:15	1/3/95	14:45
Bentonite	1/3/95	15:00	1/3/95	16:30
Grout:	1/3/95	15:00	1/3/95	16:30
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 800 gallons of water was used during drilling.

Well Schematic (No Scale)

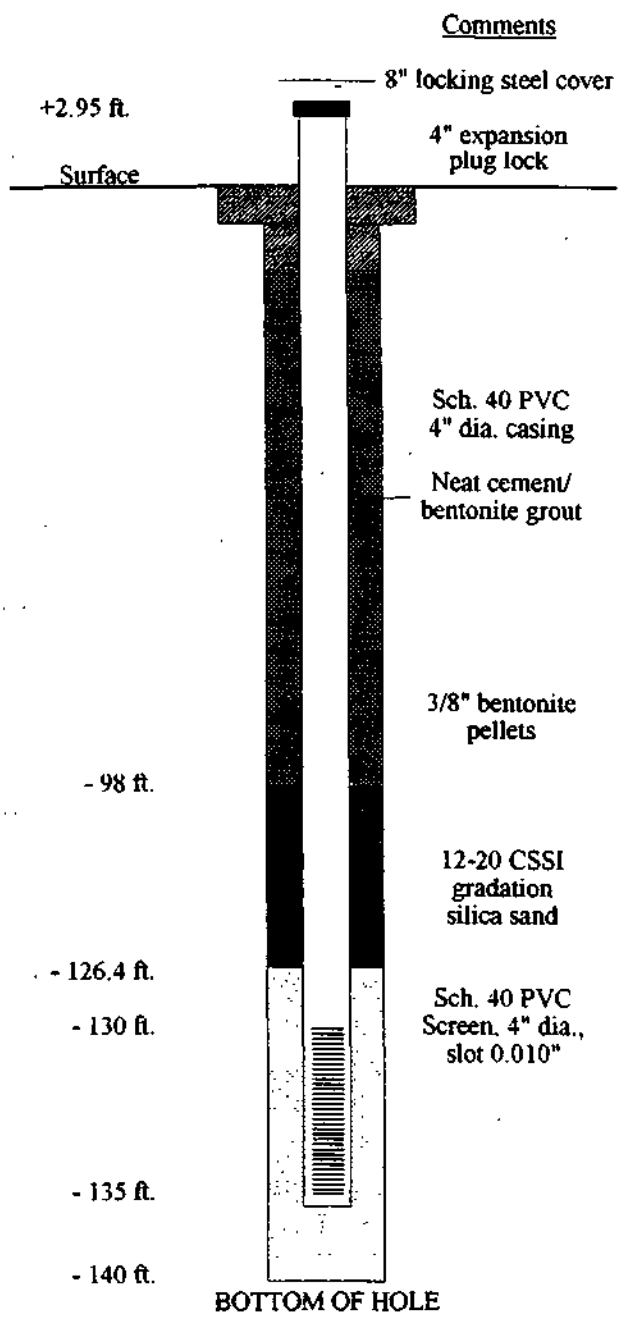

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Near southwestern corner of Garvey property.
Ground Elevation: 1940.1 ft. MSL
Top of Casing Elevation: 1942.58 ft. MSL

Well Identification: MW-8A
Legal Description: NW¼, Sec. 23 T. 7 N., R 10 W. Adams County, Nebraska
Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 132.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Lieghs, Lexington
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: C. Cubbison
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 500 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from grade to 114.5 ft depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 114.5 ft. to 129.5 ft depth.

Centralizers: None

Filter Material: CSSI gradation 16/30 clean washed silica sand; tremie-placed from 112.0 to 127.0 ft. depth. Natural Pack from 127.0 ft. to 131.5 ft. depth.
Grout (tremie-placed): 1/2" bentonite pellets from 107.0 ft. to 112.0 ft.; neat cement/bentonite grout from grade to 107.0 ft. dpth.
Surface Seal: Above-grade 6" locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	10/27/94	15:55	10/31/94	14:40
GeoPhys. Logging:				
Casing/Screen:	10/31/94	14:50	10/31/94	15:00
Filter Placement:	10/31/94	15:00	10/31/94	15:40
Bentonite	10/31/94	15:40	10/31/94	15:50
Grout:				
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hosey with high pressure water. Approximately 500 Gallons of water was used during drilling.

Well Schematic (No Scale)

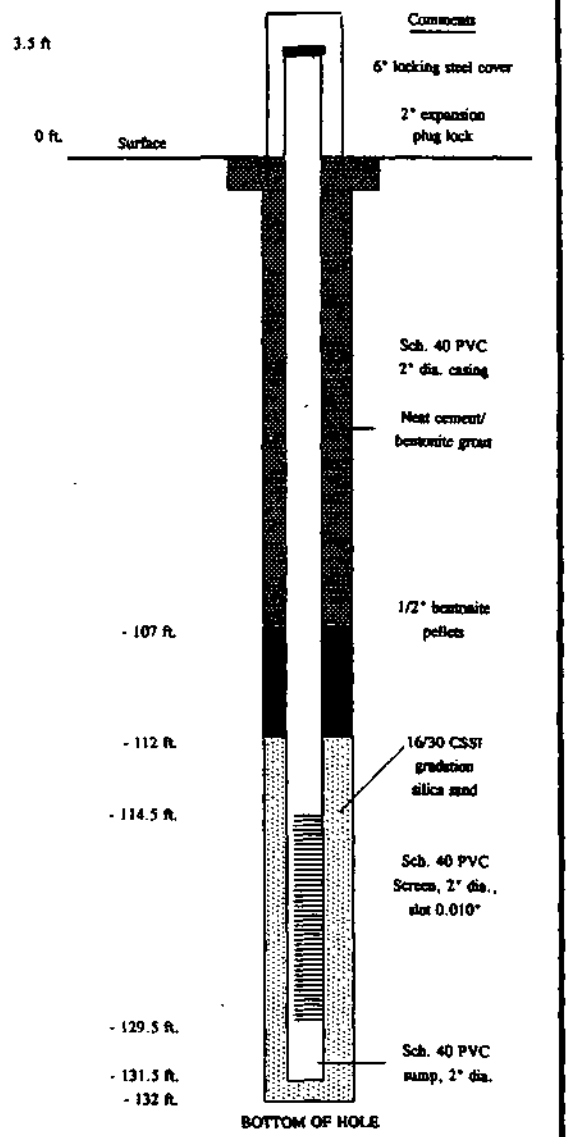

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Near southwestern corner of Garvey property.
Ground Elevation: 1924.7 ft. MSL
Top of Casing Elevation: 1927.24 ft. MSL

Well Identification: MW-9A
Legal Description: SW¼, Sec.14 T. 7 N., R 10 W. Adams County, Nebraska

Located in (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 120.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liegha, Lexington
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: C. Cubbison
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 350 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from 3.5 ft. above grade to 101.3 ft depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 101.3 ft. to 116.3 ft depth.

Centralizers: None

Filter Material: CSSI gradation 16/30 clean washed silica sand; tremie-placed from 88.0 to 118.3.0 ft. depth.
Natural Pack:
Grout (tremie-placed): 1/2" bentonite pellets from 84.0 ft. to 88.0 ft.; neat cement/bentonite grout from grade to 84.0 ft. dpth.
Surface Seal: Above-grade 6" locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	11/1/94	7:30	11/1/94	15:40
GeoPhys. Logging:				
Casing/Screen:	11/1/94	15:40	11/1/94	16:00
Filter Placement:	11/1/94	16:00	11/1/94	16:20
Bentonite	11/1/94	16:20	11/1/94	16:45
Grout:				
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hussey with high pressure water. Approximately 500 Gallons of water was used during drilling.

Well Schematic (No Scale)

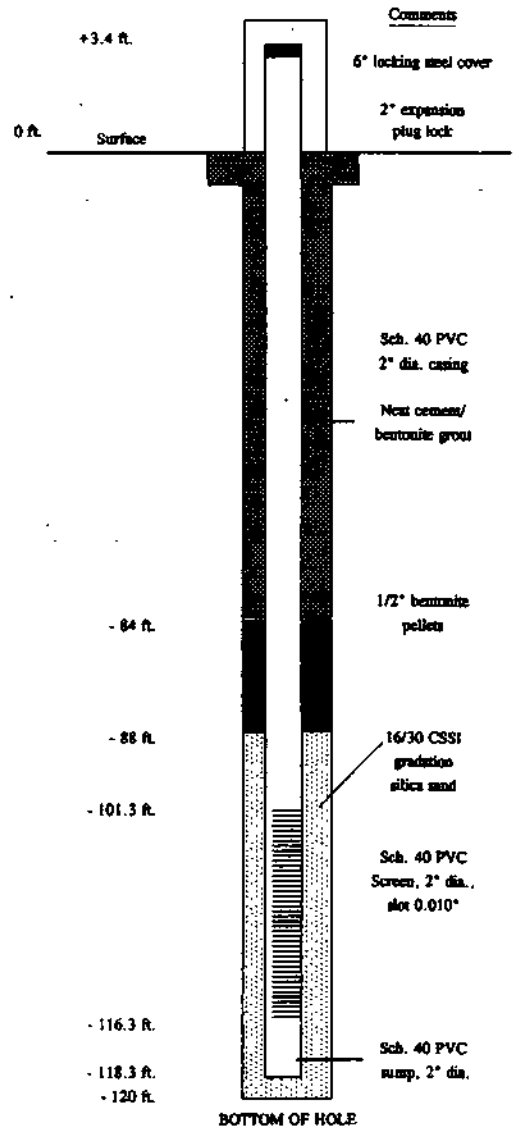

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: North of Great Plains Packaging facility

Well Identification: **MW-10A**
Legal Description: SE¼, Sec.14
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1923 ft. MSL
Top of Casing Elevation: 1922.71 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 120.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: C. Cubbison
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 500 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from grade to 101.8 ft. depth: sump of same material from 116.8 to 118.8 ft. depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 101.8 ft. to 116.8 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 16/30 clean washed silica sand, from 95.5 ft. to 100.3 ft. depth.
Natural Pack: from 100.3 ft. to 120.0 ft. depth.
Grout : 1/2" bentonite pellets from 83.0 ft. to 95.5 ft.
Concrete (road mix) placed from 0.0 to 83.0 ft. depth.

Surface Seal: Flush-mount 6" locking steel cover in a concrete pad and 2" expansion plug placed at the top of the PVC casing.

Other:

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	11/2/94	8:50	11/2/94	16:00
GeoPhys. Logging:	none		none	
Casing/Screen:	11/2/94	16:05	11/2/94	16:15
Filter Placement:	11/2/94	16:15	11/2/94	16:35
Bentonite Grout:	11/2/94	16:35	11/2/94	16:40
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 500 Gallons of water was used during drilling.

Well Schematic (No Scale)

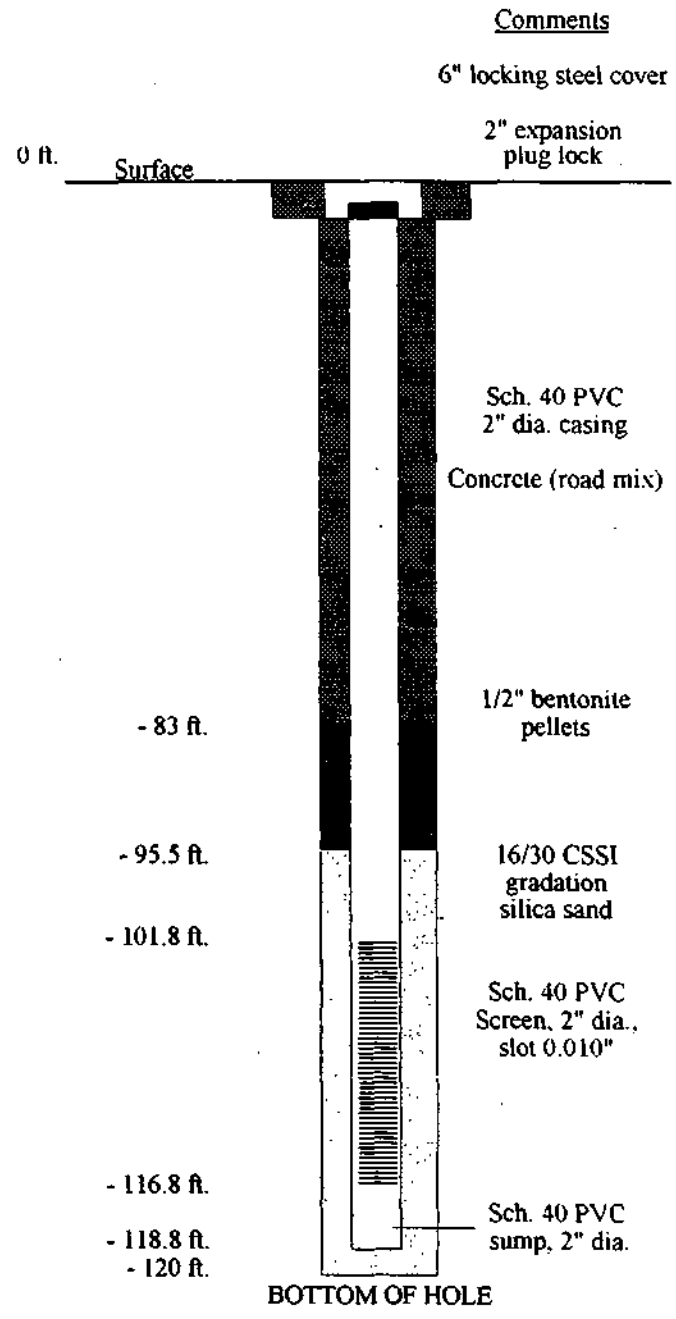

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description:

Ground Elevation: 1922.9 1922.9 ft. MSL
Top of Casing Elevation: 1922.4 1922.47 ft. MSL

Well Identification: **MW-10B**
Legal Description: NW¼, NW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Located In (circle one): Side Slope Sand Dunes Bottomland (Upland) Ravine Terrace

Drilling Summary

Total Depth: 130.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Lenny Nelson; Ed Johnson; Hank Schram.
Geologist: Ted Marguilies
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 1300 gallons of City water and 50 lb bentonite.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from .43 ft. below-grade to 120.0 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 120.0 to 125.0 ft.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 115.0 ft. to 130.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 100.0 ft. to 115.0 ft. depth; neat cement/bentonite grout from grade to 100.0 ft. depth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	1/11/95	9:45	1/11/95	11:15
GeoPhys. Logging:	none		none	
Casing/Screen:	1/11/95	13:00	1/11/95	13:30
Filter Placement:	1/11/95	13:30	1/11/95	13:50
Bentonite	1/11/95	13:50	1/11/95	14:15
Grout:	1/11/95	13:50	1/11/95	14:15
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 1300 gallons of water was used during drilling.

Well Schematic (No Scale)

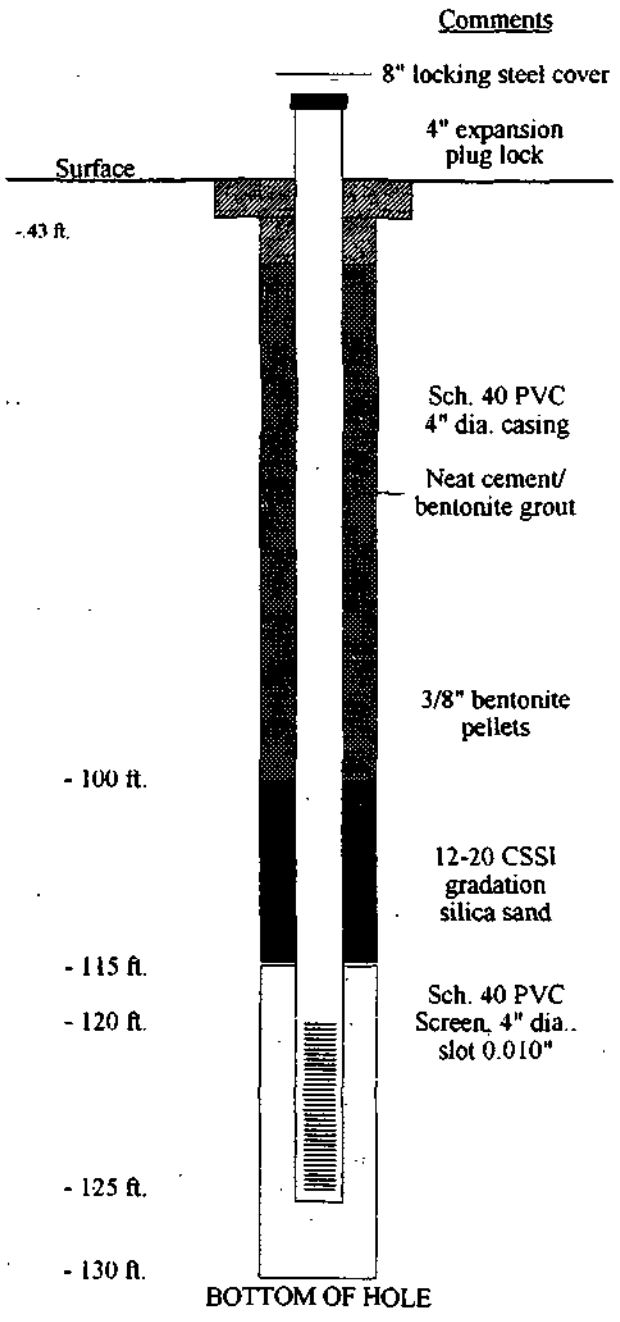

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: North side of frontage road

Well Identification: **MW-11A**
Legal Description: SE¼, Sec.14
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1911.6 ft. MSL
Top of Casing Elevation: 1911.16 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 110.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: C. Cubbison
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 250 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from grade to 91.0 ft. depth; sump of same material from 106.0 to 108.0 ft.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 106.0 ft. to 91.0 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20 clean washed silica sand, from 87.0 ft. to 97.0 ft. depth.
Natural Pack: from 97.0 ft. to 110.0 ft. depth.
Grout: 1/2" bentonite pellets from 85.0 ft. to 87.0 ft.
Concrete (road mix) placed from 0.0 to 85.0 ft. depth.

Surface Seal: Flush-mount 6" locking steel cover in a concrete pad and 2" expansion plug placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/3/94	8:35	11/3/94	14:50
GeoPhys. Logging:	none		none	
Casing/Screen:	11/3/94	14:55	11/3/94	15:05
Filter Placement:	11/3/94	15:05	11/3/94	15:33
Bentonite	11/3/94	15:33	11/3/94	15:38
Grout:				
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 500 Gallons of water was used during drilling.

Well Schematic (No Scale)

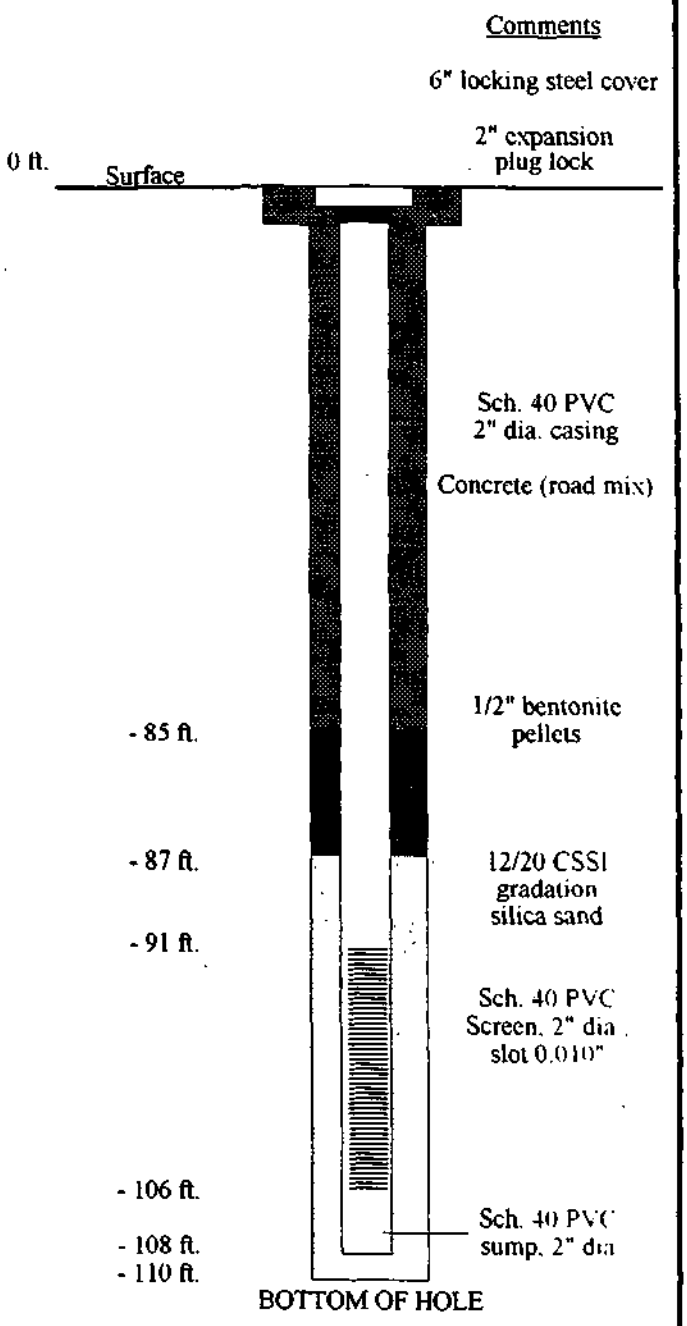

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description:

Well Identification: **MW-12A**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1916.3 ft. MSL
Top of Casing Elevation: 1918.92 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 120.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Lieghs, Lexington
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: Logan Wang
Rig & Drilling Method: 61/4" I.D Hollow Stem auger w/drag bit.
Drilling Fluid: 250 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from 2.5 ft above grade to 102.4 ft depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 102.4 to 117.4 ft depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 96.0 to 102.8 ft. depth.
Natural Pack: from 102.8 ft. to 120.0 ft. depth.
Grout (tremie-placed): 1/2" bentonite pellets from 94.8 ft. to 74.0 ft.; neat cement/bentonite grout from grade to 72.0 ft. dpth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/7/94	10;10	11/7/94	16:20
GeoPhys. Logging:				
Casing/Screen:	11/7/94	16:20	11/7/94	16:30
Filter Placement:	11/7/94	16:30	11/7/94	16:40
Bentonite Grout:	11/7/94	16:40	11/7/94	16:46
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Well was reinstalled in the same hole due to fail of the first time.

Well Schematic (No Scale)

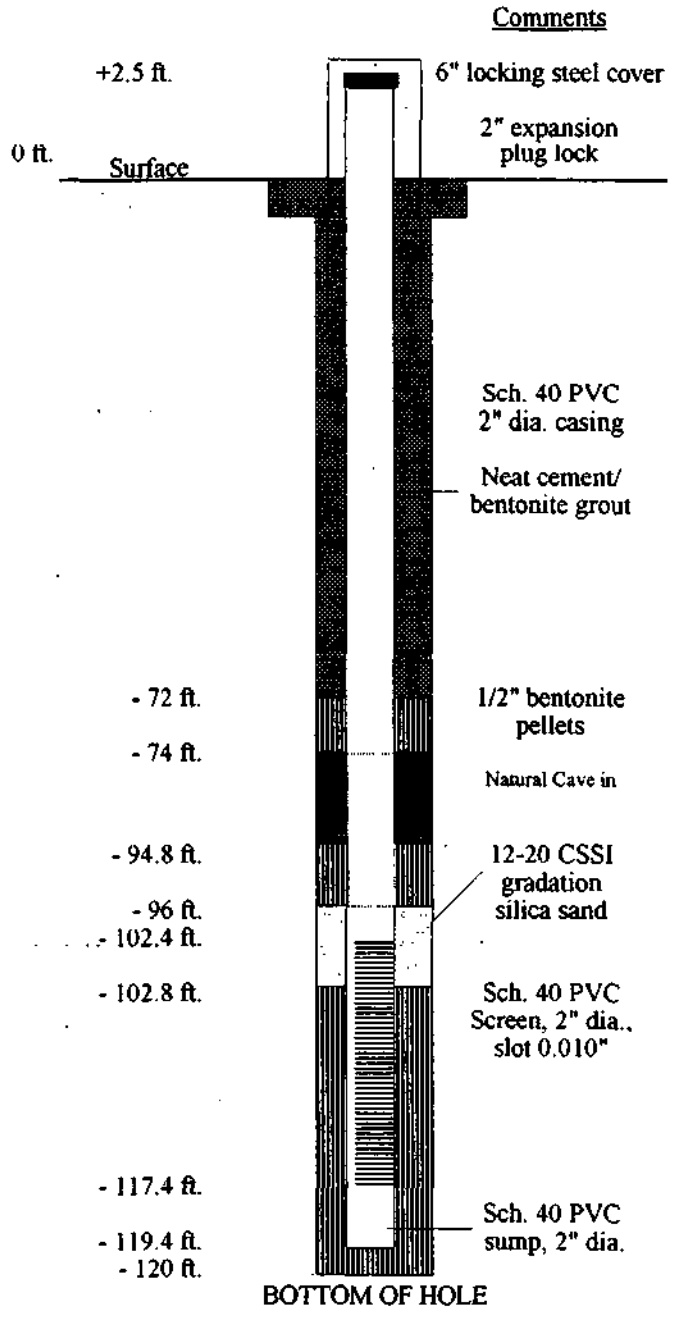

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: N6326.37, E7381.47.

Well Identification: **MW-12C**
Legal Description: NW¼, NW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Ground Elevation: 1916.0 ft. MSL
Top of Casing Elevation: 1918.93 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 170.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Lenny Nelson; Ed Johnson; Hank Schram.
Geologist: Ted Marguilies
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 1200 gallons of City water and 50 lb bentonite.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.93 ft. above-grade to 150.0 ft. depth. Also used as sump from 160' to 165' 4 1/2".

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 150.0 to 160.0 ft.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 142.0 ft. to 165.4 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 98.0 ft. to 142.0 ft. depth; neat cement/bentonite grout from grade to 98.0 ft. depth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	1/10/95	10:00	1/10/95	12:00
GeoPhys. Logging:	none		none	
Casing/Screen:	1/10/95	14:30	1/10/95	15:00
Filter Placement:	1/10/95	15:00	1/10/95	15:20
Bentonite	1/10/95	15:20	1/10/95	15:45
Grout:	1/10/95	15:20	1/10/95	15:45
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 1200 gallons of water was used during drilling.

Well Schematic (No Scale)

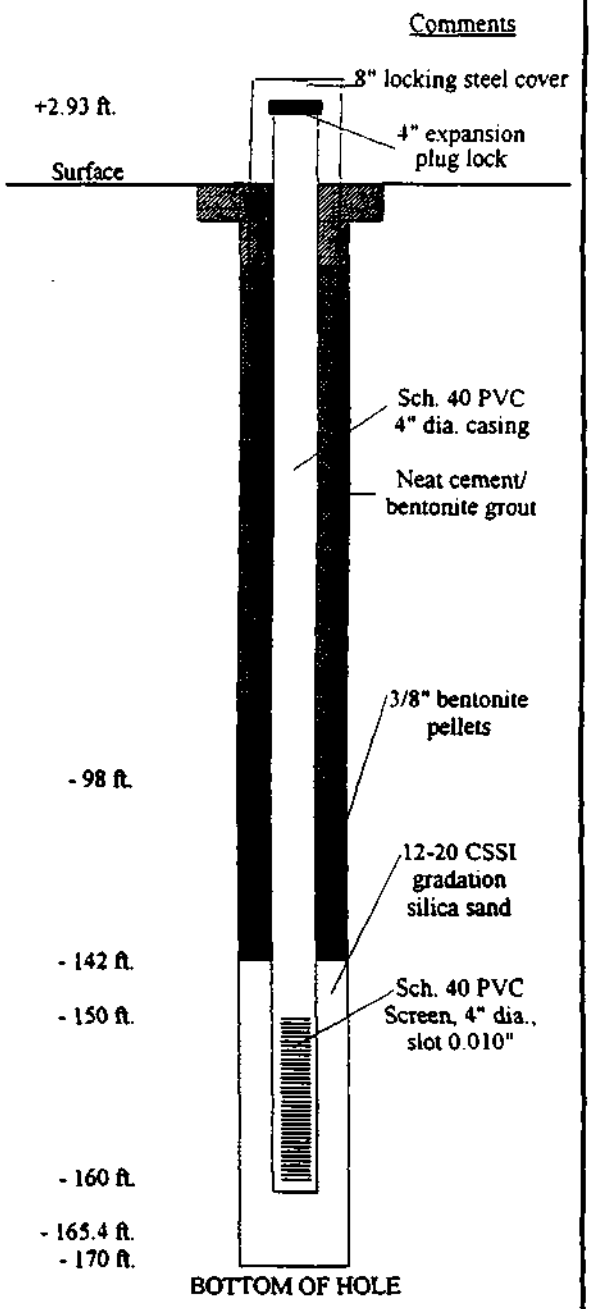

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Between railroad tracks, east of MW-4

Ground Elevation: 1928.06 1928.1 ft. MSL
Top of Casing Elevation: 1928.9 1928.94 ft. MSL

Well Identification: **MW-13C**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Located In (circle one):
Bottomland (Upland) Side Slope Sand Dunes
Ravine Terrace

Drilling Summary

Total Depth: 140 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Wess Lieh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 1200 gallons of City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from .84 ft. above grade to 133.0 ft. depth; sump of same material from 135.5 to 137.5 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 135.5 to 133.0 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 130.8 ft. to 137.5 ft. depth.
Natural Pack: from 137.5 ft. to 140.0 ft. depth.
Grout (tremie-placed): ½" bentonite pellets from 102.0 ft. to 130.8 ft.; neat cement/bentonite grout from grade to 102.0 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/7/94	10:40	11/7/94	14:25
GeoPhys. Logging:	none		none	
Casing/Screen:	11/7/94	18:05	11/7/94	18:30
Filter Placement:	11/7/94	18:30	11/7/94	19:15
Bentonite	11/7/94	18:30	11/7/94	19:15
Grout:	11/9/94	9:00	11/9/94	9:15
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 1200 Gallons of water was used during drilling.

Well Schematic (No Scale)

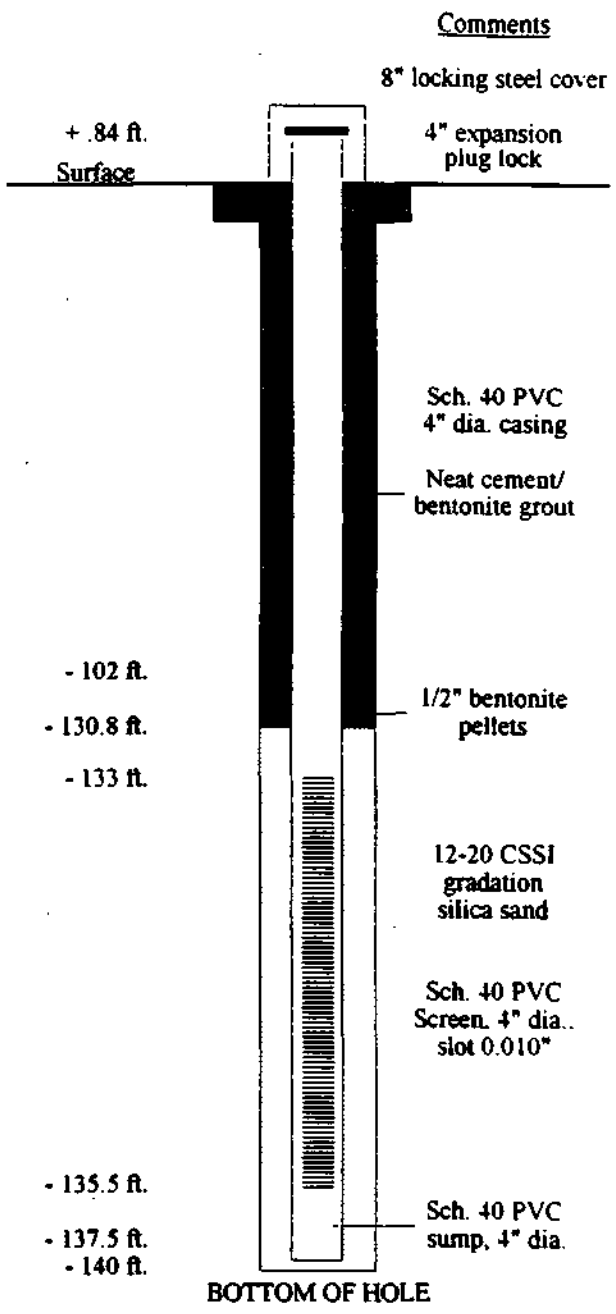

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description:

Well Identification: **MW-13E**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1928.2 ft. MSL
Top of Casing Elevation: 1929.78 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 238.8 ft. Borehole Diameter: 8 1/4 in.
Drilling Company: Layne-West Drilling Co.
Drilling Crew: Ted Thomas, Mark, Rob.
Geologist: Steve Holmes/Todd Margulies
Rig & Drilling Method: Hollow Stem

Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 80 PVC w/threaded connectors, from 3.0 ft above grade to 230.8 ft depth.

Screen: 4-inch Schedule 80 PVC w/threaded connectors; machine slotted 0.010", from 230.8 to 235.8 ft depth. The bottom cone of the same material from 235.8 to 238.8 ft..
Centralizers: None

Filter Material: CSSI gradation 10-20; clean washed silica placed from 238.8 ft to 226.0 ft with minor cave in materials.

Grout:
Wyoming-Environmental Bentonite Grout Powder from 226.0 to 4.0 ft. below grade.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: approximately 50 gallons of water was used during drilling and well installation.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	1/12/95	8:15	1/12/95	14:00
GeoPhys. Logging:				
Casing/Screen:	1/12/95	14:00	1/12/95	15:30
Filter Placement:	1/12/95	8:30	1/13/95	9:00
Bentonite	1/13/95	9:00	1/13/95	12:15
Grout:	1/13/95	9:00	1/13/95	12:15
Development:				
Other:				

Development Metho 3" submercible pump

Comment: Approximately 200 Gallons of water was used during drilling, water.

Well Schematic (No Scale)

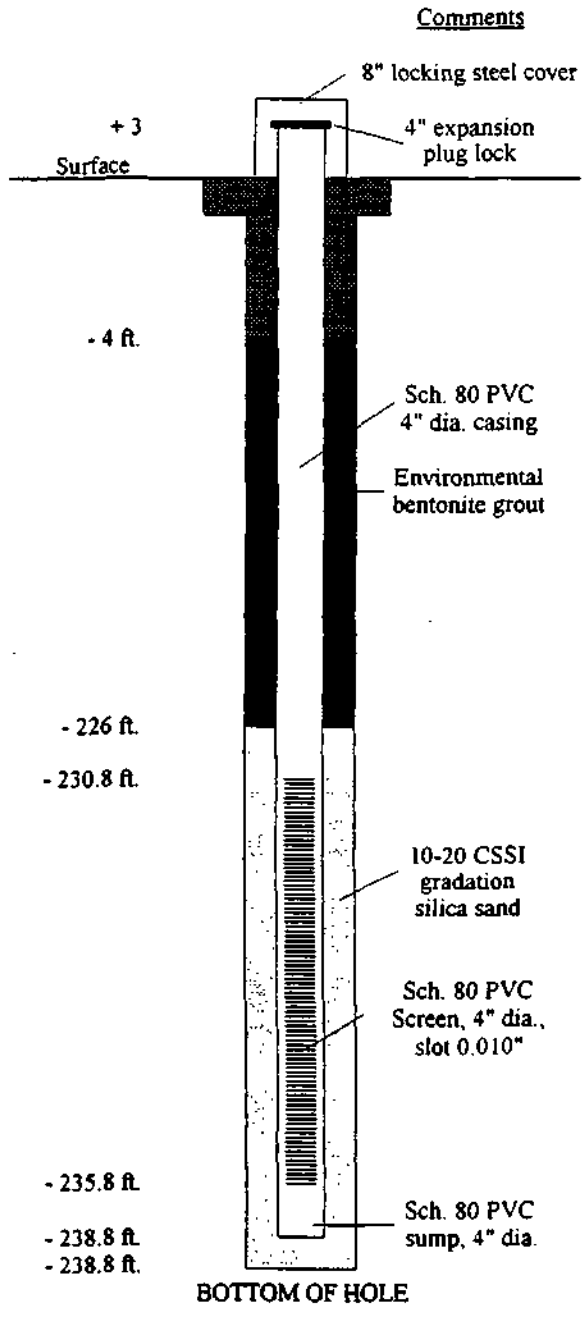

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: U.S. Highway 281 beside Laird Motors

Well Identification: **MW-14A**
Legal Description: NE¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1908.8 ft. MSL
Top of Casing Elevation: 1910.89 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 110.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: Ray Frey
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 250 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from 2.09 ft. above grade to 91.0 ft. depth; sump of same material from 106.0 to 108.0 ft. depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 91.0 to 106.0 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 88.6 to 110.0 ft. depth.
Natural Pack: from 74.3 ft. to 88.6 ft. depth.
Grout (tremie-placed): 1/2" bentonite pellets from 72.0 ft. to 74.3 ft.; neat cement/bentonite grout from grade to 60.0 ft. depth.
Surface Seal: Above-grade 6" locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/8/94	7:30	11/8/94	15:00
GeoPhys. Logging:	none		none	
Casing/Screen:	11/8/94	15:10	11/8/94	15:52
Filter Placement:	11/8/94	16:10	11/8/94	16:25
Bentonite	11/8/94	16:25	11/8/94	16:30
Grout:	11/9/94		11/9/94	
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.

Well Schematic (No Scale)

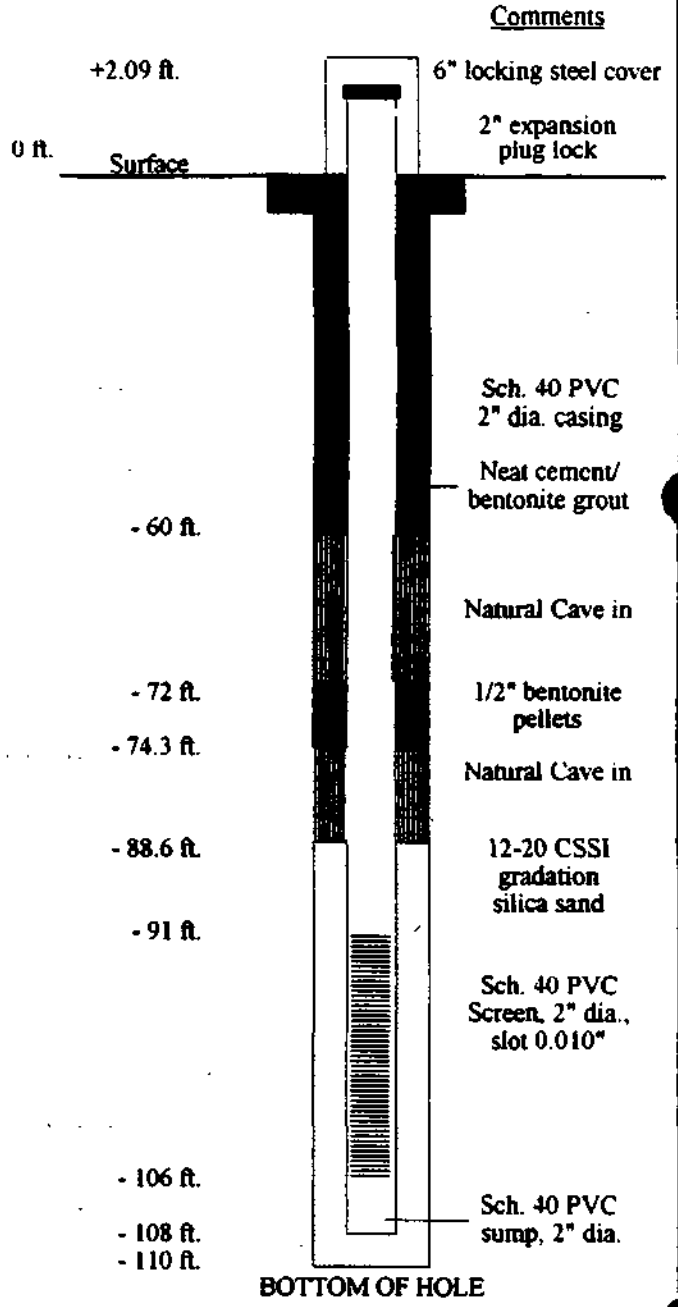

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Approximately 3500 feet south of Garvey grain elevator

Well Identification: **MW-15A**
Legal Description: SW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Ground Elevation: 1908.3 ft. MSL
Top of Casing Elevation: 1909.68 ft. MSL

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 108.0 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: Logan Wang
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 250 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from 1.38 ft. above grade to 90.0 ft. depth; sump of same material from 105.0 to 107.0 ft. depth.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 90.0 to 105.0 ft. depth.

Centralizers: None

Filter Material: Natural Pack from 86.6 to 108.0 ft. depth.

Grout (tremie-placed): 1/2" bentonite pellets from 84.6 ft. to 86.6 ft.; completed to surface with soil cuttings.

Surface Seal: Above-grade 6" locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/10/94	7:30	11/10/94	12:30
GeoPhys. Logging:	none		none	
Casing/Screen:	11/10/94	12:30	11/10/94	12:50
Filter Placement:	11/10/94	12:50	11/10/94	13:40
Bentonite	11/10/94	13:40	11/10/94	13:45
Grout:	none		none	
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Installed as a temporary well; no grout or cement installed.

Well Schematic (No Scale)

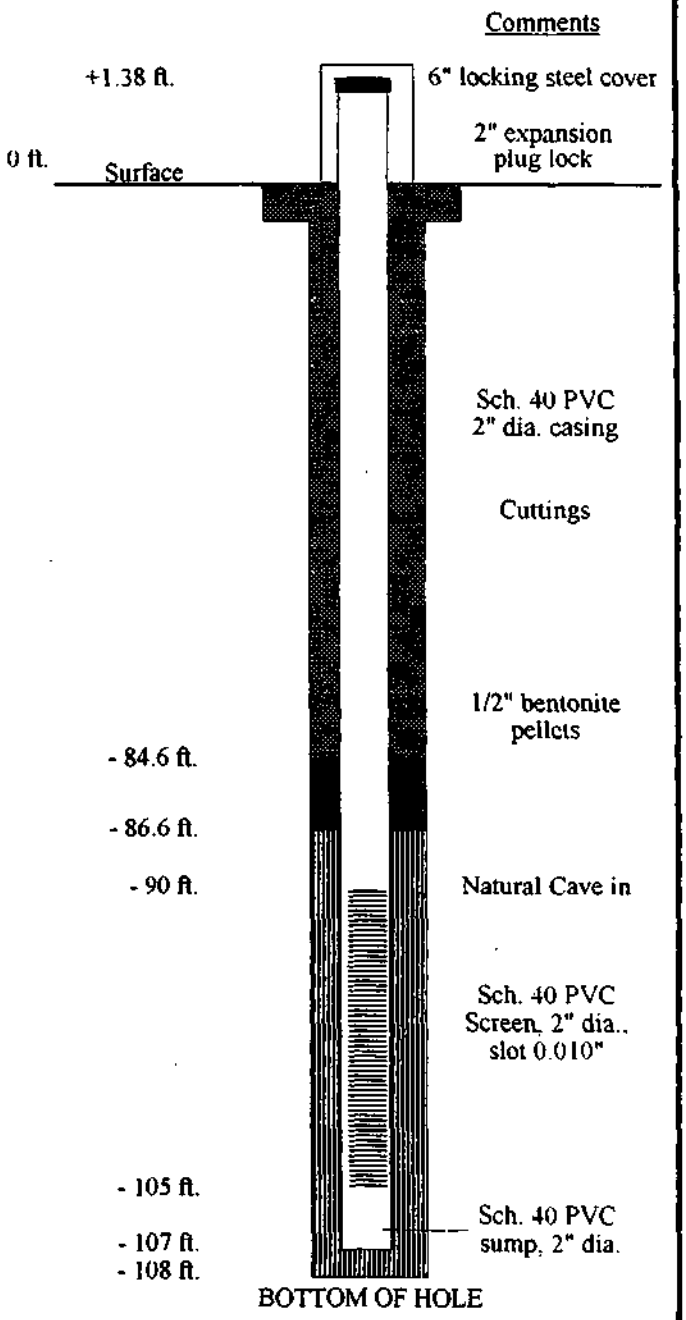

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: Approximately 3500 feet south of Garvey Grain Elevator

Well Identification: MW-15C
Legal Description: SW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Ground Elevation: 1908.40 ft. MSL
Top of Casing Elevation: 1909.19 ft. MSL

Located In (circle one): Side Slope Sand Dunes Bottomland (Upland) Ravine Terrace

Drilling Summary

Total Depth: 130 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Wess Lieh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 400-500 Gallons of City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from .79 ft. above grade to 126.0 ft. depth; sump of same material from 124.0 to 126.0 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 119.0 to 124.0 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 116.3 ft. to 130.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 86.4 ft. to 116.3 ft.; neat cement/bentonite grout from grade to 86.4 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/11/94	7:45	11/11/94	9:10
GeoPhys. Logging:	none		none	
Casing/Screen:	11/11/94	9:10	11/11/94	9:30
Filter Placement:	11/11/94	9:30	11/11/94	9:48
Bentonite	11/11/94		11/11/94	
Grout:	11/11/94		11/11/94	
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 400-500 gallons of water was used during drilling.

Well Schematic (No Scale)

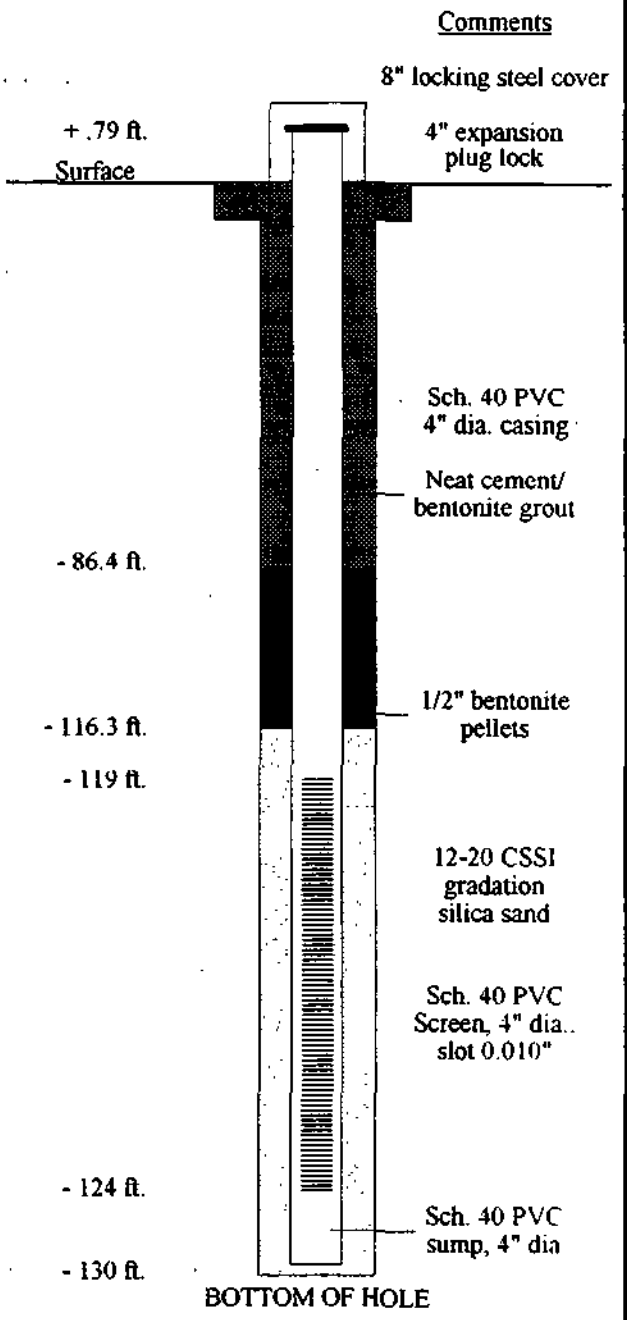

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: West side of U.S. Highway 281

Ground Elevation: 1914.6 ft. MSL
Top of Casing Elevation: 1914.12 ft. MSL

Well Identification: **MW-16A**
Legal Description: SE¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 118.5 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Brian Freeman, Lenny, Tim.
Geologist: Logan Wang
Rig & Drilling Method: CME-75 w/4¼" I.D. flight hollow-stem auger w/drag bit.
Drilling Fluid: 300 gallons of City water.

Well Materials & Design

Casing: 2-inch Schedule 40 PVC w/threaded connectors, from 1.51 ft. above grade to 100.0 ft. depth; sump of same material from 115.0 to 117.0 ft.

Screen: 2-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 100.0 to 115.0 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 99.0 to 101.0 ft. depth.
Natural cave in materials from 101.0 ft. to 118.5 ft. depth.
Grout (tremie-placed): 1/2" bentonite pellets from 86.3 ft. to 89.0 ft.; neat cement/bentonite grout from grade to 76.0 ft. depth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 2" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/9/94	7:50	11/9/94	14:45
GeoPhys. Logging:	none		none	
Casing/Screen:	11/9/94	14:45	11/9/94	15:00
Filter Placement:	11/9/94	15:00	11/9/94	15:54
Bentonite Grout:	11/10/94	14:00	11/10/94	14:10
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 500 Gallons of water was used during drilling.

Well Schematic (No Scale)

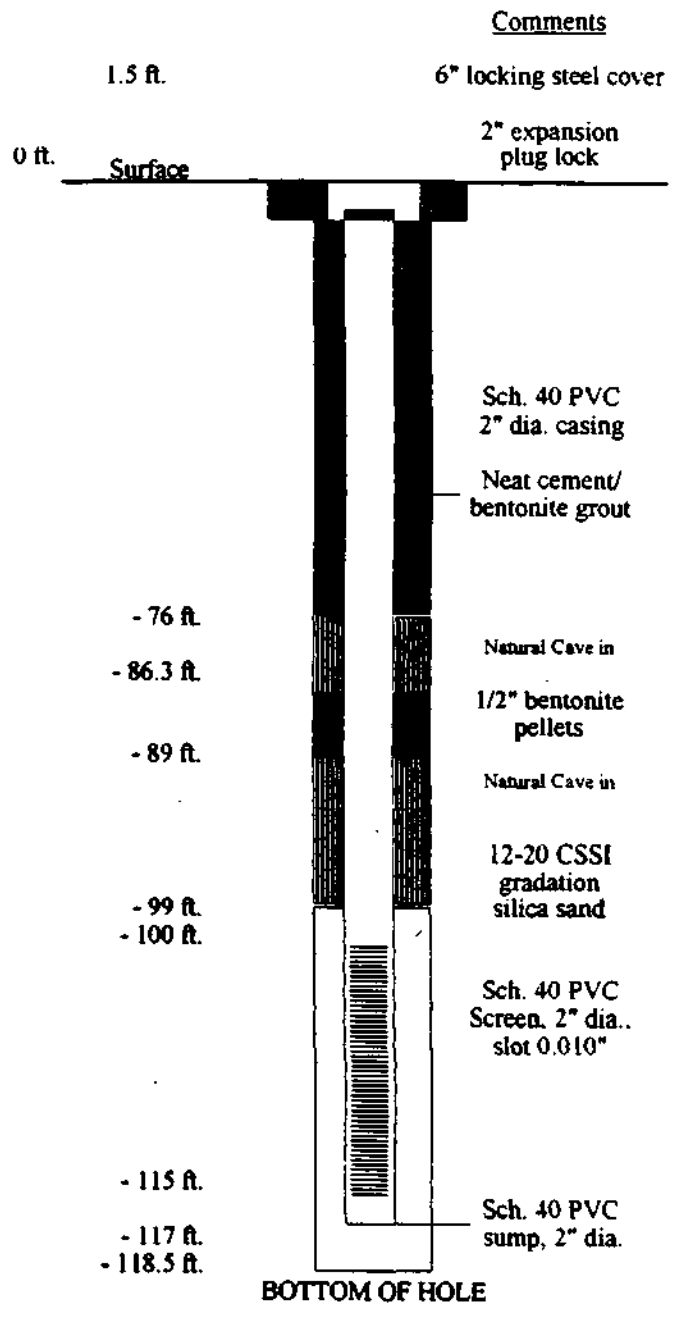

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: N2990.44, E6224.34.

Well Identification: MW-16C
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1914.6 ft. MSL
Top of Casing Elevation: 1914.25 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 160 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liehs Drilling, Lexington, NE
Drilling Crew: Lenny Nelson; Ed Johnson; Hank Schran.
Geologist: Todd Margulies
Rig & Drilling Method: Ingersoll-Rand mud rotary rig

Drilling Fluid: 1700 gallons of City water; mud.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from .35 ft. below grade to 140.2 ft. depth; sump of same material from 150.2 to 155.5 ft. depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 140.2 to 150.2 ft. depth.

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 137.0 ft. to 160.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 102.0 ft. to 137.0 ft.; neat cement/bentonite grout from grade to 102.0 ft. depth.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	1/9/94	11:00	1/9/94	13:30
GeoPhys. Logging:	none		none	
Casing/Screen:	1/9/94	15:15	1/9/94	16:00
Filter Placement:	1/9/94	16:00	1/9/94	16:15
Bentonite	1/9/94	16:15	1/9/94	16:30
Grout:	1/9/94	16:15	1/9/94	16:30
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 1700 Gallons of water was used during drilling.

Well Schematic (No Scale)

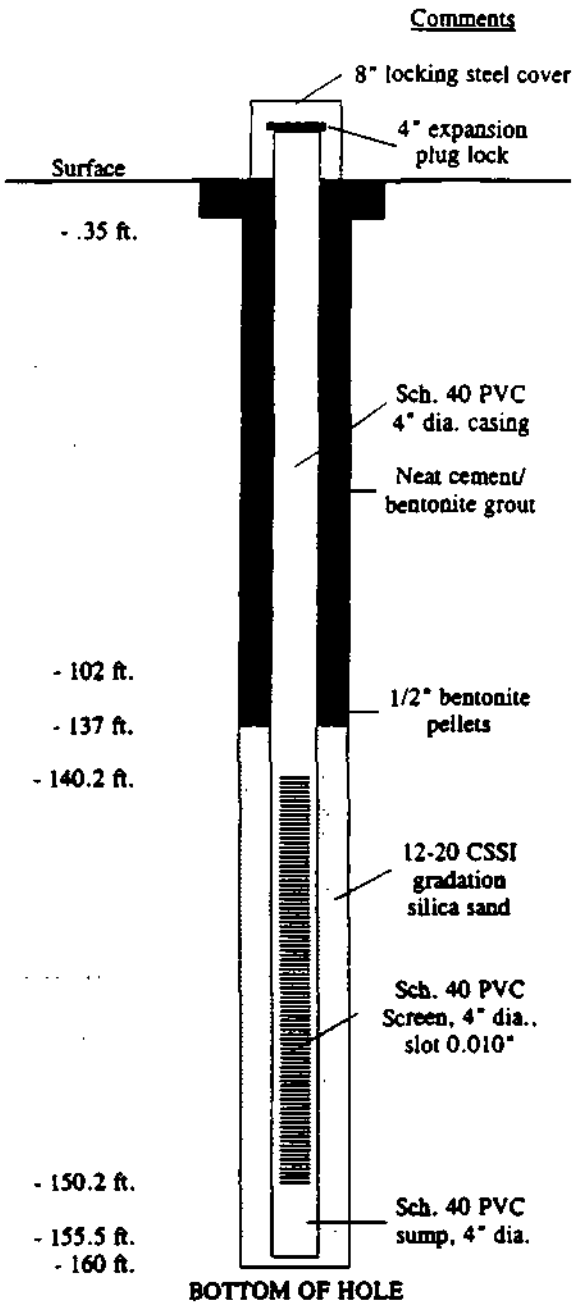

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description:

Well Identification: MW-17A
Legal Description: NE1/4, NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1900.7 ft. MSL
Top of Casing Elevation: 1902.95 ft. MSL

Located in (circle one):
Bottomland (Upland) Side Slope Sand Dunes
Ravine Terrace

Drilling Summary

Total Depth: 145 ft. Borehole Diameter: 8.0 in.
Drilling Company: Liegha, Lexington
Drilling Crew: West Liegh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method:
auger w/drag bit.
Drilling Fluid: 400-500 Gallons of City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.0 ft above grade to 84.5 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 84.5 ft. to 104.5 ft depth with a sump from 104.5 ft to 104.8 ft.
Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 79.3 ft to 104.8 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 64.3 ft. to 79 3 ft., neat cement/bentonite grout from grade to 64.3 ft. dpth.

Surface Seal: Above-grade locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/14/94	12:45	11/14/94	2:15
GeoPhys. Logging:				
Casing/Screen:	11/14/94	2:15	11/14/94	2:25
Filter Placement:	11/14/94	2:25	11/14/94	3:00
Bentonite:	11/14/94	3:00	11/14/94	3:30
Grout:	11/14/94		11/14/94	
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsay with high pressure water.
Approximately 600 gallons of water was added during construction.

Well Schematic (No Scale)

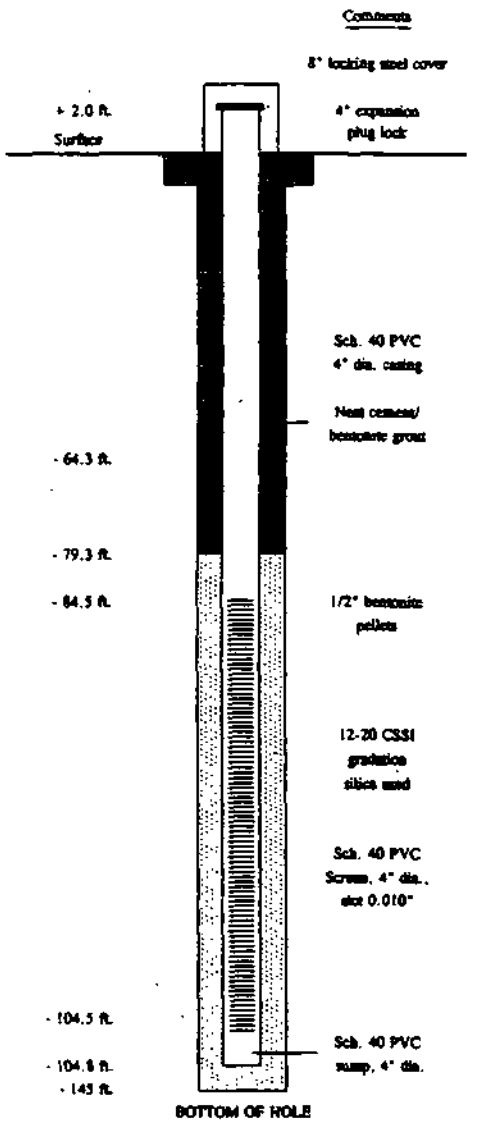

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: N4762.81, E4940.73

Well Identification: MW-17C
Legal Description: NE1/4, NW¼, Sec.23
T. 7 N., R. 10 W.
Adams County, Nebraska

Ground Elevation: 1900.7 ft. MSL
Top of Casing Elevation: 1902.73 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 145 ft. Borehole Diameter: 8.0 in.
Drilling Company: Lieghs, Lexington
Drilling Crew: Wess Liegh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Hollow Stem auger w/drag bit.
Drilling Fluid: 400-500 Gallons of City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.0 ft above grade to 130 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 130 ft. to 140 ft depth

Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 127.6 ft. to 140 ft. depth.
Grout (tremie-placed): ½" bentonite pellets from 111.4 ft. to 127.6 ft.; neat cement/bentonite grout from grade to 64.3 ft. dpth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/14/94	7:15	11/14/94	10:30
GeoPhys. Logging:				
Casing/Screen:	11/14/94	10:30	11/14/94	11:30
Filter Placement:	11/14/94	11:30	11/14/94	11:45
Bentonite	11/14/94	11:45	11/14/94	12:00
Grout:	11/14/94		11/14/94	
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water.
Approximately 1000 gallons of water was added during construction.

Well Schematic (No Scale)

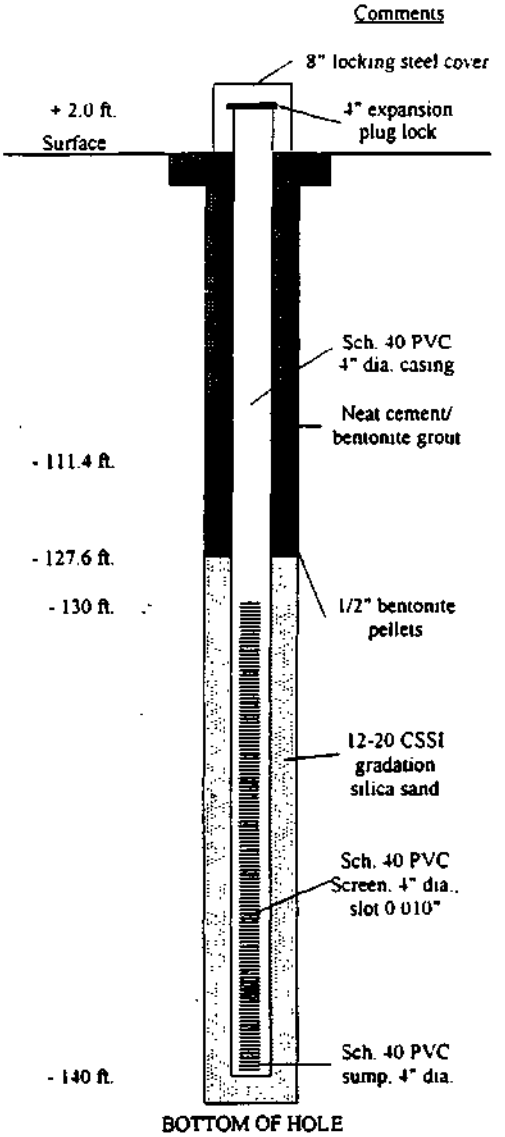

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025 0000
Local Description: south west of new Rolls Well

Well Identification: MW-17D
Legal Description: NE1/4, NW¼, Sec.23 T. 7 N., R 10 W. Adams County, Nebraska

Ground Elevation: 1900.7 ft. MSL
Top of Casing Elevation: 1902.19 ft. MSL

Located In (circle one): Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 200 ft. Borehole Diameter: 8.0 in.
Drilling Company: Lieghs, Lexington
Drilling Crew: Wess Liegh; Hank.
Geologist: Steve Holmes
Rig & Drilling Method: Hollow Stem auger w/drag bit.
Drilling Fluid: 400-500 Gallons of City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.0 ft above grade to 190 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 190.0 ft. to 192.5 ft depth with a sump from 192.5 ft to 194.8 ft.
Centralizers: None

Filter Material: CSSI gradation 12-20; clean washed silica sand; tremie-placed from 186.4 ft to 200.0 ft. depth.

Grout (tremie-placed): ½" bentonite pellets from 176.5 ft. to 186.4 ft.; neat cement/bentonite grout from grade to 176.5 ft. dpth.
Surface Seal: Above-grade locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other:

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	11/15/94	10:30	11/15/94	4:30
GeoPhys. Logging:				
Casing/Screen:	11/15/94	4:30	11/15/94	5:10
Filter Placement:	11/15/94	5:10	11/15/94	5:17
Bentonite	11/15/94	5:30	11/15/94	5:50
Grout:	11/15/94		11/15/94	
Development:				
Other:				

Development Method: 2" Impeller pump.

Comments: Decon by Hotsey with high pressure water. Approximately 1,200 gallons of water was added during construction.

Well Schematic (No Scale)

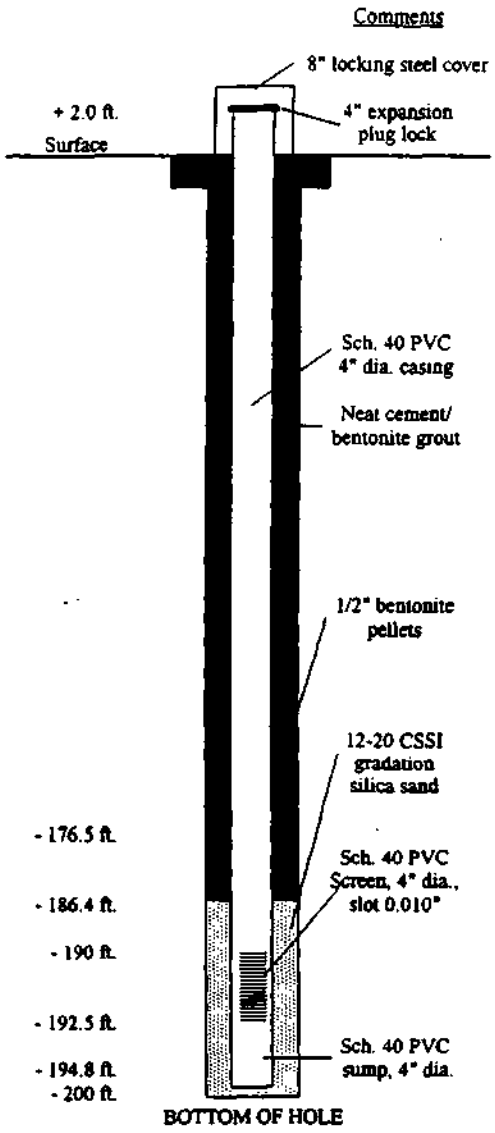

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: N4593.69, E7907.95.

Well Identification: **MW-18C**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1909.8 ft. MSL
Top of Casing Elevation: 1912.32 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 150.0 ft. Borehole Diameter: 8 1/4 in.
Drilling Company: Iiehs-West, Lexington
Drilling Crew: Lenny Nelson, Rocky Sewer, Hank Schram
Geologist: Todd Margulies
Rig & Drilling Method: Cable Tool (Regular mud rotary) ingersol/rand Drillmaster, TH-55M.
Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.52 ft above grade to 135.0 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 135.0 ft. to 140.0 ft depth. The bottom cone of the same material from 140.0 ft. to 145.5 ft.. Centralizers: None

Filter Material: CSSI gradation 10-20; clean washed silica placed from 130.0 ft to 150.0 ft with minor cave in materials.

Grout: 3/8 " bentonite pellets from 130.0 to 96.0 ft. below grade. Neat cement seal from 96.0 ft. to 3.0 ft below grade.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: approximately 1500 gallons of water was used during drilling and well installation.

Construction Time Log

	Start		Finish	
Task	Date	Time	Date	Time
Drilling:	01/18/95	9:30	01/18/95	10:45
GeoPhys. Logging:				
Casing/Screen:	01/18/95	9:30	01/18/95	10:45
Filter Placement:	01/18/95	13:45	01/18/95	14:00
Bentonite	01/18/95	14:00	01/18/95	14:20
Grout:	01/18/95	14:20	01/18/95	14:35
Development:				
Other:				

Development Method 3" submercible pump

Comments: Decon by Hotsey with high pressure water.

Well Schematic (No Scale)

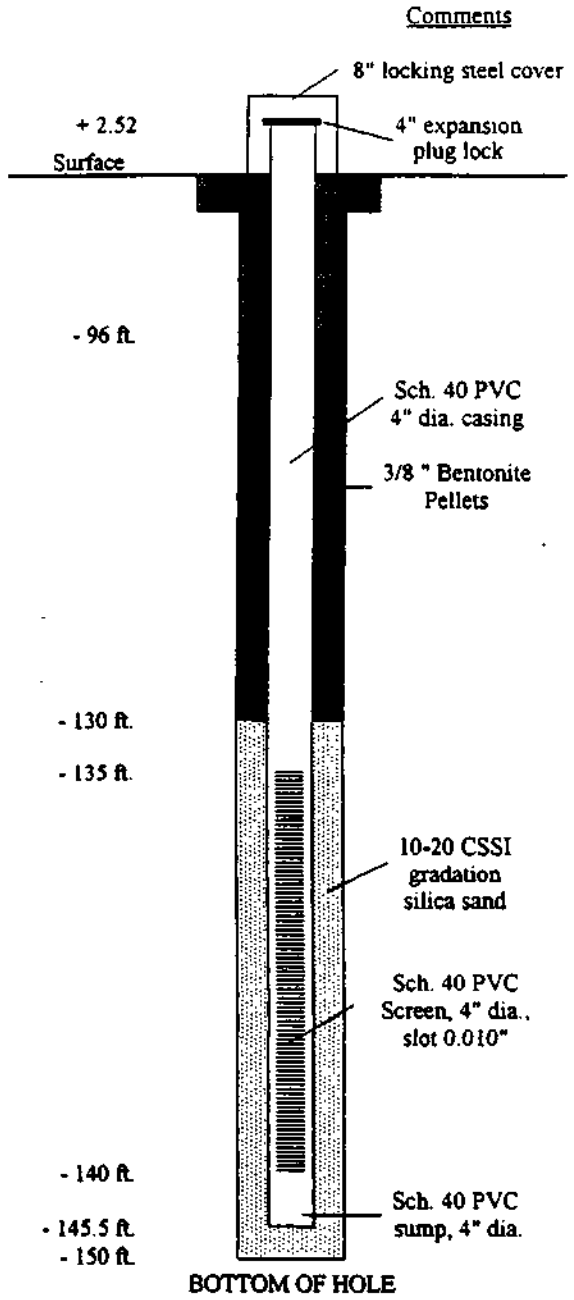

US EPA ARCHIVE DOCUMENT

WELL CONSTRUCTION SUMMARY

Site Information

Project Name: Garvey Elevator Facility
Project Number: 72-44-0025.0000
Local Description: N4615.14, E7908.8.

Well Identification: **MW-18D**
Legal Description: NW¼, Sec.23
T. 7 N., R 10 W.
Adams County, Nebraska

Ground Elevation: 1910.0 ft. MSL
Top of Casing Elevation: 1912.55 ft. MSL

Located In (circle one):
Bottomland (Upland) Side Slope Ravine Sand Dunes Terrace

Drilling Summary

Total Depth: 205.0 ft. Borehole Diameter: 8 1/4 in.
Drilling Company: liehs-West, Lexington
Drilling Crew: Lenny Nelson, Rocky Sewer, Hank Schram
Geologist: Todd Margulies
Rig & Drilling Method: Cable Tool (Regular mud rotary) ingersol/rand Drillmaster, TH-55M.
Drilling Fluid: City water.

Well Materials & Design

Casing: 4-inch Schedule 40 PVC w/threaded connectors, from 2.55 ft above grade to 188.0 ft depth.

Screen: 4-inch Schedule 40 PVC w/threaded connectors; machine slotted 0.010", from 188.0 ft. to 193.0 ft depth. The bottom cone of the same material from 193.0 ft. to 198.5 ft.. Centralizers: None

Filter Material: CSSI gradation 10-20; clean washed silica placed from 182.0 ft to 198.5.0 ft with min4or cave in materials. Natural cave in from 198.5 ft. to 205 ft.
Grout: 3/8 " bentonite pellets from 182.0 to 99.0 ft. below grade. Neat cement seal from 99.0 ft. to 3.0 ft below grade.
Surface Seal: Above-grade 8" locking steel cover in a concrete pad with 4" expansion plug lock placed at the top of the PVC casing.

Other: approximately 1500 gallons of water was used during drilling and well installation.

Construction Time Log

Task	Start Date	Start Time	Finish Date	Finish Time
Drilling:	01/19/95	8:30	01/19/95	10:20
GeoPhys. Logging:				
Casing/Screen:	01/19/95	14:00	01/19/95	14:30
Filter Placement:	01/19/95	14:30	01/19/95	15:00
Bentonite Grout:	01/19/95	15:00	01/19/95	16:30
Development:				
Other:				

Development Method 3" submercible pump

Comments: Decon by Hotsey with high pressure water.

Well Schematic (No Scale)

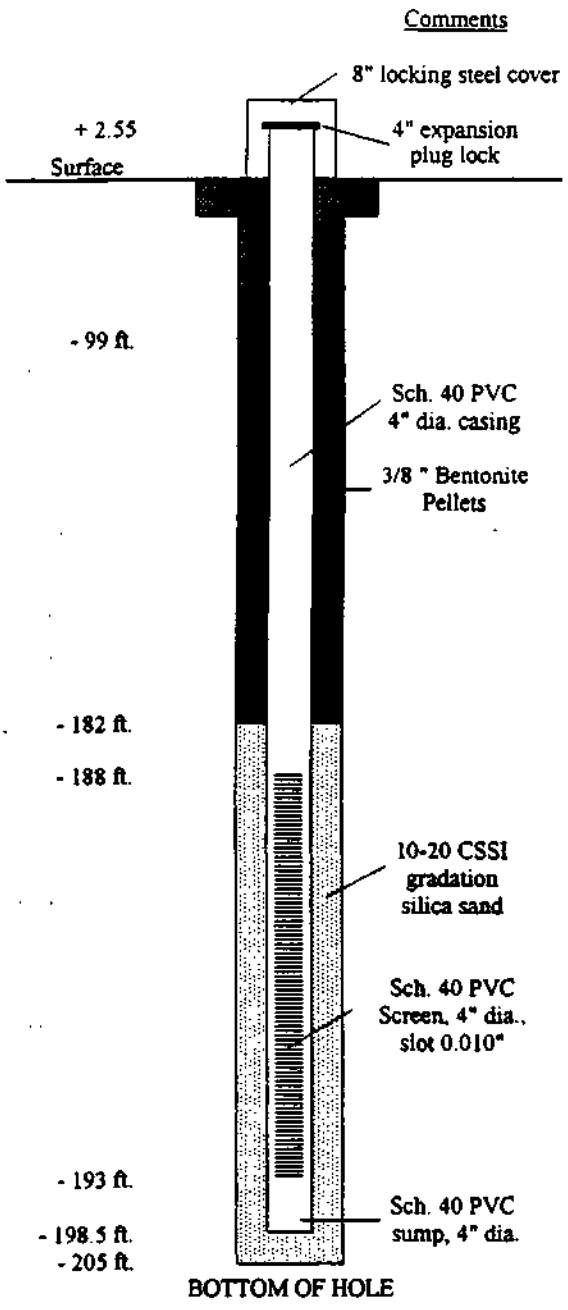

WELL INSTALLATION RECORD

WELL ID: MW - 19 | Date: 30-Apr-07 | Client: Garvey Elevator | Ground Elevation (ft.):

Total Depth: 162.5 | Depth Unit: | Geologist: J. Rodriguez

Contractor: Boart Longyear | Project #: 10264.011.300 | Water Table (ft. bgs): 120 | TOC Elevation (ft.): N/A

ENSR | AECOM

Segment Type	Material	Depth (ft) Start	Depth (ft) End	Diameter (in.) Inner	Diameter (in.) Outer	Thickness (ft.)	Slot Type	Slot Size	Fill Material Quantity	Fill Material Density	Comment
Surface Plug											
Protective casing						0					
Annular Backfill	Hydrated Cement Bentonite	5.0	115.0	4.50	8.25	110					
Top Casing	PVC Sch 80	-2.0	127.0	3.83	4.50	129					
Zone "A" Seal	Bentonite Chips	115.0	122.0	4.50	8.25	7					
Zone "A" Screen	PVC 80	127.0	132.0	3.83	4.50	5	PVC Slotted	0.10			
Zone "A" Filter Pack	Sand	122.0	133.5	4.50	8.25	12					
Zone "C" Casing	PVC Sch 80	132.0	152.0	3.83	4.50	20					
Zone "C" Seal	Bentonite Chips	133.5	150.0	4.50	8.25	17					
Zone "C" Screen	PVC Sch 80	152.0	162.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "C" Filter Pack	Sand	150.0	162.0	4.50	8.25	12					
Sump	PVC Sch 80	162.0	162.5	3.83	4.50	0.5					

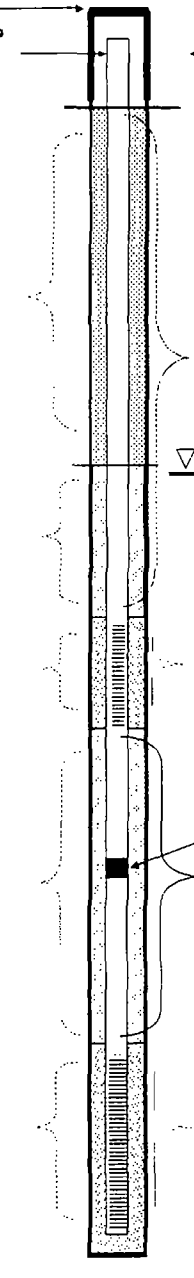

Below Ground Surface (ft) | Elevation (ft)

Annular Backfill: Start 5.0 / -5.0; End 115.0 / -115.0; Length (ft.): 110

Top Casing: Length (ft.): 129; Start -2.0 / 2.0; End 127.0 / -127.0

Zone "A" Seal: Start 115.0 / -115.0; End 122.0 / -122.0; Length (ft.) 7

Zone "A" Filter: Start 122.0 / -122.0; End 133.5 / -133.5; Length (ft.): 12

Zone "A" Screen: Length (ft.): 5; Start 127.0 / -127.0; End 132.0 / -132.0

Zone "C" Seal: Start 133.5 / -133.5; End 150.0 / -150.0; Length (ft.) 17

Zone "C" Casing: Length (ft.): 20; Start 132.0 / -132.0; End 152.0 / -152.0

Zone "C" Filter: Start 150.0 / -150.0; End 162.0 / -162.0; Length (ft.): 12

Zone "C" Screen: Length (ft.): 10; Start 152.0 / -152.0; End 162.0 / -162.0

WELL INSTALLATION RECORD

WELL ID:	MW-20	Date:	17-Apr-07	Client:	Garvey Elevator	Ground Elevation (ft.)	
Total Depth:	232.5	Depth Unit:	Niobrara Chalk	Geologist:	J. Rodriguez		
Contractor:	Boart Longyear	Project #:	10264.011.300	Water Table (ft. bgs):	116'	TOC Elevation (ft.)	

ENSR | AECOM

Segment Type	Material	Depth (ft) Start	Depth (ft) End	Diameter (in.) Inner	Diameter (in.) Outer	Thickness (ft.)	Slot Type	Slot Size	Fill Material Quantity	Fill Material Density	Comment
Surface Plug	Plastic										
Protective casing	Steel	0.0	3.0			3					
Annular Backfill	Hydrated Cement Bentonite	20.0	111.0	4.50	8.25	91					
Top Casing	PVC Sch 80	-2.0	127.0	3.83	4.50	129					
Zone "A" Seal	Bentonite Chips	111.0	126.0	4.50	8.25	15					
Zone "A" Screen	PVC 80	127.0	132.0	3.83	4.50	5	PVC Slotted	0.10			
Zone "A" Filter Pack	Sand	125.0	134.0	4.50	8.25	9					
Zone "C" Casing	PVC Sch 80	132.0	152.0	3.83	4.50	20					
Zone "C" Seal	Bentonite Chips	134.0	150.0	4.50	8.25	16					
Zone "C" Screen	PVC Sch 80	152.0	162.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "C" Filter Pack	Sand	150.0	164.0	4.50	8.25	14					
Zone "D" Casing	PVC Sch 80	162.0	182.0	3.83	4.50	20					
Zone "D" Seal	Bentonite Chips	164.0	180.0	4.50	8.25	16					
Zone "D" Screen	PVC Sch 80	182.0	192.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "D" Filter Pack	Sand	180.0	194.0	4.50	8.25	14					
Zone "E" Casing	PVC Sch 80	192.0	222.0	3.83	4.50	30					
Zone "E" Seal	Bentonite Chips	194.0	220.0	4.50	8.25	26					
Zone "E" Screen	PVC Sch 80	222.0	232.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "E" Filter Pack	Sand	220.0	232.5	4.50	8.25	13					
Sump	PVC Sch 80	232.0	232.5	3.83	4.50	0.5					

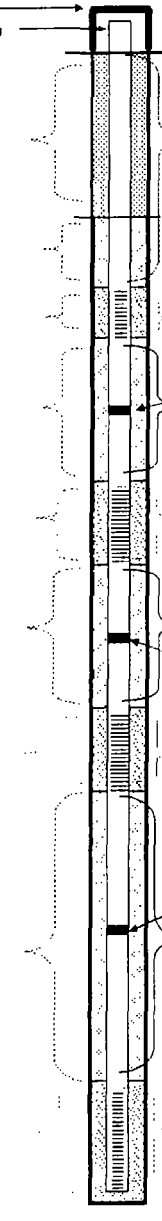

	Below Ground Surface (ft)	Elevation (ft)			Below Ground Surface (ft)	Elevation (ft)
Annular Backfill: Start	20.0	-20.0	Top Casing: Start		-2.0	2.0
End	111.0	-111.0	End		127.0	-127.0
Annular Backfill: Length (ft.)	91		Top Casing: Length (ft.)	129		
Zone "A" Seal: Start	111.0	-111.0				
End	126.0	-126.0				
Zone "A" Seal: Length (ft.)	15					
Zone "A" Filter: Start	125.0	-125.0	Zone "A" Screen: Start		127.0	-127.0
End	134.0	-134.0	End		132.0	-132.0
Zone "A" Filter: Length (ft.)	9		Zone "A" Screen: Length (ft.)	5		
Zone "C" Seal: Start	134.0	-134.0	Zone "C" Casing: Start		132.0	-132.0
End	150.0	-150.0	End		152.0	-152.0
Zone "C" Seal: Length (ft.)	16		Zone "C" Casing: Length (ft.)	20		
Zone "C" Filter: Start	150.0	-150.0	Zone "C" Screen: Start		152.0	-152.0
End	164.0	-164.0	End		162.0	-162.0
Zone "C" Filter: Length (ft.)	14		Zone "C" Screen: Length (ft.)	10		
Zone "D" Seal: Start	164.0	-164.0	Zone "D" Casing: Start		162.0	-162.0
End	180.0	-180.0	End		182.0	-182.0
Zone "D" Seal: Length (ft.)	16		Zone "D" Casing: Length (ft.)	20		
Zone "D" Filter: Start	180.0	-180.0	Zone "D" Screen: Start		182.0	-182.0
End	194.0	-194.0	End		192.0	-192.0
Zone "D" Filter: Length (ft.)	14		Zone "D" Screen: Length (ft.)	10		
Zone "E" Seal: Start	194.0	-194.0	Zone "E" Casing: Start		192.0	-192.0
End	220.0	-220.0	End		222.0	-222.0
Zone "E" Seal: Length (ft.)	26		Zone "E" Casing: Length (ft.)	30		
Zone "E" Filter: Start	220.0	-220.0	Zone "E" Screen: Start		222.0	-222.0
End	232.5	-232.5	End		232.0	-232.0
Zone "E" Filter: Length (ft.)	13		Zone "E" Screen: Length (ft.)	10		

WELL INSTALLATION RECORD

WELL ID:	MW - 30	Date:	15-Apr-07	Client:	Garver Elevator	Ground Elevation (ft.)	
Total Depth:	232.5 '	Depth Unit:	Niobrara Chalk	Geologist:	J. Rodriguez		
Contractor:	Boart Longyear	Project #:	10264.011.300	Water Table (ft. bgs):	115	TOC Elevation (ft.)	N/A

ENSR | AECOM

Segment Type	Material	Depth (ft) Start	Depth (ft) End	Diameter (in.) Inner	Diameter (in.) Outer	Thickness (ft.)	Slot Type	Slot Size	Fill Material Quantity	Fill Material Density	Comment
Surface Plug											
Protective casing						0					
Annular Backfill	Hydrated Cement Bentonite	20.0	115.0	4.50	8.25	95					
Top Casing	PVC Sch 80	-2.0	127.0	3.83	4.50	129					
Zone "A" Seal	Bentonite Chips	115.0	126.0	4.50	8.25	11					
Zone "A" Screen	PVC 80	127.0	132.0	3.83	4.50	5	PVC Slotted	0.10			
Zone "A" Filter Pack	Sand	126.0	133.0	4.50	8.25	7					
Zone "C" Casing	PVC Sch 80	132.0	152.0	3.83	4.50	20					
Zone "C" Seal	Bentonite Chips	133.0	150.0	4.50	8.25	17					
Zone "C" Screen	PVC Sch 80	152.0	162.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "C" Filter Pack	Sand	150.0	164.0	4.50	8.25	14					
Zone "D" Casing	PVC Sch 80	162.0	182.0	3.83	4.50	20					
Zone "D" Seal	Bentonite Chips	164.0	180.0	4.50	8.25	16					
Zone "D" Screen	PVC Sch 80	182.0	192.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "D" Filter Pack	Sand	180.0	194.0	4.50	8.25	14					
Zone "E" Casing	PVC Sch 80	192.0	222.0	3.83	4.50	30					
Zone "E" Seal	Bentonite Chips	194.0	220.0	4.50	8.25	26					
Zone "E" Screen	PVC Sch 80	222.0	232.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "E" Filter Pack	Sand	220.0	232.5	4.50	8.25	13					
Sump	PVC Sch 80	232.0	232.5	3.83	4.50	0.5					

	Below Ground Surface (ft)	Elevation (ft)			Below Ground Surface (ft)	Elevation (ft)
Annular Backfill: Start	20.0	-20.0	Top Casing: Start		-2.0	2.0
Annular Backfill: End	115.0	-115.0	Top Casing: End		127.0	-127.0
Annular Backfill: Length (ft.)	95		Top Casing: Length (ft.)	129		
Zone "A" Seal: Start	115.0	-115.0				
Zone "A" Seal: End	126.0	-126.0				
Zone "A" Seal: Length (ft.)	11					
Zone "A" Filter: Start	126.0	-126.0	Zone "A" Screen: Start		127.0	-127.0
Zone "A" Filter: End	133.0	-133.0	Zone "A" Screen: End		132.0	-132.0
Zone "A" Filter: Length (ft.)	7		Zone "A" Screen: Length (ft.)	5		
Zone "C" Seal: Start	133.0	-133.0	Zone "C" Casing: Start		132.0	-132.0
Zone "C" Seal: End	150.0	-150.0	Zone "C" Casing: End		152.0	-152.0
Zone "C" Seal: Length (ft.)	17		Zone "C" Casing: Length (ft.)	20		
Zone "C" Filter: Start	150.0	-150.0	Zone "C" Screen: Start		152.0	-152.0
Zone "C" Filter: End	164.0	-164.0	Zone "C" Screen: End		162.0	-162.0
Zone "C" Filter: Length (ft.)	14		Zone "C" Screen: Length (ft.)	10		
Zone "D" Seal: Start	164.0	-164.0	Zone "D" Casing: Start		162.0	-162.0
Zone "D" Seal: End	180.0	-180.0	Zone "D" Casing: End		182.0	-182.0
Zone "D" Seal: Length (ft.)	16		Zone "D" Casing: Length (ft.)	20		
Zone "D" Filter: Start	180.0	-180.0	Zone "D" Screen: Start		182.0	-182.0
Zone "D" Filter: End	194.0	-194.0	Zone "D" Screen: End		192.0	-192.0
Zone "D" Filter: Length (ft.)	14		Zone "D" Screen: Length (ft.)	10		
Zone "E" Seal: Start	194.0	-194.0	Zone "E" Casing: Start		192.0	-192.0
Zone "E" Seal: End	220.0	-220.0	Zone "E" Casing: End		222.0	-222.0
Zone "E" Seal: Length (ft.)	26		Zone "E" Casing: Length (ft.)	30		
Zone "E" Filter: Start	220.0	-220.0	Zone "E" Screen: Start		222.0	-222.0
Zone "E" Filter: End	232.5	-232.5	Zone "E" Screen: End		232.0	-232.0
Zone "E" Filter: Length (ft.)	13		Zone "E" Screen: Length (ft.)	10		

US EPA ARCHIVE DOCUMENT

WELL INSTALLATION RECORD

WELL ID:	MW - 31	Date:	2-May-07	Client:	Garvey Elevator	Ground Elevation (ft.)	
Total Depth:	162.5	Depth Unit:		Geologist:	J. Rodriguez		
Contractor:	Boart Longyear	Project #:	10264.011.300	Water Table (ft. bgs):	116.75	TOC Elevation (ft.)	N/A

ENSR | AECOM

Segment Type	Material	Depth (ft) Start	Depth (ft) End	Diameter (in.) Inner	Diameter (in.) Outer	Thickness (ft.)	Slot Type	Slot Size	Fill Material Quantity	Fill Material Density	Comment
Surface Plug											
Protective casing						0					
Annular Backfill	Hydrated Cement Bentonite	6.0	94.0	4.50	8.25	88					
Top Casing	PVC Sch 80	-2.0	127.0	3.83	4.50	129					
Zone "A" Seal	Bentonite Chips	94.0	126.0	4.50	8.25	32					
Zone "A" Screen	PVC 80	127.0	132.0	3.83	4.50	5	PVC Slotted	0.10			
Zone "A" Filter Pack	Sand	126.0	133.0	4.50	8.25	7					
Zone "C" Casing	PVC Sch 80	132.0	152.0	3.83	4.50	20					
Zone "C" Seal	Bentonite Chips	133.0	149.9	4.50	8.25	17					
Zone "C" Screen	PVC Sch 80	152.0	162.0	3.83	4.50	10	PVC Slotted	0.10			
Zone "C" Filter Pack	Sand	149.9	162.0	4.50	8.25	12					
Sump	PVC Sch 80	162.0	162.5	3.83	4.50	0.5					

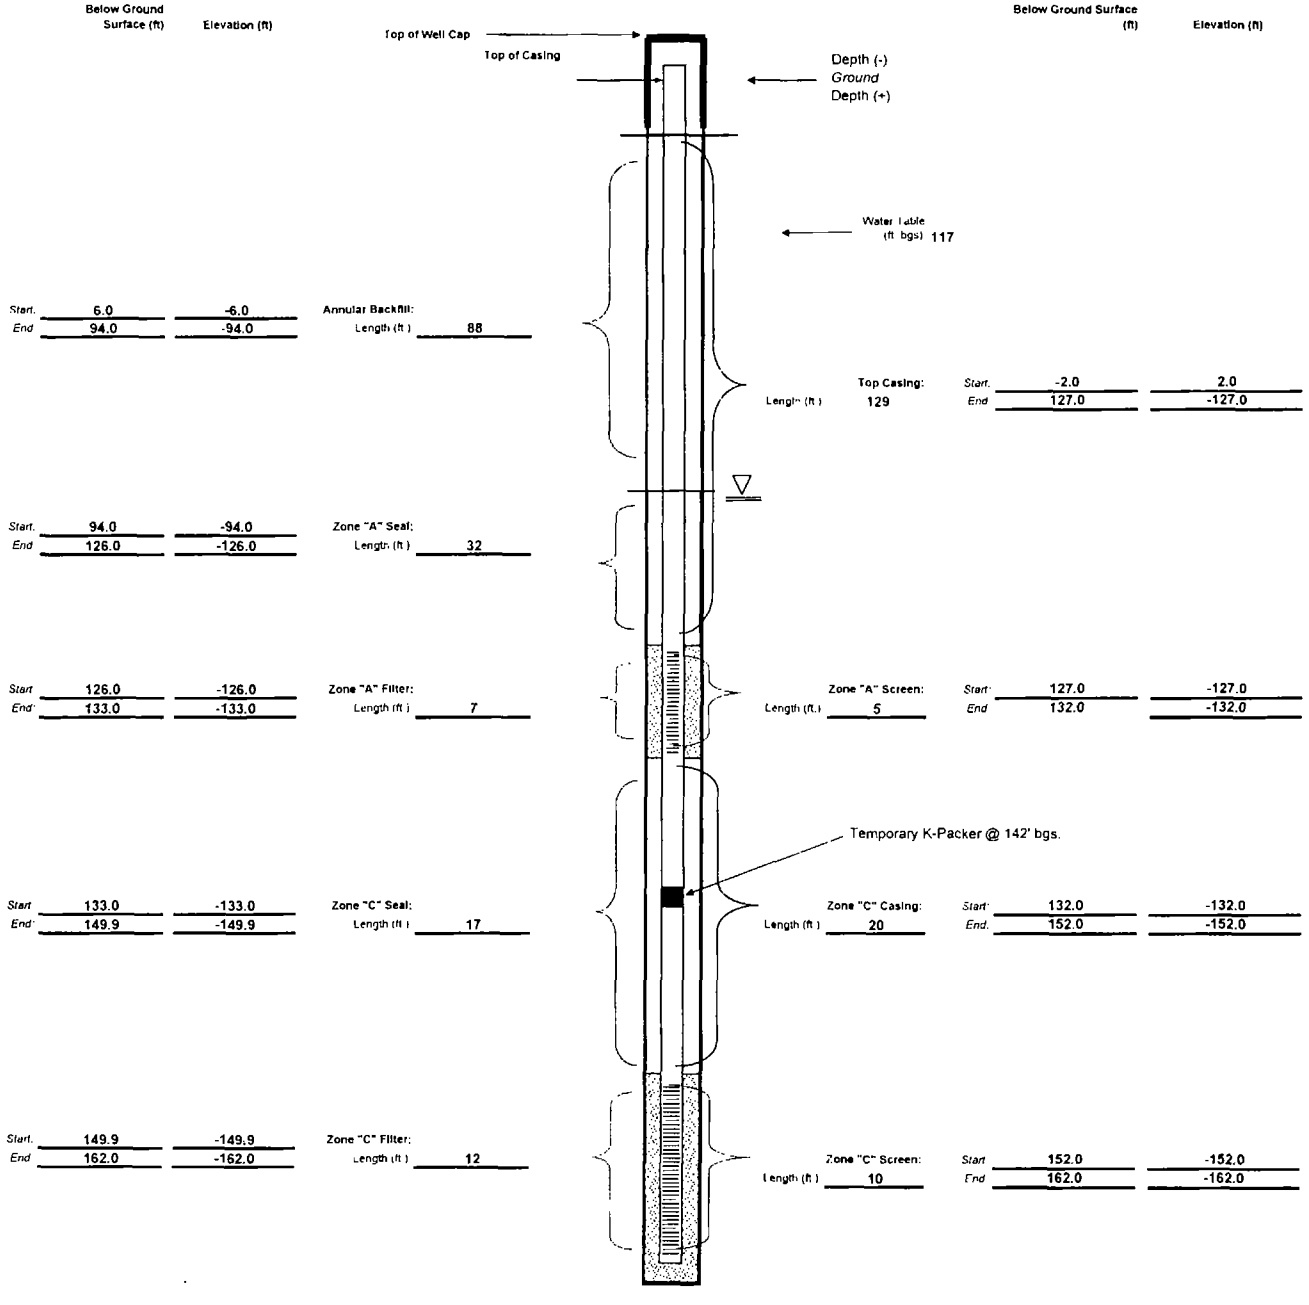

WELL INSTALLATION RECORD

WELL ID:	MW - 33	Date:	12-May-07	Client:	Garvey Elevator	Ground Elevation (ft.)	
Total Depth:	240	Depth Unit:		Geologist:	J. Rodriguez		
Contractor:	Boart Longyear	Project #:	10264.011.400	Water Table (ft. bgs):	126	TOC Elevation (ft.)	N/A

ENSR | AECOM

Segment Type	Material	Depth (ft) Start	Depth (ft) End	Diameter (in.) Inner	Diameter (in.) Outer	Thickness (ft.)	Slot Type	Slot Size	Fill Material Quantity	Fill Material Density	Comment
Surface Plug											
Protective casing						0.0					
Annular Backfill	Hydrated Cement Bentonite	3.0	112.0			109.0					
Top Casing	PVC Sch 80	-3.0	120.0			123.0					
Surface Seal	Bentonite Chips	112.0	118.0			6.0					
Filter Pack	Sand	118.0	124.0			6.0					
Filter Pack	Natural Collapse	124.0	240.0			116.0					
Screen	PVC 80	120.0	240.0			120.0	PVC Slotted	0.20			
Sump	PVC Sch 80	240.0	240.5			0.5					

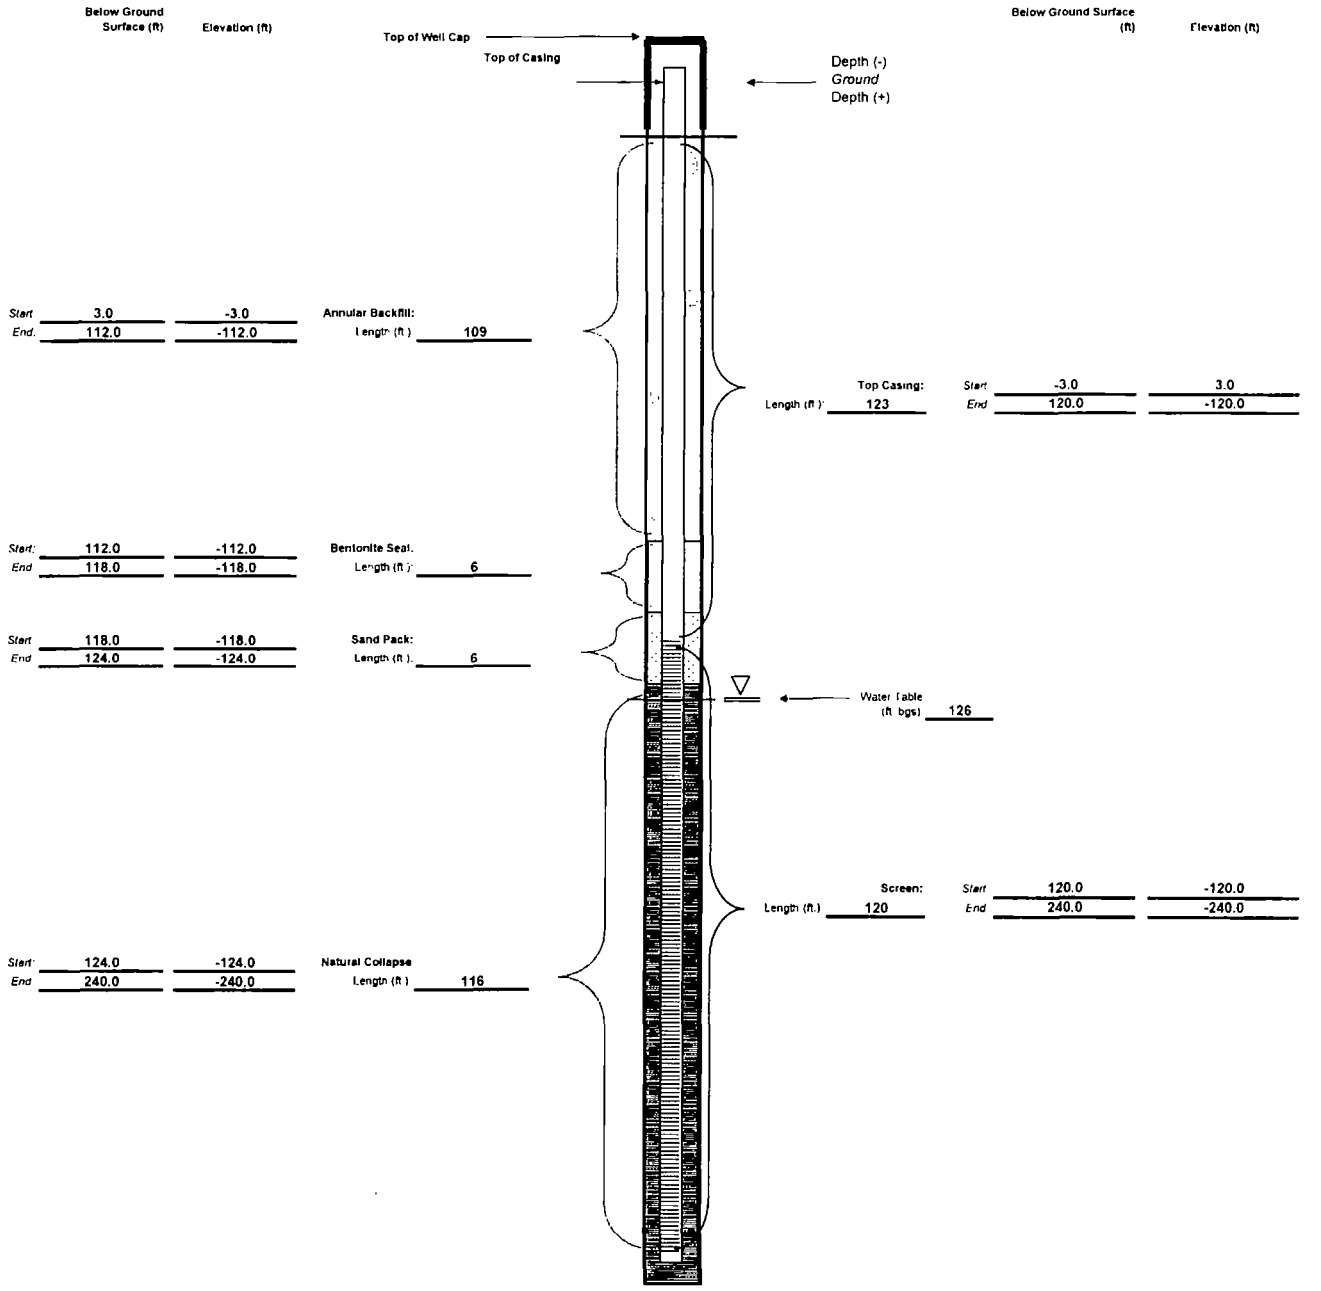

Figure O.7
MW-105 A/C/D 4-Inch Monitoring Wells Construction Diagram
W. Highway 6 & Highway 281 Site—Hastings, NE

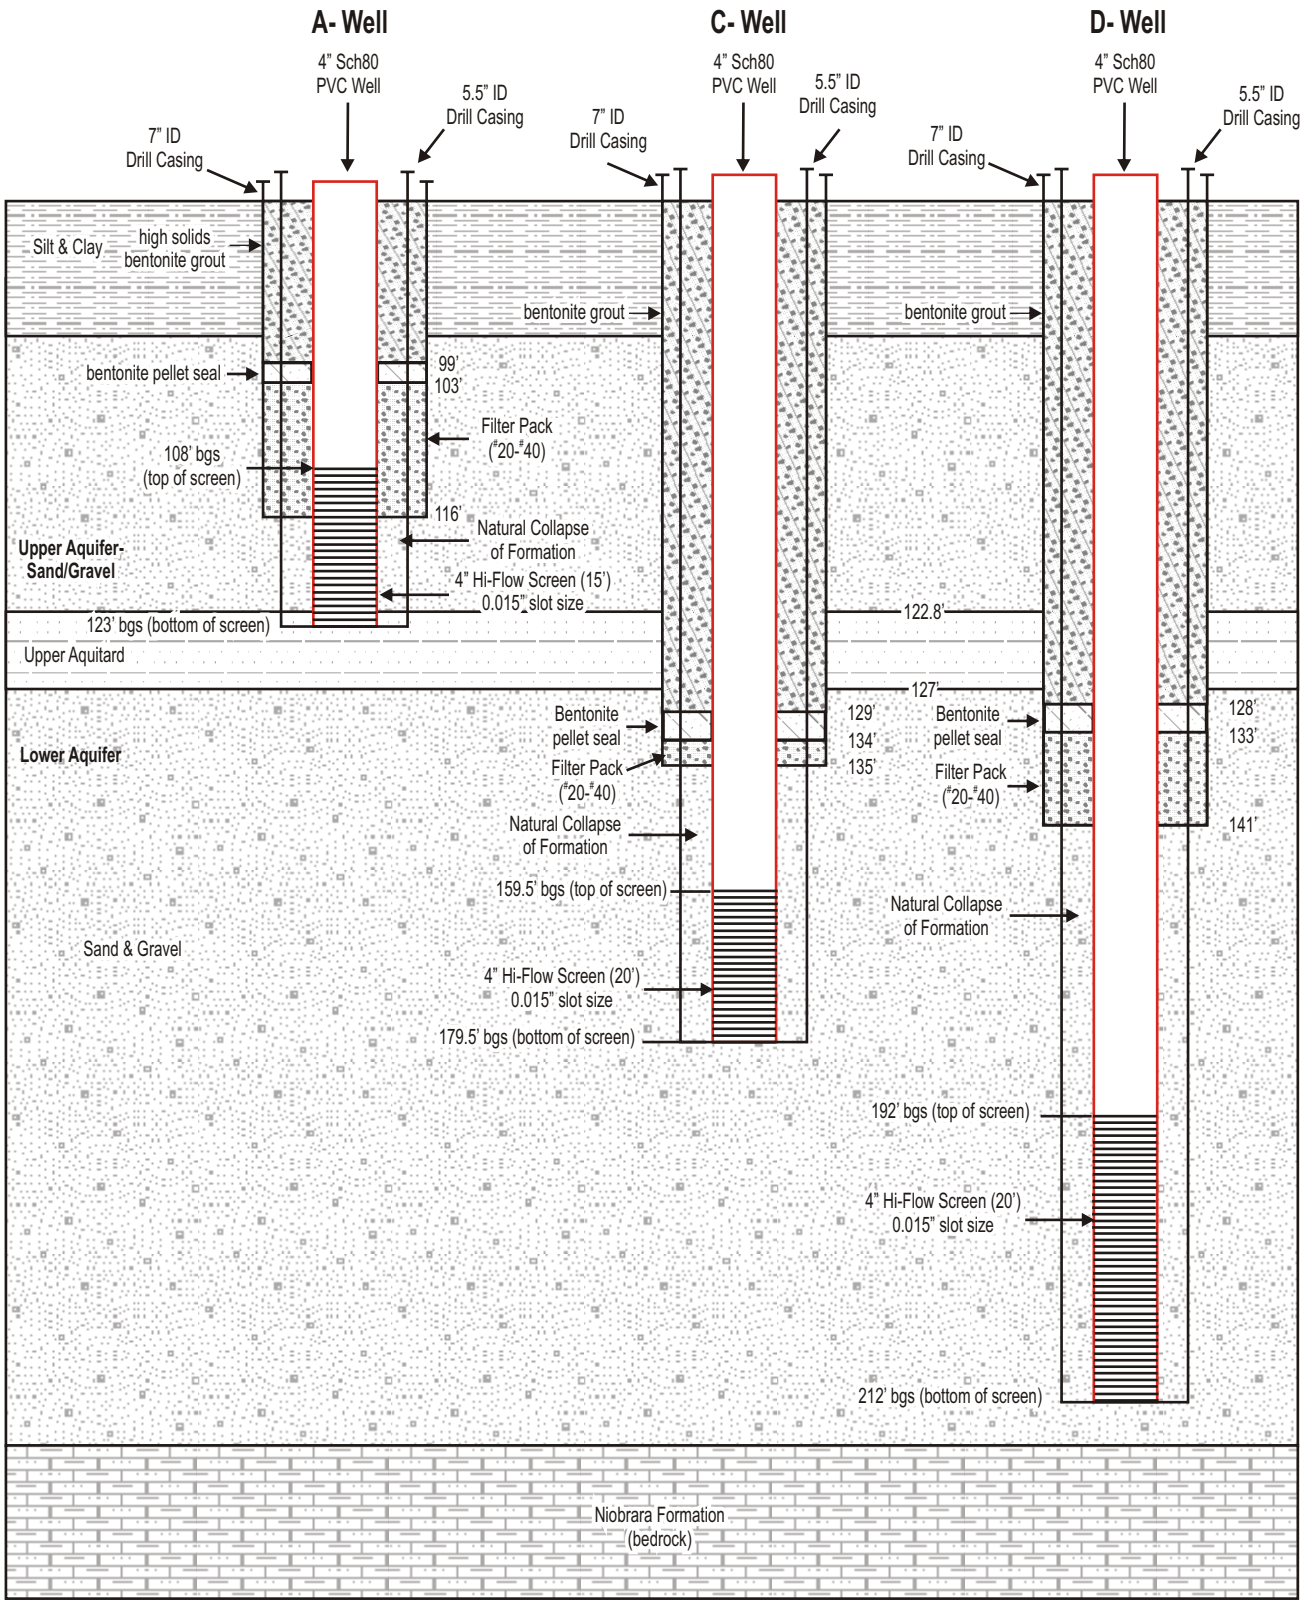

Drawing not to scale

Figure O.8
MW-106 A/C/D 4-Inch Monitoring Wells Construction Diagram
W. Highway 6 & Highway 281 Site—Hastings, NE

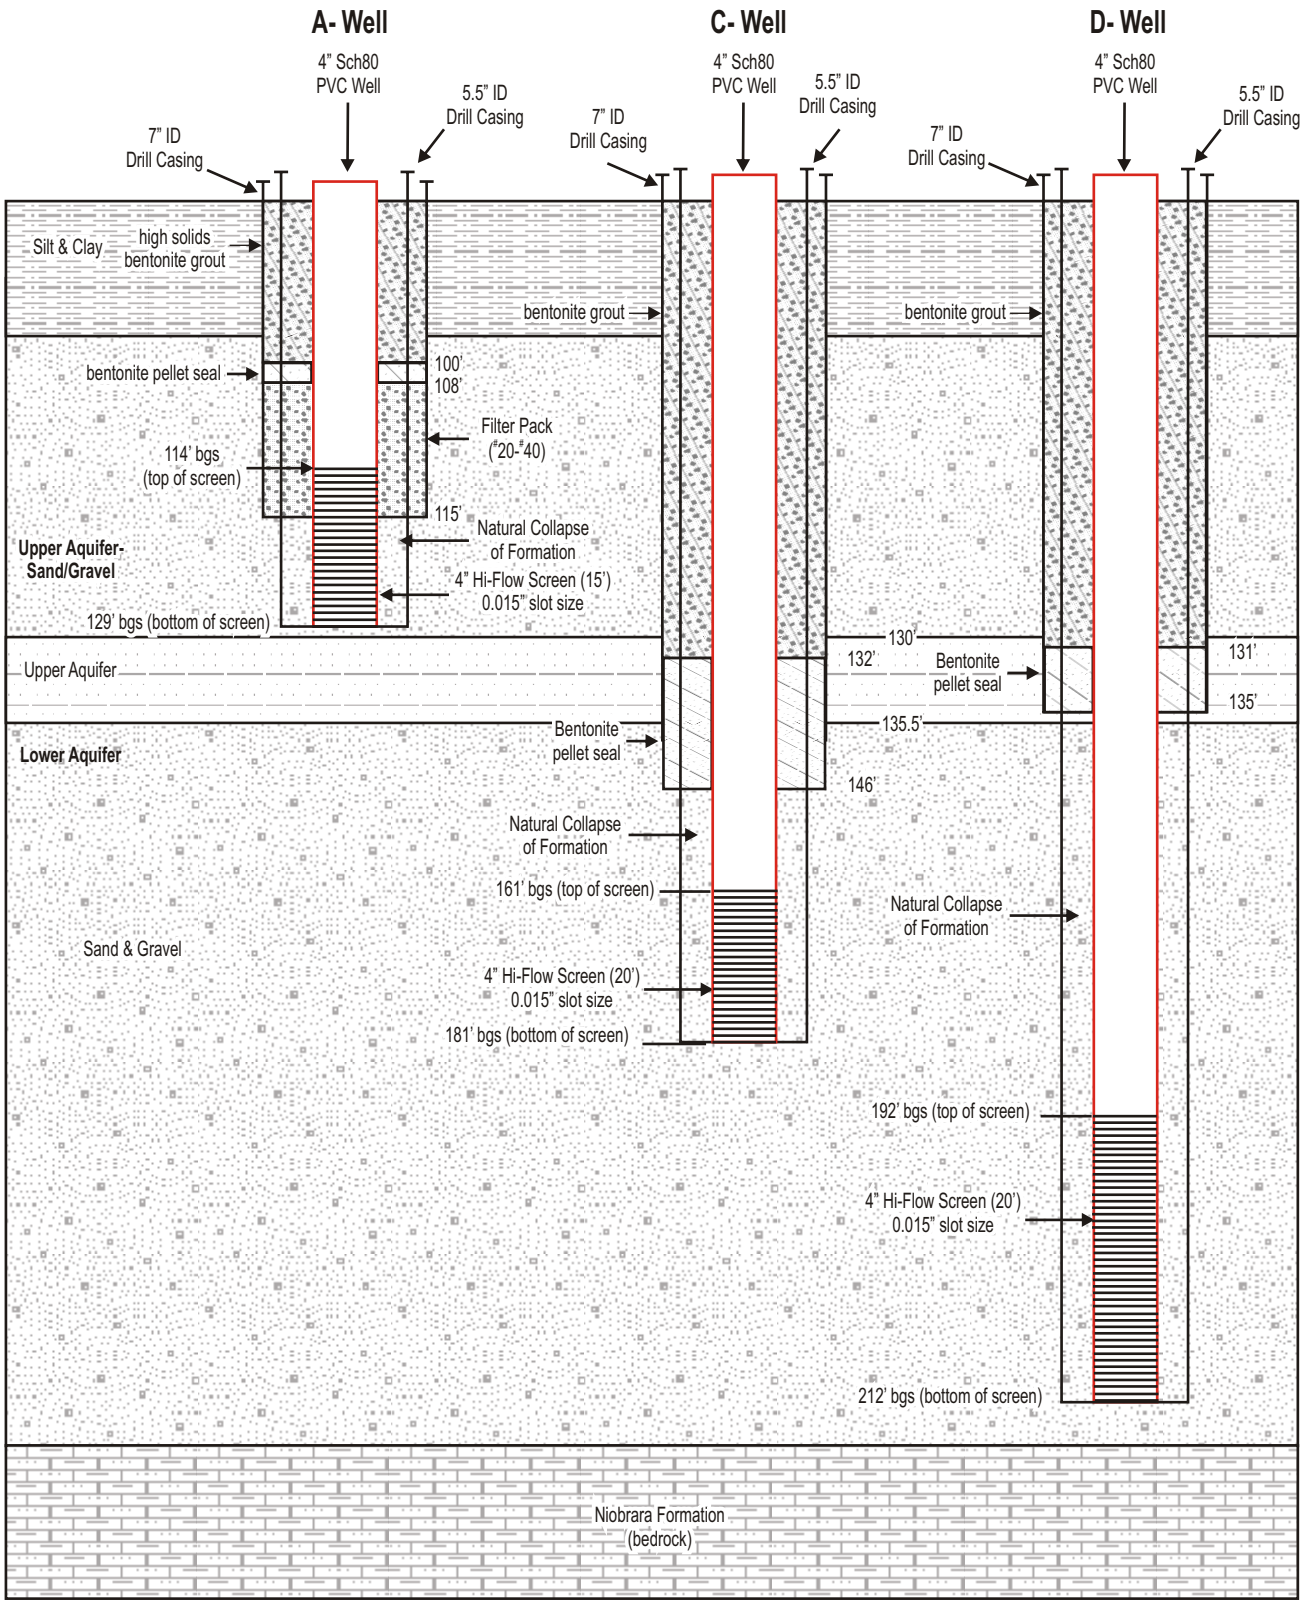

Drawing not to scale

US EPA ARCHIVE DOCUMENT

ANALYTICAL DATA FROM GARVEY ELEVATOR LEAD INVESTIGATIONS

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-E	Normal Environmental Sample	1/27/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	1/27/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	1/27/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	1/27/2006	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	1/27/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	1/27/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	3/16/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	3/16/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	3/16/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	3/16/2006	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	3/16/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	3/16/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	4/20/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	4/20/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	4/20/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	4/20/2006	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	4/20/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	4/20/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.77	ug/l	Y		
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.77	ug/l	Y		
AST-E	Normal Environmental Sample	6/1/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			71-43-2	BENZENE	0.24	ug/l	Y	J	J
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	J	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			179601-23-1	m,p-Xylene	0.29	ug/l	Y	J	J
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			108-88-3	METHYLBENZENE	0.52	ug/l	N	B	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			95-47-6	o-Xylene	0.13	ug/l	Y	J	J
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	8/9/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			99-99-0	4-NITROTOLUENE	0.025	ug/l	N	U	
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
AST-E	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			74-87-3	CHLOROMETHANE	0.19	ug/l	Y	J	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	6/8/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.23	ug/l	Y	J	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.16	ug/l	Y	J	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			95-47-6	o-Xylene		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			TIC-2.9622	TIC-Ethane, 1,1-difluoro--2.9622	3.401	ug/l	Y	JN	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-E	Normal Environmental Sample	8/1/2007	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-E	Normal Environmental Sample	1/16/2008	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-E	Normal Environmental Sample		Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			78-93-3	2-Butanone		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			67-64-1	ACETONE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			71-43-2	BENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-69-4	CFC-11		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-71-8	CFC-12		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-09-2	DICHLOROMETHANE	0.6708889165455	ug/l	Y	B	B
AST-E	Normal Environmental Sample		Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			95-47-6	o-Xylene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
AST-E	Normal Environmental Sample		Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	U
AST-I	Normal Environmental Sample	1/27/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	1/27/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	1/27/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	58	ug/l	Y		
AST-I	Normal Environmental Sample	1/27/2006	Ground Water			67-66-3	CHLOROFORM	0.39	ug/l	Y	J	J
AST-I	Normal Environmental Sample	1/27/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	1/27/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	3/16/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	3/16/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	3/16/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	75	ug/l	Y		
AST-I	Normal Environmental Sample	3/16/2006	Ground Water			67-66-3	CHLOROFORM	0.45	ug/l	Y	J	J
AST-I	Normal Environmental Sample	3/16/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	3/16/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	4/20/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	4/20/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	4/20/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	96	ug/l	Y		
AST-I	Normal Environmental Sample	4/20/2006	Ground Water			67-66-3	CHLOROFORM	0.55	ug/l	Y		
AST-I	Normal Environmental Sample	4/20/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	4/20/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
AST-I	Normal Environmental Sample	6/1/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	
AST-I	Normal Environmental Sample	6/1/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	
AST-I	Normal Environmental Sample	6/1/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	51	ug/l	Y		
AST-I	Normal Environmental Sample	6/1/2006	Ground Water			67-66-3	CHLOROFORM	0.37	ug/l	Y	J	
AST-I	Normal Environmental Sample	6/1/2006	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	
AST-I	Normal Environmental Sample	6/1/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	46	ug/l	Y	D	
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			67-66-3	CHLOROFORM	0.42	ug/l	Y	J	J
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	8/9/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	52	ug/l	Y	E	J
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	0.43	ug/l	Y	J	J
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	45	ug/l	Y		
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	1.0	ug/l	N	U	
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	1.0	ug/l	N	U,L	
AST-I	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	35	ug/l	Y	D	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	36	ug/l	Y	E	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			67-66-3	CHLOROFORM	0.35	ug/l	Y	J	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-I	Normal Environmental Sample	6/8/2007	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.19	ug/l	Y	J	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	65	ug/l	Y	D	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	60	ug/l	Y	E	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			67-66-3	CHLOROFORM	0.39	ug/l	Y	J	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-I	Normal Environmental Sample	8/1/2007	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			78-93-3	2-Butanone		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			67-64-1	ACETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			71-43-2	BENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			56-23-5	CARBON TETRACHLORIDE	60	ug/l	Y	D	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			56-23-5	CARBON TETRACHLORIDE	65	ug/l	Y	E	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-69-4	CFC-11		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-71-8	CFC-12		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			67-66-3	CHLOROFORM	0.68	ug/l	Y		
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			95-47-6	o-Xylene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-I	Normal Environmental Sample	1/16/2008	Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	
AST-I	Normal Environmental Sample		Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			78-93-3	2-Butanone		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			78-93-3	2-Butanone		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			67-64-1	ACETONE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			67-64-1	ACETONE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			71-43-2	BENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			71-43-2	BENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample		Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			56-23-5	CARBON TETRACHLORIDE	65	ug/l	Y	D	D
AST-I	Normal Environmental Sample		Ground Water			56-23-5	CARBON TETRACHLORIDE	66	ug/l	Y	E	E
AST-I	Normal Environmental Sample		Ground Water			75-69-4	CFC-11		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-69-4	CFC-11		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-71-8	CFC-12		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-71-8	CFC-12		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			67-66-3	CHLOROFORM		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-09-2	DICHLOROMETHANE	1.669755245203	ug/l	Y	JDB	JDB
AST-I	Normal Environmental Sample		Ground Water			75-09-2	DICHLOROMETHANE	0.1229006100574	ug/l	Y	JB	JB
AST-I	Normal Environmental Sample		Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			95-47-6	o-Xylene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			95-47-6	o-Xylene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
AST-I	Normal Environmental Sample		Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	U
AST-I	Normal Environmental Sample		Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	340	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	45	45	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	45	45	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	45	45	56-23-5	CARBON TETRACHLORIDE	480	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	45	45	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	45	45	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	45	45	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	1800	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	4200	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	4500	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	4400	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	2500	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	2000	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	400	ug/m3	Y		
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-1	Normal Environmental Sample	2/18/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10	Normal Environmental Sample	10/16/2006	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	830	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	56-23-5	CARBON TETRACHLORIDE	1300	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	56-23-5	CARBON TETRACHLORIDE	1400	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	25	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	1400	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	1800	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	2700	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	480	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	6700	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	5600	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	9400	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	270	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	10000	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	298	ug/m3	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	78-93-3	2-Butanone		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	78-93-3	2-Butanone		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-64-1	ACETONE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-64-1	ACETONE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	71-43-2	BENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	71-43-2	BENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	34	ug/l	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	42	ug/l	Y	E	E
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	33	ug/l	Y	D	D
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-69-4	CFC-11		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-69-4	CFC-11		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-71-8	CFC-12		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-71-8	CFC-12		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-66-3	CHLOROFORM	3.43	ug/l	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-66-3	CHLOROFORM	3.774115891011	ug/l	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-66-3	CHLOROFORM	3.5687994093	ug/l	Y	D	D
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.6249961128404	ug/l	Y		
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	1.313160443551	ug/l	Y	JD	JD
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	95-47-6	o-Xylene		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	95-47-6	o-Xylene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-10A	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	940	ug/m3	Y		
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	1900	ug/m3	Y		
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	14	ug/l	Y		
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.92	ug/l	Y		
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-11	Normal Environmental Sample	3/7/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			106-93-4	1,2-Dibromoethane	2.0	ug/l	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			75-15-0	CARBON DISULFIDE	2.0	ug/l	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	97	ug/l	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			67-66-3	CHLOROFORM	6.8	ug/l	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			74-87-3	CHLOROMETHANE	2.0	ug/l	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Ground Water			75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	260	ug/m3	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	860	ug/m3	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	1000	ug/m3	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	1600	ug/m3	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	630	ug/m3	Y		
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-12	Normal Environmental Sample	2/16/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	21	ug/l	Y		
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	2/20/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	10	ug/l	Y		
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	11	ug/l	Y		
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	19000	ug/m3	Y		
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	19000	ug/m3	Y		
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-13	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	4900	ug/m3	Y		
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/19/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	4000	ug/m3	Y		
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	17000	ug/m3	Y		
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	17000	ug/m3	Y		
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	19000	ug/m3	Y		
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-14	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	3500	ug/m3	Y		
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	1600	ug/m3	Y		
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	3100	ug/m3	Y		
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/5/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	78-93-3	2-Butanone		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-64-1	ACETONE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	71-43-2	BENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.2302749727591	ug/l	Y	J	J
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	4.9	ug/l	Y		
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	4.9	ug/l	Y		
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-69-4	CFC-11		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-71-8	CFC-12		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5442515894489	ug/l	Y		
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.4479517567474	ug/l	Y	J	J
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	95-47-6	o-Xylene		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	TIC-2.7525	TIC-Propene-2.7525	1.5297	ug/l	Y	JN	JN
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-15	Normal Environmental Sample	3/6/2007	Ground Water	120	120	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas			106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas			75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas			56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas			67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas			74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas			75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,L	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	11000	ug/m3	Y		
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	1000	ug/m3	Y	H	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	12000	ug/m3	Y	H	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	20000	ug/m3	Y		
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	2.0	ug/l	N	U,L	
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	2.0	ug/l	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	76	ug/l	Y		
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	67-66-3	CHLOROFORM	5.68	ug/l	Y		
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	2.0	ug/l	N	U	
DPT-16	Normal Environmental Sample	2/21/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			106-93-4	1,2-Dibromoethane	2.0	ug/l	N	U,L	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			75-15-0	CARBON DISULFIDE	2.0	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	53	ug/l	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			67-66-3	CHLOROFORM	2.96	ug/l	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			74-87-3	CHLOROMETHANE	2.0	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			74-87-3	CHLOROMETHANE	2.0	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Ground Water			75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	1000	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	1000	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	80000	ug/m3	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	2350	ug/m3	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	1000	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	1000	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	620	ug/m3	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	2600	ug/m3	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	1500	ug/m3	Y		
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	2/20/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	37	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	37	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	37	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	10	10	67-66-3	CHLOROFORM	37	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	10	10	74-87-3	CHLOROMETHANE	37	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	37	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	20	20	67-66-3	CHLOROFORM	35	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	20	20	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	30	30	67-66-3	CHLOROFORM	29	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	30	30	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	34	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-17	Normal Environmental Sample	8/13/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	34	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	34	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	40	40	67-66-3	CHLOROFORM	34	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	40	40	74-87-3	CHLOROMETHANE	34	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	34	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	50	50	67-66-3	CHLOROFORM	30	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	50	50	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	31	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	31	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	31	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	60	60	67-66-3	CHLOROFORM	31	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	60	60	74-87-3	CHLOROMETHANE	31	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	31	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	36	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	36	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	36	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	70	70	67-66-3	CHLOROFORM	36	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	70	70	74-87-3	CHLOROMETHANE	36	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	36	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	71-55-6	1,1,1-Trichloroethane	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	71-55-6	1,1,1-Trichloroethane	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-00-5	1,1,2-TRICHLOROETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-00-5	1,1,2-TRICHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-34-3	1,1-DICHLOROETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-34-3	1,1-DICHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-35-4	1,1-DICHLOROETHYLENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-35-4	1,1-DICHLOROETHYLENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	87-61-6	1,2,3-TRICHLOROBENZENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	87-61-6	1,2,3-TRICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	120-82-1	1,2,4-TRICHLOROBENZENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	120-82-1	1,2,4-TRICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	95-50-1	1,2-DICHLOROBENZENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	95-50-1	1,2-DICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	107-06-2	1,2-DICHLOROETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	107-06-2	1,2-DICHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	78-87-5	1,2-Dichloropropane	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	78-87-5	1,2-Dichloropropane	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	106-46-7	1,4-DICHLOROBENZENE	1.8	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	106-46-7	1,4-DICHLOROBENZENE	1.4	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	123-91-1	1,4-Dioxane		ug/kg	N	U	R
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	123-91-1	1,4-Dioxane		ug/kg	N	U	R
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	78-93-3	2-Butanone	4.5	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	78-93-3	2-Butanone	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-10-1	4-Methyl-2-Pentanone	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-10-1	4-Methyl-2-Pentanone	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-64-1	ACETONE	77	ug/kg	Y		
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-64-1	ACETONE	6.3	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	71-43-2	BENZENE	5.3	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	71-43-2	BENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-27-4	BROMODICHLOROMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-27-4	BROMODICHLOROMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-83-9	BROMOMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-83-9	BROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	11	ug/kg	Y		
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	11	ug/kg	Y		
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-69-4	CFC-11	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-69-4	CFC-11	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-71-8	CFC-12	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-71-8	CFC-12	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-90-7	CHLOROBENZENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-90-7	CHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-97-5	CHLOROBROMOMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-97-5	CHLOROBROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	124-48-1	CHLORODIBROMOMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	124-48-1	CHLORODIBROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-00-3	CHLOROETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-00-3	CHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-66-3	CHLOROFORM	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	67-66-3	CHLOROFORM	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-87-3	CHLOROMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	74-87-3	CHLOROMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	156-59-2	cis-1,2-Dichloroethene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	156-59-2	cis-1,2-Dichloroethene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	10061-01-5	cis-1,3-Dichloropropene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	10061-01-5	cis-1,3-Dichloropropene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	110-82-7	CYCLOHEXANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	110-82-7	CYCLOHEXANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	100-41-4	ETHYLBENZENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	100-41-4	ETHYLBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	98-82-8	Isopropylbenzene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	98-82-8	Isopropylbenzene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	179601-23-1	m,p-Xylene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	179601-23-1	m,p-Xylene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	541-73-1	M-DICHLOROBENZENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	541-73-1	M-DICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-20-9	METHYL ACETATE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-20-9	METHYL ACETATE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	591-78-6	METHYL N-BUTYL KETONE	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	591-78-6	METHYL N-BUTYL KETONE	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	1634-04-4	Methyl tert-butyl ether	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	1634-04-4	Methyl tert-butyl ether	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-88-3	METHYLBENZENE	5.3	ug/kg	N	J	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-88-3	METHYLBENZENE	5.6	ug/kg	N	J	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-87-2	METHYLCYLOHEXANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	108-87-2	METHYLCYLOHEXANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	95-47-6	o-Xylene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	95-47-6	o-Xylene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	100-42-5	STYRENE (MONOMER)	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	100-42-5	STYRENE (MONOMER)	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	127-18-4	TETRACHLOROETHYLENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	127-18-4	TETRACHLOROETHYLENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	TIC-18.3032	TIC-1-Hexanol, 2-ethyl--18.3032	6.7	ug/kg	Y	JN	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	TIC-19.8008	TIC-1-Pentene, 3-ethyl--19.8008	7.2	ug/kg	Y	JN	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	TIC-17.7028	TIC-Cyclic Alkane-17.7028	8.6	ug/kg	Y	J	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	TIC-19.7817	TIC-Nonanal-19.7817	5.7	ug/kg	Y	JN	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	TIC-17.6923	TIC-Octanal-17.6923	12	ug/kg	Y	JN	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	156-60-5	trans-1,2-Dichloroethene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	156-60-5	trans-1,2-Dichloroethene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	10061-02-6	trans-1,3-Dichloropropene	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	10061-02-6	trans-1,3-Dichloropropene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-25-2	TRIBROMOMETHANE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-25-2	TRIBROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-01-6	TRICHLOROETHYLENE	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	79-01-6	TRICHLOROETHYLENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-01-4	Vinyl chloride	5.3	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	80	80	75-01-4	Vinyl chloride	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	90	90	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	90	90	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	71-55-6	1,1,1-Trichloroethane	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	79-00-5	1,1,2-TRICHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-34-3	1,1-DICHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-35-4	1,1-DICHLOROETHYLENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	87-61-6	1,2,3-TRICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	120-82-1	1,2,4-TRICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	95-50-1	1,2-DICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	107-06-2	1,2-DICHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	78-87-5	1,2-Dichloropropane	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	106-46-7	1,4-DICHLOROBENZENE	1.7	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	123-91-1	1,4-Dioxane		ug/kg	N	U	R
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	78-93-3	2-Butanone	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	108-10-1	4-Methyl-2-Pentanone	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	67-64-1	ACETONE	12	ug/kg	Y		
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	71-43-2	BENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-27-4	BROMODICHLOROMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	74-83-9	BROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	2.5	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-69-4	CFC-11	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-71-8	CFC-12	5.6	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	108-90-7	CHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	74-97-5	CHLOROBROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	124-48-1	CHLORODIBROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-00-3	CHLOROETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	67-66-3	CHLOROFORM	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	67-66-3	CHLOROFORM	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	67-66-3	CHLOROFORM	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	74-87-3	CHLOROMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	156-59-2	cis-1,2-Dichloroethene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	10061-01-5	cis-1,3-Dichloropropene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	110-82-7	CYCLOHEXANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	100-41-4	ETHYLBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	98-82-8	Isopropylbenzene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	179601-23-1	m,p-Xylene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	541-73-1	M-DICHLOROBENZENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	79-20-9	METHYL ACETATE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	591-78-6	METHYL N-BUTYL KETONE	11	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	1634-04-4	Methyl tert-butyl ether	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	108-88-3	METHYLBENZENE	5.6	ug/kg	N	J	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	108-87-2	METHYLCYLOHEXANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	95-47-6	o-Xylene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	100-42-5	STYRENE (MONOMER)	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	127-18-4	TETRACHLOROETHYLENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	156-60-5	trans-1,2-Dichloroethene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	10061-02-6	trans-1,3-Dichloropropene	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-25-2	TRIBROMOMETHANE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	79-01-6	TRICHLOROETHYLENE	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	100	100	75-01-4	Vinyl chloride	5.6	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	71-55-6	1,1,1-Trichloroethane	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	79-34-5	1,1,2,2-TETRACHLOROETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	79-00-5	1,1,2-TRICHLOROETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-34-3	1,1-DICHLOROETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-35-4	1,1-DICHLOROETHYLENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	87-61-6	1,2,3-TRICHLOROBENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	120-82-1	1,2,4-TRICHLOROBENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	106-93-4	1,2-Dibromoethane	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	95-50-1	1,2-DICHLOROBENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	107-06-2	1,2-DICHLOROETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	78-87-5	1,2-Dichloropropane	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	106-46-7	1,4-DICHLOROBENZENE	1.3	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	123-91-1	1,4-Dioxane		ug/kg	N	U	R
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	78-93-3	2-Butanone	18	ug/kg	Y		
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	108-10-1	4-Methyl-2-Pentanone	9.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	67-64-1	ACETONE	17	ug/kg	Y		
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	71-43-2	BENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-27-4	BROMODICHLOROMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	74-83-9	BROMOMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-15-0	CARBON DISULFIDE	3.9	ug/kg	Y	J	J
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-69-4	CFC-11	4.9	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-71-8	CFC-12	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	108-90-7	CHLOROBENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	74-97-5	CHLOROBROMOMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	124-48-1	CHLORODIBROMOMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-00-3	CHLOROETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	67-66-3	CHLOROFORM	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	74-87-3	CHLOROMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	156-59-2	cis-1,2-Dichloroethene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	10061-01-5	cis-1,3-Dichloropropene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	110-82-7	CYCLOHEXANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-09-2	DICHLOROMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	100-41-4	ETHYLBENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	98-82-8	Isopropylbenzene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	179601-23-1	m,p-Xylene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	541-73-1	M-DICHLOROBENZENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	79-20-9	METHYL ACETATE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	591-78-6	METHYL N-BUTYL KETONE	9.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	1634-04-4	Methyl tert-butyl ether	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	108-88-3	METHYLBENZENE	4.9	ug/kg	N	J	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	108-87-2	METHYLCYLOHEXANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	95-47-6	o-Xylene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	100-42-5	STYRENE (MONOMER)	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	127-18-4	TETRACHLOROETHYLENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	156-60-5	trans-1,2-Dichloroethene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	10061-02-6	trans-1,3-Dichloropropene	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-25-2	TRIBROMOMETHANE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	79-01-6	TRICHLOROETHYLENE	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	110	110	75-01-4	Vinyl chloride	4.9	ug/kg	N	U	U
DPT-17	Normal Environmental Sample	8/13/2007	Soil	112	112	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	112	112	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	112	112	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	112	112	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	112	112	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/13/2007	Soil	112	112	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/14/2007	Soil	113	113	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/14/2007	Soil	113	113	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/14/2007	Soil	113	113	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/14/2007	Soil	113	113	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/14/2007	Soil	113	113	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-17	Normal Environmental Sample	8/14/2007	Soil	113	113	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	450	ug/m3	Y		
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	320	ug/m3	Y	M	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	440	ug/m3	Y		
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	660	ug/m3	Y		
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-18	Normal Environmental Sample	2/15/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-2	Normal Environmental Sample	2/18/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	78-93-3	2-Butanone		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	78-93-3	2-Butanone		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	67-64-1	ACETONE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	67-64-1	ACETONE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	71-43-2	BENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	71-43-2	BENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	480	ug/l	Y	D	D

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	170	ug/l	Y	E	E
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-69-4	CFC-11		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-69-4	CFC-11		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	67-66-3	CHLOROFORM	177.9548791883	ug/l	Y	D	D
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	67-66-3	CHLOROFORM	170.8153900467	ug/l	Y	E	E
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	2.945903022869	ug/l	Y		
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	95-47-6	o-Xylene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	95-47-6	o-Xylene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-01-4	Vinyl chloride		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-20D	Normal Environmental Sample	3/21/2007	Ground Water	130	130	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	220	220	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	210	210	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	200	200	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	190	190	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	170	170	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	78-93-3	2-Butanone		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	67-64-1	ACETONE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	71-43-2	BENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.315452738164	ug/l	Y	J	J
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-69-4	CFC-11		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-71-8	CFC-12		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	67-66-3	CHLOROFORM		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	95-47-6	o-Xylene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	TIC-2.7522	TIC-Propene-2.7522	0.661	ug/l	Y	JN	JN
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	160	160	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	56-23-5	CARBON TETRACHLORIDE	0.86	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	67-66-3	CHLOROFORM	7.47	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	150	150	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	0.84	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	67-66-3	CHLOROFORM	10.8	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	0.97	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	67-66-3	CHLOROFORM	15.1	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	2.9	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	67-66-3	CHLOROFORM	4.47	ug/l	Y		
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-21D	Normal Environmental Sample	3/11/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	56-23-5	CARBON TETRACHLORIDE	0.61	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	240	240	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	220	220	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	210	210	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	200	200	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	190	190	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	170	170	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	150	150	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	12.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	78-93-3	2-Butanone		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	78-93-3	2-Butanone		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	67-64-1	ACETONE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	67-64-1	ACETONE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	71-43-2	BENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	71-43-2	BENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	12.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	630	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	620	ug/l	Y	E	E
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	650	ug/l	Y	D	D
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-69-4	CFC-11		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-69-4	CFC-11		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	67-66-3	CHLOROFORM	70.5	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	67-66-3	CHLOROFORM	126.0248615515	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	67-66-3	CHLOROFORM	135.2096342043	ug/l	Y	D	D
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE	12.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	12.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	5.300070302458	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	24.51183199229	ug/l	Y	JD	JD
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	179601-23-1	m,p-Xylene		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	95-47-6	o-Xylene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	95-47-6	o-Xylene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	130	130	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	2.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	2.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	110	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	67-66-3	CHLOROFORM	42.2	ug/l	Y		
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	2.5	ug/l	N	U	
DPT-22D	Normal Environmental Sample	3/9/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	2.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U,M	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U,L	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	220	220	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	210	210	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U,L	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	200	200	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	190	190	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U,L	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	170	170	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U,L	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	150	150	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	78-93-3	2-Butanone		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	67-64-1	ACETONE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	71-43-2	BENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.216799153243	ug/l	Y	J	J
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	10	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	8.7	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-69-4	CFC-11		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-71-8	CFC-12		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	67-66-3	CHLOROFORM	3.08	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	67-66-3	CHLOROFORM	4.57487728469	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U,L	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.4054704772854	ug/l	Y	J	J
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	95-47-6	o-Xylene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	TIC-2.7615	TIC-Propene-2.7615	0.5903	ug/l	Y	JN	JN
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	140	140	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	50	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	67-66-3	CHLOROFORM	15.3	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	11	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	67-66-3	CHLOROFORM	11	ug/l	Y		
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-23D	Normal Environmental Sample	3/12/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	220	220	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	210	210	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	200	200	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	190	190	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	170	170	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	150	150	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	2.7	ug/l	Y		

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	67-66-3	CHLOROFORM	4.7	ug/l	Y		
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.0261	ug/l	Y	Q	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	78-93-3	2-Butanone		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	78-93-3	2-Butanone		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	67-64-1	ACETONE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	67-64-1	ACETONE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	71-43-2	BENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	71-43-2	BENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	0.1186759867425	ug/l	Y	J	J
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	31	ug/l	Y		
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	3.4	ug/l	Y	JD	JD
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	18	ug/l	Y		
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-69-4	CFC-11		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-69-4	CFC-11		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-71-8	CFC-12		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-90-7	CHLOROBENZENE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	67-66-3	CHLOROFORM	66.3	ug/l	Y		
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	67-66-3	CHLOROFORM	82.71470898203	ug/l	Y	D	D
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	67-66-3	CHLOROFORM	50.73390788675	ug/l	Y	E	E
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	3.587842449918	ug/l	Y	JD	JD
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	1.974475066205	ug/l	Y		
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	95-47-6	o-Xylene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	95-47-6	o-Xylene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	TIC-2.7651	TIC-Propene-2.7651	2.3324	ug/l	Y	JN	JN
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	130	130	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	8.9	ug/l	Y		

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	67-66-3	CHLOROFORM	29.1	ug/l	Y		
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-24D	Normal Environmental Sample	3/13/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-25D	Normal Environmental Sample		Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			78-93-3	2-Butanone		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			78-93-3	2-Butanone		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			67-64-1	ACETONE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			67-64-1	ACETONE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			71-43-2	BENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			71-43-2	BENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-15-0	CARBON DISULFIDE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-15-0	CARBON DISULFIDE	0.2208424596194	ug/l	Y	J	J
DPT-25D	Normal Environmental Sample		Ground Water			56-23-5	CARBON TETRACHLORIDE	55	ug/l	Y	D	D
DPT-25D	Normal Environmental Sample		Ground Water			56-23-5	CARBON TETRACHLORIDE	71	ug/l	Y	E	E
DPT-25D	Normal Environmental Sample		Ground Water			75-69-4	CFC-11		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-69-4	CFC-11		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-71-8	CFC-12		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-71-8	CFC-12		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-25D	Normal Environmental Sample		Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			67-66-3	CHLOROFORM	33.42729634806	ug/l	Y	D	D
DPT-25D	Normal Environmental Sample		Ground Water			67-66-3	CHLOROFORM	28.62184329079	ug/l	Y	E	E
DPT-25D	Normal Environmental Sample		Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-09-2	DICHLOROMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-09-2	DICHLOROMETHANE	0.4340211386572	ug/l	Y	J	J
DPT-25D	Normal Environmental Sample		Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			95-47-6	o-Xylene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			95-47-6	o-Xylene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			TIC-2.7653	TIC-Propene-2.7653	1.3099	ug/l	Y	JN	JN
DPT-25D	Normal Environmental Sample		Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-25D	Normal Environmental Sample		Ground Water			75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	220	220	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	210	210	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	200	200	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	190	190	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	78-93-3	2-Butanone		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	67-64-1	ACETONE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	71-43-2	BENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.1160608702309	ug/l	Y	J	J
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-69-4	CFC-11		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-71-8	CFC-12		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	67-66-3	CHLOROFORM		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	179601-23-1	m,p-Xylene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	95-47-6	o-Xylene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	TIC-2.7617	TIC-Propene-2.7617	1.5646	ug/l	Y	JN	JN
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	180	180	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	170	170	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	150	150	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	12	ug/l	Y		
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	67-66-3	CHLOROFORM	2.42	ug/l	Y		
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.0713	ug/l	Y	Q	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	5.0	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	5.0	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	200	ug/l	Y		
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	67-66-3	CHLOROFORM	22.4	ug/l	Y		
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE	5.0	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	5.0	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U,L	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	5.3	ug/l	Y		
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	67-66-3	CHLOROFORM	20.1	ug/l	Y		
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-26	Normal Environmental Sample	3/14/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	56-23-5	CARBON TETRACHLORIDE	1.5	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	240	240	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	71-55-6	1,1,1-Trichloroethane		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	79-34-5	1,1,2,2-TETRACHLOROETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	79-00-5	1,1,2-TRICHLOROETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-34-3	1,1-DICHLOROETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-35-4	1,1-DICHLOROETHYLENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	87-61-6	1,2,3-TRICHLOROBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	120-82-1	1,2,4-TRICHLOROBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	106-93-4	1,2-Dibromoethane		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	95-50-1	1,2-DICHLOROBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	107-06-2	1,2-DICHLOROETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	78-87-5	1,2-Dichloropropane		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	106-46-7	1,4-DICHLOROBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	123-91-1	1,4-Dioxane		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	78-93-3	2-Butanone		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	108-10-1	4-Methyl-2-Pentanone		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	67-64-1	ACETONE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	71-43-2	BENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-27-4	BROMODICHLOROMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	74-83-9	BROMOMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-15-0	CARBON DISULFIDE	0.1270713661066	ug/l	Y	J	J
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	56-23-5	CARBON TETRACHLORIDE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-69-4	CFC-11		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-71-8	CFC-12		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	108-90-7	CHLOROBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	74-97-5	CHLOROBROMOMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	124-48-1	CHLORODIBROMOMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-00-3	CHLOROETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	67-66-3	CHLOROFORM		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	74-87-3	CHLOROMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	156-59-2	cis-1,2-Dichloroethene		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	10061-01-5	cis-1,3-Dichloropropene		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	110-82-7	CYCLOHEXANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-09-2	DICHLOROMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	100-41-4	ETHYLBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	98-82-8	Isopropylbenzene		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	179601-23-1	m,p-Xylene		ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	541-73-1	M-DICHLOROBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	79-20-9	METHYL ACETATE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	591-78-6	METHYL N-BUTYL KETONE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	1634-04-4	Methyl tert-butyl ether		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	108-88-3	METHYLBENZENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	108-87-2	METHYLCYLOHEXANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	95-47-6	o-Xylene		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	100-42-5	STYRENE (MONOMER)		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	127-18-4	TETRACHLOROETHYLENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	156-60-5	trans-1,2-Dichloroethene		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	10061-02-6	trans-1,3-Dichloropropene		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-25-2	TRIBROMOMETHANE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	79-01-6	TRICHLOROETHYLENE		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	230	230	75-01-4	Vinyl chloride		ug/l	N	U	U
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	220	220	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	210	210	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	200	200	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	190	190	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	180	180	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	170	170	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	160	160	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	150	150	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	56-23-5	CARBON TETRACHLORIDE	27	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	67-66-3	CHLOROFORM	8.68	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	140	140	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	56-23-5	CARBON TETRACHLORIDE	18	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	67-66-3	CHLOROFORM	17.5	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	130	130	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	53	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	67-66-3	CHLOROFORM	7.92	ug/l	Y		
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	
DPT-27D	Normal Environmental Sample	3/10/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,M	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U,M	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	420	ug/m3	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	610	ug/m3	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	910	ug/m3	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	1000	ug/m3	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	760	ug/m3	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	950	ug/m3	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	4.0	ug/l	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	67-66-3	CHLOROFORM	1.53	ug/l	Y		
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-28	Normal Environmental Sample	3/8/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	2100	ug/m3	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	5600	ug/m3	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	5000	ug/m3	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	6300	ug/m3	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	1600	ug/m3	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	113	113	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	113	113	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	113	113	56-23-5	CARBON TETRACHLORIDE	8100	ug/m3	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	113	113	67-66-3	CHLOROFORM	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	113	113	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Soil Gas	113	113	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	2.4	ug/l	Y		
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-3	Normal Environmental Sample	2/13/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas			106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas			75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas			56-23-5	CARBON TETRACHLORIDE	270	ug/m3	Y		
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas			67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas			74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas			75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	2500	ug/m3	Y		
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	5500	ug/m3	Y	L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	9800	ug/m3	Y		
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	12000	ug/m3	Y	L	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	340	ug/m3	Y		
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	270	ug/m3	Y	L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U,L	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	790	ug/m3	Y		
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	9.0	ug/l	Y		
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-4	Normal Environmental Sample	2/14/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	10	10	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	10	10	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	10	10	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	10	10	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	10	10	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	10	10	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	20	20	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	20	20	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	20	20	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	20	20	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	20	20	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	20	20	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	30	30	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	30	30	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	30	30	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	30	30	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	30	30	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	30	30	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	40	40	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	40	40	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	40	40	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	40	40	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	40	40	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	40	40	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	50	50	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	50	50	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	50	50	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	50	50	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	50	50	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	50	50	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	60	60	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	60	60	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	60	60	56-23-5	CARBON TETRACHLORIDE	1600	ug/m3	Y		
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	60	60	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	60	60	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	60	60	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	70	70	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	70	70	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	70	70	56-23-5	CARBON TETRACHLORIDE	3000	ug/m3	Y		
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	70	70	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	70	70	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	70	70	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	4600	ug/m3	Y		
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-5	Normal Environmental Sample	2/12/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	56-23-5	CARBON TETRACHLORIDE	1400	ug/m3	Y	H	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	80	80	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	0	0	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	0	0	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	0	0	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	0	0	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	0	0	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	0	0	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	90	90	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	Y		
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-6	Normal Environmental Sample	2/17/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-7	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-7	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-7	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	5800	ug/m3	Y		
DPT-7	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	557	ug/m3	Y		
DPT-7	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-7	Normal Environmental Sample	2/18/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	3.8	ug/l	Y		
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	67-66-3	CHLOROFORM	1.82	ug/l	Y		
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-7	Normal Environmental Sample	2/19/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	1	1	106-93-4	1,2-Dibromoethane	34	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	1	1	75-15-0	CARBON DISULFIDE	34	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	1	1	56-23-5	CARBON TETRACHLORIDE	34	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	1	1	67-66-3	CHLOROFORM	34	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	1	1	74-87-3	CHLOROMETHANE	34	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	1	1	75-09-2	DICHLOROMETHANE	34	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	3	3	106-93-4	1,2-Dibromoethane	38	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	3	3	75-15-0	CARBON DISULFIDE	38	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	3	3	56-23-5	CARBON TETRACHLORIDE	38	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	3	3	67-66-3	CHLOROFORM	38	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	3	3	74-87-3	CHLOROMETHANE	38	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	3	3	75-09-2	DICHLOROMETHANE	38	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	5	5	106-93-4	1,2-Dibromoethane	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	5	5	75-15-0	CARBON DISULFIDE	37	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	5	5	56-23-5	CARBON TETRACHLORIDE	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	5	5	67-66-3	CHLOROFORM	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	5	5	74-87-3	CHLOROMETHANE	37	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-7	Normal Environmental Sample	8/8/2007	Soil	5	5	75-09-2	DICHLOROMETHANE	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	10	10	67-66-3	CHLOROFORM	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	10	10	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	37	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	20	20	67-66-3	CHLOROFORM	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	20	20	74-87-3	CHLOROMETHANE	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	37	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	30	30	67-66-3	CHLOROFORM	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	30	30	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	33	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	40	40	67-66-3	CHLOROFORM	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	40	40	74-87-3	CHLOROMETHANE	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	50	50	67-66-3	CHLOROFORM	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	50	50	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	60	60	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	60	60	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	70	70	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	70	70	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	80	80	67-66-3	CHLOROFORM	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	80	80	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/8/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	10	10	67-66-3	CHLOROFORM	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	10	10	74-87-3	CHLOROMETHANE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	20	20	67-66-3	CHLOROFORM	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	20	20	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-7	Normal Environmental Sample	8/9/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	30	30	67-66-3	CHLOROFORM	28	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	30	30	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	33	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	40	40	67-66-3	CHLOROFORM	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	40	40	74-87-3	CHLOROMETHANE	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	33	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	39	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	39	ug/kg	N	U,L	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	39	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	50	50	67-66-3	CHLOROFORM	39	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	50	50	74-87-3	CHLOROMETHANE	39	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	39	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	90	90	67-66-3	CHLOROFORM	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	90	90	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	71-55-6	1,1,1-Trichloroethane	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	79-00-5	1,1,2-TRICHLOROETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-34-3	1,1-DICHLOROETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-35-4	1,1-DICHLOROETHYLENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	87-61-6	1,2,3-TRICHLOROBENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	120-82-1	1,2,4-TRICHLOROBENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	95-50-1	1,2-DICHLOROBENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	107-06-2	1,2-DICHLOROETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	78-87-5	1,2-Dichloropropane	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	106-46-7	1,4-DICHLOROBENZENE	2.0	ug/kg	Y	J	J
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	123-91-1	1,4-Dioxane		ug/kg	N	U	R
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	78-93-3	2-Butanone	11	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	108-10-1	4-Methyl-2-Pentanone	11	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	67-64-1	ACETONE	7.8	ug/kg	Y	J	J
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	71-43-2	BENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-27-4	BROMODICHLOROMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	74-83-9	BROMOMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	14	ug/kg	Y		
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-69-4	CFC-11	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-71-8	CFC-12	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	108-90-7	CHLOROBENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	74-97-5	CHLOROBROMOMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	124-48-1	CHLORODIBROMOMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-00-3	CHLOROETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	67-66-3	CHLOROFORM	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	74-87-3	CHLOROMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	156-59-2	cis-1,2-Dichloroethene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	10061-01-5	cis-1,3-Dichloropropene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	110-82-7	CYCLOHEXANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	100-41-4	ETHYLBENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	98-82-8	Isopropylbenzene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	179601-23-1	m,p-Xylene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	541-73-1	M-DICHLOROBENZENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	79-20-9	METHYL ACETATE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	591-78-6	METHYL N-BUTYL KETONE	11	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	1634-04-4	Methyl tert-butyl ether	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	108-88-3	METHYLBENZENE	5.5	ug/kg	N	JB	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	108-87-2	METHYLCYLOHEXANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	95-47-6	o-Xylene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	100-42-5	STYRENE (MONOMER)	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	127-18-4	TETRACHLOROETHYLENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	156-60-5	trans-1,2-Dichloroethene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	10061-02-6	trans-1,3-Dichloropropene	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-25-2	TRIBROMOMETHANE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	79-01-6	TRICHLOROETHYLENE	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	100	100	75-01-4	Vinyl chloride	5.5	ug/kg	N	U	U
DPT-7	Normal Environmental Sample	8/9/2007	Soil	110	110	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	110	110	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	110	110	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	110	110	67-66-3	CHLOROFORM	29	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	110	110	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	110	110	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	115	115	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	115	115	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	115	115	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	115	115	67-66-3	CHLOROFORM	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	115	115	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/9/2007	Soil	115	115	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	60	60	67-66-3	CHLOROFORM	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	60	60	74-87-3	CHLOROMETHANE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	31	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	70	70	67-66-3	CHLOROFORM	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	70	70	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
DPT-7	Normal Environmental Sample	8/10/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	2500	ug/m3	Y		
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U,L	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	1900	ug/m3	Y		
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	1.2	ug/l	Y		
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	67-66-3	CHLOROFORM	0.5	ug/l	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-8	Normal Environmental Sample	2/19/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	56-23-5	CARBON TETRACHLORIDE	730	ug/m3	Y		
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	100	100	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	56-23-5	CARBON TETRACHLORIDE	2300	ug/m3	Y		
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	110	110	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	115	115	106-93-4	1,2-Dibromoethane	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	115	115	75-15-0	CARBON DISULFIDE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	115	115	56-23-5	CARBON TETRACHLORIDE	2400	ug/m3	Y		
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	115	115	67-66-3	CHLOROFORM	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	115	115	74-87-3	CHLOROMETHANE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Soil Gas	115	115	75-09-2	DICHLOROMETHANE	250	ug/m3	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	56-23-5	CARBON TETRACHLORIDE	7.3	ug/l	Y		
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	67-66-3	CHLOROFORM	1.42	ug/l	Y		
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
DPT-9	Normal Environmental Sample	3/7/2007	Ground Water	120	120	75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	75	ug/l	Y		
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			67-66-3	CHLOROFORM	0.60	ug/l	Y		
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			TIC-21.4698	TIC-1-Hexanol, 2-ethyl--21.4698	0.5835	ug/l	Y	JN	
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
INFLUENT	Normal Environmental Sample	10/17/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	19	ug/l	Y		
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-1	Normal Environmental Sample	7/16/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1.5	ug/l	Y		
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1.6	ug/l	Y		
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-2	Normal Environmental Sample	7/24/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	71	ug/l	Y		
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-4	Normal Environmental Sample	8/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	9.9	ug/l	Y		
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-5	Normal Environmental Sample	8/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	20	ug/l	Y		
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-6	Normal Environmental Sample	8/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-7	Normal Environmental Sample	8/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-8	Normal Environmental Sample	8/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	5	ug/l	Y		
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
IW-9	Normal Environmental Sample	8/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	8.0	ug/l	Y		
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	1.4	ug/l	Y		
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-04A	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	50	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	50	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	50	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	5.0	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	830	ug/l	Y	D	
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	1.9	ug/l	Y	J	J
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	5.0	ug/l	N	JB	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	50	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	5.0	ug/l	N	U	U
MW-04B	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	5.0	ug/l	N	U	U
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	Y		
MW-10A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	7/18/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			67-66-3	CHLOROFORM	0.86	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	
MW-10A	Normal Environmental Sample	10/17/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	160	ug/l	Y	D	
MW-10B	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	7/18/2006	Ground Water			67-66-3	CHLOROFORM	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			67-66-3	CHLOROFORM	0.74	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	
MW-10B	Normal Environmental Sample	10/17/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-11A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	1/15/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	16	ug/l	Y		
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	6/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	9.5	ug/l	Y		
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	12/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	8/12/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.1	ug/l	Y		
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12A	Normal Environmental Sample	7/19/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	450	ug/l	Y	D	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	6	ug/l	Y		
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	850	ug/l	Y	D	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			67-66-3	CHLOROFORM	6	ug/l	Y		
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	1/16/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	650	ug/l	Y	D	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	420	ug/l	Y	D	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	6/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	500	ug/l	Y	D	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			67-66-3	CHLOROFORM	1.4	ug/l	Y		
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	12/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	300	ug/l	Y		
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			67-66-3	CHLOROFORM	1.9	ug/l	Y		
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	8/12/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-12C	Normal Environmental Sample	7/19/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	18000	ug/l	Y	D	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	55	ug/l	Y		
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y	D	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			67-66-3	CHLOROFORM	7	ug/l	Y		
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/24/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y	D	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/22/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	73	ug/l	Y		
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	8/13/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	62	ug/l	Y		
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	6/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	28	ug/l	Y	D	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	52	ug/l	Y		
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	1/23/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	120	ug/l	Y		
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	12/8/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	190	ug/l	Y	D	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/20/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	84	ug/l	Y		
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.25	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	2.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	25	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	25	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	25	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	290	ug/l	Y	D	
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	2.1	ug/l	Y	J	J
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	2.5	ug/l	N	JB	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	25	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	2.5	ug/l	N	U	U
MW-13C	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	2.5	ug/l	N	U	U
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/23/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	5	ug/l	Y		
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	8/13/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	3	ug/l	Y		
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	6/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	1/22/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1.4	ug/l	Y		
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	12/8/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/20/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-13E	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	8	ug/l	Y		
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	Y		
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-14A	Normal Environmental Sample	7/19/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-16A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-16C	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/24/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	10/4/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/15/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	3/26/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/20/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	3	ug/l	Y		
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	12/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	8/13/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/16/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1.9	ug/l	Y		

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	7/14/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1.9	ug/l	Y		
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17A	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y	D	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	3/26/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/24/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y	D	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	10/5/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y	D	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/15/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y	D	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	170	ug/l	Y	D	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/20/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y	D	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	110	ug/l	Y	D	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	12/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	60	ug/l	Y		
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	8/13/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	120	ug/l	Y		
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1.4	ug/l	Y		
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17C	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/24/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	10/4/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/15/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	3/26/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/20/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	12/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	8/13/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/17/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.4	ug/l	Y		
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	7/14/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-17D	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	6/20/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	4/4/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18A	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/20/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	3	ug/l	Y		
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	4/4/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	6	ug/l	Y		
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/20/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	7	ug/l	Y		
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	6/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	7.2	ug/l	Y		
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	2.8	ug/l	Y		
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	8/13/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	4.7	ug/l	Y		
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/17/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	37	ug/l	Y		
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	7/14/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	89	ug/l	Y		
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18C	Normal Environmental Sample	11/3/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	110	ug/l	Y		
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/20/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	14	ug/l	Y		
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	9	ug/l	Y		
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	4/4/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	8	ug/l	Y		
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	61	ug/l	Y		
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	6/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y	D	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	34	ug/l	Y		
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	8/13/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	27	ug/l	Y		
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/16/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	15	ug/l	Y		
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	7/14/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	3.2	ug/l	Y		
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-18D	Normal Environmental Sample	11/3/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.10	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	10	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	10	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	10	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	95	ug/l	Y	D	
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	3.0	ug/l	Y		
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	1.0	ug/l	N	JB	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	10	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.33	ug/l	Y	J	J
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	2.9	ug/l	Y		
MW-19	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	1.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	7.0	ug/l	Y		
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			67-66-3	CHLOROFORM	0.53	ug/l	Y		
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			108-88-3	METHYLBENZENE	0.14	ug/l	Y	J	J
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			TIC-21.4730	TIC-1-Hexanol, 2-ethyl--21.4730	0.546	ug/l	Y	JN	
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-19	Normal Environmental Sample	10/16/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	22	ug/l	Y		
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	12	ug/l	Y		
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/22/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	4	ug/l	Y		
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/31/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	6/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	2.4	ug/l	Y		
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	1/24/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.6	ug/l	Y		
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/18/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	3.2	ug/l	Y		
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	11/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.11	ug/l	Y	J	J
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.29	ug/l	Y	J	J
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-1A	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			67-66-3	CHLOROFORM	0.45	ug/l	Y	J	J
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-88-3	METHYLBENZENE	0.39	ug/l	Y	J	J
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-21.4630	TIC-1-Hexanol, 2-ethyl--21.4630	0.7112	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.20	ug/l	Y	J	J
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-20-9	METHYL ACETATE	5.1	ug/l	Y		
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-88-3	METHYLBENZENE	0.47	ug/l	Y	J	J
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-14.3583	TIC-1,3-Dioxane, 2-methyl--14.3583	1.927	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-21.4665	TIC-1-Hexanol, 2-ethyl--21.4665	4.204	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-4.4157	TIC-Acetaldehyde-4.4157	37	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-9.1777	TIC-Dimethylselene-9.1777	0.506	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-6.6837	TIC-Ethanol-6.6837	5.0631	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-19.6752	TIC-Hexanal, 2-ethyl--19.6752	0.5462	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	UJ
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.11	ug/l	Y	J	J
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	7.4	ug/l	Y		
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			67-66-3	CHLOROFORM	4.6	ug/l	Y		
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			74-87-3	CHLOROMETHANE	0.14	ug/l	Y	J	J
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-88-3	METHYLBENZENE	0.62	ug/l	Y		
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			TIC-21.4744	TIC-1-Hexanol, 2-ethyl--21.4744	0.8284	ug/l	Y	JN	
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-20	Normal Environmental Sample	10/11/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	13	ug/l	Y		
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	5	ug/l	Y		
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/22/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/31/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	Y		
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	6/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	5.2	ug/l	Y		
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	12/7/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	2.3	ug/l	Y		
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	1/21/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	4.2	ug/l	Y		
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/18/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	11/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.32	ug/l	Y	J	J
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-2A	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.49	ug/l	Y	J	J
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.25	ug/l	Y	J	J
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.67	ug/l	Y		
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.30	ug/l	Y	J	J
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.11	ug/l	Y	J	J
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.33	ug/l	Y	J	J
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.13	ug/l	Y	J	J
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	580	ug/l	Y	D	
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	6.0	ug/l	Y		
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	5.0	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	5.0	ug/l	N	JB	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	50	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	5.0	ug/l	N	U	U
MW-30	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.16	ug/l	Y	J	J
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.13	ug/l	Y	J	J
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.33	ug/l	Y	J	J
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	82	ug/l	Y	D	
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	33	ug/l	Y	D	
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	B	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.26	ug/l	Y	J	J
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.52	ug/l	Y		
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			TIC-21.4648	TIC-1-Hexanol, 2-ethyl--21.4648	1.2682	ug/l	Y	JN	
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-31	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	9	ug/l	Y		
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	20000	ug/l	Y	D	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	48	ug/l	Y		
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3A	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	23	ug/l	Y	D	
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			TIC-6.6866	TIC-Ethanol-6.6866	1.1369	ug/l	Y	JN	
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			TIC-7.7652	TIC-Isopropyl Alcohol-7.7652	1.6826	ug/l	Y	JN	
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			TIC-7.8037	TIC-Isopropyl Alcohol-7.8037	2.074	ug/l	Y	JND	
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3A	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	7	ug/l	Y		
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	23000	ug/l	Y	D	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			67-66-3	CHLOROFORM	47	ug/l	Y		
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	5/2/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	2400	ug/l	Y	D	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			67-66-3	CHLOROFORM	34	ug/l	Y		
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	11	ug/l	Y		
MW-3B	Normal Environmental Sample	6/23/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1400	ug/l	Y	D	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	10	ug/l	Y		
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1300	ug/l	Y	D	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	5	ug/l	Y		
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1000	ug/l	Y	D	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/19/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	410	ug/l	Y	D	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	6/4/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	74	ug/l	Y	D	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1000	ug/l	Y		
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			67-66-3	CHLOROFORM	3.2	ug/l	Y		
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	1/23/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	860	ug/l	Y	D	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			67-66-3	CHLOROFORM	1.8	ug/l	Y		
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	12/8/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.1	ug/l	Y		
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	280	ug/l	Y	D	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	2000	ug/l	Y	D	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	4	ug/l	Y		
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3B	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3C	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	7	ug/l	Y		
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/23/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/15/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	5	ug/l	Y		
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/19/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	6/4/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	1/23/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	12/8/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3D	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3E	Normal Environmental Sample	6/23/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	4	ug/l	Y		
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/20/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	6/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3E	Normal Environmental Sample	1/23/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.1	ug/l	Y		
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	12/8/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	11/3/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	JB	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-3E	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	9	ug/l	Y		
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	18000	ug/l	Y	D	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			67-66-3	CHLOROFORM	240	ug/l	Y	D	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	5/2/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1.8	ug/l	Y		
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1.9	ug/l	Y		
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	3200	ug/l	Y	D	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			67-66-3	CHLOROFORM	26	ug/l	Y		
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	1/24/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1400	ug/l	Y	D	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			67-66-3	CHLOROFORM	10	ug/l	Y		
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	12/9/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y		
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	7/19/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	96	ug/l	Y		
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			67-66-3	CHLOROFORM	1.7	ug/l	Y		
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4A	Normal Environmental Sample	11/3/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	9	ug/l	Y		
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	29000	ug/l	Y	D	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			67-66-3	CHLOROFORM	52	ug/l	Y		
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	5/2/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	9	ug/l	Y		
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	10000	ug/l	Y	D	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			67-66-3	CHLOROFORM	150	ug/l	Y	D	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	130	ug/l	Y		
MW-4B	Normal Environmental Sample	6/26/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	6	ug/l	Y		
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	8200	ug/l	Y	D	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			67-66-3	CHLOROFORM	100	ug/l	Y	D	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	2	ug/l	Y		
MW-4B	Normal Environmental Sample	1/22/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	Y		
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	4700	ug/l	Y	D	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			67-66-3	CHLOROFORM	29	ug/l	Y		
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	8/12/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	8200	ug/l	Y	D	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			67-66-3	CHLOROFORM	44	ug/l	Y		
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	6/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	5.1	ug/l	Y		
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	7000	ug/l	Y	D	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			67-66-3	CHLOROFORM	37	ug/l	Y	D	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-4B	Normal Environmental Sample	12/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	24000	ug/l	Y	D	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	30	ug/l	Y		
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	16	ug/l	Y		
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	0.42	ug/l	Y	J	J
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	7.9	ug/l	Y		
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	0.33	ug/l	Y	J	J
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	0.62	ug/l	Y		J
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	0.57	ug/l	Y		
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			TIC-21.4721	TIC-1-Hexanol, 2-ethyl--21.4721	0.5788	ug/l	Y	JN	
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			TIC-3.0051	TIC-Propene-3.0051	0.6848	ug/l	Y	JN	
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5A	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	15000	ug/l	Y	D	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	17	ug/l	Y		
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1700	ug/l	Y	D	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			67-66-3	CHLOROFORM	19	ug/l	Y		
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	6	ug/l	Y		
MW-5B	Normal Environmental Sample	6/25/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	860	ug/l	Y	D	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			67-66-3	CHLOROFORM	6	ug/l	Y		
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/15/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	960	ug/l	Y	D	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	8/13/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	480	ug/l	Y	D	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	6/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	910	ug/l	Y	D	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			67-66-3	CHLOROFORM	10	ug/l	Y		
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y		
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			67-66-3	CHLOROFORM	1.1	ug/l	Y		
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	1/22/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y		
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	87	ug/l	Y		
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	35	ug/l	Y		
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	11/3/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	33	ug/l	Y	D	
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5B	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/25/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/15/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	4	ug/l	Y		
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	8/13/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	3	ug/l	Y		
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	6/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/8/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	1/22/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	11/3/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			TIC-21.4832	TIC-1-Hexanol, 2-ethyl--21.4832	0.644	ug/l	Y	JN	
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			TIC-7.9769	TIC-Isopropyl Alcohol-7.9769	14	ug/l	Y	JN	
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-5D	Normal Environmental Sample	10/13/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	330	ug/l	Y		
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	290	ug/l	Y	D	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	75	ug/l	Y		
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/22/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y	D	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	9/29/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	68	ug/l	Y		
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/14/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	65	ug/l	Y	D	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	3/25/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	47	ug/l	Y		
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	63	ug/l	Y		
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/19/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	26	ug/l	Y		
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/4/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	16	ug/l	Y		
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/6/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	21	ug/l	Y		
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	8/12/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.3	ug/l	Y		
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	11	ug/l	Y		
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/24/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	10	ug/l	Y		
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	12/9/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	14	ug/l	Y		
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	7/13/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.1	ug/l	Y		
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	16	ug/l	Y		
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	11	ug/l	Y		
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.5	ug/l	Y		
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	56	ug/l	Y		
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	86	ug/l	Y	D	
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	1.0	ug/l	Y		
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.16	ug/l	Y	J	J
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			TIC-21.4703	TIC-1-Hexanol, 2-ethyl--21.4703	0.6554	ug/l	Y	JN	
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6A	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/22/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	9/29/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/14/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	3/25/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/19/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/4/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	8/12/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/16/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	12/9/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1.1	ug/l	Y		
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	7/13/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			108-88-3	METHYLBENZENE	0.14	ug/l	Y	J	J
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6D	Normal Environmental Sample	10/12/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/23/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	9/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/14/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	3/25/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	8/11/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/19/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	6/4/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	1/21/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	12/9/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	10/19/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-6E	Normal Environmental Sample	11/2/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.38	ug/l	Y	J	J
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.22	ug/l	Y	J	J
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-6E	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			TIC-7.7845	TIC-Isopropyl Alcohol-7.7845	1.9978	ug/l	Y	JN	
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-7A	Normal Environmental Sample	10/9/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			67-66-3	CHLOROFORM	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-7B	Normal Environmental Sample	10/9/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	4/30/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			71-55-6	1,1,1-Trichloroethane	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.50	ug/l	N	U	UJ
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			106-93-4	1,2-Dibromoethane	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			78-87-5	1,2-Dichloropropane	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			71-43-2	BENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			74-83-9	BROMOMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-15-0	CARBON DISULFIDE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			56-23-5	CARBON TETRACHLORIDE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-69-4	CFC-11	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-71-8	CFC-12	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			108-90-7	CHLOROBENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-00-3	CHLOROETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			67-66-3	CHLOROFORM	0.36	ug/l	Y	J	J
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			74-87-3	CHLOROMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			110-82-7	CYCLOHEXANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-09-2	DICHLOROMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			100-41-4	ETHYLBENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			98-82-8	Isopropylbenzene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			179601-23-1	m,p-Xylene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			541-73-1	M-DICHLOROBENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			79-20-9	METHYL ACETATE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			1634-04-4	Methyl tert-butyl ether	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			108-88-3	METHYLBENZENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			108-87-2	METHYLCYLOHEXANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			95-47-6	o-Xylene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			100-42-5	STYRENE (MONOMER)	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-25-2	TRIBROMOMETHANE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			79-01-6	TRICHLOROETHYLENE	0.50	ug/l	N	U	U
MW-8A	Normal Environmental Sample	10/10/2007	Ground Water			75-01-4	Vinyl chloride	0.50	ug/l	N	U	U
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
MW-9A	Normal Environmental Sample	4/29/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	4	ug/l	Y		
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	490	ug/l	Y	D	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	4	ug/l	Y		
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	200	ug/l	Y	D	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			67-66-3	CHLOROFORM	4	ug/l	Y		
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	180	ug/l	Y	D	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y	D	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	5	ug/l	Y		
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	98	ug/l	Y		
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	53	ug/l	Y		
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y	D	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	58	ug/l	Y	D	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	100	ug/l	Y		
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	7.6	ug/l	Y		
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	52	ug/l	Y		
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	95	ug/l	Y		
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	1.3	ug/l	Y		
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	170	ug/l	Y		
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	2.7	ug/l	Y		
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	18	ug/l	Y		
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	68	ug/l	Y		
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-1	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	3200	ug/l	Y	D	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	22	ug/l	Y		
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	2000	ug/l	Y	D	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			67-66-3	CHLOROFORM	21	ug/l	Y		
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	5	ug/l	Y		
RW-2	Normal Environmental Sample	6/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	600	ug/l	Y	D	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	15	ug/l	Y		
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	910	ug/l	Y	D	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	16	ug/l	Y		
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	700	ug/l	Y	D	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	7	ug/l	Y		
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	370	ug/l	Y	D	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	570	ug/l	Y	D	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	6	ug/l	Y		
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	500	ug/l	Y	D	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			67-66-3	CHLOROFORM	4	ug/l	Y		
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/15/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	52	ug/l	Y	E	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	32	ug/l	Y		
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	2.9	ug/l	Y		
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	180	ug/l	Y		
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	2.8	ug/l	Y		
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	17	ug/l	Y		
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y		
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	2.4	ug/l	Y		
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y	E	J
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	2.2	ug/l	Y		
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	2.0	ug/l	N	U	
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	2.0	ug/l	N	U	
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	100	ug/l	Y		
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	2.0	ug/l	N	U	
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	2.0	ug/l	N	U	
RW-2	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	Y		
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	2500	ug/l	Y	D	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	23	ug/l	Y		
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-3	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	2	ug/l	Y		
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	2200	ug/l	Y	D	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			67-66-3	CHLOROFORM	49	ug/l	Y		
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	16	ug/l	Y		
RW-3	Normal Environmental Sample	6/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	990	ug/l	Y	D	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	26	ug/l	Y		
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1200	ug/l	Y	D	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	19	ug/l	Y		
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1100	ug/l	Y	D	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	13	ug/l	Y		
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	400	ug/l	Y	D	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	5	ug/l	Y		
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	410	ug/l	Y	D	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	6	ug/l	Y		
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-3	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	430	ug/l	Y	D	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			67-66-3	CHLOROFORM	5	ug/l	Y		
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/15/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	270	ug/l	Y	D	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	2.6	ug/l	Y		
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	42	ug/l	Y		
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	95	ug/l	Y		
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	1.6	ug/l	Y		
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	140	ug/l	Y		
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	2.5	ug/l	Y		
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	95	ug/l	Y		
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1.9	ug/l	Y		
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	170	ug/l	Y		
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	71	ug/l	Y	E	J
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	1.5	ug/l	Y		
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	2.0	ug/l	N	U	
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	2.0	ug/l	N	U	
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	60	ug/l	Y		
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	2.0	ug/l	N	U	
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	2.0	ug/l	N	U,L	
RW-3	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	5500	ug/l	Y	D	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	27	ug/l	Y		
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	2	ug/l	Y		
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	3600	ug/l	Y	D	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			67-66-3	CHLOROFORM	55	ug/l	Y		
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	28	ug/l	Y		
RW-4	Normal Environmental Sample	6/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1500	ug/l	Y	D	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	21	ug/l	Y		
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1600	ug/l	Y	D	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	19	ug/l	Y		
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1100	ug/l	Y	D	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	11	ug/l	Y		
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			75-15-0	CARBON DISULFIDE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1000	ug/l	Y	D	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			67-66-3	CHLOROFORM	10	ug/l	Y		
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/13/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-15-0	CARBON DISULFIDE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-15-0	CARBON DISULFIDE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-15-0	CARBON DISULFIDE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-15-0	CARBON DISULFIDE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	5	ug/l	Y		
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	2	ug/l	Y		
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	290	ug/l	Y	D	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			67-66-3	CHLOROFORM	5	ug/l	Y		
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/18/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	1100	ug/l	Y	D	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	7	ug/l	Y		
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	670	ug/l	Y	D	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	6	ug/l	Y		
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	380	ug/l	Y	D	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			67-66-3	CHLOROFORM	4	ug/l	Y		
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/15/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	370	ug/l	Y	D	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	2.3	ug/l	Y		
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	150	ug/l	Y		
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	2.8	ug/l	Y		
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	98	ug/l	Y		
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	1.5	ug/l	Y		
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	1.2	ug/l	Y		
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y		
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1.2	ug/l	Y		
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	88	ug/l	Y		
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	55	ug/l	Y	E	J
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	0.64	ug/l	Y		
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	52	ug/l	Y		
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	1.0	ug/l	N	U	
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	
RW-4	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	4	ug/l	Y		
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	5400	ug/l	Y	D	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	33	ug/l	Y		
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	2	ug/l	Y		
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	2900	ug/l	Y	D	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			67-66-3	CHLOROFORM	43	ug/l	Y		
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	17	ug/l	Y		
RW-5	Normal Environmental Sample	6/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	1300	ug/l	Y	D	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	15	ug/l	Y		
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	650	ug/l	Y	D	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	5	ug/l	Y		
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	51	ug/l	Y		
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	300	ug/l	Y	D	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	190	ug/l	Y		
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/15/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	230	ug/l	Y	D	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	2.1	ug/l	Y		
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	44	ug/l	Y		
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	92	ug/l	Y		
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	1.3	ug/l	Y		
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	24	ug/l	Y		
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	170	ug/l	Y		
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-5	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	580	ug/l	Y	D	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	200	ug/l	Y	D	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	160	ug/l	Y	D	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	3	ug/l	Y		
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	110	ug/l	Y		
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	36	ug/l	Y		
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	82	ug/l	Y	D	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	48	ug/l	Y		
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	8/15/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	57	ug/l	Y	D	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	170	ug/l	Y		
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	2.7	ug/l	Y		
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	17	ug/l	Y		
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	66	ug/l	Y		
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	26	ug/l	Y	E	J
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	0.28	ug/l	Y	J	J

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	45	ug/l	Y		
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	51	ug/l	Y		
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	1.0	ug/l	N	U,L	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
RW-6	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			56-23-5	CARBON TETRACHLORIDE	190	ug/l	Y	D	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	5/1/1997	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	500	ug/l	Y	D	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	280	ug/l	Y	D	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			67-66-3	CHLOROFORM	4	ug/l	Y		
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/28/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	190	ug/l	Y	D	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	110	ug/l	Y	D	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	41	ug/l	Y		
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	6	ug/l	Y		
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	660	ug/l	Y	D	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	31	ug/l	Y		
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/15/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	53	ug/l	Y	E	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	6.8	ug/l	Y		
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	74	ug/l	Y		
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	1.4	ug/l	Y		
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	110	ug/l	Y		
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	1.4	ug/l	Y		
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	14	ug/l	Y		
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	79	ug/l	Y		
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	44	ug/l	Y	E	J
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	0.23	ug/l	Y	J	J
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-7	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	2.0	ug/l	N	U	
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	2.0	ug/l	N	U	
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	28	ug/l	Y		
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	2.0	ug/l	N	U	
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	2.0	ug/l	N	U,L	
RW-7	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	2.0	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	440	ug/l	Y	D	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	3/27/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	180	ug/l	Y	D	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			67-66-3	CHLOROFORM	1	ug/l	Y		
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	10/7/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			56-23-5	CARBON TETRACHLORIDE	97	ug/l	Y	D	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			67-66-3	CHLOROFORM	2	ug/l	Y		
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/16/1999	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	66	ug/l	Y		
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/9/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	10	ug/l	Y		
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			56-23-5	CARBON TETRACHLORIDE	71	ug/l	Y		
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/21/2000	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			56-23-5	CARBON TETRACHLORIDE	24	ug/l	Y		
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/5/2001	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			74-83-9	BROMOMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			56-23-5	CARBON TETRACHLORIDE	4.5	ug/l	Y		
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	8/10/2002	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	63	ug/l	Y		
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	7/14/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			56-23-5	CARBON TETRACHLORIDE	130	ug/l	Y		
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	12/10/2003	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			56-23-5	CARBON TETRACHLORIDE	19	ug/l	Y		
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			67-66-3	CHLOROFORM	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			75-09-2	DICHLOROMETHANE	41	ug/l	Y		
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	4/7/2004	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			107-06-2	1,2-DICHLOROETHANE	1	ug/l	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			106-46-7	1,4-DICHLOROBENZENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			75-27-4	BROMODICHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			56-23-5	CARBON TETRACHLORIDE	120	ug/l	Y		
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			67-66-3	CHLOROFORM	1.4	ug/l	Y		
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			74-87-3	CHLOROMETHANE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			75-09-2	DICHLOROMETHANE	5	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			127-18-4	TETRACHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	6/1/2005	Ground Water			79-01-6	TRICHLOROETHYLENE	1	ug/l	N	U	
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			71-55-6	1,1,1-Trichloroethane	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			79-34-5	1,1,2,2-TETRACHLOROETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			79-00-5	1,1,2-TRICHLOROETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-34-3	1,1-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-35-4	1,1-DICHLOROETHYLENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			87-61-6	1,2,3-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			120-82-1	1,2,4-TRICHLOROBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.05	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			95-50-1	1,2-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			107-06-2	1,2-DICHLOROETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			78-87-5	1,2-Dichloropropane	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			106-46-7	1,4-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			123-91-1	1,4-Dioxane		ug/l	N	U	R
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			78-93-3	2-Butanone	5.0	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			108-10-1	4-Methyl-2-Pentanone	5.0	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			67-64-1	ACETONE	5.0	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			71-43-2	BENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-27-4	BROMODICHLOROMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			74-83-9	BROMOMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-15-0	CARBON DISULFIDE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	44	ug/l	Y	E	J
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-69-4	CFC-11	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-71-8	CFC-12	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			108-90-7	CHLOROBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			74-97-5	CHLOROBROMOMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			124-48-1	CHLORODIBROMOMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-00-3	CHLOROETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			67-66-3	CHLOROFORM	0.17	ug/l	Y	J	J
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			74-87-3	CHLOROMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			156-59-2	cis-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			10061-01-5	cis-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			110-82-7	CYCLOHEXANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-09-2	DICHLOROMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			100-41-4	ETHYLBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			98-82-8	Isopropylbenzene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			179601-23-1	m,p-Xylene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			541-73-1	M-DICHLOROBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			79-20-9	METHYL ACETATE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			591-78-6	METHYL N-BUTYL KETONE	5.0	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			1634-04-4	Methyl tert-butyl ether	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			108-88-3	METHYLBENZENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			108-87-2	METHYLCYLOHEXANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			95-47-6	o-Xylene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			100-42-5	STYRENE (MONOMER)	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			127-18-4	TETRACHLOROETHYLENE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			156-60-5	trans-1,2-Dichloroethene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			10061-02-6	trans-1,3-Dichloropropene	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-25-2	TRIBROMOMETHANE	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			79-01-6	TRICHLOROETHYLENE	0.5	ug/l	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
RW-8	Normal Environmental Sample	9/7/2006	Ground Water			75-01-4	Vinyl chloride	0.5	ug/l	N	U	U
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	0.025	ug/l	N	U	
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			106-93-4	1,2-Dibromoethane	1.0	ug/l	N	U	
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			75-15-0	CARBON DISULFIDE	1.0	ug/l	N	U	
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			56-23-5	CARBON TETRACHLORIDE	48	ug/l	Y		
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			67-66-3	CHLOROFORM	1.0	ug/l	N	U	
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			74-87-3	CHLOROMETHANE	1.0	ug/l	N	U	
RW-8	Normal Environmental Sample	11/8/2006	Ground Water			75-09-2	DICHLOROMETHANE	1.0	ug/l	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	10	10	67-66-3	CHLOROFORM	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	10	10	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U,L	
SO-1	Normal Environmental Sample	8/12/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	20	20	67-66-3	CHLOROFORM	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	20	20	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	30	30	67-66-3	CHLOROFORM	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	30	30	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	40	40	67-66-3	CHLOROFORM	28	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	40	40	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	34	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	34	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	34	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	50	50	67-66-3	CHLOROFORM	34	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	50	50	74-87-3	CHLOROMETHANE	34	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	34	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	60	60	67-66-3	CHLOROFORM	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	60	60	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	62.5	62.5	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	62.5	62.5	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	62.5	62.5	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	62.5	62.5	67-66-3	CHLOROFORM	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	62.5	62.5	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	62.5	62.5	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	71-55-6	1,1,1-Trichloroethane	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	79-00-5	1,1,2-TRICHLOROETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-34-3	1,1-DICHLOROETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-35-4	1,1-DICHLOROETHYLENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	87-61-6	1,2,3-TRICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	120-82-1	1,2,4-TRICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	106-93-4	1,2-Dibromoethane	5.8	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	95-50-1	1,2-DICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	107-06-2	1,2-DICHLOROETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	78-87-5	1,2-Dichloropropane	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	106-46-7	1,4-DICHLOROBENZENE	2.6	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	78-93-3	2-Butanone	6.9	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	108-10-1	4-Methyl-2-Pentanone	12	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	67-64-1	ACETONE	6.8	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	71-43-2	BENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-27-4	BROMODICHLOROMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	74-83-9	BROMOMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-15-0	CARBON DISULFIDE	4.2	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-69-4	CFC-11	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-71-8	CFC-12	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	108-90-7	CHLOROBENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	74-97-5	CHLOROBROMOMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	124-48-1	CHLORODIBROMOMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-00-3	CHLOROETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	67-66-3	CHLOROFORM	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	74-87-3	CHLOROMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	156-59-2	cis-1,2-Dichloroethene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	10061-01-5	cis-1,3-Dichloropropene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	110-82-7	CYCLOHEXANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-09-2	DICHLOROMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	100-41-4	ETHYLBENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	98-82-8	Isopropylbenzene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	179601-23-1	m,p-Xylene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	541-73-1	M-DICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	79-20-9	METHYL ACETATE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	591-78-6	METHYL N-BUTYL KETONE	12	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	1634-04-4	Methyl tert-butyl ether	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	108-88-3	METHYLBENZENE	5.8	ug/kg	N	J	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	108-87-2	METHYLCYLOHEXANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	95-47-6	o-Xylene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	100-42-5	STYRENE (MONOMER)	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	127-18-4	TETRACHLOROETHYLENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	156-60-5	trans-1,2-Dichloroethene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	10061-02-6	trans-1,3-Dichloropropene	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-25-2	TRIBROMOMETHANE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	79-01-6	TRICHLOROETHYLENE	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	68	68	75-01-4	Vinyl chloride	5.8	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	70	70	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	70	70	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	80	80	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	80	80	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-1	Normal Environmental Sample	8/12/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	90	90	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	90	90	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	93	93	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	93	93	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	93	93	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	93	93	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	93	93	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	93	93	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	100	100	67-66-3	CHLOROFORM	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	100	100	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	71-55-6	1,1,1-Trichloroethane	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	79-00-5	1,1,2-TRICHLOROETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-34-3	1,1-DICHLOROETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-35-4	1,1-DICHLOROETHYLENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	87-61-6	1,2,3-TRICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	120-82-1	1,2,4-TRICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	106-93-4	1,2-Dibromoethane	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	106-93-4	1,2-Dibromoethane	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	95-50-1	1,2-DICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	107-06-2	1,2-DICHLOROETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	78-87-5	1,2-Dichloropropane	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	106-46-7	1,4-DICHLOROBENZENE	2.7	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	78-93-3	2-Butanone	7.7	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	108-10-1	4-Methyl-2-Pentanone	11	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	67-64-1	ACETONE	9.1	ug/kg	Y	J	J
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	71-43-2	BENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-27-4	BROMODICHLOROMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	74-83-9	BROMOMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-15-0	CARBON DISULFIDE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-69-4	CFC-11	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-71-8	CFC-12	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	108-90-7	CHLOROBENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	74-97-5	CHLOROBROMOMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	124-48-1	CHLORODIBROMOMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-00-3	CHLOROETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	67-66-3	CHLOROFORM	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	74-87-3	CHLOROMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	156-59-2	cis-1,2-Dichloroethene	5.4	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	10061-01-5	cis-1,3-Dichloropropene	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	110-82-7	CYCLOHEXANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-09-2	DICHLOROMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	100-41-4	ETHYLBENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	98-82-8	Isopropylbenzene	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	179601-23-1	m,p-Xylene	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	541-73-1	M-DICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	79-20-9	METHYL ACETATE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	591-78-6	METHYL N-BUTYL KETONE	11	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	1634-04-4	Methyl tert-butyl ether	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	108-88-3	METHYLBENZENE	5.4	ug/kg	N	J	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	108-87-2	METHYLCYLOHEXANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	95-47-6	o-Xylene	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	100-42-5	STYRENE (MONOMER)	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	127-18-4	TETRACHLOROETHYLENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	156-60-5	trans-1,2-Dichloroethene	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	10061-02-6	trans-1,3-Dichloropropene	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-25-2	TRIBROMOMETHANE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	79-01-6	TRICHLOROETHYLENE	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	109.5	109.5	75-01-4	Vinyl chloride	5.4	ug/kg	N	U	U
SO-1	Normal Environmental Sample	8/12/2007	Soil	111	111	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	111	111	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	111	111	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	111	111	67-66-3	CHLOROFORM	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	111	111	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/12/2007	Soil	111	111	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/13/2007	Soil	114	114	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/13/2007	Soil	114	114	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/13/2007	Soil	114	114	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/13/2007	Soil	114	114	67-66-3	CHLOROFORM	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/13/2007	Soil	114	114	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
SO-1	Normal Environmental Sample	8/13/2007	Soil	114	114	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	39	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	39	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	39	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	10	10	67-66-3	CHLOROFORM	39	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	10	10	74-87-3	CHLOROMETHANE	39	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	39	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	20	20	67-66-3	CHLOROFORM	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	20	20	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	30	30	67-66-3	CHLOROFORM	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	30	30	74-87-3	CHLOROMETHANE	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	29	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	33	33	106-93-4	1,2-Dibromoethane	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	33	33	75-15-0	CARBON DISULFIDE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	33	33	56-23-5	CARBON TETRACHLORIDE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	33	33	67-66-3	CHLOROFORM	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	33	33	74-87-3	CHLOROMETHANE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	33	33	75-09-2	DICHLOROMETHANE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-14	Normal Environmental Sample	8/14/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	40	40	67-66-3	CHLOROFORM	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	40	40	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	50	50	67-66-3	CHLOROFORM	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	50	50	74-87-3	CHLOROMETHANE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	53	53	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	53	53	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	53	53	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	53	53	67-66-3	CHLOROFORM	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	53	53	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	53	53	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	60	60	67-66-3	CHLOROFORM	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	60	60	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	70	70	67-66-3	CHLOROFORM	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	70	70	74-87-3	CHLOROMETHANE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	36	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	72.5	72.5	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	72.5	72.5	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	72.5	72.5	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	72.5	72.5	67-66-3	CHLOROFORM	30	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	72.5	72.5	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	72.5	72.5	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	85	85	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	85	85	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	85	85	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	85	85	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	85	85	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	85	85	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	90	90	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	90	90	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	94	94	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	94	94	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	94	94	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	94	94	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	94	94	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/14/2007	Soil	94	94	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	100	100	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	100	100	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	71-55-6	1,1,1-Trichloroethane	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	79-34-5	1,1,2,2-TETRACHLOROETHANE	4.6	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	79-00-5	1,1,2-TRICHLOROETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-34-3	1,1-DICHLOROETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-35-4	1,1-DICHLOROETHYLENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	87-61-6	1,2,3-TRICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	120-82-1	1,2,4-TRICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	106-93-4	1,2-Dibromoethane	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	95-50-1	1,2-DICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	107-06-2	1,2-DICHLOROETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	78-87-5	1,2-Dichloropropane	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	106-46-7	1,4-DICHLOROBENZENE	1.4	ug/kg	Y	J	J
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	78-93-3	2-Butanone	20	ug/kg	Y		
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	108-10-1	4-Methyl-2-Pentanone	9.3	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	67-64-1	ACETONE	14	ug/kg	Y		
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	71-43-2	BENZENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-27-4	BROMODICHLOROMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	74-83-9	BROMOMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-15-0	CARBON DISULFIDE	5.6	ug/kg	Y		
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-69-4	CFC-11	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-71-8	CFC-12	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	108-90-7	CHLOROBENZENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	74-97-5	CHLOROBROMOMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	124-48-1	CHLORODIBROMOMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-00-3	CHLOROETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	67-66-3	CHLOROFORM	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	74-87-3	CHLOROMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	156-59-2	cis-1,2-Dichloroethene	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	10061-01-5	cis-1,3-Dichloropropene	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	110-82-7	CYCLOHEXANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-09-2	DICHLOROMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	100-41-4	ETHYLBENZENE	0.28	ug/kg	Y	J	J
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	98-82-8	Isopropylbenzene	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	179601-23-1	m,p-Xylene	4.6	ug/kg	N	JB	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	541-73-1	M-DICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	79-20-9	METHYL ACETATE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	591-78-6	METHYL N-BUTYL KETONE	9.3	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	1634-04-4	Methyl tert-butyl ether	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	108-88-3	METHYLBENZENE	4.6	ug/kg	N	JB	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	108-87-2	METHYLCYLOHEXANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	95-47-6	o-Xylene	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	100-42-5	STYRENE (MONOMER)	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	127-18-4	TETRACHLOROETHYLENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	TIC-18.3058	TIC-1-Hexanol, 2-ethyl--18.3058	4.7	ug/kg	Y	JN	JN
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	156-60-5	trans-1,2-Dichloroethene	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	10061-02-6	trans-1,3-Dichloropropene	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-25-2	TRIBROMOMETHANE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	79-01-6	TRICHLOROETHYLENE	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	110	110	75-01-4	Vinyl chloride	4.6	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/15/2007	Soil	115.5	115.5	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	115.5	115.5	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	115.5	115.5	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-14	Normal Environmental Sample	8/15/2007	Soil	115.5	115.5	67-66-3	CHLOROFORM	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	115.5	115.5	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/15/2007	Soil	115.5	115.5	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
SO-14	Normal Environmental Sample	8/17/2007	Soil			71-55-6	1,1,1-Trichloroethane	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			79-34-5	1,1,2,2-TETRACHLOROETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			79-00-5	1,1,2-TRICHLOROETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-34-3	1,1-DICHLOROETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-35-4	1,1-DICHLOROETHYLENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			87-61-6	1,2,3-TRICHLOROBENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			120-82-1	1,2,4-TRICHLOROBENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			106-93-4	1,2-Dibromoethane	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			95-50-1	1,2-DICHLOROBENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			107-06-2	1,2-DICHLOROETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			78-87-5	1,2-Dichloropropane	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			106-46-7	1,4-DICHLOROBENZENE	3.1	ug/kg	Y	J	J
SO-14	Normal Environmental Sample	8/17/2007	Soil			123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-14	Normal Environmental Sample	8/17/2007	Soil			78-93-3	2-Butanone	9.6	ug/kg	Y	J	J
SO-14	Normal Environmental Sample	8/17/2007	Soil			108-10-1	4-Methyl-2-Pentanone	10	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			67-64-1	ACETONE	8.2	ug/kg	Y	J	J
SO-14	Normal Environmental Sample	8/17/2007	Soil			71-43-2	BENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-27-4	BROMODICHLOROMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			74-83-9	BROMOMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-15-0	CARBON DISULFIDE	1.0	ug/kg	Y	J	J
SO-14	Normal Environmental Sample	8/17/2007	Soil			56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-69-4	CFC-11	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-71-8	CFC-12	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			108-90-7	CHLOROBENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			74-97-5	CHLOROBROMOMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			124-48-1	CHLORODIBROMOMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-00-3	CHLOROETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			67-66-3	CHLOROFORM	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			74-87-3	CHLOROMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			156-59-2	cis-1,2-Dichloroethene	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			10061-01-5	cis-1,3-Dichloropropene	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			110-82-7	CYCLOHEXANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-09-2	DICHLOROMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			100-41-4	ETHYLBENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			98-82-8	Isopropylbenzene	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			179601-23-1	m,p-Xylene	5.1	ug/kg	N	JB	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			541-73-1	M-DICHLOROBENZENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			79-20-9	METHYL ACETATE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			591-78-6	METHYL N-BUTYL KETONE	10	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			1634-04-4	Methyl tert-butyl ether	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			108-88-3	METHYLBENZENE	5.1	ug/kg	N	JB	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			108-87-2	METHYLCYLOHEXANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			95-47-6	o-Xylene	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			100-42-5	STYRENE (MONOMER)	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			127-18-4	TETRACHLOROETHYLENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			156-60-5	trans-1,2-Dichloroethene	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			10061-02-6	trans-1,3-Dichloropropene	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-25-2	TRIBROMOMETHANE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			79-01-6	TRICHLOROETHYLENE	5.1	ug/kg	N	U	U
SO-14	Normal Environmental Sample	8/17/2007	Soil			75-01-4	Vinyl chloride	5.1	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	10	10	67-66-3	CHLOROFORM	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	10	10	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-28	Normal Environmental Sample	8/15/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	34	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	34	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	34	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	20	20	67-66-3	CHLOROFORM	34	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	20	20	74-87-3	CHLOROMETHANE	34	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	34	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	31	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	31	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	31	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	30	30	67-66-3	CHLOROFORM	31	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	30	30	74-87-3	CHLOROMETHANE	31	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	31	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	71-55-6	1,1,1-Trichloroethane	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	79-34-5	1,1,2,2-TETRACHLOROETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	79-00-5	1,1,2-TRICHLOROETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-34-3	1,1-DICHLOROETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-35-4	1,1-DICHLOROETHYLENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	87-61-6	1,2,3-TRICHLOROBENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	120-82-1	1,2,4-TRICHLOROBENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	95-50-1	1,2-DICHLOROBENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	107-06-2	1,2-DICHLOROETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	78-87-5	1,2-Dichloropropane	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	106-46-7	1,4-DICHLOROBENZENE	2.0	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	78-93-3	2-Butanone	11	ug/kg	Y		
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	108-10-1	4-Methyl-2-Pentanone	9.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	67-64-1	ACETONE	10	ug/kg	Y		
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	71-43-2	BENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-27-4	BROMODICHLOROMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	74-83-9	BROMOMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	1.7	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-69-4	CFC-11	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-71-8	CFC-12	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	108-90-7	CHLOROBENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	74-97-5	CHLOROBROMOMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	124-48-1	CHLORODIBROMOMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-00-3	CHLOROETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	67-66-3	CHLOROFORM	30	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	67-66-3	CHLOROFORM	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	74-87-3	CHLOROMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	156-59-2	cis-1,2-Dichloroethene	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	10061-01-5	cis-1,3-Dichloropropene	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	110-82-7	CYCLOHEXANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	100-41-4	ETHYLBENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	98-82-8	Isopropylbenzene	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	179601-23-1	m,p-Xylene	4.8	ug/kg	N	JB	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	541-73-1	M-DICHLOROBENZENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	79-20-9	METHYL ACETATE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	591-78-6	METHYL N-BUTYL KETONE	9.6	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	1634-04-4	Methyl tert-butyl ether	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	108-88-3	METHYLBENZENE	4.8	ug/kg	N	JB	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	108-87-2	METHYLCYLOHEXANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	95-47-6	o-Xylene	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	100-42-5	STYRENE (MONOMER)	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	127-18-4	TETRACHLOROETHYLENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	156-60-5	trans-1,2-Dichloroethene	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	10061-02-6	trans-1,3-Dichloropropene	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-25-2	TRIBROMOMETHANE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	79-01-6	TRICHLOROETHYLENE	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	40	40	75-01-4	Vinyl chloride	4.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/15/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	50	50	67-66-3	CHLOROFORM	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	50	50	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	28	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	28	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	28	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	60	60	67-66-3	CHLOROFORM	28	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	60	60	74-87-3	CHLOROMETHANE	28	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	28	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	70	70	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	70	70	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	80	80	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	80	80	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/15/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	90	90	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	90	90	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	71-55-6	1,1,1-Trichloroethane	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	79-00-5	1,1,2-TRICHLOROETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-34-3	1,1-DICHLOROETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-35-4	1,1-DICHLOROETHYLENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	87-61-6	1,2,3-TRICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	120-82-1	1,2,4-TRICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	95-50-1	1,2-DICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	107-06-2	1,2-DICHLOROETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	78-87-5	1,2-Dichloropropane	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	106-46-7	1,4-DICHLOROBENZENE	1.8	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	78-93-3	2-Butanone	11	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	108-10-1	4-Methyl-2-Pentanone	12	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	67-64-1	ACETONE	7.8	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	71-43-2	BENZENE	5.8	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-27-4	BROMODICHLOROMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	74-83-9	BROMOMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	5.1	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-69-4	CFC-11	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-71-8	CFC-12	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	108-90-7	CHLOROBENZENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	74-97-5	CHLOROBROMOMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	124-48-1	CHLORODIBROMOMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-00-3	CHLOROETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	67-66-3	CHLOROFORM	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	74-87-3	CHLOROMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	156-59-2	cis-1,2-Dichloroethene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	10061-01-5	cis-1,3-Dichloropropene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	110-82-7	CYCLOHEXANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	100-41-4	ETHYLBENZENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	98-82-8	Isopropylbenzene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	179601-23-1	m,p-Xylene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	541-73-1	M-DICHLOROBENZENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	79-20-9	METHYL ACETATE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	591-78-6	METHYL N-BUTYL KETONE	12	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	1634-04-4	Methyl tert-butyl ether	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	108-88-3	METHYLBENZENE	5.8	ug/kg	N	JB	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	108-87-2	METHYLCYLOHEXANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	95-47-6	o-Xylene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	100-42-5	STYRENE (MONOMER)	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	127-18-4	TETRACHLOROETHYLENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	156-60-5	trans-1,2-Dichloroethene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	10061-02-6	trans-1,3-Dichloropropene	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-25-2	TRIBROMOMETHANE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	79-01-6	TRICHLOROETHYLENE	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	100	100	75-01-4	Vinyl chloride	5.8	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	110	110	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	110	110	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	110	110	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	110	110	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	110	110	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	110	110	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	71-55-6	1,1,1-Trichloroethane	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	79-34-5	1,1,2,2-TETRACHLOROETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	79-00-5	1,1,2-TRICHLOROETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-34-3	1,1-DICHLOROETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-35-4	1,1-DICHLOROETHYLENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	87-61-6	1,2,3-TRICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	120-82-1	1,2,4-TRICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	106-93-4	1,2-Dibromoethane	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	95-50-1	1,2-DICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	107-06-2	1,2-DICHLOROETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	78-87-5	1,2-Dichloropropane	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	106-46-7	1,4-DICHLOROBENZENE	1.5	ug/kg	Y	J	J

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	78-93-3	2-Butanone	10	ug/kg	Y		
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	108-10-1	4-Methyl-2-Pentanone	9.3	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	67-64-1	ACETONE	9.3	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	71-43-2	BENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-27-4	BROMODICHLOROMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	74-83-9	BROMOMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-15-0	CARBON DISULFIDE	3.2	ug/kg	Y	J	J
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-69-4	CFC-11	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-71-8	CFC-12	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	108-90-7	CHLOROBENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	74-97-5	CHLOROBROMOMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	124-48-1	CHLORODIBROMOMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-00-3	CHLOROETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	67-66-3	CHLOROFORM	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	74-87-3	CHLOROMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	156-59-2	cis-1,2-Dichloroethene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	10061-01-5	cis-1,3-Dichloropropene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	110-82-7	CYCLOHEXANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-09-2	DICHLOROMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	100-41-4	ETHYLBENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	98-82-8	Isopropylbenzene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	179601-23-1	m,p-Xylene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	541-73-1	M-DICHLOROBENZENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	79-20-9	METHYL ACETATE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	591-78-6	METHYL N-BUTYL KETONE	9.3	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	1634-04-4	Methyl tert-butyl ether	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	108-88-3	METHYLBENZENE	4.6	ug/kg	N	JB	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	108-87-2	METHYLCYLOHEXANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	95-47-6	o-Xylene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	100-42-5	STYRENE (MONOMER)	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	127-18-4	TETRACHLOROETHYLENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	156-60-5	trans-1,2-Dichloroethene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	10061-02-6	trans-1,3-Dichloropropene	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-25-2	TRIBROMOMETHANE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	79-01-6	TRICHLOROETHYLENE	4.6	ug/kg	N	U	U
SO-28	Normal Environmental Sample	8/16/2007	Soil	115	115	75-01-4	Vinyl chloride	4.6	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	10	10	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	10	10	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	10	10	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	10	10	67-66-3	CHLOROFORM	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	10	10	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	10	10	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	20	20	106-93-4	1,2-Dibromoethane	37	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	20	20	75-15-0	CARBON DISULFIDE	37	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	20	20	56-23-5	CARBON TETRACHLORIDE	37	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	20	20	67-66-3	CHLOROFORM	37	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	20	20	74-87-3	CHLOROMETHANE	37	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-3	Normal Environmental Sample	8/11/2007	Soil	20	20	75-09-2	DICHLOROMETHANE	37	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	30	30	106-93-4	1,2-Dibromoethane	30	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	30	30	75-15-0	CARBON DISULFIDE	30	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	30	30	56-23-5	CARBON TETRACHLORIDE	30	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	30	30	67-66-3	CHLOROFORM	30	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	30	30	74-87-3	CHLOROMETHANE	30	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	30	30	75-09-2	DICHLOROMETHANE	30	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	40	40	106-93-4	1,2-Dibromoethane	33	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	40	40	75-15-0	CARBON DISULFIDE	33	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	40	40	56-23-5	CARBON TETRACHLORIDE	33	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	40	40	67-66-3	CHLOROFORM	33	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	40	40	74-87-3	CHLOROMETHANE	33	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	40	40	75-09-2	DICHLOROMETHANE	33	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	50	50	106-93-4	1,2-Dibromoethane	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	50	50	75-15-0	CARBON DISULFIDE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	50	50	56-23-5	CARBON TETRACHLORIDE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	50	50	67-66-3	CHLOROFORM	35	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	50	50	74-87-3	CHLOROMETHANE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	50	50	75-09-2	DICHLOROMETHANE	35	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	60	60	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	60	60	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	60	60	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	60	60	67-66-3	CHLOROFORM	27	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	60	60	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	60	60	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	70	70	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	70	70	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	70	70	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	70	70	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	70	70	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	70	70	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	80	80	67-66-3	CHLOROFORM	26	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil	80	80	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	71-55-6	1,1,1-Trichloroethane	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	79-34-5	1,1,2,2-TETRACHLOROETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	79-00-5	1,1,2-TRICHLOROETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-34-3	1,1-DICHLOROETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-35-4	1,1-DICHLOROETHYLENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	87-61-6	1,2,3-TRICHLOROBENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	120-82-1	1,2,4-TRICHLOROBENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	95-50-1	1,2-DICHLOROBENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	107-06-2	1,2-DICHLOROETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	78-87-5	1,2-Dichloropropane	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	106-46-7	1,4-DICHLOROBENZENE	3.3	ug/kg	Y	J	J
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	78-93-3	2-Butanone	6.1	ug/kg	Y	J	J
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	108-10-1	4-Methyl-2-Pentanone	12	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	67-64-1	ACETONE	7.0	ug/kg	Y	J	J
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	71-43-2	BENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-27-4	BROMODICHLOROMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	74-83-9	BROMOMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	1.7	ug/kg	Y	J	J
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-69-4	CFC-11	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-71-8	CFC-12	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	108-90-7	CHLOROBENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	74-97-5	CHLOROBROMOMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	124-48-1	CHLORODIBROMOMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-00-3	CHLOROETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	67-66-3	CHLOROFORM	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	74-87-3	CHLOROMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	156-59-2	cis-1,2-Dichloroethene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	10061-01-5	cis-1,3-Dichloropropene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	110-82-7	CYCLOHEXANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	100-41-4	ETHYLBENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	98-82-8	Isopropylbenzene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	179601-23-1	m,p-Xylene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	541-73-1	M-DICHLOROBENZENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	79-20-9	METHYL ACETATE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	591-78-6	METHYL N-BUTYL KETONE	12	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	1634-04-4	Methyl tert-butyl ether	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	108-88-3	METHYLBENZENE	6.0	ug/kg	N	JB	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	108-87-2	METHYLCYLOHEXANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	95-47-6	o-Xylene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	100-42-5	STYRENE (MONOMER)	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	127-18-4	TETRACHLOROETHYLENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	156-60-5	trans-1,2-Dichloroethene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	10061-02-6	trans-1,3-Dichloropropene	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-25-2	TRIBROMOMETHANE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	79-01-6	TRICHLOROETHYLENE	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	90	90	75-01-4	Vinyl chloride	6.0	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/11/2007	Soil	104	104	106-93-4	1,2-Dibromoethane	31	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	104	104	75-15-0	CARBON DISULFIDE	31	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	104	104	56-23-5	CARBON TETRACHLORIDE	31	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	104	104	67-66-3	CHLOROFORM	31	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	104	104	74-87-3	CHLOROMETHANE	31	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil	104	104	75-09-2	DICHLOROMETHANE	31	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil			106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil			75-15-0	CARBON DISULFIDE	27	ug/kg	N	U,L	
SO-3	Normal Environmental Sample	8/11/2007	Soil			56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil			67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil			74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/11/2007	Soil			75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-3	Normal Environmental Sample	8/15/2007	Soil			71-55-6	1,1,1-Trichloroethane	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			79-34-5	1,1,2,2-TETRACHLOROETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			79-00-5	1,1,2-TRICHLOROETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-34-3	1,1-DICHLOROETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-35-4	1,1-DICHLOROETHYLENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			87-61-6	1,2,3-TRICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			120-82-1	1,2,4-TRICHLOROBENZENE	5.4	ug/kg	N	U	U

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-3	Normal Environmental Sample	8/15/2007	Soil			96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			106-93-4	1,2-Dibromoethane	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			95-50-1	1,2-DICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			107-06-2	1,2-DICHLOROETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			78-87-5	1,2-Dichloropropane	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			106-46-7	1,4-DICHLOROBENZENE	1.9	ug/kg	Y	J	J
SO-3	Normal Environmental Sample	8/15/2007	Soil			123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-3	Normal Environmental Sample	8/15/2007	Soil			78-93-3	2-Butanone	12	ug/kg	Y		
SO-3	Normal Environmental Sample	8/15/2007	Soil			108-10-1	4-Methyl-2-Pentanone	11	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			67-64-1	ACETONE	16	ug/kg	Y		
SO-3	Normal Environmental Sample	8/15/2007	Soil			71-43-2	BENZENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-27-4	BROMODICHLOROMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			74-83-9	BROMOMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-15-0	CARBON DISULFIDE	7.1	ug/kg	Y		
SO-3	Normal Environmental Sample	8/15/2007	Soil			56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-69-4	CFC-11	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-71-8	CFC-12	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			108-90-7	CHLOROBENZENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			74-97-5	CHLOROBROMOMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			124-48-1	CHLORODIBROMOMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-00-3	CHLOROETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			67-66-3	CHLOROFORM	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			74-87-3	CHLOROMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			156-59-2	cis-1,2-Dichloroethene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			10061-01-5	cis-1,3-Dichloropropene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			110-82-7	CYCLOHEXANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-09-2	DICHLOROMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			100-41-4	ETHYLBENZENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			98-82-8	Isopropylbenzene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			179601-23-1	m,p-Xylene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			541-73-1	M-DICHLOROBENZENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			79-20-9	METHYL ACETATE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			591-78-6	METHYL N-BUTYL KETONE	11	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			1634-04-4	Methyl tert-butyl ether	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			108-88-3	METHYLBENZENE	5.4	ug/kg	N	J	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			108-87-2	METHYLCYLOHEXANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			95-47-6	o-Xylene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			100-42-5	STYRENE (MONOMER)	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			127-18-4	TETRACHLOROETHYLENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			156-60-5	trans-1,2-Dichloroethene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			10061-02-6	trans-1,3-Dichloropropene	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-25-2	TRIBROMOMETHANE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			79-01-6	TRICHLOROETHYLENE	5.4	ug/kg	N	U	U
SO-3	Normal Environmental Sample	8/15/2007	Soil			75-01-4	Vinyl chloride	5.4	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	71-55-6	1,1,1-Trichloroethane	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	79-00-5	1,1,2-TRICHLOROETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-34-3	1,1-DICHLOROETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-35-4	1,1-DICHLOROETHYLENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	87-61-6	1,2,3-TRICHLOROBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	120-82-1	1,2,4-TRICHLOROBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	106-93-4	1,2-Dibromoethane	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	95-50-1	1,2-DICHLOROBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	107-06-2	1,2-DICHLOROETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	78-87-5	1,2-Dichloropropane	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	106-46-7	1,4-DICHLOROBENZENE	1.5	ug/kg	Y	J	J
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	123-91-1	1,4-Dioxane		ug/kg	N	U	R

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	78-93-3	2-Butanone	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	108-10-1	4-Methyl-2-Pentanone	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	67-64-1	ACETONE	10	ug/kg	Y		
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	71-43-2	BENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-27-4	BROMODICHLOROMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	74-83-9	BROMOMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-15-0	CARBON DISULFIDE	2.0	ug/kg	Y	J	J
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-69-4	CFC-11	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-71-8	CFC-12	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	108-90-7	CHLOROBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	74-97-5	CHLOROBROMOMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	124-48-1	CHLORODIBROMOMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-00-3	CHLOROETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	67-66-3	CHLOROFORM	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	74-87-3	CHLOROMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	156-59-2	cis-1,2-Dichloroethene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	10061-01-5	cis-1,3-Dichloropropene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	110-82-7	CYCLOHEXANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-09-2	DICHLOROMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	100-41-4	ETHYLBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	98-82-8	Isopropylbenzene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	179601-23-1	m,p-Xylene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	541-73-1	M-DICHLOROBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	79-20-9	METHYL ACETATE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	591-78-6	METHYL N-BUTYL KETONE	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	1634-04-4	Methyl tert-butyl ether	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	108-88-3	METHYLBENZENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	108-87-2	METHYLCYLOHEXANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	95-47-6	o-Xylene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	100-42-5	STYRENE (MONOMER)	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	127-18-4	TETRACHLOROETHYLENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	156-60-5	trans-1,2-Dichloroethene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	10061-02-6	trans-1,3-Dichloropropene	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-25-2	TRIBROMOMETHANE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	79-01-6	TRICHLOROETHYLENE	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	80	80	75-01-4	Vinyl chloride	5.0	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	90	90	106-93-4	1,2-Dibromoethane	32	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	90	90	75-15-0	CARBON DISULFIDE	32	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	90	90	56-23-5	CARBON TETRACHLORIDE	32	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	90	90	67-66-3	CHLOROFORM	32	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	90	90	74-87-3	CHLOROMETHANE	32	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	90	90	75-09-2	DICHLOROMETHANE	32	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	100	100	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	100	100	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	100	100	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	100	100	67-66-3	CHLOROFORM	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	100	100	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	100	100	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	107.5	107.5	106-93-4	1,2-Dibromoethane	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	107.5	107.5	75-15-0	CARBON DISULFIDE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	107.5	107.5	56-23-5	CARBON TETRACHLORIDE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	107.5	107.5	67-66-3	CHLOROFORM	26	ug/kg	N	U,L	
SO-4	Normal Environmental Sample	8/10/2007	Soil	107.5	107.5	74-87-3	CHLOROMETHANE	26	ug/kg	N	U	

Garvey Site Historical Database Query Results
Garvey Grain Elevator Site
Hastings, NE

sys_loc_code	sample_type_desc	sample_date	matrix_desc	start_depth	end_depth	cas_rn	chemical_name	result_text	result_unit	detect_flag	lab_qualifiers	val_qualifiers
SO-4	Normal Environmental Sample	8/10/2007	Soil	107.5	107.5	75-09-2	DICHLOROMETHANE	26	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	71-55-6	1,1,1-Trichloroethane	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	79-34-5	1,1,2,2-TETRACHLOROETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	79-00-5	1,1,2-TRICHLOROETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-34-3	1,1-DICHLOROETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-35-4	1,1-DICHLOROETHYLENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	87-61-6	1,2,3-TRICHLOROBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	120-82-1	1,2,4-TRICHLOROBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	96-12-8	1,2-DIBROMO-3-CHLOROPROPANE (DBCP)	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	106-93-4	1,2-Dibromoethane	27	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	106-93-4	1,2-Dibromoethane	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	95-50-1	1,2-DICHLOROBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	107-06-2	1,2-DICHLOROETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	78-87-5	1,2-Dichloropropane	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	106-46-7	1,4-DICHLOROBENZENE	1.4	ug/kg	Y	J	J
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	123-91-1	1,4-Dioxane		ug/kg	N	U	R
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	78-93-3	2-Butanone	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	108-10-1	4-Methyl-2-Pentanone	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	67-64-1	ACETONE	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	71-43-2	BENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-27-4	BROMODICHLOROMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	74-83-9	BROMOMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-15-0	CARBON DISULFIDE	27	ug/kg	N	U,L	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-15-0	CARBON DISULFIDE	7.3	ug/kg	Y		
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	56-23-5	CARBON TETRACHLORIDE	27	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	56-23-5	CARBON TETRACHLORIDE		ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-69-4	CFC-11	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-71-8	CFC-12	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	76-13-1	CHLORINATED FLUOROCARBON (FREON 113)	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	108-90-7	CHLOROBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	74-97-5	CHLOROBROMOMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	124-48-1	CHLORODIBROMOMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-00-3	CHLOROETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	67-66-3	CHLOROFORM	27	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	67-66-3	CHLOROFORM	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	74-87-3	CHLOROMETHANE	27	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	74-87-3	CHLOROMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	156-59-2	cis-1,2-Dichloroethene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	10061-01-5	cis-1,3-Dichloropropene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	110-82-7	CYCLOHEXANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-09-2	DICHLOROMETHANE	27	ug/kg	N	U	
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-09-2	DICHLOROMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	100-41-4	ETHYLBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	98-82-8	Isopropylbenzene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	179601-23-1	m,p-Xylene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	541-73-1	M-DICHLOROBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	79-20-9	METHYL ACETATE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	591-78-6	METHYL N-BUTYL KETONE	10	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	1634-04-4	Methyl tert-butyl ether	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	108-88-3	METHYLBENZENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	108-87-2	METHYLCYLOHEXANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	95-47-6	o-Xylene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	100-42-5	STYRENE (MONOMER)	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	127-18-4	TETRACHLOROETHYLENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	156-60-5	trans-1,2-Dichloroethene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	10061-02-6	trans-1,3-Dichloropropene	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-25-2	TRIBROMOMETHANE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	79-01-6	TRICHLOROETHYLENE	5.2	ug/kg	N	U	U
SO-4	Normal Environmental Sample	8/10/2007	Soil	115	115	75-01-4	Vinyl chloride	5.2	ug/kg	N	U	U

US EPA ARCHIVE DOCUMENT

ANALYTICAL DATA FROM NDEQ-LEAD INVESTIGATIONS

TestAmerica
INCORPORATED

1/20/03

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

This report includes the analytical certificates of analysis for all samples listed below. These samples relate to your project 51153.02.11A03 GARVEY GRAIN SITE/NDEQ. The Laboratory Project number is 316225
An executed copy of the chain of custody, the project quality control data, and the sample receipt form are also included as an addendum to this report.

Sample Identification	Lab Number	Collection Date
101	03-A4312	1/ 8/03
102	03-A4313	1/ 8/03
103	03-A4314	1/ 8/03
104	03-A4315	1/ 9/03
105	03-A4316	1/ 9/03
106	03-A4317	1/ 9/03
107	03-A4318	1/ 9/03
108	03-A4319	1/ 9/03
109	03-A4320	1/ 9/03
110	03-A4321	1/ 9/03
110FD	03-A4322	1/ 9/03
111	03-A4323	1/ 9/03
112	03-A4324	1/ 9/03
113	03-A4325	1/ 9/03
114	03-A4326	1/ 9/03
115	03-A4327	1/ 9/03
116	03-A4328	1/ 9/03
117	03-A4329	1/10/03
118	03-A4330	1/10/03
118FD	03-A4331	1/10/03
119	03-A4332	1/10/03
120	03-A4333	1/10/03
121	03-A4334	1/10/03

Sample Identification	Lab Number	Collection Date

These results relate only to the items tested.
This report shall not be reproduced except in full and with permission of the laboratory.

Report Approved By: _____ Report Date: 1/20/03

Paul E. Lane, Jr., Lab Director
Michael H. Dunn, M.S., Technical Director
Johnny A. Mitchell, Dir. Technical Serv.
Eric S. Smith, Assistant Technical Director
Roxanne L. Connor, Technical Services
Gail A. Lage, Technical Serv.
Glenn L. Norton, Technical Serv.
Kelly S. Comstock, Technical Serv.
Pamela A. Langford, Technical Serv.

US EPA ARCHIVE DOCUMENT

8164
316295

TestAmerica INCORPORATED
Nashville Division
2960 Foster Creighton
Nashville, TN 37204
Phone: 615-726-0177
Fax: 615-726-3404

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?
Compliance Monitoring ____

Client Name: TetraTech EMT Client #: ____
Address: 8030 FLINT ST12
City/State/Zip Code: LENEXIA, KS 66215
Project Manager: Dave Zimmermann
Telephone Number: 1-913.495.3900 Fax: 913 894 6295
Sampler Name: (Print Name) Adam Elliott
Sampler Signature: ____

Project Name: CARVEY GRAIN SITE/INDEX
Project #: 51153.02.114403
Site/Location ID: Hastings State: NE
Report To: Tom O'Connor
Invoice To: Dave Zimmermann
Quote #: 51153.02-114403 PO#: ____

TAT: ___ Standard ___ Rush (surcharges may apply)
Date Needed: ____
Fax Results: (Y) N

SAMPLE ID	Date Sampled	Time Sampled	G = Grab, C = Composite	Field Filtered	Matrix: SL - Sludge, DW - Drinking Water, S - Soil/Solid, GW - Groundwater, WW - Wastewater, Specify Other	Preservation & # of Containers: HNO_3	HCl	NaOH	H_2SO_4	Methanol	None	Other (Specify) ICE	Analyze For: 8260B	QC Deliverables	REMARKS
101	10/8/03	1430	G		DW		X					X	X		12
102	10/8/03	1650	G		DW		X					X	X		13
103	10/8/03	1720	G		DW		X					X	X		14
104	10/9/03	850	G		DW		X					X	X		15
105	10/9/03	910	G		DW		X					X	X		16
106	10/9/03	930	G		DW		X					X	X		17
107	10/9/03	950	G		DW		X					X	X		18
108	10/9/03	1015	G		DW		X					X	X		19
109	10/9/03	1115	G		DW		X					X	X		20
110	10/9/03	1350	G		DW		X					X	X		4321

QC Deliverables: ___ None ___ Level 2 (Batch QC) ___ Level 3 ___ Level 4 Other: ____

Special Instructions:

LABORATORY COMMENTS:
Init Lab Temp:
Rec Lab Temp: 1.5
Custody Seals: Y N N/A
Bottles Supplied by Test America: Y N
Method of Shipment:

Relinquished By	Date	Time	Received By	Date	Time
Relinquished By: [signature]	Date: 10/10/03	Time: 1400	Received By:	Date	Time
Relinquished By:	Date:	Time:	Received By	Date:	Time:
Relinquished By:	Date:	Time:	Received By [signature]	Date 10/11/03	Time 0900

US EPA ARCHIVE DOCUMENT

TestAmerica INCORPORATED

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Phone: 615-726-0177
Fax: 615-726-3404

316225

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?
Compliance Monitoring _____

Client Name: Tetra Tech EMI Client #: _____
Address: 8320 FLINT STR
City/State/Zip Code: LENEXA, KS
Project Manager: Dave Zimmermann
Telephone Number: 913 495 3900 Fax: 913 994 6295
Sampler Name (Print Name): Adam Elliott
Sampler Signature: _____

Project Name: GARVEY GRAIN - ITF
Project #: 5153.02.11A03
Site/Location ID: Hastings State: NE
Report To: Tom O'Connor
Invoice To: David Zimmerman
Quote #: 5153.02.11A03 PO#: _____

TAT
___ Standard
___ Rush (surcharges may apply)
Date Needed: _____
Fax Results: Y N

QC Deliverables
___ None
___ Level 2 (Batch QC)
___ Level 3
___ Level 4
Other: _____

SAMPLE ID	Date Sampled	Time Sampled	G = Grab, C = Composite	Field Filtered	Matrix: SL - Sludge, DW - Drinking Water, GW - Groundwater, S - Soil/Solid, WW - Wastewater, Specify Other	Preservation & # of Containers: HNO_3	HCl	NaOH	H_2SO_4	Methanol	None	Other (Specify) ICE	Analyze For: 8260B	REMARKS
110 FD	1/9/03	1350	G		DW		X					X	X	9223
111	1/9/03	1420	G		DW		X					X	X	23
111 MS	1/9/03	1430	G		DW		X					X	X	1
111 MSD	1/9/03	1430	G		DW		X					X	X	1
112	1/9/03	1450	G		DW		X					X	X	24
113	1/9/03	1540	G		DW		X					X	X	25
114	1/9/03	1630	G		DW		X					X	X	26
115	1/9/03	1645	G		DW		X					X	X	27
116	1/9/03	1735	G		DW		X					X	X	28
117	1/10/03	0905	G		DW		X					X	X	4329

Special Instructions:

LABORATORY COMMENTS:
Init Lab Temp:
Rec Lab Temp: 1.5
Custody Seals: Y N N/A
Bottles Supplied by Test America: Y N
Method of Shipment:

Relinquished By: Adam A Elliott	Date: 01/10/03	Time: 1420	Received By	Date:	Time
Relinquished By	Date	Time	Received By	Date	Time
Relinquished By	Date	Time	Received By: SL	Date: 1/11/03	Time: 0900

US EPA ARCHIVE DOCUMENT

TestAmerica INCORPORATED

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Phone: 615-726-0177
Fax: 615-726-3404

316275

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?
Compliance Monitoring _____

Client Name: Tetra Tech EMI Client #: _____
Address: 8030 FLINT STR
City/State/Zip Code: LENEXA, KS 66215
Project Manager: Dave Zimmermann
Telephone Number: 913 495 3900 Fax: 913 894 6295
Sampler Name (Print Name): Adam Elliott
Sampler Signature: _____

Project Name: HARVEY GRAIN SITE
Project #: 51153.02.11A03
Site/Location ID: HASTINGS State: NE
Report To: David Zimmermann
Invoice To: David Zimmermann
Quote #: 51153021103 PO#: _____

TAT
___ Standard
___ Rush (surcharges may apply)
Date Needed: _____
Fax Results: Y N

Matrix: SL - Sludge, DW - Drinking Water, GW - Groundwater, S - Soil/Solid, WW - Wastewater, Specify Other
Preservation & # of Containers: HNO_3, HCl, NaOH, H_2SO_4, Methanol, None, Other (Specify) ICE
Analyze For: 8260B

SAMPLE ID	Date Sampled	Time Sampled	G = Grab, C = Composite	Field Filtered	Matrix	HNO_3	HCl	NaOH	H_2SO_4	Methanol	None	Other (Specify) ICE	8260B	QC Deliverables	REMARKS
118	1/10/03	1055	G		DW		X					X	X		4030
118 FD	1/10/03	1055	G		DW		X					X	X		31
119	1/10/03	1130	G		DW		X					X	X		32
120	1/10/03	1150	G		DW		X					X	X		33
121	1/10/03	1355	G		DW		X					X	X		4334
Trip Blank	N/A														Not Rec.

QC Deliverables
___ None
___ Level 2 (Batch QC)
___ Level 3
___ Level 4
Other _____

Special Instructions:

LABORATORY COMMENTS:
Init Lab Temp:
Rec Lab Temp: 1.5
Custody Seals: G N N/A
Bottles Supplied by Test America: Y N
Method of Shipment:

	Date	Time		Date	Time
Relinquished By: Adam R Elliott	01/10/03	1600	Received By:		
Relinquished By:			Received By:		
Relinquished By:			Received By:	1/11/03	0910

TESTAMERICA,INC.-NASHVILLE

COOLER RECEIPT FORM

Client: Tetra Tech Emi BC# 31622S

Cooler Received On: 1/11/03 And Opened On: 1/11/03 By: Shawn Gracey

Shawn Gracey
(Signature)

1. Temperature of Cooler when opened 1.5 Degrees Celsius
2. Were custody seals on outside of cooler?..... (YES) NO N/A
   a. If yes, how many, what kind and where: 2 (FRONT/BACK/SIDE)
   b. Were the seals intact, signed, and dated correctly?..... (YES) NO N/A
3. Were custody seals on containers and intact?..... (NO) YES N/A
4. Were custody papers inside cooler?..... (YES) NO N/A
5. Were custody papers properly filled out (ink,signed,etc)?..... (YES) NO N/A
6. Did you sign the custody papers in the appropriate place?..... (YES) NO N/A
7. What kind of packing material used? (Bubblewrap) Peanuts Vermiculite Other None
8. Was sufficient ice used (if appropriate)?..... (YES) NO N/A
9. Did all bottles arrive in good condition(unbroken)?..... (YES) NO N/A
10. Were all bottle labels complete (#,date,signed,pres,etc)?..... (YES) NO N/A
11. Did all bottle labels and tags agree with custody papers?..... (YES) NO N/A
12. Were correct bottles used for the analysis requested?..... (YES) NO N/A
13. a. Were VOA vials received?..... (YES) NO N/A
    b. Was there any observable head space present in any VOA vial?..... (NO) YES N/A
14. Was sufficient amount of sample sent in each bottle?..... (YES) NO N/A
15. Were correct preservatives used?..... (YES) NO N/A
    If not, record standard ID of preservative used here_____
16. Was residual chlorine present?..... NO YES (N/A)
17. Corrective action taken, if necessary:

See attached for resolution

SAMPLE NONCONFORMANCE/COC REVISION FORM

TestAmerica INCORPORATED
Nashville Division

DATE RECEIVED: 1/13/03

ACCT NO.: 8764 (confirms)

SDG NUMBER: 316225

COMPANY NAME: Tetra Tech

Relinquished by:	Date/Time:	Received by:	Date/Time
MB	1/13/03 7:15	AJ	1/13/03 830
Relinquished by:	Date/Time:	Received by:	Date/Time:
AJ	1/13/03 1324	[illegible]	1:13:03 @ 13:25
Relinquished by:	Date/Time:	Received by:	Date/Time:

NONCONFORMANCE ISSUE(S):

OIL & GREASE METHOD?	METALS LIST?
TPH METHOD?	TCLP WHAT?
EDB METHOD?	HERB LIST- LONG OR SHORT?
NEED LIST OF COMPOUNDS?	RUN SOILS BY 8260 INSTEAD OF 8021?
TEMPERATURE UPON RECEIPT?	SATURDAY DELIVERY MARKED?
ICE -- OR-- NO ICE??	SAMPLES TO BE SUBCONTRACTED?
NO COC - PLEASE FAX	NO ANALYSIS REQUESTED?
DOCUMENTATION LEVEL?	OUT OF HOLDING TIME -- TEST:

OTHER: - Received no TB

RESOLUTION: Account # 8164 ; Client notified about TB; Client needs 5 day TAT

PERSON CONTACTED	DATE/TIME	VIA E-MAIL or VOICEMAIL	NOTES AND/OR COMMENTS:
Dave Zimmerman	1/13/03 842	voicemail	left message for him
Tom O'Connor	1/13/03 1324	See above	

Revised 12/9/02

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4312
Sample ID: 101
Sample Type: Ground water
Site ID:

Date Collected: 1/ 8/03
Time Collected: 16:30
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/13/03	19:58	B.Herford	8260B	3433
Benzene	ND	mg/l	0 0020	1	1/13/03	19:58	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/13/03	19:58	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0 00200	1	1/13/03	19:58	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/13/03	19:58	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0 00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0 00200	1	1/13/03	19:58	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0 00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4312
Sample ID: 101
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/13/03	19:58	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/13/03	19:58	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/13/03	19:58	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/13/03	19:58	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/13/03	19:58	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/13/03	19:58	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/13/03	19:58	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/13/03	19:58	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4312
Sample ID: 101
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/13/03	19:58	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	97.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	92.	80 - 128.
VOA Surr, DBFM	92.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4313
Sample ID: 102
Sample Type: Ground water
Site ID:

Date Collected: 1/ 8/03
Time Collected: 16:50
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	1:02	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	1:02	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	1:02	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	1:02	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4313
Sample ID: 102
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	1:02	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0 0100	1	1/14/03	1:02	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0 00200	1	1/14/03	1:02	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0 00200	1	1/14/03	1:02	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	1:02	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	1:02	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	1:02	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	1:02	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	1:02	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	1:02	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4313
Sample ID: 102
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	1:02	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	99.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	91.	80. - 128
VOA Surr, DBFM	93.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4314
Sample ID: 103
Sample Type: Ground water
Site ID:

Date Collected: 1/ 8/03
Time Collected: 17:20
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	1:36	B.Herford	8260B	5535
Benzene	ND	mg/l	0.0020	1	1/14/03	1:36	B.Herford	8260B	5535
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Bromoform	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Bromomethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
2-Butanone	ND	mg/l	0.0250	1	1/14/03	1:36	B.Herford	8260B	5535
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Carbon tetrachloride	0.00370	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Chloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Chloroform	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Chloromethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	1:36	B.Herford	8260B	5535
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4314
Sample ID: 103
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	1:36	B.Herford	8260B	5535
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	1:36	B.Herford	8260B	5535
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	1:36	B.Herford	8260B	5535
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	1:36	B.Herford	8260B	5535
Naphthalene	ND	mg/l	0.00500	1	1/14/03	1:36	B.Herford	8260B	5535
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Styrene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Toluene	ND	mg/l	0.0020	1	1/14/03	1:36	B.Herford	8260B	5535
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	1:36	B.Herford	8260B	5535
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	1:36	B.Herford	8260B	5535
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4314
Sample ID: 103
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	1:36	B.Herford	8260B	5535

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	95.	73 - 133.
VOA Surr Toluene-d8	102.	80. - 121.
VOA Surr, 4-BFB	92.	80. - 128.
VOA Surr, DBFM	95.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4315
Sample ID: 104
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 8:50
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	2:10	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	2:10	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	2:10	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	2:10	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433

Sample report continued .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4315
Sample ID: 104
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	2:10	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	2:10	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	2:10	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	2:10	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	2:10	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	2:10	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	2:10	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	2:10	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4315
Sample ID: 104
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	2:10	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	96.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	94.	80 - 128.
VOA Surr, DBFM	91.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4316
Sample ID: 105
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 9:10
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	2:44	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	2:44	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	2:44	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Carbon tetrachloride	0.0358	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	2:44	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4316
Sample ID: 105
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	2:44	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	2:44	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	2:44	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	2:44	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	2:44	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	2:44	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	2:44	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	2:44	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4316
Sample ID: 105
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	2:44	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	96.	73. - 133.
VOA Surr Toluene-d8	102.	80. - 121.
VOA Surr, 4-BFB	93.	80. - 128.
VOA Surr, DBFM	92.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4317
Sample ID: 106
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 9:30
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	3:17	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	3:17	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	3:17	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Carbon tetrachloride	0.0606	mg/l	0 00200	1	1/14/03	3:17	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	3:17	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4317
Sample ID: 106
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	3:17	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	3:17	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	3:17	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	3:17	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	3:17	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	3:17	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	3:17	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	3:17	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0 00200	1	1/14/03	3:17	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4317
Sample ID: 106
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	3:17	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	95.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	92.	80. - 128.
VOA Surr, DBFM	92.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4318
Sample ID: 107
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 9:50
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	3:51	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	3:51	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	3:51	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0 00200	1	1/14/03	3:51	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Carbon tetrachloride	0.0111	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	3:51	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4318
Sample ID: 107
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	3:51	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	3:51	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	3:51	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	3:51	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	3:51	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	3:51	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	3:51	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	3:51	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4318
Sample ID: 107
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	3:51	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	96.	73. - 133.
VOA Surr Toluene-d8	99	80. - 121.
VOA Surr, 4-BFB	92.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4319
Sample ID: 108
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 10:15
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	4:25	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	4:25	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	4:25	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Carbon tetrachloride	0.111	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	4:25	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4319
Sample ID: 108
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	4:25	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	4:25	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	4:25	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	4:25	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	4:25	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	4:25	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	4:25	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	4:25	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4319
Sample ID: 108
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	4:25	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	97.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	95.	80. - 128.
VOA Surr, DBFM	96.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4320
Sample ID: 109
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 11:15
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	4:58	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	4:58	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	4:58	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	4:58	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4320
Sample ID: 109
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	4:58	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	4:58	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	4:58	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	4:58	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	4:58	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0 00200	1	1/14/03	4:58	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	4:58	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	4:58	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	4:58	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4320
Sample ID: 109
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	4:58	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	94.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	90.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4321
Sample ID: 110
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 13:50
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	5:33	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	5:33	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	5:33	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	5:33	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4321
Sample ID: 110
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	5:33	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	5:33	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	5:33	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	5:33	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	5:33	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	5:33	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	5:33	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	5:33	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4321
Sample ID: 110
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	5:33	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	99.	73. - 133.
VOA Surr Toluene-d8	102.	80. - 121.
VOA Surr, 4-BFB	93.	80. - 128.
VOA Surr, DBFM	96.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4322
Sample ID: 110FD
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 13:50
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/13/03	18:50	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/13/03	18:50	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/13/03	18:50	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/13/03	18:50	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433

Sample report continued .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4322
Sample ID: 110FD
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/13/03	18:50	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/13/03	18:50	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/13/03	18:50	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/13/03	18:50	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/13/03	18:50	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/13/03	18:50	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/13/03	18:50	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/13/03	18:50	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4322
Sample ID: 110FD
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/13/03	18:50	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	98.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	94.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4323
Sample ID: 111
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 14:20
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/13/03	20:31	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/13/03	20:31	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Bromoform	ND	mg/l	0 00200	1	1/13/03	20:31	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0 00200	1	1/13/03	20:31	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/13/03	20:31	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0 00200	1	1/13/03	20:31	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/13/03	20:31	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4323
Sample ID: 111
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/13/03	20:31	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/13/03	20:31	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/13/03	20:31	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/13/03	20:31	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/13/03	20:31	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/13/03	20:31	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/13/03	20:31	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/13/03	20:31	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4323
Sample ID: 111
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/13/03	20:31	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	99.	73. - 133.
VOA Surr Toluene-d8	102.	80. - 121.
VOA Surr, 4-BFB	94.	80. - 128.
VOA Surr, DBFM	96	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4324
Sample ID: 112
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 14:50
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	6:06	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	6:06	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	6:06	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	6:06	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4324
Sample ID: 112
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	6:06	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	6:06	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	6:06	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	6:06	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	6:06	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	6:06	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	6:06	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	6:06	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4324
Sample ID: 112
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	6:06	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	98.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	93.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4325
Sample ID: 113
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 15:40
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	6:40	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	6:40	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	6:40	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	6:40	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4325
Sample ID: 113
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	6:40	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	6:40	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	6:40	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	6:40	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	6:40	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	6:40	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	6:40	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	6:40	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4325
Sample ID: 113
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	6:40	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	96.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	93.	80. - 128.
VOA Surr, DBFM	95.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4326
Sample ID: 114
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 16:30
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	7:14	B.Herford	8260B	3433
Benzene	ND	mg/l	0 0020	1	1/14/03	7:14	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	7:14	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	7:14	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4326
Sample ID: 114
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0 00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	7:14	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	7:14	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	7:14	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	7:14	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	7:14	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	7:14	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0 00200	1	1/14/03	7:14	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	7:14	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0 00200	1	1/14/03	7:14	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	7:14	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4326
Sample ID: 114
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	7:14	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	94.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	92.	80. - 128.
VOA Surr, DBFM	93.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4327
Sample ID: 115
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 16:45
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	7:48	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	7:48	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	7:48	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	7:48	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4327
Sample ID: 115
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0 00200	1	1/14/03	7:48	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	7:48	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	7:48	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	7:48	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	7:48	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	7:48	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0 00200	1	1/14/03	7:48	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	7:48	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	7:48	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	7:48	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4327
Sample ID: 115
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	7:48	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	98.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	93.	80 - 128.
VOA Surr, DBFM	96.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4328
Sample ID: 116
Sample Type: Ground water
Site ID:

Date Collected: 1/ 9/03
Time Collected: 17:35
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	8:22	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/14/03	8:22	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0.0250	1	1/14/03	8:22	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0 00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	8:22	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4328
Sample ID: 116
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	8:22	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	8:22	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	8:22	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	8:22	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/14/03	8:22	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/14/03	8:22	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	8:22	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	8:22	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4328
Sample ID: 116
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	8:22	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	96.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	92.	80. - 128.
VOA Surr, DBFM	95.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4329
Sample ID: 117
Sample Type: Ground water
Site ID:

Date Collected: 1/10/03
Time Collected: 9:05
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	13:22	B.Herford	8260B	5535
Benzene	ND	mg/l	0.0020	1	1/14/03	13:22	B.Herford	8260B	5535
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Bromoform	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Bromomethane	ND	mg/l	0.00200	1	1/14/03	13.22	B.Herford	8260B	5535
2-Butanone	ND	mg/l	0.0250	1	1/14/03	13:22	B.Herford	8260B	5535
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Chloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Chloroform	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Chloromethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	13:22	B.Herford	8260B	5535
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4329
Sample ID: 117
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2-Dichloropropane	ND	mg/l	0 00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	13:22	B.Herford	8260B	5535
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	13:22	B.Herford	8260B	5535
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
4-Methyl-2-pentanone	ND	mg/l	0 0100	1	1/14/03	13:22	B.Herford	8260B	5535
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	13:22	B.Herford	8260B	5535
Naphthalene	ND	mg/l	0 00500	1	1/14/03	13:22	B.Herford	8260B	5535
n-Propylbenzene	ND	mg/l	0 00200	1	1/14/03	13:22	B.Herford	8260B	5535
Styrene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Toluene	ND	mg/l	0.0020	1	1/14/03	13:22	B.Herford	8260B	5535
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	13:22	B.Herford	8260B	5535
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	13:22	B.Herford	8260B	5535
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	13:22	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4329.
Sample ID: 117
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	13:22	B Herford	8260B	5535

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	98.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	94.	80. - 128.
VOA Surr, DBFM	97.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4330
Sample ID: 118
Sample Type: Ground water
Site ID:

Date Collected: 1/10/03
Time Collected: 10:55
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	13:56	B.Herford	8260B	5535
Benzene	ND	mg/l	0.0020	1	1/14/03	13:56	B.Herford	8260B	5535
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Bromoform	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Bromomethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
2-Butanone	ND	mg/l	0.0250	1	1/14/03	13:56	B.Herford	8260B	5535
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Carbon tetrachloride	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Chloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Chloroform	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Chloromethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	13:56	B.Herford	8260B	5535
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4330
Sample ID: 118
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	13:56	B.Herford	8260B	5535
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	13:56	B.Herford	8260B	5535
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	13:56	B.Herford	8260B	5535
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	13:56	B.Herford	8260B	5535
Naphthalene	ND	mg/l	0.00500	1	1/14/03	13:56	B.Herford	8260B	5535
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Styrene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Toluene	ND	mg/l	0.0020	1	1/14/03	13:56	B.Herford	8260B	5535
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	13:56	B.Herford	8260B	5535
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	13:56	B.Herford	8260B	5535
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4330
Sample ID: 118
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	13:56	B.Herford	8260B	5535

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	95.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	91.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4331
Sample ID: 118FD
Sample Type: Ground water
Site ID:

Date Collected: 1/10/03
Time Collected: 10:55
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/13/03	19:24	B.Herford	8260B	3433
Benzene	ND	mg/l	0.0020	1	1/13/03	19:24	B.Herford	8260B	3433
Bromobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Bromochloromethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Bromoform	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Bromomethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
2-Butanone	ND	mg/l	0 0250	1	1/13/03	19:24	B.Herford	8260B	3433
n-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
sec-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
t-Butylbenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Carbon disulfide	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Carbon tetrachloride	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Chlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Chloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Chloroform	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Chloromethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
2-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
4-Chlorotoluene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/13/03	19:24	B.Herford	8260B	3433
Dibromochloromethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Dibromomethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4331
Sample ID: 118FD
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B Herford	8260B	3433
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Ethylbenzene	ND	mg/l	0.0020	1	1/13/03	19:24	B.Herford	8260B	3433
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
2-Hexanone	ND	mg/l	0.0100	1	1/13/03	19:24	B.Herford	8260B	3433
Isopropylbenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/13/03	19:24	B.Herford	8260B	3433
Methylene chloride	ND	mg/l	0.00500	1	1/13/03	19:24	B.Herford	8260B	3433
Naphthalene	ND	mg/l	0.00500	1	1/13/03	19:24	B.Herford	8260B	3433
n-Propylbenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Styrene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Tetrachloroethene	ND	mg/l	0.00200	1	1/13/03	19.24	B.Herford	8260B	3433
Toluene	ND	mg/l	0.0020	1	1/13/03	19:24	B.Herford	8260B	3433
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Trichloroethene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/13/03	19:24	B.Herford	8260B	3433
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Vinyl chloride	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433
Xylenes (Total)	ND	mg/l	0.0020	1	1/13/03	19:24	B.Herford	8260B	3433
Bromodichloromethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4331
Sample ID: 118FD
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/13/03	19:24	B.Herford	8260B	3433

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	95.	73. - 133.
VOA Surr Toluene-d8	103.	80. - 121.
VOA Surr, 4-BFB	91.	80. - 128.
VOA Surr, DBFM	92.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4332
Sample ID: 119
Sample Type: Ground water
Site ID:

Date Collected: 1/10/03
Time Collected: 11:30
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	14:30	B.Herford	8260B	5535
Benzene	ND	mg/l	0.0020	1	1/14/03	14:30	B.Herford	8260B	5535
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Bromoform	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Bromomethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
2-Butanone	ND	mg/l	0.0250	1	1/14/03	14:30	B.Herford	8260B	5535
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Carbon tetrachloride	0.00640	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Chloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Chloroform	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Chloromethane	ND	mg/l	0 00200	1	1/14/03	14:30	B.Herford	8260B	5535
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	14:30	B.Herford	8260B	5535
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4332
Sample ID: 119
Project: 51153.02.11A03
Page 2

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	14:30	B.Herford	8260B	5535
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	14:30	B.Herford	8260B	5535
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	14:30	B.Herford	8260B	5535
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	14:30	B.Herford	8260B	5535
Naphthalene	ND	mg/l	0.00500	1	1/14/03	14:30	B.Herford	8260B	5535
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Styrene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Toluene	ND	mg/l	0.0020	1	1/14/03	14:30	B.Herford	8260B	5535
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	14:30	B.Herford	8260B	5535
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	14:30	B.Herford	8260B	5535
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4332
Sample ID: 119
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	14:30	B.Herford	8260B	5535

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	98.	73. - 133.
VOA Surr Toluene-d8	103.	80. - 121.
VOA Surr, 4-BFB	94.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4333
Sample ID: 120
Sample Type: Ground water
Site ID:

Date Collected: 1/10/03
Time Collected: 11:50
Date Received: 1/11/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	15:04	B.Herford	8260B	5535
Benzene	ND	mg/l	0.0020	1	1/14/03	15:04	B.Herford	8260B	5535
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Bromoform	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Bromomethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
2-Butanone	ND	mg/l	0.0250	1	1/14/03	15:04	B.Herford	8260B	5535
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Carbon tetrachloride	0.242	mg/l	0.0100	5	1/15/03	15:17	B.Herford	8260B	8383
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Chloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Chloroform	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Chloromethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	15:04	B.Herford	8260B	5535
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4333
Sample ID: 120
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	15:04	B.Herford	8260B	5535
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	15:04	B.Herford	8260B	5535
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	15:04	B.Herford	8260B	5535
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	15:04	B.Herford	8260B	5535
Naphthalene	ND	mg/l	0.00500	1	1/14/03	15:04	B.Herford	8260B	5535
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Styrene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Toluene	ND	mg/l	0.0020	1	1/14/03	15:04	B.Herford	8260B	5535
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	15:04	B.Herford	8260B	5535
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	15:04	B.Herford	8260B	5535
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4333
Sample ID: 120
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	15:04	B.Herford	8260B	5535

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	97.	73. - 133.
VOA Surr Toluene-d8	100.	80. - 121.
VOA Surr, 4-BFB	90.	80. - 120.
VOA Surr, DBFM	97.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Sampler: ADAM ELLIOTT

Lab Number: 03-A4334
Sample ID: 121
Sample Type: Ground water
Site ID:

Date Collected: 1/10/03
Time Collected: 13:55
Date Received: 1/11/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0500	1	1/14/03	15:39	B.Herford	8260B	5535
Benzene	ND	mg/l	0.0020	1	1/14/03	15:39	B.Herford	8260B	5535
Bromobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Bromochloromethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Bromoform	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Bromomethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
2-Butanone	ND	mg/l	0.0250	1	1/14/03	15:39	B.Herford	8260B	5535
n-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
sec-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
t-Butylbenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Carbon disulfide	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Carbon tetrachloride	0.103	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Chlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Chloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Chloroform	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Chloromethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
2-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
4-Chlorotoluene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/14/03	15:39	B.Herford	8260B	5535
Dibromochloromethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2-Dibromoethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Dibromomethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,3-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,4-Dichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Dichlorodifluoromethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4334
Sample ID: 121
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2-Dichloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,1-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
cis-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
trans-1,2-Dichloroethene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,3-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
2,2-Dichloropropane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,1-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
cis-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
trans-1,3-Dichloropropene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Ethylbenzene	ND	mg/l	0.0020	1	1/14/03	15:39	B.Herford	8260B	5535
Hexachlorobutadiene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
2-Hexanone	ND	mg/l	0.0100	1	1/14/03	15:39	B.Herford	8260B	5535
Isopropylbenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
4-Isopropyltoluene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
4-Methyl-2-pentanone	ND	mg/l	0.0100	1	1/14/03	15:39	B.Herford	8260B	5535
Methylene chloride	ND	mg/l	0.00500	1	1/14/03	15:39	B.Herford	8260B	5535
Naphthalene	ND	mg/l	0.00500	1	1/14/03	15:39	B.Herford	8260B	5535
n-Propylbenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Styrene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Tetrachloroethene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Toluene	ND	mg/l	0.0020	1	1/14/03	15:39	B.Herford	8260B	5535
1,2,3-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2,4-Trichlorobenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,1,1-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,1,2-Trichloroethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Trichloroethene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2,3-Trichloropropane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
1,2,4-Trimethylbenzene	ND	mg/l	0.0020	1	1/14/03	15:39	B.Herford	8260B	5535
1,3,5-Trimethylbenzene	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Vinyl chloride	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535
Xylenes (Total)	ND	mg/l	0.0020	1	1/14/03	15:39	B.Herford	8260B	5535
Bromodichloromethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A4334
Sample ID: 121
Project: 51153.02.11A03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00200	1	1/14/03	15:39	B.Herford	8260B	5535

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	97.	73. - 133.
VOA Surr Toluene-d8	101.	80. - 121.
VOA Surr, 4-BFB	95.	80. - 128.
VOA Surr, DBFM	93.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 1
Laboratory Receipt Date: 1/11/03

Matrix Spike Recovery

Note: If Blank is referenced as the sample spiked, insufficient volume was received for MS/MSD analysis for that method and the method requirements for MS/MSD analysis could not be met.

Analyte	units	Orig. Val.	MS Val	Spike Conc	Recovery	Target Range	Q.C. Batch	Spike Sample
VOA PARAMETERS								
Benzene	mg/l	< 0.0020	0.0526	0.0500	105	78. - 132.	3433	03-A4323
Benzene	mg/l	< 0.0020	0.0519	0.0500	104	78. - 132.	5535	03-A4314
Chlorobenzene	mg/l	< 0.00200	0.0537	0.0500	107	79. - 124.	3433	03-A4323
Chlorobenzene	mg/l	< 0.00200	0.0537	0.0500	107	79. - 124.	5535	03-A4314
1,1-Dichloroethene	mg/l	< 0.00200	0.0505	0.0500	101	68. - 141.	3433	03-A4323
1,1-Dichloroethene	mg/l	< 0.00200	0.0481	0.0500	96	68. - 141.	5535	03-A4314
Toluene	mg/l	< 0.0020	0.0554	0.0500	111	77. - 134.	3433	03-A4323
Toluene	mg/l	< 0.0020	0.0540	0.0500	108	77. - 134.	5535	03-A4314
Trichloroethene	mg/l	< 0 00200	0.0495	0.0500	99	73. - 137.	3433	03-A4323
Trichloroethene	mg/l	< 0.00200	0.0459	0.0500	92	73. - 137.	5535	03-A4314
Tetrachloroethene	mg/l	< 0.00200	0.0507	0.0500	101	72. - 136.	3433	03-A4323
Tetrachloroethene	mg/l	< 0.00200	0.0493	0.0500	99	72. - 136.	5535	03-A4314
VOA Surr 1,2-DCA-d4	% Rec				97	73. - 133.	3433	
VOA Surr 1,2-DCA-d4	% Rec				98	73. - 133.	5535	
VOA Surr Toluene-d8	% Rec				101	80. - 121.	3433	
VOA Surr Toluene-d8	% Rec				103	80. - 121.	5535	
VOA Surr, 4-BFB	% Rec				91	80. - 120.	3433	
VOA Surr, 4-BFB	% Rec				92	80. - 128.	5535	
VOA Surr, DBFM	% Rec				94	81. - 121.	3433	
VOA Surr, DBFM	% Rec				94	81. - 121.	5535	

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 2
Laboratory Receipt Date: 1/11/03

Analyte	units	Orig. Val.	Duplicate	RPD	Limit	Q.C. Batch
		Matrix Spike Duplicate				
VOA PARAMETERS						
Benzene	mg/l	0.0526	0.0515	2.11	15.	3433
Benzene	mg/l	0 0519	0.0530	2.10	15.	5535
Chlorobenzene	mg/l	0.0537	0.0542	0.93	16.	3433
Chlorobenzene	mg/l	0.0537	0.0538	0.19	16.	5535
1,1-Dichloroethene	mg/l	0.0505	0.0496	1.80	19.	3433
1,1-Dichloroethene	mg/l	0.0481	0.0505	4.87	19.	5535
Toluene	mg/l	0.0554	0.0547	1.27	16.	3433
Toluene	mg/l	0.0540	0.0556	2.92	16.	5535
Trichloroethene	mg/l	0.0495	0.0482	2.66	20.	3433
Trichloroethene	mg/l	0.0459	0.0472	2.79	20.	5535
Tetrachloroethene	mg/l	0.0507	0.0525	3.49	23.	3433
Tetrachloroethene	mg/l	0.0493	0.0502	1.81	23.	5535
VOA Surr 1,2-DCA-d4	% Rec		94.			3433
VOA Surr 1,2-DCA-d4	% Rec		96.			5535
VOA Surr Toluene-d8	% Rec		102.			3433
VOA Surr Toluene-d8	% Rec		102.			5535
VOA Surr, 4-BFB	% Rec		91.			3433
VOA Surr, 4-BFB	% Rec		91.			5535
VOA Surr, DBFM	% Rec		95.			3433
VOA Surr, DBFM	% Rec		94.			5535

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 3
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
VOA PARAMETERS						
Acetone	mg/l	0.250	0.221	88	60 - 154	3433
Acetone	mg/l	0.250	0.237	95	60 - 154	3433
Acetone	mg/l	0.250	0.237	95	60 - 154	5535
Acetone	mg/l	0.250	0.258	103	60 - 154	5535
Benzene	mg/l	0.0500	0.0513	103	78 - 127	3433
Benzene	mg/l	0.0500	0.0524	105	78 - 127	3433
Benzene	mg/l	0.0500	0.0524	105	78 - 127	5535
Benzene	mg/l	0.0500	0.0516	103	78 - 127	5535
Bromobenzene	mg/l	0.0500	0.0530	106	80 - 120	3433
Bromobenzene	mg/l	0.0500	0.0547	109	80 - 120	3433
Bromobenzene	mg/l	0.0500	0.0547	109	80 - 120	5535
Bromobenzene	mg/l	0.0500	0.0567	113	80 - 120	5535
Bromochloromethane	mg/l	0 0500	0.0488	98	66 - 137	3433
Bromochloromethane	mg/l	0.0500	0.0492	98	66 - 137	3433
Bromochloromethane	mg/l	0.0500	0.0492	98	66 - 137	5535
Bromochloromethane	mg/l	0.0500	0.0474	95	66 - 137	5535
Bromoform	mg/l	0.0500	0.0498	100	66 - 129	3433
Bromoform	mg/l	0.0500	0.0456	91	66 - 129	3433
Bromoform	mg/l	0.0500	0.0456	91	66 - 129	5535
Bromoform	mg/l	0.0500	0.0492	98	66 - 129	5535
Bromomethane	mg/l	0.0500	0.0689	138	47 - 163	3433
Bromomethane	mg/l	0.0500	0.0703	141	47 - 163	3433
Bromomethane	mg/l	0.0500	0.0703	141	47 - 163	5535
Bromomethane	mg/l	0.0500	0.0756	151	47 - 163	5535
2-Butanone	mg/l	0.250	0.236	94	75 - 140	3433
2-Butanone	mg/l	0.250	0.227	91	75 - 140	3433
2-Butanone	mg/l	0.250	0.227	91	75 - 140	5535
2-Butanone	mg/l	0.250	0.249	100	75 - 140	5535
n-Butylbenzene	mg/l	0.0500	0.0529	106	61 - 131	3433

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 4
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
n-Butylbenzene	mg/l	0.0500	0.0568	114	61 - 131	3433
n-Butylbenzene	mg/l	0.0500	0.0568	114	61 - 131	5535
n-Butylbenzene	mg/l	0.0500	0.0580	116	61 - 131	5535
sec-Butylbenzene	mg/l	0.0500	0.0531	106	72 - 124	3433
sec-Butylbenzene	mg/l	0.0500	0.0538	108	72 - 124	3433
sec-Butylbenzene	mg/l	0.0500	0.0538	108	72 - 124	5535
sec-Butylbenzene	mg/l	0.0500	0.0554	111	72 - 124	5535
t-Butylbenzene	mg/l	0 0500	0.0517	103	74 - 123	3433
t-Butylbenzene	mg/l	0.0500	0.0518	104	74 - 123	3433
t-Butylbenzene	mg/l	0.0500	0.0518	104	74 - 123	5535
t-Butylbenzene	mg/l	0.0500	0.0530	106	74 - 123	5535
Carbon disulfide	mg/l	0.0500	0.0566	113	67 - 138	3433
Carbon disulfide	mg/l	0.0500	0.0593	119	67 - 138	3433
Carbon disulfide	mg/l	0.0500	0.0593	119	67 - 138	5535
Carbon disulfide	mg/l	0.0500	0.0583	117	67 - 138	5535
Carbon tetrachloride	mg/l	0.0500	0.0461	92	69 - 132	3433
Carbon tetrachloride	mg/l	0.0500	0.0440	88	69 - 132	3433
Carbon tetrachloride	mg/l	0.0500	0.0440	88	69 - 132	5535
Carbon tetrachloride	mg/l	0.0500	0.0457	91	69 - 132	5535
Carbon tetrachloride	mg/l	0.0500	0.0445	89	69 - 132	8383
Chlorobenzene	mg/l	0.0500	0.0527	105	81 - 120	3433
Chlorobenzene	mg/l	0.0500	0.0533	107	81 - 120	3433
Chlorobenzene	mg/l	0.0500	0.0533	107	81 - 120	5535
Chlorobenzene	mg/l	0.0500	0.0549	110	81 - 120	5535
Chloroethane	mg/l	0.0500	0.0537	107	65 - 134	3433
Chloroethane	mg/l	0.0500	0.0483	97	65 - 134	3433
Chloroethane	mg/l	0.0500	0.0483	97	65 - 134	5535
Chloroethane	mg/l	0.0500	0.0573	115	65 - 134	5535
Chloroform	mg/l	0.0500	0.0504	101	77 - 125	3433
Chloroform	mg/l	0.0500	0.0512	102	77 - 125	3433
Chloroform	mg/l	0.0500	0.0512	102	77 - 125	5535

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 5
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Chloroform	mg/l	0.0500	0.0527	105	77 - 125	5535
Chloromethane	mg/l	0.0500	0.0472	94	43 - 142	3433
Chloromethane	mg/l	0.0500	0.0316	63	43 - 142	3433
Chloromethane	mg/l	0.0500	0.0316	63	43 - 142	5535
Chloromethane	mg/l	0.0500	0.0525	105	43 - 142	5535
2-Chlorotoluene	mg/l	0.0500	0.0538	108	76 - 126	3433
2-Chlorotoluene	mg/l	0.0500	0.0551	110	76 - 126	3433
2-Chlorotoluene	mg/l	0.0500	0.0551	110	76 - 126	5535
2-Chlorotoluene	mg/l	0.0500	0.0549	110	76 - 126	5535
4-Chlorotoluene	mg/l	0.0500	0.0542	108	79 - 123	3433
4-Chlorotoluene	mg/l	0.0500	0.0557	111	79 - 123	3433
4-Chlorotoluene	mg/l	0.0500	0.0557	111	79 - 123	5535
4-Chlorotoluene	mg/l	0.0500	0.0561	112	79 - 123	5535
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0441	88	64 - 132	3433
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0428	86	64 - 132	3433
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0428	86	64 - 132	5535
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0495	99	64 - 132	5535
Dibromochloromethane	mg/l	0.0500	0.0527	105	78 - 124	3433
Dibromochloromethane	mg/l	0.0500	0.0496	99	78 - 124	3433
Dibromochloromethane	mg/l	0.0500	0.0496	99	78 - 124	5535
Dibromochloromethane	mg/l	0.0500	0.0523	105	78 - 124	5535
1,2-Dibromoethane	mg/l	0.0500	0.0520	104	79 - 126	3433
1,2-Dibromoethane	mg/l	0.0500	0.0518	104	79 - 126	3433
1,2-Dibromoethane	mg/l	0.0500	0.0518	104	79 - 126	5535
1,2-Dibromoethane	mg/l	0.0500	0.0524	105	79 - 126	5535
Dibromomethane	mg/l	0.0500	0.0484	97	75 - 131	3433
Dibromomethane	mg/l	0.0500	0.0490	98	75 - 131	3433
Dibromomethane	mg/l	0.0500	0.0490	98	75 - 131	5535
Dibromomethane	mg/l	0.0500	0.0489	98	75 - 131	5535
1,2-Dichlorobenzene	mg/l	0.0500	0.0518	104	80 - 120	3433
1,2-Dichlorobenzene	mg/l	0.0500	0.0537	107	80 - 120	3433

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 6
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val	Analyzed Val	% Recovery	Target Range	Q.C. Batch
1,2-Dichlorobenzene	mg/l	0.0500	0.0537	107	80 - 120	5535
1,2-Dichlorobenzene	mg/l	0.0500	0.0542	108	80 - 120	5535
1,3-Dichlorobenzene	mg/l	0.0500	0.0517	103	79 - 120	3433
1,3-Dichlorobenzene	mg/l	0.0500	0.0527	105	79 - 120	3433
1,3-Dichlorobenzene	mg/l	0.0500	0.0527	105	79 - 120	5535
1,3-Dichlorobenzene	mg/l	0.0500	0.0532	106	79 - 120	5535
1,4-Dichlorobenzene	mg/l	0.0500	0.0521	104	78 - 118	3433
1,4-Dichlorobenzene	mg/l	0.0500	0 0541	108	78 - 118	3433
1,4-Dichlorobenzene	mg/l	0.0500	0.0541	108	78 - 118	5535
1,4-Dichlorobenzene	mg/l	0.0500	0.0549	110	78 - 118	5535
Dichlorodifluoromethane	mg/l	0.0500	0.0479	96	45 - 149	3433
Dichlorodifluoromethane	mg/l	0.0500	0.0360	72	45 - 149	3433
Dichlorodifluoromethane	mg/l	0.0500	0.0360	72	45 - 149	5535
Dichlorodifluoromethane	mg/l	0.0500	0.0652	130	45 - 149	5535
1,1-Dichloroethane	mg/l	0.0500	0.0521	104	73 - 128	3433
1,1-Dichloroethane	mg/l	0 0500	0.0536	107	73 - 128	3433
1,1-Dichloroethane	mg/l	0.0500	0.0536	107	73 - 128	5535
1,1-Dichloroethane	mg/l	0.0500	0.0519	104	73 - 128	5535
1,2-Dichloroethane	mg/l	0.0500	0.0483	97	71 - 135	3433
1,2-Dichloroethane	mg/l	0.0500	0.0504	101	71 - 135	3433
1,2-Dichloroethane	mg/l	0.0500	0.0504	101	71 - 135	5535
1,2-Dichloroethane	mg/l	0.0500	0.0513	103	71 - 135	5535
1,1-Dichloroethene	mg/l	0.0500	0.0514	103	72 - 128	3433
1,1-Dichloroethene	mg/l	0.0500	0.0509	102	72 - 128	3433
1,1-Dichloroethene	mg/l	0.0500	0.0509	102	72 - 128	5535
1,1-Dichloroethene	mg/l	0.0500	0.0490	98	72 - 128	5535
cis-1,2-Dichloroethene	mg/l	0.0500	0.0520	104	76 - 127	3433
cis-1,2-Dichloroethene	mg/l	0.0500	0.0526	105	76 - 127	3433
cis-1,2-Dichloroethene	mg/l	0.0500	0.0526	105	76 - 127	5535
cis-1,2-Dichloroethene	mg/l	0.0500	0.0529	106	76 - 127	5535
trans-1,2-Dichloroethene	mg/l	0.0500	0.0525	105	71 - 131	3433

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 7
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
trans-1,2-Dichloroethene	mg/l	0.0500	0.0553	111	71 - 131	3433
trans-1,2-Dichloroethene	mg/l	0.0500	0.0553	111	71 - 131	5535
trans-1,2-Dichloroethene	mg/l	0.0500	0.0540	108	71 - 131	5535
1,2-Dichloropropane	mg/l	0 0500	0.0531	106	75 - 127	3433
1,2-Dichloropropane	mg/l	0 0500	0.0539	108	75 - 127	3433
1,2-Dichloropropane	mg/l	0.0500	0.0539	108	75 - 127	5535
1,2-Dichloropropane	mg/l	0.0500	0.0542	108	75 - 127	5535
1,3-Dichloropropane	mg/l	0.0500	0.0525	105	81 - 128	3433
1,3-Dichloropropane	mg/l	0.0500	0.0547	109	81 - 128	3433
1,3-Dichloropropane	mg/l	0.0500	0.0547	109	81 - 128	5535
1,3-Dichloropropane	mg/l	0.0500	0.0556	111	81 - 128	5535
2,2-Dichloropropane	mg/l	0.0500	0.0518	104	45 - 145	3433
2,2-Dichloropropane	mg/l	0.0500	0.0494	99	45 - 145	3433
2,2-Dichloropropane	mg/l	0.0500	0.0494	99	45 - 145	5535
2,2-Dichloropropane	mg/l	0.0500	0.0509	102	45 - 145	5535
1,1-Dichloropropene	mg/l	0.0500	0.0500	100	76 - 127	3433
1,1-Dichloropropene	mg/l	0.0500	0.0493	99	76 - 127	3433
1,1-Dichloropropene	mg/l	0.0500	0.0493	99	76 - 127	5535
1,1-Dichloropropene	mg/l	0.0500	0.0494	99	76 - 127	5535
cis-1,3-Dichloropropene	mg/l	0.0500	0.0523	105	72 - 131	3433
cis-1,3-Dichloropropene	mg/l	0.0500	0.0524	105	72 - 131	3433
cis-1,3-Dichloropropene	mg/l	0.0500	0.0524	105	72 - 131	5535
cis-1,3-Dichloropropene	mg/l	0.0500	0.0533	107	72 - 131	5535
trans-1,3-Dichloropropene	mg/l	0.0500	0.0513	103	69 - 131	3433
trans-1,3-Dichloropropene	mg/l	0.0500	0.0489	98	69 - 131	3433
trans-1,3-Dichloropropene	mg/l	0.0500	0.0489	98	69 - 131	5535
trans-1,3-Dichloropropene	mg/l	0.0500	0.0522	104	69 - 131	5535
Ethylbenzene	mg/l	0.0500	0.0544	109	78 - 125	3433
Ethylbenzene	mg/l	0.0500	0.0550	110	78 - 125	3433
Ethylbenzene	mg/l	0.0500	0.0550	110	78 - 125	5535
Ethylbenzene	mg/l	0.0500	0.0560	112	78 - 125	5535

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 8
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Hexachlorobutadiene	mg/l	0.0500	0.0442	88	59 - 126	3433
Hexachlorobutadiene	mg/l	0.0500	0.0455	91	59 - 126	3433
Hexachlorobutadiene	mg/l	0.0500	0.0455	91	59 - 126	5535
Hexachlorobutadiene	mg/l	0.0500	0.0472	94	59 - 126	5535
2-Hexanone	mg/l	0.250	0.248	99	71 - 142	3433
2-Hexanone	mg/l	0.250	0.246	98	71 - 142	3433
2-Hexanone	mg/l	0.250	0.246	98	71 - 142	5535
2-Hexanone	mg/l	0.250	0.269	108	71 - 142	5535
Isopropylbenzene	mg/l	0.0500	0.0538	108	78 - 123	3433
Isopropylbenzene	mg/l	0.0500	0.0549	110	78 - 123	3433
Isopropylbenzene	mg/l	0 0500	0.0549	110	78 - 123	5535
Isopropylbenzene	mg/l	0.0500	0.0552	110	78 - 123	5535
4-Isopropyltoluene	mg/l	0.0500	0.0521	104	73 - 125	3433
4-Isopropyltoluene	mg/l	0.0500	0.0542	108	73 - 125	3433
4-Isopropyltoluene	mg/l	0.0500	0.0542	108	73 - 125	5535
4-Isopropyltoluene	mg/l	0.0500	0.0554	111	73 - 125	5535
4-Methyl-2-pentanone	mg/l	0.250	0.250	100	71 - 141	3433
4-Methyl-2-pentanone	mg/l	0.250	0.251	100	71 - 141	3433
4-Methyl-2-pentanone	mg/l	0.250	0.251	100	71 - 141	5535
4-Methyl-2-pentanone	mg/l	0.250	0.272	109	71 - 141	5535
Methylene chloride	mg/l	0.0500	0.0578	116	70 - 140	3433
Methylene chloride	mg/l	0.0500	0.0520	104	70 - 140	3433
Methylene chloride	mg/l	0 0500	0.0520	104	70 - 140	5535
Methylene chloride	mg/l	0.0500	0.0490	98	70 - 140	5535
Naphthalene	mg/l	0.0500	0.0515	103	52 - 140	3433
Naphthalene	mg/l	0.0500	0.0509	102	52 - 140	3433
Naphthalene	mg/l	0.0500	0.0509	102	52 - 140	5535
Naphthalene	mg/l	0.0500	0.0549	110	52 - 140	5535
n-Propylbenzene	mg/l	0.0500	0.0544	109	75 - 125	3433
n-Propylbenzene	mg/l	0.0500	0.0566	113	75 - 125	3433
n-Propylbenzene	mg/l	0.0500	0.0566	113	75 - 125	5535

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 9
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
n-Propylbenzene	mg/l	0.0500	0.0568	114	75 - 125	5535
Styrene	mg/l	0.0500	0.0545	109	82 - 122	3433
Styrene	mg/l	0.0500	0.0542	108	82 - 122	3433
Styrene	mg/l	0.0500	0.0542	108	82 - 122	5535
Styrene	mg/l	0.0500	0.0553	111	82 - 122	5535
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0514	103	85 - 123	3433
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0497	99	85 - 123	3433
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0497	99	85 - 123	5535
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0511	102	85 - 123	5535
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0535	107	74 - 133	3433
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0551	110	74 - 133	3433
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0551	110	74 - 133	5535
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0574	115	74 - 133	5535
Tetrachloroethene	mg/l	0.0500	0.0493	99	76 - 123	3433
Tetrachloroethene	mg/l	0 0500	0.0504	101	76 - 123	3433
Tetrachloroethene	mg/l	0.0500	0.0504	101	76 - 123	5535
Tetrachloroethene	mg/l	0.0500	0.0497	99	76 - 123	5535
Toluene	mg/l	0.0500	0.0539	108	78 - 127	3433
Toluene	mg/l	0.0500	0.0542	108	78 - 127	3433
Toluene	mg/l	0.0500	0.0542	108	78 - 127	5535
Toluene	mg/l	0.0500	0.0540	108	78 - 127	5535
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0485	97	59 - 132	3433
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0481	96	59 - 132	3433
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0481	96	59 - 132	5535
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0511	102	59 - 132	5535
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0490	98	60 - 133	3433
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0491	98	60 - 133	3433
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0491	98	60 - 133	5535
1,2,4-Trichlorobenzene	mg/l	0 0500	0.0522	104	60 - 133	5535
1,1,1-Trichloroethane	mg/l	0.0500	0.0476	95	74 - 128	3433
1,1,1-Trichloroethane	mg/l	0 0500	0.0471	94	74 - 128	3433

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 10
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
1,1,1-Trichloroethane	mg/l	0.0500	0.0471	94	74 - 128	5535
1,1,1-Trichloroethane	mg/l	0.0500	0.0472	94	74 - 128	5535
1,1,2-Trichloroethane	mg/l	0.0500	0.0512	102	85 - 125	3433
1,1,2-Trichloroethane	mg/l	0.0500	0.0531	106	85 - 125	3433
1,1,2-Trichloroethane	mg/l	0.0500	0.0531	106	85 - 125	5535
1,1,2-Trichloroethane	mg/l	0.0500	0.0520	104	85 - 125	5535
Trichloroethene	mg/l	0.0500	0.0463	93	78 - 125	3433
Trichloroethene	mg/l	0.0500	0.0451	90	78 - 125	3433
Trichloroethene	mg/l	0.0500	0.0451	90	78 - 125	5535
Trichloroethene	mg/l	0.0500	0.0470	94	78 - 125	5535
1,2,3-Trichloropropane	mg/l	0.0500	0.0502	100	75 - 130	3433
1,2,3-Trichloropropane	mg/l	0.0500	0.0508	102	75 - 130	3433
1,2,3-Trichloropropane	mg/l	0.0500	0.0508	102	75 - 130	5535
1,2,3-Trichloropropane	mg/l	0.0500	0.0542	108	75 - 130	5535
1,2,4-Trimethylbenzene	mg/l	0 0500	0.0529	106	77 - 122	3433
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0546	109	77 - 122	3433
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0546	109	77 - 122	5535
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0552	110	77 - 122	5535
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0530	106	75 - 125	3433
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0548	110	75 - 125	3433
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0548	110	75 - 125	5535
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0555	111	75 - 125	5535
Vinyl chloride	mg/l	0.0500	0.0542	108	61 - 140	3433
Vinyl chloride	mg/l	0.0500	0.0441	88	61 - 140	3433
Vinyl chloride	mg/l	0.0500	0.0441	88	61 - 140	5535
Vinyl chloride	mg/l	0.0500	0.0592	118	61 - 140	5535
Xylenes (Total)	mg/l	0.150	0.160	107	77 - 126	3433
Xylenes (Total)	mg/l	0.150	0.163	109	77 - 126	3433
Xylenes (Total)	mg/l	0.150	0.163	109	77 - 126	5535
Xylenes (Total)	mg/l	0.150	0.165	110	77 - 126	5535
Bromodichloromethane	mg/l	0.0500	0.0478	96	79 - 126	3433

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 11
Laboratory Receipt Date: 1/11/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Bromodichloromethane	mg/l	0 0500	0.0481	96	79 - 126	3433
Bromodichloromethane	mg/l	0.0500	0.0481	96	79 - 126	5535
Bromodichloromethane	mg/l	0.0500	0.0490	98	79 - 126	5535
Trichlorofluoromethane	mg/l	0.0500	0.0475	95	60 - 140	3433
Trichlorofluoromethane	mg/l	0.0500	0.0447	89	60 - 140	3433
Trichlorofluoromethane	mg/l	0.0500	0.0447	89	60 - 140	5535
Trichlorofluoromethane	mg/l	0.0500	0.0522	104	60 - 140	5535
VOA Surr 1,2-DCA-d4	% Rec			96	73 - 133	3433
VOA Surr 1,2-DCA-d4	% Rec			94	73 - 133	3433
VOA Surr 1,2-DCA-d4	% Rec			94	73 - 133	5535
VOA Surr 1,2-DCA-d4	% Rec			98	73 - 133	5535
VOA Surr 1,2-DCA-d4	% Rec			97	73 - 133	8383
VOA Surr Toluene-d8	% Rec			102	80 - 121	3433
VOA Surr Toluene-d8	% Rec			102	80 - 121	3433
VOA Surr Toluene-d8	% Rec			102	80 - 121	5535
VOA Surr Toluene-d8	% Rec			102	80 - 121	5535
VOA Surr Toluene-d8	% Rec			103	80 - 121	8383
VOA Surr, 4-BFB	% Rec			89	80 - 128	3433
VOA Surr, 4-BFB	% Rec			94	80 - 128	3433
VOA Surr, 4-BFB	% Rec			94	80 - 128	5535
VOA Surr, 4-BFB	% Rec			95	80 - 128	5535
VOA Surr, 4-BFB	% Rec			90	80 - 128	8383
VOA Surr, DBFM	% Rec			95	81 - 121	3433
VOA Surr, DBFM	% Rec			93	81 - 121	3433
VOA Surr, DBFM	% Rec			93	81 - 121	5535
VOA Surr, DBFM	% Rec			94	81 - 121	5535
VOA Surr, DBFM	% Rec			95	81 - 121	8383

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 12
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Date Analyzed	Time Analyzed
VOA PARAMETERS					
Acetone	< 0.00470	mg/l	3433	1/13/03	13:12
Acetone	< 0.00470	mg/l	3433	1/14/03	0:28
Acetone	< 0.00470	mg/l	5535	1/14/03	0:28
Acetone	< 0.00470	mg/l	5535	1/14/03	12:49
Benzene	< 0.0005	mg/l	3433	1/13/03	13:12
Benzene	< 0.0005	mg/l	3433	1/14/03	0:28
Benzene	< 0.0005	mg/l	5535	1/14/03	0:28
Benzene	< 0.0005	mg/l	5535	1/14/03	12:49
Bromobenzene	< 0.00030	mg/l	3433	1/13/03	13:12
Bromobenzene	< 0.00030	mg/l	3433	1/14/03	0:28
Bromobenzene	< 0.00030	mg/l	5535	1/14/03	0:28
Bromobenzene	< 0.00030	mg/l	5535	1/14/03	12:49
Bromochloromethane	< 0.00030	mg/l	3433	1/13/03	13:12
Bromochloromethane	< 0.00030	mg/l	3433	1/14/03	0:28
Bromochloromethane	< 0.00030	mg/l	5535	1/14/03	0:28
Bromochloromethane	< 0.00030	mg/l	5535	1/14/03	12:49
Bromoform	< 0.00060	mg/l	3433	1/13/03	13:12
Bromoform	< 0.00060	mg/l	3433	1/14/03	0:28
Bromoform	< 0.00060	mg/l	5535	1/14/03	0:28
Bromoform	< 0.00060	mg/l	5535	1/14/03	12:49
Bromomethane	< 0.00060	mg/l	3433	1/13/03	13:12
Bromomethane	< 0.00060	mg/l	3433	1/14/03	0:28
Bromomethane	< 0.00060	mg/l	5535	1/14/03	0:28
Bromomethane	< 0.00060	mg/l	5535	1/14/03	12:49
2-Butanone	< 0.00310	mg/l	3433	1/13/03	13:12
2-Butanone	< 0.00310	mg/l	3433	1/14/03	0:28
2-Butanone	< 0.00310	mg/l	5535	1/14/03	0:28
2-Butanone	< 0.00310	mg/l	5535	1/14/03	12:49
n-Butylbenzene	< 0.00010	mg/l	3433	1/13/03	13:12

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 13
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
n-Butylbenzene	< 0 00010	mg/l	3433	1/14/03	0:28
n-Butylbenzene	< 0.00010	mg/l	5535	1/14/03	0:28
n-Butylbenzene	< 0.00010	mg/l	5535	1/14/03	12:49
sec-Butylbenzene	< 0.00030	mg/l	3433	1/13/03	13:12
sec-Butylbenzene	< 0.00030	mg/l	3433	1/14/03	0:28
sec-Butylbenzene	< 0.00030	mg/l	5535	1/14/03	0:28
sec-Butylbenzene	< 0.00030	mg/l	5535	1/14/03	12:49
t-Butylbenzene	< 0.00030	mg/l	3433	1/13/03	13:12
t-Butylbenzene	< 0.00030	mg/l	3433	1/14/03	0:28
t-Butylbenzene	< 0.00030	mg/l	5535	1/14/03	0:28
t-Butylbenzene	< 0.00030	mg/l	5535	1/14/03	12:49
Carbon disulfide	< 0.00020	mg/l	3433	1/13/03	13:12
Carbon disulfide	< 0.00020	mg/l	3433	1/14/03	0:28
Carbon disulfide	< 0.00020	mg/l	5535	1/14/03	0:28
Carbon disulfide	< 0.00020	mg/l	5535	1/14/03	12:49
Carbon tetrachloride	< 0.00040	mg/l	3433	1/13/03	13:12
Carbon tetrachloride	< 0.00040	mg/l	3433	1/14/03	0:28
Carbon tetrachloride	< 0.00040	mg/l	5535	1/14/03	0:28
Carbon tetrachloride	< 0.00040	mg/l	5535	1/14/03	12:49
Carbon tetrachloride	< 0.00040	mg/l	8383	1/15/03	13:35
Chlorobenzene	< 0 00020	mg/l	3433	1/13/03	13:12
Chlorobenzene	< 0.00020	mg/l	3433	1/14/03	0:28
Chlorobenzene	< 0.00020	mg/l	5535	1/14/03	0:28
Chlorobenzene	< 0.00020	mg/l	5535	1/14/03	12:49
Chloroethane	< 0.00100	mg/l	3433	1/13/03	13:12
Chloroethane	< 0.00100	mg/l	3433	1/14/03	0:28
Chloroethane	< 0.00100	mg/l	5535	1/14/03	0:28
Chloroethane	< 0.00100	mg/l	5535	1/14/03	12:49
Chloroform	< 0.00080	mg/l	3433	1/13/03	13:12
Chloroform	< 0.00080	mg/l	3433	1/14/03	0:28
Chloroform	< 0.00080	mg/l	5535	1/14/03	0:28

Project QC continued .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 14
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
Chloroform	< 0.00080	mg/l	5535	1/14/03	12:49
Chloromethane	< 0.00070	mg/l	3433	1/13/03	13:12
Chloromethane	< 0.00070	mg/l	3433	1/14/03	0:28
Chloromethane	< 0.00070	mg/l	5535	1/14/03	0:28
Chloromethane	< 0.00070	mg/l	5535	1/14/03	12:49
2-Chlorotoluene	< 0.00040	mg/l	3433	1/13/03	13:12
2-Chlorotoluene	< 0 00040	mg/l	3433	1/14/03	0:28
2-Chlorotoluene	< 0.00040	mg/l	5535	1/14/03	0:28
2-Chlorotoluene	< 0 00040	mg/l	5535	1/14/03	12:49
4-Chlorotoluene	< 0.00050	mg/l	3433	1/13/03	13:12
4-Chlorotoluene	< 0.00050	mg/l	3433	1/14/03	0:28
4-Chlorotoluene	< 0.00050	mg/l	5535	1/14/03	0:28
4-Chlorotoluene	< 0.00050	mg/l	5535	1/14/03	12:49
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	3433	1/13/03	13:12
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	3433	1/14/03	0:28
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	5535	1/14/03	0:28
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	5535	1/14/03	12:49
Dibromochloromethane	< 0.00050	mg/l	3433	1/13/03	13:12
Dibromochloromethane	< 0.00050	mg/l	3433	1/14/03	0:28
Dibromochloromethane	< 0.00050	mg/l	5535	1/14/03	0:28
Dibromochloromethane	< 0.00050	mg/l	5535	1/14/03	12:49
1,2-Dibromoethane	< 0.00040	mg/l	3433	1/13/03	13:12
1,2-Dibromoethane	< 0.00040	mg/l	3433	1/14/03	0:28
1,2-Dibromoethane	< 0.00040	mg/l	5535	1/14/03	0:28
1,2-Dibromoethane	< 0.00040	mg/l	5535	1/14/03	12:49
Dibromomethane	< 0.00090	mg/l	3433	1/13/03	13:12
Dibromomethane	< 0.00090	mg/l	3433	1/14/03	0:28
Dibromomethane	< 0.00090	mg/l	5535	1/14/03	0:28
Dibromomethane	< 0.00090	mg/l	5535	1/14/03	12:49
1,2-Dichlorobenzene	< 0.00020	mg/l	3433	1/13/03	13:12
1,2-Dichlorobenzene	< 0.00020	mg/l	3433	1/14/03	0:28

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 15
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
1,2-Dichlorobenzene	< 0.00020	mg/l	5535	1/14/03	0:28
1,2-Dichlorobenzene	< 0 00020	mg/l	5535	1/14/03	12:49
1,3-Dichlorobenzene	< 0.00030	mg/l	3433	1/13/03	13:12
1,3-Dichlorobenzene	< 0.00030	mg/l	3433	1/14/03	0:28
1,3-Dichlorobenzene	< 0.00030	mg/l	5535	1/14/03	0:28
1,3-Dichlorobenzene	< 0.00030	mg/l	5535	1/14/03	12:49
1,4-Dichlorobenzene	< 0.00040	mg/l	3433	1/13/03	13:12
1,4-Dichlorobenzene	< 0.00040	mg/l	3433	1/14/03	0:28
1,4-Dichlorobenzene	< 0.00040	mg/l	5535	1/14/03	0:28
1,4-Dichlorobenzene	< 0.00040	mg/l	5535	1/14/03	12:49
Dichlorodifluoromethane	< 0.00050	mg/l	3433	1/13/03	13:12
Dichlorodifluoromethane	< 0.00050	mg/l	3433	1/14/03	0:28
Dichlorodifluoromethane	< 0.00050	mg/l	5535	1/14/03	0:28
Dichlorodifluoromethane	< 0 00050	mg/l	5535	1/14/03	12:49
1,1-Dichloroethane	< 0.00020	mg/l	3433	1/13/03	13:12
1,1-Dichloroethane	< 0 00020	mg/l	3433	1/14/03	0:28
1,1-Dichloroethane	< 0.00020	mg/l	5535	1/14/03	0:28
1,1-Dichloroethane	< 0.00020	mg/l	5535	1/14/03	12:49
1,2-Dichloroethane	< 0 00060	mg/l	3433	1/13/03	13:12
1,2-Dichloroethane	< 0.00060	mg/l	3433	1/14/03	0:28
1,2-Dichloroethane	< 0.00060	mg/l	5535	1/14/03	0:28
1,2-Dichloroethane	< 0.00060	mg/l	5535	1/14/03	12:49
1,1-Dichloroethene	< 0.00060	mg/l	3433	1/13/03	13:12
1,1-Dichloroethene	< 0.00060	mg/l	3433	1/14/03	0:28
1,1-Dichloroethene	< 0.00060	mg/l	5535	1/14/03	0:28
1,1-Dichloroethene	< 0.00060	mg/l	5535	1/14/03	12:49
cis-1,2-Dichloroethene	< 0.00060	mg/l	3433	1/13/03	13:12
cis-1,2-Dichloroethene	< 0.00060	mg/l	3433	1/14/03	0:28
cis-1,2-Dichloroethene	< 0.00060	mg/l	5535	1/14/03	0:28
cis-1,2-Dichloroethene	< 0.00060	mg/l	5535	1/14/03	12:49
trans-1,2-Dichloroethene	< 0.00050	mg/l	3433	1/13/03	13:12

Project QC continued . . .

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 16
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
trans-1,2-Dichloroethene	< 0.00050	mg/l	3433	1/14/03	0:28
trans-1,2-Dichloroethene	< 0.00050	mg/l	5535	1/14/03	0:28
trans-1,2-Dichloroethene	< 0.00050	mg/l	5535	1/14/03	12:49
1,2-Dichloropropane	< 0.00040	mg/l	3433	1/13/03	13:12
1,2-Dichloropropane	< 0.00040	mg/l	3433	1/14/03	0:28
1,2-Dichloropropane	< 0.00040	mg/l	5535	1/14/03	0:28
1,2-Dichloropropane	< 0.00040	mg/l	5535	1/14/03	12:49
1,3-Dichloropropane	< 0.00040	mg/l	3433	1/13/03	13:12
1,3-Dichloropropane	< 0.00040	mg/l	3433	1/14/03	0:28
1,3-Dichloropropane	< 0.00040	mg/l	5535	1/14/03	0:28
1,3-Dichloropropane	< 0.00040	mg/l	5535	1/14/03	12:49
2,2-Dichloropropane	< 0.00040	mg/l	3433	1/13/03	13:12
2,2-Dichloropropane	< 0.00040	mg/l	3433	1/14/03	0:28
2,2-Dichloropropane	< 0.00040	mg/l	5535	1/14/03	0:28
2,2-Dichloropropane	< 0.00040	mg/l	5535	1/14/03	12:49
1,1-Dichloropropene	< 0.00050	mg/l	3433	1/13/03	13:12
1,1-Dichloropropene	< 0.00050	mg/l	3433	1/14/03	0:28
1,1-Dichloropropene	< 0.00050	mg/l	5535	1/14/03	0:28
1,1-Dichloropropene	< 0.00050	mg/l	5535	1/14/03	12:49
cis-1,3-Dichloropropene	< 0.00030	mg/l	3433	1/13/03	13:12
cis-1,3-Dichloropropene	< 0.00030	mg/l	3433	1/14/03	0:28
cis-1,3-Dichloropropene	< 0.00030	mg/l	5535	1/14/03	0:28
cis-1,3-Dichloropropene	< 0.00030	mg/l	5535	1/14/03	12:49
trans-1,3-Dichloropropene	< 0.00050	mg/l	3433	1/13/03	13:12
trans-1,3-Dichloropropene	< 0.00050	mg/l	3433	1/14/03	0:28
trans-1,3-Dichloropropene	< 0.00050	mg/l	5535	1/14/03	0:28
trans-1,3-Dichloropropene	< 0.00050	mg/l	5535	1/14/03	12:49
Ethylbenzene	< 0.0003	mg/l	3433	1/13/03	13:12
Ethylbenzene	< 0.0003	mg/l	3433	1/14/03	0:28
Ethylbenzene	< 0.0003	mg/l	5535	1/14/03	0:28
Ethylbenzene	< 0.0003	mg/l	5535	1/14/03	12:49

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 17
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
Hexachlorobutadiene	< 0.00080	mg/l	3433	1/13/03	13:12
Hexachlorobutadiene	< 0.00080	mg/l	3433	1/14/03	0:28
Hexachlorobutadiene	< 0.00080	mg/l	5535	1/14/03	0:28
Hexachlorobutadiene	< 0.00080	mg/l	5535	1/14/03	12:49
2-Hexanone	< 0.00420	mg/l	3433	1/13/03	13:12
2-Hexanone	< 0.00420	mg/l	3433	1/14/03	0:28
2-Hexanone	< 0.00420	mg/l	5535	1/14/03	0:28
2-Hexanone	< 0.00420	mg/l	5535	1/14/03	12:49
Isopropylbenzene	< 0.00040	mg/l	3433	1/13/03	13:12
Isopropylbenzene	< 0.00040	mg/l	3433	1/14/03	0:28
Isopropylbenzene	< 0.00040	mg/l	5535	1/14/03	0:28
Isopropylbenzene	< 0.00040	mg/l	5535	1/14/03	12:49
4-Isopropyltoluene	< 0.00060	mg/l	3433	1/13/03	13:12
4-Isopropyltoluene	< 0.00060	mg/l	3433	1/14/03	0:28
4-Isopropyltoluene	< 0.00060	mg/l	5535	1/14/03	0:28
4-Isopropyltoluene	< 0.00060	mg/l	5535	1/14/03	12:49
4-Methyl-2-pentanone	< 0.00490	mg/l	3433	1/13/03	13:12
4-Methyl-2-pentanone	< 0.00490	mg/l	3433	1/14/03	0:28
4-Methyl-2-pentanone	< 0.00490	mg/l	5535	1/14/03	0:28
4-Methyl-2-pentanone	< 0.00490	mg/l	5535	1/14/03	12:49
Methylene chloride	< 0.00240	mg/l	3433	1/13/03	13:12
Methylene chloride	< 0.00240	mg/l	3433	1/14/03	0:28
Methylene chloride	< 0.00240	mg/l	5535	1/14/03	0:28
Methylene chloride	< 0.00240	mg/l	5535	1/14/03	12:49
Naphthalene	< 0.00120	mg/l	3433	1/13/03	13:12
Naphthalene	< 0.00120	mg/l	3433	1/14/03	0:28
Naphthalene	< 0.00120	mg/l	5535	1/14/03	0:28
Naphthalene	< 0.00120	mg/l	5535	1/14/03	12:49
n-Propylbenzene	< 0.00030	mg/l	3433	1/13/03	13:12
n-Propylbenzene	< 0.00030	mg/l	3433	1/14/03	0:28
n-Propylbenzene	< 0.00030	mg/l	5535	1/14/03	0:28

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 18
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
n-Propylbenzene	< 0.00030	mg/l	5535	1/14/03	12:49
Styrene	< 0.00040	mg/l	3433	1/13/03	13:12
Styrene	< 0.00040	mg/l	3433	1/14/03	0:28
Styrene	< 0.00040	mg/l	5535	1/14/03	0:28
Styrene	< 0.00040	mg/l	5535	1/14/03	12:49
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	3433	1/13/03	13:12
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	3433	1/14/03	0:28
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	5535	1/14/03	0:28
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	5535	1/14/03	12:49
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	3433	1/13/03	13:12
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	3433	1/14/03	0:28
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	5535	1/14/03	0:28
1,1,2,2-Tetrachloroethane	< 0 00040	mg/l	5535	1/14/03	12:49
Tetrachloroethene	< 0.00040	mg/l	3433	1/13/03	13:12
Tetrachloroethene	< 0.00040	mg/l	3433	1/14/03	0:28
Tetrachloroethene	< 0.00040	mg/l	5535	1/14/03	0:28
Tetrachloroethene	< 0.00040	mg/l	5535	1/14/03	12:49
Toluene	< 0.0006	mg/l	3433	1/13/03	13:12
Toluene	< 0.0006	mg/l	3433	1/14/03	0:28
Toluene	< 0.0006	mg/l	5535	1/14/03	0:28
Toluene	< 0 0006	mg/l	5535	1/14/03	12:49
1,2,3-Trichlorobenzene	< 0.00100	mg/l	3433	1/13/03	13:12
1,2,3-Trichlorobenzene	< 0.00100	mg/l	3433	1/14/03	0:28
1,2,3-Trichlorobenzene	< 0.00100	mg/l	5535	1/14/03	0:28
1,2,3-Trichlorobenzene	< 0.00100	mg/l	5535	1/14/03	12:49
1,2,4-Trichlorobenzene	< 0.00060	mg/l	3433	1/13/03	13:12
1,2,4-Trichlorobenzene	< 0.00060	mg/l	3433	1/14/03	0:28
1,2,4-Trichlorobenzene	< 0.00060	mg/l	5535	1/14/03	0:28
1,2,4-Trichlorobenzene	< 0.00060	mg/l	5535	1/14/03	12:49
1,1,1-Trichloroethane	< 0.00070	mg/l	3433	1/13/03	13:12
1,1,1-Trichloroethane	< 0.00070	mg/l	3433	1/14/03	0:28

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 19
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
1,1,1-Trichloroethane	< 0.00070	mg/l	5535	1/14/03	0:28
1,1,1-Trichloroethane	< 0.00070	mg/l	5535	1/14/03	12:49
1,1,2-Trichloroethane	< 0.00040	mg/l	3433	1/13/03	13:12
1,1,2-Trichloroethane	< 0.00040	mg/l	3433	1/14/03	0:28
1,1,2-Trichloroethane	< 0.00040	mg/l	5535	1/14/03	0:28
1,1,2-Trichloroethane	< 0.00040	mg/l	5535	1/14/03	12:49
Trichloroethene	< 0.00040	mg/l	3433	1/13/03	13:12
Trichloroethene	< 0.00040	mg/l	3433	1/14/03	0:28
Trichloroethene	< 0.00040	mg/l	5535	1/14/03	0:28
Trichloroethene	< 0.00040	mg/l	5535	1/14/03	12:49
1,2,3-Trichloropropane	< 0.00060	mg/l	3433	1/13/03	13:12
1,2,3-Trichloropropane	< 0.00060	mg/l	3433	1/14/03	0:28
1,2,3-Trichloropropane	< 0.00060	mg/l	5535	1/14/03	0:28
1,2,3-Trichloropropane	< 0.00060	mg/l	5535	1/14/03	12:49
1,2,4-Trimethylbenzene	< 0.0003	mg/l	3433	1/13/03	13:12
1,2,4-Trimethylbenzene	< 0.0003	mg/l	3433	1/14/03	0:28
1,2,4-Trimethylbenzene	< 0.0003	mg/l	5535	1/14/03	0:28
1,2,4-Trimethylbenzene	< 0.0003	mg/l	5535	1/14/03	12:49
1,3,5-Trimethylbenzene	< 0.00100	mg/l	3433	1/13/03	13:12
1,3,5-Trimethylbenzene	< 0.00100	mg/l	3433	1/14/03	0:28
1,3,5-Trimethylbenzene	< 0.00100	mg/l	5535	1/14/03	0:28
1,3,5-Trimethylbenzene	< 0.00100	mg/l	5535	1/14/03	12:49
Vinyl chloride	< 0.00050	mg/l	3433	1/13/03	13:12
Vinyl chloride	< 0.00050	mg/l	3433	1/14/03	0:28
Vinyl chloride	< 0.00050	mg/l	5535	1/14/03	0:28
Vinyl chloride	< 0.00050	mg/l	5535	1/14/03	12:49
Xylenes (Total)	< 0.0009	mg/l	3433	1/13/03	13:12
Xylenes (Total)	< 0.0009	mg/l	3433	1/14/03	0:28
Xylenes (Total)	< 0.0009	mg/l	5535	1/14/03	0:28
Xylenes (Total)	< 0.0009	mg/l	5535	1/14/03	12:49
Bromodichloromethane	< 0.00030	mg/l	3433	1/13/03	13:12

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 20
Laboratory Receipt Date: 1/11/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
Bromodichloromethane	< 0.00030	mg/l	3433	1/14/03	0:28
Bromodichloromethane	< 0.00030	mg/l	5535	1/14/03	0:28
Bromodichloromethane	< 0.00030	mg/l	5535	1/14/03	12:49
Trichlorofluoromethane	< 0.00040	mg/l	3433	1/13/03	13:12
Trichlorofluoromethane	< 0.00040	mg/l	3433	1/14/03	0:28
Trichlorofluoromethane	< 0.00040	mg/l	5535	1/14/03	0:28
Trichlorofluoromethane	< 0.00040	mg/l	5535	1/14/03	12:49
VOA Surr 1,2-DCA-d4	95.	% Rec	3433	1/13/03	13:12
VOA Surr 1,2-DCA-d4	98.	% Rec	3433	1/14/03	0:28
VOA Surr 1,2-DCA-d4	98.	% Rec	5535	1/14/03	0:28
VOA Surr 1,2-DCA-d4	99.	% Rec	5535	1/14/03	12:49
VOA Surr 1,2-DCA-d4	96.	% Rec	8383	1/15/03	13:35
VOA Surr Toluene-d8	102.	% Rec	3433	1/13/03	13:12
VOA Surr Toluene-d8	100.	% Rec	3433	1/14/03	0:28
VOA Surr Toluene-d8	100.	% Rec	5535	1/14/03	0:28
VOA Surr Toluene-d8	102.	% Rec	5535	1/14/03	12:49
VOA Surr Toluene-d8	103	% Rec	8383	1/15/03	13:35
VOA Surr, 4-BFB	93.	% Rec	3433	1/13/03	13:12
VOA Surr, 4-BFB	94	% Rec	3433	1/14/03	0.28
VOA Surr, 4-BFB	94.	% Rec	5535	1/14/03	0:28
VOA Surr, 4-BFB	92.	% Rec	5535	1/14/03	12:49
VOA Surr, 4-BFB	91.	% Rec	8383	1/15/03	13:35
VOA Surr, DBFM	94	% Rec	3433	1/13/03	13:12
VOA Surr, DBFM	95.	% Rec	3433	1/14/03	0:28
VOA Surr, DBFM	95.	% Rec	5535	1/14/03	0:28
VOA Surr, DBFM	92.	% Rec	5535	1/14/03	12:49
VOA Surr, DBFM	94.	% Rec	8383	1/15/03	13:35

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: 51153.02.11A03
Project Name: GARVEY GRAIN SITE/NDEQ
Page: 21
Laboratory Receipt Date: 1/11/03

= Value outside Laboratory historical or method prescribed QC limits.

End of Report for Project 316225

TestAmerica
INCORPORATED

1/23/03

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST
LENEXA, KS 66214

This report includes the analytical certificates of analysis for all samples listed below. These samples relate to your project S1153.02.11A.03 GARVEY GRAIN SITE. The Laboratory Project number is 316708
An executed copy of the chain of custody, the project quality control data, and the sample receipt form are also included as an addendum to this report.

Sample Identification	Lab Number	Collection Date
122	03-A6048	1/13/03
122 FD	03-A6049	1/13/03
123	03-A6050	1/13/03
124	03-A6051	1/13/03
125	03-A6052	1/13/03
126 MS/MSD	03-A6053	1/13/03
127	03-A6054	1/14/03
128	03-A6055	1/14/03
129	03-A6056	1/14/03
129 FD	03-A6057	1/14/03
130	03-A6058	1/14/03
131	03-A6059	1/14/03
132	03-A6060	1/14/03
133	03-A6061	1/14/03
134	03-A6062	1/14/03
135	03-A6063	1/14/03

TestAmerica
INCORPORATED

Sample Identification	Lab Number	Collection Date

These results relate only to the items tested.
This report shall not be reproduced except in full and with permission of the laboratory.

Report Approved By: Roxanne L. Connor Report Date: 1/23/03

Paul E. Lane, Jr., Lab Director
Michael H. Dunn, M.S., Technical Director
Johnny A. Mitchell, Dir. Technical Serv.
Eric S. Smith, Assistant Technical Director
Roxanne L. Connor, Technical Services
Gail A. Lage, Technical Serv.
Glenn L. Norton, Technical Serv.
Kelly S. Comstock, Technical Serv.
Pamela A. Langford, Technical Serv.

US EPA ARCHIVE DOCUMENT

TestAmerica INCORPORATED

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Phone: 615-726-0177
Fax: 615-726-3404

316708

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?
Compliance Monitoring _____

Client Name: Tetra Tech EM Inc. Client #: 8164
Address: 8030 Flint St.
City/State/Zip Code: Lenexa, KS 66214
Project Manager: Tom O'Connor
Telephone Number: 402-486-3710 Fax: 402-486-3710
Sampler Name (Print Name): Adam Elliott
Sampler Signature: Adam R Elliott

Project Name: Garvey Grain Site
Project #: 51153.02.11A.03
Site/Location ID: Hastings State: NE
Report To:
Invoice To:
Quote #: PO#:

TAT: X Standard; ___ Rush (surcharges may apply)
Date Needed: _____
Fax Results: (Y) N

QC Deliverables: ___ None; ___ Level 2 (Batch QC); ___ Level 3; ___ Level 4; Other: _____

SAMPLE ID	Date Sampled	Time Sampled	G = Grab, C = Composite	Field Filtered	Matrix: SL - Sludge, DW - Drinking Water, GW - Groundwater, S - Soil/Solid, WW - Wastewater, Specify Other	Preservation & # of Containers: HNO_3	HCl	NaOH	H_2SO_4	Methanol	None	Other (Specify) TCL	Analyze For: VOCs by 8260B									QC Deliverables	REMARKS
122	4/13/03	1135	G		DW		✓					✓	✓					6048					
122 FD	4/13/03	1135																049					
123		1325																050					
124		1410																051					
125		1530																052					
126 (see note)	4/13/03	1605																053					*Note: Collected triple volume for MS/MSD - 126 MS/MSD.
127	4/14/03	0845																054					
128		0930																055					
129		0940																056					
129 FD	4/14/03	0940	G		DW		✓					✓	✓					1057					

Special Instructions:

LABORATORY COMMENTS:
Init Lab Temp:
Rec Lab Temp:
Custody Seals: Y N N/A
Bottles Supplied by Test America: Y N
Method of Shipment:

Relinquished By	Date	Time	Received By	Date	Time
Adam R Elliott	4/16/03	1135			
			Received By	4/16/03	9:10

US EPA ARCHIVE DOCUMENT

TestAmerica INCORPORATED

Nashville Division
2960 Foster Creighton
Nashville, TN 37204
Phone: 615-726-0177
Fax: 615-726-3404

316708

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?
Compliance Monitoring ____

Client Name: Tetra Tech EM Inc. Client #: 8164
Address: 8030 Flint St.
City/State/Zip Code: Lenexa, KS 66214
Project Manager: Tom O'Connor
Telephone Number: 402-486-3710 Fax: 402-486-3710
Sampler Name. (Print Name): Adam Elliott
Sampler Signature: Adam R Elliott

Project Name: Garvey Gram Site
Project #: 81153.02.11A.03
Site/Location ID: Hastings State: NE
Report To:
Invoice To
Quote #: PO#:

TAT
X Standard
___ Rush (surcharges may apply)
Date Needed: ____
Fax Results: (Y) N

SAMPLE ID	Date Sampled	Time Sampled	G = Grab, C = Composite	Field Filtered	Matrix: SL - Sludge, DW - Drinking Water, GW - Groundwater, S - Soil/Solid, WW - Wastewater, Specify Other	Preservation & # of Containers: HNO_3	HCl	NaOH	H_2SO_4	Methanol	None	Other (Specify)	Analyze For: VOCs by 8260B	QC Deliverables: None / Level 2 (Batch QC) / Level 3 / Level 4 / Other	REMARKS
130	1/14/03	1005	G		DW		✓					✓	✓		6058
131	"	1050	"		"		"					"	"		059
132	"	1105	"		"		"					"	"		060
133	"	1120	"		"		"					"	"		061
134	"	1135	"		"		"					"	"		062
135	1/14/03	1415	G		DW		✓					✓	✓		063
Trip Blank	—	—	—		—		—					—	—		

Special Instructions:

LABORATORY COMMENTS:
Init Lab Temp:
Rec Lab Temp:
Custody Seals: Y N N/A
Bottles Supplied by Test America: Y N
Method of Shipment:

Relinquished By	Date	Time	Received By	Date	Time
Adam R Elliott	01/15/03	1135			
			Cerg	1/16/03	9:20

TESTAMERICA,INC.-NASHVILLE

COOLER RECEIPT FORM

Client: Tetra Tech EMI BC# 316708

Cooler Received On: 1/16/03 And Opened On: 1/16/03 By: SHANE GAMBILL

Shane Gambill
(Signature)

1. Temperature of Cooler when opened 1.0 Degrees Celsius
2. Were custody seals on outside of cooler?.....(YES) NO N/A
   a. If yes, how many, what kind and where: FRONT/BACK/SIDE 1/2/3/4
   b. Were the seals intact, signed, and dated correctly?.....YES NO (N/A)
3. Were custody seals on containers and intact?.....NO YES (N/A)
4. Were custody papers inside cooler?.....(YES) NO N/A
5. Were custody papers properly filled out (ink,signed,etc)?.....(YES) NO N/A
6. Did you sign the custody papers in the appropriate place?.....(YES) NO N/A
7. What kind of packing material used? (Bubblewrap) Peanuts Vermiculite Other None
8. Was sufficient ice used (if appropriate)?.....(YES) NO N/A
9. Did all bottles arrive in good condition(unbroken)?.....(YES) NO N/A
10. Were all bottle labels complete (#,date,signed,pres,etc)?.....(YES) NO N/A
11. Did all bottle labels and tags agree with custody papers?.....(YES) NO N/A
12. Were correct bottles used for the analysis requested?.....(YES) NO N/A
13. a. Were VOA vials received?.....(YES) NO N/A
    b. Was there any observable head space present in any VOA vial?.....(NO) YES N/A
14. Was sufficient amount of sample sent in each bottle?.....(YES) NO N/A
15. Were correct preservatives used?.....(YES) NO N/A
    If not, record standard ID of preservative used here_____
16. Was residual chlorine present?.....NO YES (N/A)
17. Corrective action taken, if necessary:

    See attached for resolution

TestAmerica, Inc.

Fax

To: Dave Hackey	From: Andi Jones
Fax #: 913-894-42945	Pages: 2
Phone:	Date: 2/5/03
Re: Nonconformance	CC:

• Comments:

Please add this to Project # 316708

This material is intended only for the use of the individual(s) or entity to whom it is addressed, and may contain information that is privileged and confidential. If you are not the intended recipient, or the employee or agent responsible for delivering this material to the intended recipient, you are hereby notified that any dissemination, distribution or copying of this FAX is strictly prohibited. If you have received this communication in error, please notify us immediately by FAX or by phone (800-765-0980)

SAMPLE NONCONFORMANCE/COC REVISION FORM

TestAmerica
Nashville Division

6048 - 6063

DATE RECEIVED: 1/16/03 ACCT NO.: 8164

SDG NUMBER: 316708 COMPANY NAME: Tetra Tech

Relinquished by:	Date/Time:	Received by:	Date/Time
[illegible]	1/16/03 9:12	[illegible]	2/[illegible]/03 950
Relinquished by:	Date/Time:	Received by:	Date/Time:
AJ	2/5/03 1034	[illegible]	2/5/03 1157
Relinquished by:	Date/Time:	Received by:	Date/Time:

NONCONFORMANCE ISSUE(S):

OIL & GREASE METHOD?	METALS LIST?
TPH METHOD?	TCLP WHAT?
EDB METHOD?	HERB LIST- LONG OR SHORT?
NEED LIST OF COMPOUNDS?	RUN SOILS BY 8260 INSTEAD OF 8021?
TEMPERATURE UPON RECEIPT?	SATURDAY DELIVERY MARKED?
ICE -- OR-- NO ICE?	SAMPLES TO BE SUBCONTRACTED?
NO COC - PLEASE FAX	NO ANALYSIS REQUESTED?
DOCUMENTATION LEVEL?	OUT OF HOLDING TIME -- TEST:

OTHER: Did not receive T.P.

RESOLUTION: Client notified

PERSON CONTACTED	DATE/TIME	VIA E-MAIL or VOICEMAIL	NOTES AND/OR COMMENTS:
Angela Suarez	2/4 954	left VM	
David Hulley	2/5 1034	Del above	

Revised 12/9/02

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6048
Sample ID: 122
Sample Type: Ground water
Site ID:

Date Collected: 1/13/03
Time Collected: 11:35
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	2:42	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	2:42	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	2:42	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Carbon tetrachloride	0.177	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Chloromethane	ND	mg/l	0 00100	1	1/21/03	2:42	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	2:42	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6048
Sample ID: 122
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	2:42	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	2:42	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	2:42	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	2:42	C. Wani	8260B	937
Naphthalene	ND	mg/l	0 00500	1	1/21/03	2:42	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	2:42	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0 00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	2:42	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	2:42	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6048
Sample ID: 122
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	2:42	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	104.	73. - 133.
VOA Surr Toluene-d8	104.	80. - 121.
VOA Surr, 4-BFB	114.	80. - 126.
VOA Surr, DBFM	95.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6049
Sample ID: 122 FD
Sample Type: Ground water
Site ID:

Date Collected: 1/13/03
Time Collected: 11:35
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	3:08	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	3:08	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	3:08	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Carbon tetrachloride	0.176	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	3:08	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6049
Sample ID: 122 FD
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0 0010	1	1/21/03	3:08	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	3:08	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	3:08	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	3:08	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	3:08	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	3:08	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0 0010	1	1/21/03	3:08	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0 00100	1	1/21/03	3:08	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	3:08	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6049
Sample ID: 122 FD
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	3:08	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	102.	73. - 133.
VOA Surr Toluene-d8	105.	80. - 121.
VOA Surr, 4-BFB	109.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit
E = Estimated Value above the calibration limit of the instrument
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6050
Sample ID: 123
Sample Type: Ground water
Site ID:

Date Collected: 1/13/03
Time Collected: 13:25
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	3:34	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	3:34	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	3:34	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	3:34	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	3.34	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6050
Sample ID: 123
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	3:34	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	3:34	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	3:34	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	3:34	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	3:34	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	3:34	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	3:34	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	3:34	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937

Sample report continued . . .

ANALYTICAL REPORT

Laboratory Number: 03-A6050
Sample ID: 123
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	3:34	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	106.	73. - 133.
VOA Surr Toluene-d8	105.	80. - 121.
VOA Surr, 4-BFB	108.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6051
Sample ID: 124
Sample Type: Ground water
Site ID:

Date Collected: 1/13/03
Time Collected: 14:10
Date Received: 1/16/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	4:00	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	4:00	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	4:00	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Carbon tetrachloride	0.362	mg/l	0.0100	10	1/22/03	9:22	C. Wani	8260B	574
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	4:00	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6051
Sample ID: 124
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	4:00	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	4:00	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	4:00	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0 00250	1	1/21/03	4:00	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	4:00	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	4:00	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0 00100	1	1/21/03	4:00	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	4:00	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	4:00	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6051
Sample ID: 124
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	4:00	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	90.	73. - 133.
VOA Surr Toluene-d8	105.	80. - 121.
VOA Surr, 4-BFB	110.	80. - 128.
VOA Surr, DBFM	89.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6052
Sample ID: 125
Sample Type: Ground water
Site ID:

Date Collected: 1/13/03
Time Collected: 15:30
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	4:25	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	4:25	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	4:25	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	4:25	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6052
Sample ID: 125
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	4:25	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	4:25	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	4:25	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	4:25	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	4:25	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	4:25	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	4:25	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	4:25	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	4:25	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6052
Sample ID: 125
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0 00100	1	1/21/03	4:25	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	104.	73. - 133.
VOA Surr Toluene-d8	106.	80. - 121.
VOA Surr, 4-BFB	105.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6053
Sample ID: 126 MS/MSD
Sample Type: Ground water
Site ID:

Date Collected: 1/13/03
Time Collected: 16:05
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	8:44	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	8:44	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
2-Butanone	ND	mg/l	0 0250	1	1/21/03	8:44	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	8:44	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6053
Sample ID: 126 MS/MSD
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	8:44	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	8:44	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	8:44	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	8:44	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	8:44	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0 00100	1	1/21/03	8:44	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	8:44	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	8:44	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0 0010	1	1/21/03	8:44	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6053
Sample ID: 126 MS/MSD
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	8:44	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	98.	73. - 133.
VOA Surr Toluene-d8	104.	80. - 121.
VOA Surr, 4-BFB	105.	80. - 128.
VOA Surr, DBFM	92.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6054
Sample ID: 127
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 8:45
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	9:10	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	9:10	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	9:10	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	9:10	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6054
Sample ID: 127
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	9:10	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	9:10	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	9:10	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	9:10	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	9:10	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	9:10	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	9:10	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	9:10	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6054
Sample ID: 127
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	9:10	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	97.	73. - 133.
VOA Surr Toluene-d8	104.	80. - 121.
VOA Surr, 4-BFB	107.	80. - 128.
VOA Surr, DBFM	92.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6055
Sample ID: 128
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 9:30
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	9:35	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	9:35	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	9:35	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0 00100	1	1/21/03	9:35	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Carbon tetrachloride	0.0113	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	9:35	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0 00100	1	1/21/03	9:35	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6055
Sample ID: 128
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	9:35	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	9:35	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	9:35	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	9:35	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	9:35	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	9:35	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	9:35	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	9:35	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6055
Sample ID: 128
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	9:35	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	97.	73. - 133.
VOA Surr Toluene-d8	106.	80. - 121.
VOA Surr, 4-BFB	108.	80. - 128.
VOA Surr, DBFM	91.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6056
Sample ID: 129
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 9:40
Date Received: 1/16/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	10:01	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	10:01	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	10:01	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0 00100	1	1/21/03	10:01	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Chloromethane	ND	mg/l	0 00100	1	1/21/03	10:01	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	10:01	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6056
Sample ID: 129
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0 00100	1	1/21/03	10:01	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	10:01	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	10:01	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	10:01	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	10:01	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	10:01	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	10:01	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0 00100	1	1/21/03	10:01	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	10:01	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0 00100	1	1/21/03	10:01	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	10:01	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6056
Sample ID: 129
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	10:01	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	101.	73. - 133.
VOA Surr Toluene-d8	106.	80. - 121.
VOA Surr, 4-BFB	108.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6057
Sample ID: 129 FD
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 9:40
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	10:27	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	10:27	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	10:27	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	10:27	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6057
Sample ID: 129 FD
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	10:27	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	10:27	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	10:27	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	10:27	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	10:27	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	10:27	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	10:27	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	10:27	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6057
Sample ID: 129 FD
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	10:27	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	104.	73. - 133.
VOA Surr Toluene-d8	106.	80. - 121.
VOA Surr, 4-BFB	104.	80. - 128.
VOA Surr, DBFM	95.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6058
Sample ID: 130
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 10:05
Date Received: 1/16/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	10:53	C. Wani	8260B	937
Benzene	ND	mg/l	0 0010	1	1/21/03	10:53	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	10:53	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0 00100	1	1/21/03	10:53	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Carbon tetrachloride	0.00670	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	10:53	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0 00100	1	1/21/03	10:53	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937

Sample report continued .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6058
Sample ID: 130
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	10:53	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	10:53	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	10:53	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	10:53	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	10:53	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	10:53	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	10:53	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	10:53	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6058
Sample ID: 130
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	10:53	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	104.	73. - 133.
VOA Surr Toluene-d8	108.	80. - 121.
VOA Surr, 4-BFB	106.	80. - 128.
VOA Surr, DBFM	96	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6059
Sample ID: 131
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 10:50
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	11:19	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	11:19	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Bromomethane	ND	mg/l	0 00100	1	1/21/03	11:19	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	11:19	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Carbon tetrachloride	0.535	mg/l	0.0500	50	1/22/03	16:23	C. Wani	8260B	574
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	11:19	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6059
Sample ID: 131
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	11:19	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	11:19	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	11:19	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	11:19	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	11:19	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	11:19	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	11:19	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	11:19	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6059
Sample ID: 131
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	11:19	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	86.	73. - 133.
VOA Surr Toluene-d8	104.	80. - 121.
VOA Surr, 4-BFB	108.	80. - 128.
VOA Surr, DBFM	86.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6060
Sample ID: 132
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 11:05
Date Received: 1/16/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/22/03	15:58	C. Wani	8260B	574
Benzene	ND	mg/l	0.0010	1	1/22/03	15:58	C. Wani	8260B	574
Bromobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Bromochloromethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Bromoform	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Bromomethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
2-Butanone	ND	mg/l	0.0250	1	1/22/03	15:58	C. Wani	8260B	574
n-Butylbenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
sec-Butylbenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
t-Butylbenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Carbon disulfide	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Carbon tetrachloride	0.00340	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Chlorobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Chloroethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Chloroform	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Chloromethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
2-Chlorotoluene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
4-Chlorotoluene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/22/03	15:58	C. Wani	8260B	574
Dibromochloromethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Dibromomethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6060
Sample ID: 132
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/22/03	15:59	C. Wani	8260B	574
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Ethylbenzene	ND	mg/l	0.0010	1	1/22/03	15:58	C. Wani	8260B	574
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
2-Hexanone	ND	mg/l	0 00500	1	1/22/03	15:58	C. Wani	8260B	574
Isopropylbenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/22/03	15:58	C. Wani	8260B	574
Methylene chloride	ND	mg/l	0.00250	1	1/22/03	15:58	C. Wani	8260B	574
Naphthalene	ND	mg/l	0.00500	1	1/22/03	15:58	C. Wani	8260B	574
n-Propylbenzene	ND	mg/l	0 00100	1	1/22/03	15:58	C. Wani	8260B	574
Styrene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Tetrachloroethene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Toluene	ND	mg/l	0.0010	1	1/22/03	15:58	C. Wani	8260B	574
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Trichloroethene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/22/03	15:58	C. Wani	8260B	574
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Vinyl chloride	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574
Xylenes (Total)	ND	mg/l	0.0010	1	1/22/03	15:58	C. Wani	8260B	574
Bromodichloromethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6060
Sample ID: 132
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/22/03	15:58	C. Wani	8260B	574

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	85.	73. - 133.
VOA Surr Toluene-d8	110.	80. - 121.
VOA Surr, 4-BFB	111.	80. - 128.
VOA Surr, DBFM	86.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6061
Sample ID: 133
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 11:20
Date Received: 1/16/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	12:10	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	12:10	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	12:10	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Carbon tetrachloride	0.495	mg/l	0.0500	50	1/22/03	16:49	C. Wani	8260B	574
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	12:10	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6061
Sample ID: 133
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	12:10	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	12:10	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	12:10	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	12:10	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	12:10	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	12:10	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	12:10	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	12:10	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6061
Sample ID: 133
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	12:10	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	87.	73. - 133.
VOA Surr Toluene-d8	109.	80. - 121.
VOA Surr, 4-BPB	108.	80. - 128.
VOA Surr, DBFM	87.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6062
Sample ID: 134
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 11:35
Date Received: 1/16/03
Time Received: 9:00
Page: 1

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	12:36	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	12:36	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	12:36	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	12:36	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6062
Sample ID: 134
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	12.36	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	12:36	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	12:36	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	12:36	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	12:36	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	12:36	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0 00100	1	1/21/03	12:36	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	12:36	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0 00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	12:36	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	12:36	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6062
Sample ID: 134
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	12:36	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	106.	73. - 133.
VOA Surr Toluene-d8	106.	80. - 121.
VOA Surr, 4-BFB	111.	80. - 128.
VOA Surr, DBFM	97.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

ANALYTICAL REPORT

TETRA TECH EMI 8164
ANGELA SUAREZ
8030 FLINT ST.
LENEXA, KS 66214

Project: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Sampler: ADAM ELLIOTT

Lab Number: 03-A6063
Sample ID: 135
Sample Type: Ground water
Site ID:

Date Collected: 1/14/03
Time Collected: 14:15
Date Received: 1/16/03
Time Received: 9:00

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
VOLATILE ORGANICS									
Acetone	ND	mg/l	0.0250	1	1/21/03	13:02	C. Wani	8260B	937
Benzene	ND	mg/l	0.0010	1	1/21/03	13:02	C. Wani	8260B	937
Bromobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Bromochloromethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Bromoform	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Bromomethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
2-Butanone	ND	mg/l	0.0250	1	1/21/03	13:02	C. Wani	8260B	937
n-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
sec-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
t-Butylbenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Carbon disulfide	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Carbon tetrachloride	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Chlorobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Chloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Chloroform	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Chloromethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
2-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
4-Chlorotoluene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2-Dibromo-3-chloropropane	ND	mg/l	0.00500	1	1/21/03	13:02	C. Wani	8260B	937
Dibromochloromethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2-Dibromoethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Dibromomethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,3-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,4-Dichlorobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Dichlorodifluoromethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937

Sample report continued . . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6063
Sample ID: 135
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
1,1-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2-Dichloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,1-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
cis-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
trans-1,2-Dichloroethene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,3-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
2,2-Dichloropropane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,1-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
cis-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
trans-1,3-Dichloropropene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Ethylbenzene	ND	mg/l	0.0010	1	1/21/03	13:02	C. Wani	8260B	937
Hexachlorobutadiene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
2-Hexanone	ND	mg/l	0.00500	1	1/21/03	13:02	C. Wani	8260B	937
Isopropylbenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
4-Isopropyltoluene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
4-Methyl-2-pentanone	ND	mg/l	0.00500	1	1/21/03	13:02	C. Wani	8260B	937
Methylene chloride	ND	mg/l	0.00250	1	1/21/03	13:02	C. Wani	8260B	937
Naphthalene	ND	mg/l	0.00500	1	1/21/03	13:02	C. Wani	8260B	937
n-Propylbenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Styrene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,1,1,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,1,2,2-Tetrachloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Tetrachloroethene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Toluene	ND	mg/l	0.0010	1	1/21/03	13:02	C. Wani	8260B	937
1,2,3-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2,4-Trichlorobenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,1,1-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,1,2-Trichloroethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Trichloroethene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2,3-Trichloropropane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
1,2,4-Trimethylbenzene	ND	mg/l	0.0010	1	1/21/03	13:02	C. Wani	8260B	937
1,3,5-Trimethylbenzene	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Vinyl chloride	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937
Xylenes (Total)	ND	mg/l	0.0010	1	1/21/03	13:02	C. Wani	8260B	937
Bromodichloromethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937

Sample report continued . .

TestAmerica
INCORPORATED

ANALYTICAL REPORT

Laboratory Number: 03-A6063
Sample ID: 135
Project: S1153.02.11A.03

Analyte	Result	Units	Report Limit	Dil Factor	Analysis Date	Analysis Time	Analyst	Method	Batch
Trichlorofluoromethane	ND	mg/l	0.00100	1	1/21/03	13:02	C. Wani	8260B	937

Surrogate	% Recovery	Target Range
VOA Surr 1,2-DCA-d4	104.	73. - 133.
VOA Surr Toluene-d8	108.	80. - 121.
VOA Surr, 4-BFB	108.	80. - 128.
VOA Surr, DBFM	94.	81. - 121.

LABORATORY COMMENTS:

ND = Not detected at the report limit.
B = Analyte was detected in the method blank.
J = Estimated Value below Report Limit.
E = Estimated Value above the calibration limit of the instrument.
# = Recovery outside Laboratory historical or method prescribed limits.

End of Sample Report.

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 1
Laboratory Receipt Date: 1/16/03

Matrix Spike Recovery

Note: If Blank is referenced as the sample spiked, insufficient volume was received for MS/MSD analysis for that method and the method requirements for MS/MSD analysis could not be met.

Analyte	units	Orig. Val.	MS Val	Spike Conc	Recovery	Target Range	Q.C. Batch	Spike Sample
VOA PARAMETERS								
Benzene	mg/l	< 0.0010	0.0520	0.0500	104	78. - 132.	937	03-A6053
Benzene	mg/l	< 0.0005	0.0537	0.0500	107	78. - 132.	574	blank
Chlorobenzene	mg/l	< 0.00100	0.0530	0.0500	106	79. - 124.	937	03-A6053
Chlorobenzene	mg/l	< 0.00020	0.0526	0.0500	105	79. - 124.	574	blank
1,1-Dichloroethene	mg/l	< 0.00100	0.0499	0.0500	100	68. - 141.	937	03-A6053
1,1-Dichloroethene	mg/l	< 0.00060	0.0516	0.0500	103	68. - 141.	574	blank
Toluene	mg/l	< 0.0010	0.0566	0.0500	113	77. - 134.	937	03-A6053
Toluene	mg/l	< 0.0006	0.0561	0.0500	112	77. - 134.	574	blank
Trichloroethene	mg/l	< 0.00100	0.0496	0.0500	99	73. - 137.	937	03-A6053
Trichloroethene	mg/l	< 0.00040	0.0517	0.0500	103	73. - 137.	574	blank
Tetrachloroethene	mg/l	< 0.00100	0.0521	0.0500	104	72. - 136.	937	03-A6053
Tetrachloroethene	mg/l	< 0.00040	0.0518	0.0500	104	72. - 136.	574	blank
VOA Surr 1,2-DCA-d4	% Rec				105	73. - 133.	937	
VOA Surr 1,2-DCA-d4	% Rec				77	73. - 133.	574	
VOA Surr Toluene-d8	% Rec				104	80. - 121.	937	
VOA Surr Toluene-d8	% Rec				100	80. - 121.	574	
VOA Surr, 4-BFB	% Rec				101	80. - 128.	937	
VOA Surr, 4-BFB	% Rec				102	80. - 128.	574	
VOA Surr, DBFM	% Rec				96	81. - 121.	937	
VOA Surr, DBFM	% Rec				83	81. - 121.	574	

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 2
Laboratory Receipt Date: 1/16/03

Matrix Spike Duplicate

Analyte	units	Orig. Val.	Duplicate	RPD	Limit	Q.C. Batch

Matrix Spike Duplicate

Analyte	units	Orig. Val.	Duplicate	RPD	Limit	Q.C. Batch
VOA PARAMETERS						
Benzene	mg/l	0.0520	0.0563	7.94	15.	937
Benzene	mg/l	0.0537	0.0535	0.37	15.	574
Chlorobenzene	mg/l	0.0530	0.0557	4.97	16.	937
Chlorobenzene	mg/l	0 0526	0.0515	2.11	16.	574
1,1-Dichloroethene	mg/l	0.0499	0.0589	16.54	19.	937
1,1-Dichloroethene	mg/l	0.0516	0.0502	2.75	19.	574
Toluene	mg/l	0 0566	0.0613	7.97	16.	937
Toluene	mg/l	0.0561	0.0592	5.38	16.	574
Trichloroethene	mg/l	0.0496	0.0544	9.23	20.	937
Trichloroethene	mg/l	0.0517	0.0506	2.15	20.	574
Tetrachloroethene	mg/l	0.0521	0.0572	9.33	23.	937
Tetrachloroethene	mg/l	0.0518	0.0549	5.81	23.	574
VOA Surr 1,2-DCA-d4	% Rec		99.			937
VOA Surr 1,2-DCA-d4	% Rec		74.			574
VOA Surr Toluene-d8	% Rec		104.			937
VOA Surr Toluene-d8	% Rec		105.			574
VOA Surr, 4-BFB	% Rec		104.			937
VOA Surr, 4-BFB	% Rec		103.			574
VOA Surr, DBFM	% Rec		46.			937
VOA Surr, DBFM	% Rec		84.			574

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 3
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
VOA PARAMETERS						
Acetone	mg/l	0.250	0.267	107	60 - 154	937
Acetone	mg/l	0.250	0.272	109	60 - 154	937
Acetone	mg/l	0.250	0.269	108	60 - 154	574
Acetone	mg/l	0.250	0.218	87	60 - 154	574
Benzene	mg/l	0.0500	0.0556	111	78 - 127	937
Benzene	mg/l	0.0500	0.0524	105	78 - 127	937
Benzene	mg/l	0.0500	0.0542	108	78 - 127	574
Benzene	mg/l	0.0500	0.0506	101	78 - 127	574
Bromobenzene	mg/l	0.0500	0.0608	122 #	80 - 120	937
Bromobenzene	mg/l	0 0500	0.0573	115	80 - 120	937
Bromobenzene	mg/l	0.0500	0.0604	121 #	80 - 120	574
Bromobenzene	mg/l	0.0500	0.0569	114	80 - 120	574
Bromochloromethane	mg/l	0.0500	0.0524	105	66 - 137	937
Bromochloromethane	mg/l	0.0500	0.0496	99	66 - 137	937
Bromochloromethane	mg/l	0.0500	0.0510	102	66 - 137	574
Bromochloromethane	mg/l	0.0500	0.0476	95	66 - 137	574
Bromoform	mg/l	0.0500	0.0529	106	66 - 129	937
Bromoform	mg/l	0.0500	0.0519	104	66 - 129	937
Bromoform	mg/l	0.0500	0.0497	99	66 - 129	574
Bromoform	mg/l	0.0500	0.0445	89	66 - 129	574
Bromomethane	mg/l	0.0500	0.0592	118	47 - 163	937
Bromomethane	mg/l	0.0500	0.0627	125	47 - 163	937
Bromomethane	mg/l	0.0500	0.0535	107	47 - 163	574
Bromomethane	mg/l	0.0500	0.0461	92	47 - 163	574
2-Butanone	mg/l	0.250	0.281	112	75 - 140	937
2-Butanone	mg/l	0.250	0.295	118	75 - 140	937
2-Butanone	mg/l	0.250	0.307	123	75 - 140	574
2-Butanone	mg/l	0.250	0.265	106	75 - 140	574
n-Butylbenzene	mg/l	0.0500	0.0531	106	61 - 131	937

Project QC continued

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 4
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
n-Butylbenzene	mg/l	0.0500	0.0486	97	61 - 131	937
n-Butylbenzene	mg/l	0.0500	0.0508	102	61 - 131	574
n-Butylbenzene	mg/l	0.0500	0.0500	100	61 - 131	574
sec-Butylbenzene	mg/l	0.0500	0.0537	107	72 - 124	937
sec-Butylbenzene	mg/l	0.0500	0.0503	101	72 - 124	937
sec-Butylbenzene	mg/l	0.0500	0.0528	106	72 - 124	574
sec-Butylbenzene	mg/l	0.0500	0.0506	101	72 - 124	574
t-Butylbenzene	mg/l	0.0500	0.0533	107	74 - 123	937
t-Butylbenzene	mg/l	0.0500	0.0501	100	74 - 123	937
t-Butylbenzene	mg/l	0.0500	0.0519	104	74 - 123	574
t-Butylbenzene	mg/l	0.0500	0.0493	99	74 - 123	574
Carbon disulfide	mg/l	0.0500	0.0614	123	67 - 138	937
Carbon disulfide	mg/l	0.0500	0.0561	112	67 - 138	937
Carbon disulfide	mg/l	0.0500	0.0564	113	67 - 138	574
Carbon disulfide	mg/l	0.0500	0.0540	108	67 - 138	574
Carbon tetrachloride	mg/l	0.0500	0.0531	106	69 - 132	937
Carbon tetrachloride	mg/l	0.0500	0.0538	108	69 - 132	937
Carbon tetrachloride	mg/l	0.0500	0.0430	86	69 - 132	574
Carbon tetrachloride	mg/l	0.0500	0.0406	81	69 - 132	574
Chlorobenzene	mg/l	0.0500	0.0555	111	81 - 120	937
Chlorobenzene	mg/l	0.0500	0.0528	106	81 - 120	937
Chlorobenzene	mg/l	0.0500	0.0525	105	81 - 120	574
Chlorobenzene	mg/l	0.0500	0.0508	102	81 - 120	574
Chloroethane	mg/l	0.0500	0.0571	114	65 - 134	937
Chloroethane	mg/l	0.0500	0.0564	113	65 - 134	937
Chloroethane	mg/l	0.0500	0.0516	103	65 - 134	574
Chloroethane	mg/l	0.0500	0.0489	98	65 - 134	574
Chloroform	mg/l	0.0500	0.0468	94	77 - 125	937
Chloroform	mg/l	0.0500	0.0461	92	77 - 125	937
Chloroform	mg/l	0.0500	0.0409	82	77 - 125	574
Chloroform	mg/l	0.0500	0.0380	76 #	77 - 125	574

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 5
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Chloromethane	mg/l	0 0500	0.0506	101	43 - 142	937
Chloromethane	mg/l	0.0500	0.0474	95	43 - 142	937
Chloromethane	mg/l	0.0500	0.0421	84	43 - 142	574
Chloromethane	mg/l	0.0500	0.0410	82	43 - 142	574
2-Chlorotoluene	mg/l	0.0500	0.0623	125	76 - 126	937
2-Chlorotoluene	mg/l	0.0500	0.0593	119	76 - 126	937
2-Chlorotoluene	mg/l	0.0500	0.0611	122	76 - 126	574
2-Chlorotoluene	mg/l	0.0500	0.0576	115	76 - 126	574
4-Chlorotoluene	mg/l	0.0500	0.0604	121	79 - 123	937
4-Chlorotoluene	mg/l	0.0500	0.0567	113	79 - 123	937
4-Chlorotoluene	mg/l	0.0500	0.0594	119	79 - 123	574
4-Chlorotoluene	mg/l	0.0500	0.0565	113	79 - 123	574
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0545	109	64 - 132	937
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0519	104	64 - 132	937
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0 0567	113	64 - 132	574
1,2-Dibromo-3-chloropropane	mg/l	0.0500	0.0468	94	64 - 132	574
Dibromochloromethane	mg/l	0.0500	0.0612	122	78 - 124	937
Dibromochloromethane	mg/l	0.0500	0.0595	119	78 - 124	937
Dibromochloromethane	mg/l	0.0500	0.0581	116	78 - 124	574
Dibromochloromethane	mg/l	0.0500	0.0521	104	78 - 124	574
1,2-Dibromoethane	mg/l	0.0500	0.0596	119	79 - 126	937
1,2-Dibromoethane	mg/l	0.0500	0.0579	116	79 - 126	937
1,2-Dibromoethane	mg/l	0.0500	0.0572	114	79 - 126	574
1,2-Dibromoethane	mg/l	0.0500	0.0526	105	79 - 126	574
Dibromomethane	mg/l	0.0500	0.0519	104	75 - 131	937
Dibromomethane	mg/l	0.0500	0.0514	103	75 - 131	937
Dibromomethane	mg/l	0.0500	0.0491	98	75 - 131	574
Dibromomethane	mg/l	0.0500	0.0445	89	75 - 131	574
1,2-Dichlorobenzene	mg/l	0.0500	0.0586	117	80 - 120	937
1,2-Dichlorobenzene	mg/l	0.0500	0.0549	110	80 - 120	937
1,2-Dichlorobenzene	mg/l	0.0500	0.0576	115	80 - 120	574

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 6
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
1,2-Dichlorobenzene	mg/l	0.0500	0.0547	109	80 - 120	574
1,3-Dichlorobenzene	mg/l	0.0500	0.0592	118	79 - 120	937
1,3-Dichlorobenzene	mg/l	0.0500	0.0555	111	79 - 120	937
1,3-Dichlorobenzene	mg/l	0.0500	0.0585	117	79 - 120	574
1,3-Dichlorobenzene	mg/l	0.0500	0.0556	111	79 - 120	574
1,4-Dichlorobenzene	mg/l	0.0500	0.0530	106	78 - 118	937
1,4-Dichlorobenzene	mg/l	0 0500	0.0516	103	78 - 118	937
1,4-Dichlorobenzene	mg/l	0 0500	0.0533	107	78 - 118	574
1,4-Dichlorobenzene	mg/l	0 0500	0.0504	101	78 - 118	574
Dichlorodifluoromethane	mg/l	0.0500	0.0485	97	45 - 149	937
Dichlorodifluoromethane	mg/l	0 0500	0.0430	86	45 - 149	937
Dichlorodifluoromethane	mg/l	0.0500	0.0357	71	45 - 149	574
Dichlorodifluoromethane	mg/l	0.0500	0.0348	70	45 - 149	574
1,1-Dichloroethane	mg/l	0.0500	0.0544	109	73 - 128	937
1,1-Dichloroethane	mg/l	0.0500	0.0537	107	73 - 128	937
1,1-Dichloroethane	mg/l	0.0500	0.0491	98	73 - 128	574
1,1-Dichloroethane	mg/l	0.0500	0.0451	90	73 - 128	574
1,2-Dichloroethane	mg/l	0.0500	0.0490	98	71 - 135	937
1,2-Dichloroethane	mg/l	0.0500	0.0504	101	71 - 135	937
1,2-Dichloroethane	mg/l	0.0500	0.0410	82	71 - 135	574
1,2-Dichloroethane	mg/l	0 0500	0.0376	75	71 - 135	574
1,1-Dichloroethene	mg/l	0.0500	0.0569	114	72 - 128	937
1,1-Dichloroethene	mg/l	0.0500	0.0554	111	72 - 128	937
1,1-Dichloroethene	mg/l	0.0500	0.0540	108	72 - 128	574
1,1-Dichloroethene	mg/l	0.0500	0.0502	100	72 - 128	574
cis-1,2-Dichloroethene	mg/l	0.0500	0.0542	108	76 - 127	937
cis-1,2-Dichloroethene	mg/l	0.0500	0.0522	104	76 - 127	937
cis-1,2-Dichloroethene	mg/l	0.0500	0.0482	96	76 - 127	574
cis-1,2-Dichloroethene	mg/l	0.0500	0.0453	91	76 - 127	574
trans-1,2-Dichloroethene	mg/l	0.0500	0.0542	108	71 - 131	937
trans-1,2-Dichloroethene	mg/l	0.0500	0.0521	104	71 - 131	937

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 7
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
trans-1,2-Dichloroethene	mg/l	0.0500	0.0472	94	71 - 131	574
trans-1,2-Dichloroethene	mg/l	0.0500	0.0450	90	71 - 131	574
1,2-Dichloropropane	mg/l	0.0500	0.0537	107	75 - 127	937
1,2-Dichloropropane	mg/l	0.0500	0.0510	102	75 - 127	937
1,2-Dichloropropane	mg/l	0.0500	0.0516	103	75 - 127	574
1,2-Dichloropropane	mg/l	0.0500	0.0478	96	75 - 127	574
1,3-Dichloropropane	mg/l	0.0500	0.0594	119	81 - 128	937
1,3-Dichloropropane	mg/l	0.0500	0.0576	115	81 - 128	937
1,3-Dichloropropane	mg/l	0.0500	0.0569	114	81 - 128	574
1,3-Dichloropropane	mg/l	0.0500	0.0538	108	81 - 128	574
2,2-Dichloropropane	mg/l	0.0500	0.0532	106	45 - 145	937
2,2-Dichloropropane	mg/l	0.0500	0.0445	89	45 - 145	937
2,2-Dichloropropane	mg/l	0.0500	0.0418	84	45 - 145	574
2,2-Dichloropropane	mg/l	0.0500	0.0441	88	45 - 145	574
1,1-Dichloropropene	mg/l	0.0500	0.0570	114	76 - 127	937
1,1-Dichloropropene	mg/l	0.0500	0.0541	108	76 - 127	937
1,1-Dichloropropene	mg/l	0.0500	0.0515	103	76 - 127	574
1,1-Dichloropropene	mg/l	0 0500	0.0486	97	76 - 127	574
cis-1,3-Dichloropropene	mg/l	0.0500	0.0600	120	72 - 131	937
cis-1,3-Dichloropropene	mg/l	0.0500	0.0569	114	72 - 131	937
cis-1,3-Dichloropropene	mg/l	0.0500	0.0580	116	72 - 131	574
cis-1,3-Dichloropropene	mg/l	0.0500	0.0558	112	72 - 131	574
trans-1,3-Dichloropropene	mg/l	0.0500	0.0609	122	69 - 131	937
trans-1,3-Dichloropropene	mg/l	0.0500	0.0582	116	69 - 131	937
trans-1,3-Dichloropropene	mg/l	0.0500	0.0558	112	69 - 131	574
trans-1,3-Dichloropropene	mg/l	0.0500	0.0536	107	69 - 131	574
Ethylbenzene	mg/l	0.0500	0.0622	124	78 - 125	937
Ethylbenzene	mg/l	0.0500	0.0596	119	78 - 125	937
Ethylbenzene	mg/l	0.0500	0.0581	116	78 - 125	574
Ethylbenzene	mg/l	0.0500	0.0560	112	78 - 125	574
Hexachlorobutadiene	mg/l	0.0500	0.0560	112	59 - 126	937

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 8
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Hexachlorobutadiene	mg/l	0.0500	0.0524	105	59 - 126	937
Hexachlorobutadiene	mg/l	0.0500	0.0524	105	59 - 126	574
Hexachlorobutadiene	mg/l	0.0500	0.0511	102	59 - 126	574
2-Hexanone	mg/l	0.250	0.275	110	71 - 142	937
2-Hexanone	mg/l	0.250	0.276	110	71 - 142	937
2-Hexanone	mg/l	0.250	0.284	114	71 - 142	574
2-Hexanone	mg/l	0.250	0.245	98	71 - 142	574
Isopropylbenzene	mg/l	0.0500	0.0556	111	78 - 123	937
Isopropylbenzene	mg/l	0.0500	0.0531	106	78 - 123	937
Isopropylbenzene	mg/l	0.0500	0.0496	99	78 - 123	574
Isopropylbenzene	mg/l	0.0500	0.0485	97	78 - 123	574
4-Isopropyltoluene	mg/l	0.0500	0.0616	123	73 - 125	937
4-Isopropyltoluene	mg/l	0.0500	0.0566	113	73 - 125	937
4-Isopropyltoluene	mg/l	0.0500	0.0582	116	73 - 125	574
4-Isopropyltoluene	mg/l	0.0500	0.0568	114	73 - 125	574
4-Methyl-2-pentanone	mg/l	0.250	0.301	120	71 - 141	937
4-Methyl-2-pentanone	mg/l	0.250	0.311	124	71 - 141	937
4-Methyl-2-pentanone	mg/l	0.250	0.310	124	71 - 141	574
4-Methyl-2-pentanone	mg/l	0.250	0.276	110	71 - 141	574
Methylene chloride	mg/l	0.0500	0.0526	105	70 - 140	937
Methylene chloride	mg/l	0.0500	0.0501	100	70 - 140	937
Methylene chloride	mg/l	0.0500	0.0495	99	70 - 140	574
Methylene chloride	mg/l	0.0500	0.0470	94	70 - 140	574
Naphthalene	mg/l	0.0500	0.0557	111	52 - 140	937
Naphthalene	mg/l	0.0500	0.0539	108	52 - 140	937
Naphthalene	mg/l	0.0500	0.0588	118	52 - 140	574
Naphthalene	mg/l	0.0500	0.0523	105	52 - 140	574
n-Propylbenzene	mg/l	0.0500	0.0554	111	75 - 125	937
n-Propylbenzene	mg/l	0.0500	0.0507	101	75 - 125	937
n-Propylbenzene	mg/l	0.0500	0.0548	110	75 - 125	574
n-Propylbenzene	mg/l	0.0500	0.0535	107	75 - 125	574

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 9
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Styrene	mg/l	0.0500	0.0534	107	82 - 122	937
Styrene	mg/l	0.0500	0.0521	104	82 - 122	937
Styrene	mg/l	0.0500	0.0495	99	82 - 122	574
Styrene	mg/l	0.0500	0.0487	97	82 - 122	574
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0560	112	85 - 123	937
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0548	110	85 - 123	937
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0507	101	85 - 123	574
1,1,1,2-Tetrachloroethane	mg/l	0.0500	0.0490	98	85 - 123	574
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0574	115	74 - 133	937
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0505	101	74 - 133	937
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0602	120	74 - 133	574
1,1,2,2-Tetrachloroethane	mg/l	0.0500	0.0558	112	74 - 133	574
Tetrachloroethene	mg/l	0.0500	0.0576	115	76 - 123	937
Tetrachloroethene	mg/l	0.0500	0.0532	106	76 - 123	937
Tetrachloroethene	mg/l	0.0500	0.0535	107	76 - 123	574
Tetrachloroethene	mg/l	0.0500	0.0521	104	76 - 123	574
Toluene	mg/l	0.0500	0.0594	119	78 - 127	937
Toluene	mg/l	0.0500	0.0578	116	78 - 127	937
Toluene	mg/l	0.0500	0.0603	121	78 - 127	574
Toluene	mg/l	0.0500	0.0584	117	78 - 127	574
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0581	116	59 - 132	937
1,2,3-Trichlorobenzene	mg/l	0 0500	0.0560	112	59 - 132	937
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0590	118	59 - 132	574
1,2,3-Trichlorobenzene	mg/l	0.0500	0.0526	105	59 - 132	574
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0628	126	60 - 133	937
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0590	118	60 - 133	937
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0635	127	60 - 133	574
1,2,4-Trichlorobenzene	mg/l	0.0500	0.0608	122	60 - 133	574
1,1,1-Trichloroethane	mg/l	0.0500	0.0524	105	74 - 128	937
1,1,1-Trichloroethane	mg/l	0.0500	0.0522	104	74 - 128	937
1,1,1-Trichloroethane	mg/l	0.0500	0.0433	87	74 - 128	574

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 10
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
1,1,1-Trichloroethane	mg/l	0.0500	0.0404	81	74 - 128	574
1,1,2-Trichloroethane	mg/l	0.0500	0.0561	112	85 - 125	937
1,1,2-Trichloroethane	mg/l	0.0500	0.0538	108	85 - 125	937
1,1,2-Trichloroethane	mg/l	0.0500	0.0546	109	85 - 125	574
1,1,2-Trichloroethane	mg/l	0.0500	0.0513	103	85 - 125	574
Trichloroethene	mg/l	0.0500	0.0534	107	78 - 125	937
Trichloroethene	mg/l	0.0500	0.0546	109	78 - 125	937
Trichloroethene	mg/l	0.0500	0.0534	107	78 - 125	574
Trichloroethene	mg/l	0.0500	0.0482	96	78 - 125	574
1,2,3-Trichloropropane	mg/l	0.0500	0.0562	112	75 - 130	937
1,2,3-Trichloropropane	mg/l	0.0500	0.0562	112	75 - 130	937
1,2,3-Trichloropropane	mg/l	0.0500	0.0580	116	75 - 130	574
1,2,3-Trichloropropane	mg/l	0.0500	0.0534	107	75 - 130	574
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0536	107	77 - 122	937
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0495	99	77 - 122	937
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0524	105	77 - 122	574
1,2,4-Trimethylbenzene	mg/l	0.0500	0.0502	100	77 - 122	574
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0538	108	75 - 125	937
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0500	100	75 - 125	937
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0524	105	75 - 125	574
1,3,5-Trimethylbenzene	mg/l	0.0500	0.0500	100	75 - 125	574
Vinyl chloride	mg/l	0.0500	0.0547	109	61 - 140	937
Vinyl chloride	mg/l	0.0500	0.0518	104	61 - 140	937
Vinyl chloride	mg/l	0.0500	0.0458	92	61 - 140	574
Vinyl chloride	mg/l	0.0500	0.0450	90	61 - 140	574
Xylenes (Total)	mg/l	0.150	0.185	123	77 - 126	937
Xylenes (Total)	mg/l	0.150	0.178	119	77 - 126	937
Xylenes (Total)	mg/l	0.150	0.169	113	77 - 126	574
Xylenes (Total)	mg/l	0.150	0.164	109	77 - 126	574
Bromodichloromethane	mg/l	0.0500	0.0543	109	79 - 126	937
Bromodichloromethane	mg/l	0.0500	0.0538	108	79 - 126	937

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 11
Laboratory Receipt Date: 1/16/03

Laboratory Control Data

Analyte	units	Known Val.	Analyzed Val	% Recovery	Target Range	Q.C. Batch
Bromodichloromethane	mg/l	0.0500	0.0469	94	79 - 126	574
Bromodichloromethane	mg/l	0.0500	0.0430	86	79 - 126	574
Trichlorofluoromethane	mg/l	0.0500	0.0494	99	60 - 140	937
Trichlorofluoromethane	mg/l	0.0500	0.0504	101	60 - 140	937
Trichlorofluoromethane	mg/l	0.0500	0.0375	75	60 - 140	574
Trichlorofluoromethane	mg/l	0.0500	0.0360	72	60 - 140	574
VOA Surr 1,2-DCA-d4	% Rec			88	73 - 133	937
VOA Surr 1,2-DCA-d4	% Rec			94	73 - 133	937
VOA Surr 1,2-DCA-d4	% Rec			75	73 - 133	574
VOA Surr 1,2-DCA-d4	% Rec			73	73 - 133	574
VOA Surr Toluene-d8	% Rec			101	80 - 121	937
VOA Surr Toluene-d8	% Rec			102	80 - 121	937
VOA Surr Toluene-d8	% Rec			105	80 - 121	574
VOA Surr Toluene-d8	% Rec			107	80 - 121	574
VOA Surr, 4-BFB	% Rec			103	80 - 128	937
VOA Surr, 4-BFB	% Rec			101	80 - 128	937
VOA Surr, 4-BFB	% Rec			105	80 - 128	574
VOA Surr, 4-BFB	% Rec			105	80 - 128	574
VOA Surr, DBFM	% Rec			87	81 - 121	937
VOA Surr, DBFM	% Rec			90	81 - 121	937
VOA Surr, DBFM	% Rec			82	81 - 121	574
VOA Surr, DBFM	% Rec			80	81 - 121	574

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Date Analyzed	Time Analyzed
VOA PARAMETERS					
Acetone	< 0.00470	mg/l	937	1/20/03	21:59
Acetone	< 0.00470	mg/l	937	1/21/03	8:18

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 12
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
Acetone	< 0.00470	mg/l	574	1/22/03	4:13
Acetone	< 0.00470	mg/l	574	1/22/03	14:37
Benzene	< 0.0005	mg/l	937	1/20/03	21:59
Benzene	< 0.0005	mg/l	937	1/21/03	8:18
Benzene	< 0.0005	mg/l	574	1/22/03	4:13
Benzene	< 0.0005	mg/l	574	1/22/03	14:37
Bromobenzene	< 0.00030	mg/l	937	1/20/03	21:59
Bromobenzene	< 0.00030	mg/l	937	1/21/03	8:18
Bromobenzene	< 0.00030	mg/l	574	1/22/03	4:13
Bromobenzene	< 0.00030	mg/l	574	1/22/03	14:37
Bromochloromethane	< 0.00030	mg/l	937	1/20/03	21:59
Bromochloromethane	< 0.00030	mg/l	937	1/21/03	8:18
Bromochloromethane	< 0.00030	mg/l	574	1/22/03	4:13
Bromochloromethane	< 0 00030	mg/l	574	1/22/03	14:37
Bromoform	< 0.00060	mg/l	937	1/20/03	21:59
Bromoform	< 0.00060	mg/l	937	1/21/03	8:18
Bromoform	< 0.00060	mg/l	574	1/22/03	4:13
Bromoform	< 0.00060	mg/l	574	1/22/03	14:37
Bromomethane	< 0.00060	mg/l	937	1/20/03	21:59
Bromomethane	< 0.00060	mg/l	937	1/21/03	8:18
Bromomethane	< 0.00060	mg/l	574	1/22/03	4:13
Bromomethane	< 0.00060	mg/l	574	1/22/03	14:37
2-Butanone	< 0.00310	mg/l	937	1/20/03	21:59
2-Butanone	< 0.00310	mg/l	937	1/21/03	8:18
2-Butanone	< 0.00310	mg/l	574	1/22/03	4:13
2-Butanone	< 0.00310	mg/l	574	1/22/03	14:37
n-Butylbenzene	< 0 00010	mg/l	937	1/20/03	21:59
n-Butylbenzene	< 0.00010	mg/l	937	1/21/03	8:18
n-Butylbenzene	< 0.00010	mg/l	574	1/22/03	4:13
n-Butylbenzene	< 0.00010	mg/l	574	1/22/03	14:37
sec-Butylbenzene	< 0.00030	mg/l	937	1/20/03	21:59

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 13
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
sec-Butylbenzene	< 0.00030	mg/l	937	1/21/03	8:18
sec-Butylbenzene	< 0 00030	mg/l	574	1/22/03	4:13
sec-Butylbenzene	< 0.00030	mg/l	574	1/22/03	14:37
t-Butylbenzene	< 0.00030	mg/l	937	1/20/03	21:59
t-Butylbenzene	< 0.00030	mg/l	937	1/21/03	8:18
t-Butylbenzene	< 0.00030	mg/l	574	1/22/03	4:13
t-Butylbenzene	< 0.00030	mg/l	574	1/22/03	14:37
Carbon disulfide	< 0.00020	mg/l	937	1/20/03	21:59
Carbon disulfide	< 0.00020	mg/l	937	1/21/03	8:18
Carbon disulfide	< 0.00020	mg/l	574	1/22/03	4:13
Carbon disulfide	< 0.00020	mg/l	574	1/22/03	14:37
Carbon tetrachloride	< 0.00040	mg/l	937	1/20/03	21:59
Carbon tetrachloride	< 0.00040	mg/l	937	1/21/03	8:18
Carbon tetrachloride	< 0.00040	mg/l	574	1/22/03	4:13
Carbon tetrachloride	< 0.00040	mg/l	574	1/22/03	14:37
Chlorobenzene	< 0.00020	mg/l	937	1/20/03	21:59
Chlorobenzene	< 0.00020	mg/l	937	1/21/03	8:18
Chlorobenzene	< 0.00020	mg/l	574	1/22/03	4:13
Chlorobenzene	< 0.00020	mg/l	574	1/22/03	14:37
Chloroethane	< 0 00100	mg/l	937	1/20/03	21:59
Chloroethane	< 0.00100	mg/l	937	1/21/03	8:18
Chloroethane	< 0.00100	mg/l	574	1/22/03	4:13
Chloroethane	< 0.00100	mg/l	574	1/22/03	14:37
Chloroform	< 0.00080	mg/l	937	1/20/03	21:59
Chloroform	< 0 00080	mg/l	937	1/21/03	8:18
Chloroform	< 0.00080	mg/l	574	1/22/03	4:13
Chloroform	< 0 00080	mg/l	574	1/22/03	14:37
Chloromethane	< 0.00070	mg/l	937	1/20/03	21:59
Chloromethane	< 0.00070	mg/l	937	1/21/03	8:18
Chloromethane	< 0.00070	mg/l	574	1/22/03	4:13
Chloromethane	< 0.00070	mg/l	574	1/22/03	14:37

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 14
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
2-Chlorotoluene	< 0.00040	mg/l	937	1/20/03	21:59
2-Chlorotoluene	< 0.00040	mg/l	937	1/21/03	8:18
2-Chlorotoluene	< 0.00040	mg/l	574	1/22/03	4:13
2-Chlorotoluene	< 0.00040	mg/l	574	1/22/03	14:37
4-Chlorotoluene	< 0.00050	mg/l	937	1/20/03	21:59
4-Chlorotoluene	< 0.00050	mg/l	937	1/21/03	8:18
4-Chlorotoluene	< 0.00050	mg/l	574	1/22/03	4:13
4-Chlorotoluene	< 0.00050	mg/l	574	1/22/03	14:37
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	937	1/20/03	21:59
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	937	1/21/03	8:18
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	574	1/22/03	4:13
1,2-Dibromo-3-chloropropane	< 0.00070	mg/l	574	1/22/03	14:37
Dibromochloromethane	< 0.00050	mg/l	937	1/20/03	21:59
Dibromochloromethane	< 0.00050	mg/l	937	1/21/03	8:18
Dibromochloromethane	< 0.00050	mg/l	574	1/22/03	4:13
Dibromochloromethane	< 0.00050	mg/l	574	1/22/03	14:37
1,2-Dibromoethane	< 0.00040	mg/l	937	1/20/03	21:59
1,2-Dibromoethane	< 0.00040	mg/l	937	1/21/03	8:18
1,2-Dibromoethane	< 0.00040	mg/l	574	1/22/03	4:13
1,2-Dibromoethane	< 0.00040	mg/l	574	1/22/03	14:37
Dibromomethane	< 0.00090	mg/l	937	1/20/03	21:59
Dibromomethane	< 0.00090	mg/l	937	1/21/03	8:18
Dibromomethane	< 0.00090	mg/l	574	1/22/03	4:13
Dibromomethane	< 0.00090	mg/l	574	1/22/03	14:37
1,2-Dichlorobenzene	< 0.00020	mg/l	937	1/20/03	21:59
1,2-Dichlorobenzene	< 0.00020	mg/l	937	1/21/03	8:18
1,2-Dichlorobenzene	< 0.00020	mg/l	574	1/22/03	4:13
1,2-Dichlorobenzene	< 0.00020	mg/l	574	1/22/03	14:37
1,3-Dichlorobenzene	< 0.00030	mg/l	937	1/20/03	21:59
1,3-Dichlorobenzene	< 0.00030	mg/l	937	1/21/03	8:18
1,3-Dichlorobenzene	< 0.00030	mg/l	574	1/22/03	4:13

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 15
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
1,3-Dichlorobenzene	< 0.00030	mg/l	574	1/22/03	14:37
1,4-Dichlorobenzene	< 0.00040	mg/l	937	1/20/03	21:59
1,4-Dichlorobenzene	< 0.00040	mg/l	937	1/21/03	8:18
1,4-Dichlorobenzene	< 0.00040	mg/l	574	1/22/03	4:13
1,4-Dichlorobenzene	< 0.00040	mg/l	574	1/22/03	14:37
Dichlorodifluoromethane	< 0.00050	mg/l	937	1/20/03	21:59
Dichlorodifluoromethane	< 0.00050	mg/l	937	1/21/03	8:18
Dichlorodifluoromethane	< 0 00050	mg/l	574	1/22/03	4:13
Dichlorodifluoromethane	< 0.00050	mg/l	574	1/22/03	14:37
1,1-Dichloroethane	< 0.00020	mg/l	937	1/20/03	21:59
1,1-Dichloroethane	< 0.00020	mg/l	937	1/21/03	8:18
1,1-Dichloroethane	< 0.00020	mg/l	574	1/22/03	4:13
1,1-Dichloroethane	< 0.00020	mg/l	574	1/22/03	14:37
1,2-Dichloroethane	< 0.00060	mg/l	937	1/20/03	21:59
1,2-Dichloroethane	< 0.00060	mg/l	937	1/21/03	8:18
1,2-Dichloroethane	< 0.00060	mg/l	574	1/22/03	4:13
1,2-Dichloroethane	< 0.00060	mg/l	574	1/22/03	14:37
1,1-Dichloroethene	< 0.00060	mg/l	937	1/20/03	21:59
1,1-Dichloroethene	< 0.00060	mg/l	937	1/21/03	8:18
1,1-Dichloroethene	< 0.00060	mg/l	574	1/22/03	4:13
1,1-Dichloroethene	< 0.00060	mg/l	574	1/22/03	14:37
cis-1,2-Dichloroethene	< 0.00060	mg/l	937	1/20/03	21:59
cis-1,2-Dichloroethene	< 0.00060	mg/l	937	1/21/03	8:18
cis-1,2-Dichloroethene	< 0.00060	mg/l	574	1/22/03	4:13
cis-1,2-Dichloroethene	< 0.00060	mg/l	574	1/22/03	14:37
trans-1,2-Dichloroethene	< 0.00050	mg/l	937	1/20/03	21:59
trans-1,2-Dichloroethene	< 0.00050	mg/l	937	1/21/03	8:18
trans-1,2-Dichloroethene	< 0.00050	mg/l	574	1/22/03	4:13
trans-1,2-Dichloroethene	< 0.00050	mg/l	574	1/22/03	14:37
1,2-Dichloropropane	< 0.00040	mg/l	937	1/20/03	21:59
1,2-Dichloropropane	< 0.00040	mg/l	937	1/21/03	8:18

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 16
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
1,2-Dichloropropane	< 0.00040	mg/l	574	1/22/03	4:13
1,2-Dichloropropane	< 0.00040	mg/l	574	1/22/03	14:37
1,3-Dichloropropane	< 0.00040	mg/l	937	1/20/03	21:59
1,3-Dichloropropane	< 0.00040	mg/l	937	1/21/03	8:18
1,3-Dichloropropane	< 0.00040	mg/l	574	1/22/03	4:13
1,3-Dichloropropane	< 0.00040	mg/l	574	1/22/03	14:37
2,2-Dichloropropane	< 0.00040	mg/l	937	1/20/03	21:59
2,2-Dichloropropane	< 0.00040	mg/l	937	1/21/03	8:18
2,2-Dichloropropane	< 0.00040	mg/l	574	1/22/03	4:13
2,2-Dichloropropane	< 0.00040	mg/l	574	1/22/03	14:37
1,1-Dichloropropene	< 0.00050	mg/l	937	1/20/03	21:59
1,1-Dichloropropene	< 0.00050	mg/l	937	1/21/03	8:18
1,1-Dichloropropene	< 0.00050	mg/l	574	1/22/03	4:13
1,1-Dichloropropene	< 0.00050	mg/l	574	1/22/03	14:37
cis-1,3-Dichloropropene	< 0.00030	mg/l	937	1/20/03	21:59
cis-1,3-Dichloropropene	< 0.00030	mg/l	937	1/21/03	8:18
cis-1,3-Dichloropropene	< 0.00030	mg/l	574	1/22/03	4:13
cis-1,3-Dichloropropene	< 0.00030	mg/l	574	1/22/03	14:37
trans-1,3-Dichloropropene	< 0.00050	mg/l	937	1/20/03	21:59
trans-1,3-Dichloropropene	< 0.00050	mg/l	937	1/21/03	8:18
trans-1,3-Dichloropropene	< 0.00050	mg/l	574	1/22/03	4:13
trans-1,3-Dichloropropene	< 0.00050	mg/l	574	1/22/03	14:37
Ethylbenzene	< 0.0003	mg/l	937	1/20/03	21:59
Ethylbenzene	< 0.0003	mg/l	937	1/21/03	8:18
Ethylbenzene	< 0.0003	mg/l	574	1/22/03	4:13
Ethylbenzene	< 0.0003	mg/l	574	1/22/03	14:37
Hexachlorobutadiene	< 0.00080	mg/l	937	1/20/03	21:59
Hexachlorobutadiene	< 0.00080	mg/l	937	1/21/03	8:18
Hexachlorobutadiene	< 0.00080	mg/l	574	1/22/03	4:13
Hexachlorobutadiene	< 0.00080	mg/l	574	1/22/03	14:37
2-Hexanone	< 0.00420	mg/l	937	1/20/03	21:59

Project QC continued . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 17
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
2-Hexanone	< 0.00420	mg/l	937	1/21/03	8:18
2-Hexanone	< 0.00420	mg/l	574	1/22/03	4:13
2-Hexanone	< 0.00420	mg/l	574	1/22/03	14:37
Isopropylbenzene	< 0.00040	mg/l	937	1/20/03	21:59
Isopropylbenzene	< 0.00040	mg/l	937	1/21/03	8:18
Isopropylbenzene	< 0.00040	mg/l	574	1/22/03	4:13
Isopropylbenzene	< 0.00040	mg/l	574	1/22/03	14:37
4-Isopropyltoluene	< 0.00060	mg/l	937	1/20/03	21:59
4-Isopropyltoluene	< 0.00060	mg/l	937	1/21/03	8:18
4-Isopropyltoluene	< 0.00060	mg/l	574	1/22/03	4:13
4-Isopropyltoluene	< 0.00060	mg/l	574	1/22/03	14:37
4-Methyl-2-pentanone	< 0.00490	mg/l	937	1/20/03	21:59
4-Methyl-2-pentanone	< 0.00490	mg/l	937	1/21/03	8:18
4-Methyl-2-pentanone	< 0.00490	mg/l	574	1/22/03	4:13
4-Methyl-2-pentanone	< 0.00490	mg/l	574	1/22/03	14:37
Methylene chloride	< 0.00240	mg/l	937	1/20/03	21:59
Methylene chloride	< 0.00240	mg/l	937	1/21/03	8:18
Methylene chloride	< 0.00240	mg/l	574	1/22/03	4:13
Methylene chloride	< 0.00240	mg/l	574	1/22/03	14:37
Naphthalene	0.00330	mg/l	937	1/20/03	21:59
Naphthalene	0.00320	mg/l	937	1/21/03	8:18
Naphthalene	< 0.00120	mg/l	574	1/22/03	4:13
Naphthalene	0.00370	mg/l	574	1/22/03	14:37
n-Propylbenzene	< 0.00030	mg/l	937	1/20/03	21:59
n-Propylbenzene	< 0.00030	mg/l	937	1/21/03	8:18
n-Propylbenzene	< 0.00030	mg/l	574	1/22/03	4:13
n-Propylbenzene	< 0.00030	mg/l	574	1/22/03	14:37
Styrene	< 0.00040	mg/l	937	1/20/03	21:59
Styrene	< 0.00040	mg/l	937	1/21/03	8:18
Styrene	< 0.00040	mg/l	574	1/22/03	4:13
Styrene	< 0.00040	mg/l	574	1/22/03	14:37

Project QC continued . . .

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 18
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	937	1/20/03	21:59
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	937	1/21/03	8:18
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	574	1/22/03	4:13
1,1,1,2-Tetrachloroethane	< 0.00060	mg/l	574	1/22/03	14:37
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	937	1/20/03	21:59
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	937	1/21/03	8:18
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	574	1/22/03	4:13
1,1,2,2-Tetrachloroethane	< 0.00040	mg/l	574	1/22/03	14:37
Tetrachloroethene	< 0.00040	mg/l	937	1/20/03	21:59
Tetrachloroethene	< 0.00040	mg/l	937	1/21/03	8:18
Tetrachloroethene	< 0.00040	mg/l	574	1/22/03	4:13
Tetrachloroethene	< 0.00040	mg/l	574	1/22/03	14:37
Toluene	< 0.0006	mg/l	937	1/20/03	21:59
Toluene	< 0.0006	mg/l	937	1/21/03	8:18
Toluene	< 0.0006	mg/l	574	1/22/03	4:13
Toluene	< 0.0006	mg/l	574	1/22/03	14:37
1,2,3-Trichlorobenzene	< 0.00100	mg/l	937	1/20/03	21:59
1,2,3-Trichlorobenzene	< 0.00100	mg/l	937	1/21/03	8:18
1,2,3-Trichlorobenzene	< 0.00100	mg/l	574	1/22/03	4:13
1,2,3-Trichlorobenzene	< 0.00100	mg/l	574	1/22/03	14:37
1,2,4-Trichlorobenzene	< 0.00060	mg/l	937	1/20/03	21:59
1,2,4-Trichlorobenzene	< 0.00060	mg/l	937	1/21/03	8:18
1,2,4-Trichlorobenzene	< 0.00060	mg/l	574	1/22/03	4:13
1,2,4-Trichlorobenzene	< 0.00060	mg/l	574	1/22/03	14:37
1,1,1-Trichloroethane	< 0.00070	mg/l	937	1/20/03	21:59
1,1,1-Trichloroethane	< 0 00070	mg/l	937	1/21/03	8:18
1,1,1-Trichloroethane	< 0.00070	mg/l	574	1/22/03	4:13
1,1,1-Trichloroethane	< 0.00070	mg/l	574	1/22/03	14:37
1,1,2-Trichloroethane	< 0.00040	mg/l	937	1/20/03	21:59
1,1,2-Trichloroethane	< 0.00040	mg/l	937	1/21/03	8:18
1,1,2-Trichloroethane	< 0.00040	mg/l	574	1/22/03	4:13

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 19
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
1,1,2-Trichloroethane	< 0.00040	mg/l	574	1/22/03	14:37
Trichloroethene	< 0.00040	mg/l	937	1/20/03	21:59
Trichloroethene	< 0 00040	mg/l	937	1/21/03	8:18
Trichloroethene	< 0.00040	mg/l	574	1/22/03	4:13
Trichloroethene	< 0 00040	mg/l	574	1/22/03	14:37
1,2,3-Trichloropropane	< 0 00060	mg/l	937	1/20/03	21:59
1,2,3-Trichloropropane	< 0.00060	mg/l	937	1/21/03	8:18
1,2,3-Trichloropropane	< 0.00060	mg/l	574	1/22/03	4:13
1,2,3-Trichloropropane	< 0.00060	mg/l	574	1/22/03	14:37
1,2,4-Trimethylbenzene	< 0.0003	mg/l	937	1/20/03	21:59
1,2,4-Trimethylbenzene	< 0.0003	mg/l	937	1/21/03	8:18
1,2,4-Trimethylbenzene	< 0.0003	mg/l	574	1/22/03	4:13
1,2,4-Trimethylbenzene	< 0.0003	mg/l	574	1/22/03	14:37
1,3,5-Trimethylbenzene	< 0.00100	mg/l	937	1/20/03	21:59
1,3,5-Trimethylbenzene	< 0 00100	mg/l	937	1/21/03	8:18
1,3,5-Trimethylbenzene	< 0.00100	mg/l	574	1/22/03	4:13
1,3,5-Trimethylbenzene	< 0.00100	mg/l	574	1/22/03	14:37
Vinyl chloride	< 0.00050	mg/l	937	1/20/03	21:59
Vinyl chloride	< 0.00050	mg/l	937	1/21/03	8:18
Vinyl chloride	< 0.00050	mg/l	574	1/22/03	4:13
Vinyl chloride	< 0.00050	mg/l	574	1/22/03	14:37
Xylenes (Total)	< 0.0009	mg/l	937	1/20/03	21:59
Xylenes (Total)	< 0.0009	mg/l	937	1/21/03	8:18
Xylenes (Total)	< 0.0009	mg/l	574	1/22/03	4:13
Xylenes (Total)	< 0.0009	mg/l	574	1/22/03	14:37
Bromodichloromethane	< 0.00030	mg/l	937	1/20/03	21:59
Bromodichloromethane	< 0.00030	mg/l	937	1/21/03	8:18
Bromodichloromethane	< 0.00030	mg/l	574	1/22/03	4:13
Bromodichloromethane	< 0.00030	mg/l	574	1/22/03	14:37
Trichlorofluoromethane	< 0.00040	mg/l	937	1/20/03	21:59
Trichlorofluoromethane	< 0.00040	mg/l	937	1/21/03	8:18

Project QC continued . . .

TestAmerica
INCORPORATED

PROJECT QUALITY CONTROL DATA
Project Number: S1153.02.11A.03
Project Name: GARVEY GRAIN SITE
Page: 20
Laboratory Receipt Date: 1/16/03

Blank Data

Analyte	Blank Value	Units	Q.C. Batch	Analysis Date	Analysis Time
Trichlorofluoromethane	< 0.00040	mg/l	574	1/22/03	4:13
Trichlorofluoromethane	< 0.00040	mg/l	574	1/22/03	14:37
VOA Surr 1,2-DCA-d4	92.	% Rec	937	1/20/03	21:59
VOA Surr 1,2-DCA-d4	95.	% Rec	937	1/21/03	8:18
VOA Surr 1,2-DCA-d4	74.	% Rec	574	1/22/03	4:13
VOA Surr 1,2-DCA-d4	77.	% Rec	574	1/22/03	14:37
VOA Surr Toluene-d8	102.	% Rec	937	1/20/03	21:59
VOA Surr Toluene-d8	104.	% Rec	937	1/21/03	8:18
VOA Surr Toluene-d8	102.	% Rec	574	1/22/03	4:13
VOA Surr Toluene-d8	109.	% Rec	574	1/22/03	14:37
VOA Surr, 4-BFB	105.	% Rec	937	1/20/03	21:59
VOA Surr, 4-BFB	106.	% Rec	937	1/21/03	8:18
VOA Surr, 4-BFB	105.	% Rec	574	1/22/03	4:13
VOA Surr, 4-BFB	106.	% Rec	574	1/22/03	14:37
VOA Surr, DBFM	90	% Rec	937	1/20/03	21:59
VOA Surr, DBFM	91.	% Rec	937	1/21/03	8:18
VOA Surr, DBFM	81	% Rec	574	1/22/03	4:13
VOA Surr, DBFM	82.	% Rec	574	1/22/03	14:37

= Value outside Laboratory historical or method prescribed QC limits.

End of Report for Project 316708

ATTACHMENT 10

LEVEL III DATA VALIDATION REPORT

Tetra Tech EM Inc.
DATA VALIDATION REPORT
LEVEL III

Site:	Garvey Grain Site
Laboratory:	TestAmerica, Inc
Data Reviewer:	David Hickey, Tetra Tech EM Inc. (Tetra Tech)
Review Date	February 11, 2003
Sample Delivery Groups (SDGs):	316708, 316225
Sample Numbers:	101 to 110, 110FD, 111 to 118, 118FD, 119 to 122, 122FD, 123 to 129, 129FD, 130 to 135
Matrix / Number of Samples:	39 drinking waters

The data were qualified according to the U.S. Environmental Protection Agency (EPA) Region 7 document entitled "Contract Laboratory Program Data Validation Functional Guidelines for Evaluating Organic Analytical Data" (2430.3D, November 2000). In addition, the Tetra Tech document "Review of Data Packages from Subcontracted Laboratories" (February 2002) was used along with other criteria specified in the applicable EPA Solid Waste (SW)-846 methods.

The review was intended to identify problems and quality control (QC) deficiencies that were readily apparent from the summary data package. The following sections discuss any problems or deficiencies that were found, and data qualifications applied because of non-compliant QC. The data review was limited to the available field and laboratory QC information submitted with the project specific data package.

I, David Hickey, certify that all data validation criteria outlined in the above referenced documents were assessed, and any qualifications made to the data were in accordance with those documents.

Certified by David Hickey, Project Chemist

2/11/03
Date

DATA VALIDATION QUALIFIERS

U — The analyte was analyzed for, but was not detected above the reported sample quantitation limit.

J — The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.

R — The sample results are rejected due to serious deficiencies in the ability to analyze the sample and meet quality control criteria. The presence or absence of the analyte cannot be verified.

DATA ASSESSMENT

Sample delivery groups (SDGs) 316708 and 316225 included thirty-nine (39) water environmental samples. All samples were analyzed by SW-846 Method 8260B for volatile organic compounds (VOCs). There were four (4) field duplicates associated with this SDG. There were no field blanks, trip blanks, or performance evaluation samples associated with this SDG.

I. Holding Time and Chain-of-Custody Record (COC) Requirements

The samples received by the laboratory were processed within established holding times. There were two anomalies with the COCs. Each COC indicated that a trip blank was shipped to the laboratory for analysis. Though the COCs document receipt of all field samples, neither COC documents receipt of a trip blank. Telephone conversations with the laboratory revealed that the laboratory had no record of trip blanks accompanying the samples. No other anomalies were found with the COC. No data were qualified.

II. Sample Preparation

All samples were properly digested and analyzed according to the approved laboratory procedures. Sample preparation procedures were documented appropriately. No anomalies were found with the sample preparation documentation.

III. GC/MS Instrument Tune

Initial GC/MS tuning data were not submitted for review as part of the standard data deliverable.

IV. Calibrations

Instrument calibration data were not submitted for review as part of the standard data deliverable.

V. Blanks

All calibration blanks and method (preparation) blanks were free from contamination, with one exception. Naphthalene was found in the method blanks associated with SDG 316708; however, naphthalene was not detected in any of the field samples. Therefore, no data were qualified.

The absence of trip blanks with these SDGs does not adversely affect the data. Several of the field samples in both SDGs were nondetect for target analytes, indicating that there was no contamination during transportation. No data were qualified.

VI. Matrix Spike/Matrix Spike Duplicate (MS/MSD)

MS/MSD results were within the established control limits. No data were qualified.

VII. Surrogates

All surrogate recoveries were within the established control limits. No data were qualified.

VIII. Internal Standards

Internal standard area summaries and retention time data were not submitted for review as part of the standard data deliverable.

IX. Laboratory Control Sample/Laboratory Control Sample Duplicate (LCS/LCSD)

LCS/LCSD percent recoveries were within established control limits, with two exceptions. The LCS/LCSD recoveries associated with SDG 316708 were high for bromobenzene and low for chloroform. Since all field samples associated with SDG 316708 were nondetect for both analytes, no data were qualified.

X. Field Duplicates

Field duplicates were collected for samples 110, 118, 122, and 129. Relative percent differences (RPDs) were calculated between field samples and their duplicates for detected analytes. Carbon tetrachloride was detected in samples 122 and 122FD. The calculated RPD was 0.57, indicating excellent sampling precision. No data were qualified.

XI. Comments

There are no additional comments on this SDG.

XII. Overall Assessment of Data

Overall data quality is acceptable, without qualifications. All data are usable for their intended purposes.

US EPA ARCHIVE DOCUMENT

ENSR CPT/MIP DATA

DATE : 10-11-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 01

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0	0	CLAYS
0.13	0	0.05	1.52	0	CLAYS
0.2	0	0.05	0.88	0	CLAYS
0.26	0	0.03	0.34	-0.01	CLAYS
0.33	0	0.04	0.36	0	CLAYS
0.39	9.22	0.08	0.56	-0.01	CLAYEY SANDY SILT&SILT
0.46	12.06	0.14	0.81	0	CLAYEY SANDY SILT&SILT
0.52	14.05	0.2	1.05	-0.01	CLAYEY SANDY SILT&SILT
0.59	15.71	0.26	1.29	0	CLAYEY SANDY SILT&SILT
0.66	18.02	0.33	1.55	0.04	CLAYEY SANDY SILT&SILT
0.72	20.61	0.39	1.82	0.05	CLAYEY SANDY SILT&SILT
0.79	22.37	0.46	2.12	0.04	CLAYEY SANDY SILT&SILT
0.85	22.53	0.52	2.5	0.02	CLAYEY SANDY SILT&SILT
0.92	21.96	0.61	2.99	0	CLAYEY SANDY SILT&SILT
0.98	21.6	0.7	3.58	-0.01	CLAYEY SILT&SILTY CLAYS
1.05	20.71	0.75	3.97	-0.01	CLAYEY SILT&SILTY CLAYS
1.12	20	0.81	4.38	-0.01	CLAYEY SILT&SILTY CLAYS
1.18	18.94	0.84	4.71	-0.01	CLAYS
1.25	18.53	0.87	4.96	-0.03	CLAYS
1.31	18.05	0.84	4.92	-0.03	CLAYS
1.38	17.63	0.82	4.85	-0.02	CLAYS
1.44	17.35	0.77	4.62	-0.04	CLAYS
1.51	17.06	0.76	4.58	-0.13	CLAYS
1.57	16.51	0.71	4.28	-0.24	CLAYEY SILT&SILTY CLAYS
1.64	16.38	0.66	3.97	-0.21	CLAYEY SILT&SILTY CLAYS
1.71	16.42	0.61	3.67	-0.13	CLAYEY SILT&SILTY CLAYS
1.77	16.64	0.61	3.57	-0.2	CLAYEY SILT&SILTY CLAYS
1.84	16.45	0.56	3.23	-0.12	CLAYEY SILT&SILTY CLAYS
1.9	16.8	0.52	2.93	-0.16	CLAYEY SILT&SILTY CLAYS
1.97	16.93	0.51	2.81	-0.21	CLAYEY SANDY SILT&SILT
2.03	17.35	0.48	2.58	-0.15	CLAYEY SANDY SILT&SILT
2.1	17.83	0.49	2.57	-0.16	CLAYEY SANDY SILT&SILT
2.16	18.18	0.52	2.64	-0.26	CLAYEY SANDY SILT&SILT
2.23	18.91	0.55	2.67	-0.06	CLAYEY SANDY SILT&SILT
2.3	19.33	0.57	2.69	-0.06	CLAYEY SANDY SILT&SILT
2.36	19.84	0.62	2.85	-0.02	CLAYEY SANDY SILT&SILT
2.43	20.86	0.64	2.89	-0.11	CLAYEY SANDY SILT&SILT
2.49	22.02	0.6	2.64	-0.05	CLAYEY SANDY SILT&SILT
2.56	22.5	0.54	2.36	-0.08	CLAYEY SANDY SILT&SILT
2.62	22.44	0.47	2.06	-0.08	CLAYEY SANDY SILT&SILT
2.69	22.63	0.41	1.8	-0.01	CLAYEY SANDY SILT&SILT
2.76	22.91	0.37	1.63	0	CLAYEY SANDY SILT&SILT
2.82	22.82	0.32	1.44	0	CLAYEY SANDY SILT&SILT
2.89	22.85	0.26	1.14	0	SILTY SAND
2.95	22.66	0.21	0.93	0.01	SILTY SAND
3.02	22.5	0.19	0.88	0	SILTY SAND

US EPA ARCHIVE DOCUMENT

3.08	22.15	0.2	0.94	0.01	SILTY SAND
3.15	22.18	0.2	0.94	0	SILTY SAND
3.21	21.89	0.2	0.94	0	SILTY SAND
3.28	21.38	0.21	0.98	0.01	SILTY SAND
3.35	21.41	0.2	0.96	0	SILTY SAND
3.41	21.19	0.18	0.85	0.01	SILTY SAND
3.48	20.96	0.17	0.8	0	SILTY SAND
3.54	20.77	0.15	0.69	0.02	SILTY SAND
3.61	21.25	0.15	0.66	0.02	SILTY SAND
3.67	21.73	0.15	0.66	0.03	SILTY SAND
3.74	22.37	0.15	0.68	0.03	SILTY SAND
3.8	22.53	0.18	0.8	0.04	SILTY SAND
3.87	22.75	0.2	0.92	0.03	SILTY SAND
3.94	22.75	0.23	1.05	0.03	SILTY SAND
4	22.27	0.25	1.18	0.05	SILTY SAND
4.07	21.76	0.26	1.22	0.05	SILTY SAND
4.13	21.12	0.27	1.24	0.04	CLAYEY SANDY SILT&SILT
4.2	21.02	0.27	1.21	0.04	CLAYEY SANDY SILT&SILT
4.26	21.22	0.25	1.13	0.04	SILTY SAND
4.33	21.66	0.24	1.05	0.04	SILTY SAND
4.4	22.34	0.24	1.04	0.04	SILTY SAND
4.46	22.85	0.25	1.03	0.05	SILTY SAND
4.53	23.39	0.28	1.16	0.05	SILTY SAND
4.59	23.68	0.31	1.23	0.05	SILTY SAND
4.66	24.19	0.32	1.27	0.05	SILTY SAND
4.72	24.74	0.34	1.3	0.04	SILTY SAND
4.79	25.16	0.35	1.3	0.05	SILTY SAND
4.85	25.5	0.37	1.31	0.06	SILTY SAND
4.92	26.75	0.44	1.53	0.04	CLAYEY SANDY SILT&SILT
4.99	27.39	0.49	1.63	0.06	CLAYEY SANDY SILT&SILT
5.05	28.36	0.54	1.76	0.06	CLAYEY SANDY SILT&SILT
5.12	29.54	0.58	1.86	0.05	CLAYEY SANDY SILT&SILT
5.18	30.5	0.63	1.97	0.05	CLAYEY SANDY SILT&SILT
5.25	31.26	0.68	2.12	0.06	CLAYEY SANDY SILT&SILT
5.31	32.32	0.71	2.22	0.05	CLAYEY SANDY SILT&SILT
5.38	32.77	0.73	2.32	0.04	CLAYEY SANDY SILT&SILT
5.44	32.35	0.74	2.36	0.03	CLAYEY SANDY SILT&SILT
5.51	31.75	0.74	2.35	0.02	CLAYEY SANDY SILT&SILT
5.58	31.01	0.76	2.36	0.03	CLAYEY SANDY SILT&SILT
5.64	31.01	0.78	2.38	0.03	CLAYEY SANDY SILT&SILT
5.71	31.53	0.81	2.41	0.03	CLAYEY SANDY SILT&SILT
5.77	32.13	0.84	2.43	0.06	CLAYEY SANDY SILT&SILT
5.84	32.93	0.84	2.41	0.08	CLAYEY SANDY SILT&SILT
5.9	34.12	0.86	2.45	0.05	CLAYEY SANDY SILT&SILT
5.97	35.3	0.92	2.62	0.05	CLAYEY SANDY SILT&SILT
6.04	35.75	0.98	2.83	0.08	CLAYEY SANDY SILT&SILT
6.1	35.91	1	2.96	0.07	CLAYEY SANDY SILT&SILT
6.17	35.01	0.99	2.97	0.06	CLAYEY SANDY SILT&SILT
6.23	33.99	0.97	2.96	0.06	CLAYEY SANDY SILT&SILT
6.3	33.48	0.95	2.97	0.03	CLAYEY SANDY SILT&SILT
6.36	32.87	0.93	2.96	0.05	CLAYEY SANDY SILT&SILT
6.43	32.26	0.9	2.92	0.08	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

6.49	32.13	0.87	2.91	0.07	CLAYEY SANDY SILT&SILT
6.56	31.36	0.84	2.91	0.08	CLAYEY SANDY SILT&SILT
6.63	30.5	0.79	2.81	0.09	CLAYEY SANDY SILT&SILT
6.69	29.47	0.77	2.78	0.11	CLAYEY SANDY SILT&SILT
6.76	28.64	0.72	2.66	0.1	CLAYEY SANDY SILT&SILT
6.82	27.33	0.69	2.57	0.1	CLAYEY SANDY SILT&SILT
6.89	26.98	0.64	2.44	0.1	CLAYEY SANDY SILT&SILT
6.95	26.28	0.59	2.29	0.11	CLAYEY SANDY SILT&SILT
7.02	26.4	0.54	2.13	0.12	CLAYEY SANDY SILT&SILT
7.08	26.82	0.5	2.02	0.12	CLAYEY SANDY SILT&SILT
7.15	26.5	0.48	1.96	0.12	CLAYEY SANDY SILT&SILT
7.22	24.64	0.45	1.86	0.11	CLAYEY SANDY SILT&SILT
7.28	23.55	0.42	1.72	0.12	CLAYEY SANDY SILT&SILT
7.35	23.91	0.4	1.62	0.13	CLAYEY SANDY SILT&SILT
7.41	24.64	0.4	1.62	0.13	CLAYEY SANDY SILT&SILT
7.48	25.06	0.4	1.6	0.12	CLAYEY SANDY SILT&SILT
7.54	24.58	0.37	1.5	0.13	CLAYEY SANDY SILT&SILT
7.61	25.19	0.35	1.39	0.12	SILTY SAND
7.68	25.08	0.35	1.39	0.14	SILTY SAND
7.74	24.97	0.35	1.4	0.12	CLAYEY SANDY SILT&SILT
7.81	24.86	0.36	1.42	0.14	CLAYEY SANDY SILT&SILT
7.87	25	0.36	1.46	0.13	CLAYEY SANDY SILT&SILT
7.94	25.57	0.38	1.52	0.12	CLAYEY SANDY SILT&SILT
8	25.57	0.41	1.65	0.13	CLAYEY SANDY SILT&SILT
8.07	25.28	0.44	1.78	0.13	CLAYEY SANDY SILT&SILT
8.13	24.32	0.45	1.86	0.14	CLAYEY SANDY SILT&SILT
8.2	24.26	0.47	1.92	0.13	CLAYEY SANDY SILT&SILT
8.27	24.55	0.49	1.97	0.13	CLAYEY SANDY SILT&SILT
8.33	24.45	0.48	1.92	0.13	CLAYEY SANDY SILT&SILT
8.4	24.13	0.47	1.84	0.13	CLAYEY SANDY SILT&SILT
8.46	24.83	0.45	1.75	0.13	CLAYEY SANDY SILT&SILT
8.53	25.83	0.46	1.77	0.13	CLAYEY SANDY SILT&SILT
8.59	26.18	0.48	1.85	0.14	CLAYEY SANDY SILT&SILT
8.66	26.15	0.5	1.92	0.14	CLAYEY SANDY SILT&SILT
8.72	26.24	0.52	2	0.14	CLAYEY SANDY SILT&SILT
8.79	26.44	0.54	2.06	0.14	CLAYEY SANDY SILT&SILT
8.86	26.18	0.57	2.13	0.13	CLAYEY SANDY SILT&SILT
8.92	25.89	0.64	2.35	0.11	CLAYEY SANDY SILT&SILT
8.99	25.76	0.71	2.54	0.12	CLAYEY SANDY SILT&SILT
9.05	26.5	0.78	2.68	0.13	CLAYEY SANDY SILT&SILT
9.12	27.46	0.82	2.73	0.13	CLAYEY SANDY SILT&SILT
9.18	28.48	0.85	2.72	0.13	CLAYEY SANDY SILT&SILT
9.25	29.86	0.87	2.72	0.13	CLAYEY SANDY SILT&SILT
9.32	30.72	0.91	2.76	0.15	CLAYEY SANDY SILT&SILT
9.38	32.03	0.93	2.79	0.14	CLAYEY SANDY SILT&SILT
9.45	32.87	0.95	2.83	0.14	CLAYEY SANDY SILT&SILT
9.51	33.57	0.95	2.84	0.14	CLAYEY SANDY SILT&SILT
9.58	34.02	0.99	2.99	0.14	CLAYEY SANDY SILT&SILT
9.64	33.79	1	3.05	0.14	CLAYEY SANDY SILT&SILT
9.71	33.45	1	3.09	0.15	CLAYEY SANDY SILT&SILT
9.77	33.15	1.01	3.12	0.13	CLAYEY SANDY SILT&SILT
9.84	32.51	1.02	3.15	0.12	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

9.91	32.03	1.06	3.27	0.12	CLAYEY SANDY SILT&SILT
9.97	31.68	0.95	2.91	0.14	CLAYEY SANDY SILT&SILT
10.04	32.29	1	3.03	0.16	CLAYEY SANDY SILT&SILT
10.1	33.12	1.01	3.07	0.14	CLAYEY SANDY SILT&SILT
10.17	33.32	0.99	3.07	0.09	CLAYEY SANDY SILT&SILT
10.23	33.12	1.01	3.18	0.12	CLAYEY SANDY SILT&SILT
10.3	33.06	1.04	3.37	0.12	CLAYEY SANDY SILT&SILT
10.36	32.67	1.11	3.69	0.12	CLAYEY SILT&SILTY CLAYS
10.43	31.78	1.17	3.98	0.12	CLAYEY SILT&SILTY CLAYS
10.5	30.21	1.2	4.15	0.18	CLAYEY SILT&SILTY CLAYS
10.56	29.31	1.17	4.11	0.27	CLAYEY SILT&SILTY CLAYS
10.63	28.77	1.14	4	0.29	CLAYEY SILT&SILTY CLAYS
10.69	28.29	1.12	3.96	0.3	CLAYEY SILT&SILTY CLAYS
10.76	28.26	1.11	3.94	0.24	CLAYEY SILT&SILTY CLAYS
10.82	28.23	1.09	3.86	0.21	CLAYEY SILT&SILTY CLAYS
10.89	28.51	1.06	3.78	0.2	CLAYEY SILT&SILTY CLAYS
10.96	28.36	1.04	3.72	0.19	CLAYEY SILT&SILTY CLAYS
11.02	28.03	1.04	3.75	0.21	CLAYEY SILT&SILTY CLAYS
11.09	27.87	0.99	3.59	0.21	CLAYEY SILT&SILTY CLAYS
11.15	28.03	1.03	3.78	0.21	CLAYEY SILT&SILTY CLAYS
11.22	28.07	1.05	3.93	0.22	CLAYEY SILT&SILTY CLAYS
11.28	28.1	1.05	4	0.2	CLAYEY SILT&SILTY CLAYS
11.35	27.14	1.04	4.04	0.22	CLAYEY SILT&SILTY CLAYS
11.41	26.24	1.04	4.09	0.21	CLAYEY SILT&SILTY CLAYS
11.48	25.57	1.05	4.13	0.21	CLAYEY SILT&SILTY CLAYS
11.55	25.09	1.05	4.11	0.21	CLAYEY SILT&SILTY CLAYS
11.61	24.74	1.03	4.02	0.22	CLAYEY SILT&SILTY CLAYS
11.68	24.93	1.01	3.9	0.22	CLAYEY SILT&SILTY CLAYS
11.74	25.76	0.97	3.77	0.21	CLAYEY SILT&SILTY CLAYS
11.81	26.21	0.95	3.69	0.22	CLAYEY SILT&SILTY CLAYS
11.87	26.05	0.93	3.63	0.22	CLAYEY SILT&SILTY CLAYS
11.94	25.86	0.93	3.67	0.22	CLAYEY SILT&SILTY CLAYS
12	25.67	0.94	3.74	0.15	CLAYEY SILT&SILTY CLAYS
12.07	25.41	0.94	3.78	0.12	CLAYEY SILT&SILTY CLAYS
12.14	25.41	0.93	3.76	0.12	CLAYEY SILT&SILTY CLAYS
12.2	25.09	0.9	3.67	0.13	CLAYEY SILT&SILTY CLAYS
12.27	24.8	0.87	3.59	0.13	CLAYEY SILT&SILTY CLAYS
12.33	24.71	0.84	3.49	0.13	CLAYEY SILT&SILTY CLAYS
12.4	24.52	0.82	3.46	0.13	CLAYEY SILT&SILTY CLAYS
12.46	24.16	0.83	3.55	0.14	CLAYEY SILT&SILTY CLAYS
12.53	24.26	0.82	3.55	0.13	CLAYEY SILT&SILTY CLAYS
12.6	23.65	0.83	3.61	0.13	CLAYEY SILT&SILTY CLAYS
12.66	23.27	0.83	3.63	0.1	CLAYEY SILT&SILTY CLAYS
12.73	22.69	0.8	3.54	0.16	CLAYEY SILT&SILTY CLAYS
12.79	22.53	0.78	3.49	0.16	CLAYEY SILT&SILTY CLAYS
12.86	22.72	0.78	3.52	0.16	CLAYEY SILT&SILTY CLAYS
12.92	22.91	0.79	3.64	0.18	CLAYEY SILT&SILTY CLAYS
12.99	23.01	0.79	3.77	0.17	CLAYEY SILT&SILTY CLAYS
13.05	22.5	0.76	3.76	0.17	CLAYEY SILT&SILTY CLAYS
13.12	21.12	0.72	3.71	0.14	CLAYEY SILT&SILTY CLAYS
13.19	20.29	0.69	3.67	0.1	CLAYEY SILT&SILTY CLAYS
13.25	19.74	0.67	3.63	0.09	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

13.32	19.23	0.64	3.57	0.11	CLAYEY SILT&SILTY CLAYS
13.38	18.66	0.61	3.5	0.1	CLAYEY SILT&SILTY CLAYS
13.45	18.08	0.6	3.53	0.11	CLAYEY SILT&SILTY CLAYS
13.51	17.51	0.6	3.57	0.11	CLAYEY SILT&SILTY CLAYS
13.58	16.93	0.6	3.67	0.12	CLAYEY SILT&SILTY CLAYS
13.64	16.8	0.62	3.78	0.12	CLAYEY SILT&SILTY CLAYS
13.71	16.55	0.64	3.9	0.11	CLAYEY SILT&SILTY CLAYS
13.78	16.16	0.65	3.96	0.12	CLAYEY SILT&SILTY CLAYS
13.84	15.97	0.65	3.96	0.12	CLAYEY SILT&SILTY CLAYS
13.91	16.29	0.66	4.02	0.12	CLAYEY SILT&SILTY CLAYS
13.97	16.55	0.65	4.01	0.12	CLAYEY SILT&SILTY CLAYS
14.04	16.77	0.65	4.06	0.1	CLAYEY SILT&SILTY CLAYS
14.1	16.61	0.66	4.22	0.12	CLAYEY SILT&SILTY CLAYS
14.17	16.58	0.67	4.35	0.1	CLAYEY SILT&SILTY CLAYS
14.24	15.94	0.66	4.44	0.1	CLAYS
14.3	15.26	0.65	4.47	0.13	CLAYS
14.37	14.85	0.66	4.57	0.14	CLAYS
14.43	14.98	0.66	4.62	0.16	CLAYS
14.5	14.63	0.66	4.62	0.16	CLAYS
14.56	14.12	0.65	4.61	0.14	CLAYS
14.63	14.02	0.62	4.41	0.13	CLAYS
14.69	14.28	0.57	4.16	0.1	CLAYEY SILT&SILTY CLAYS
14.76	14.28	0.53	3.92	0.07	CLAYEY SILT&SILTY CLAYS
14.83	14.28	0.48	3.67	0.12	CLAYEY SILT&SILTY CLAYS
14.89	13.75	0.44	3.42	0.15	CLAYEY SILT&SILTY CLAYS
14.96	13.23	0.39	3.02	0.16	CLAYEY SILT&SILTY CLAYS
15.02	12.71	0.34	2.61	0.18	CLAYEY SILT&SILTY CLAYS
15.09	12.61	0.31	2.4	0.17	CLAYEY SANDY SILT&SILT
15.15	12.76	0.28	2.12	0.18	CLAYEY SANDY SILT&SILT
15.22	12.91	0.25	1.87	0.18	CLAYEY SANDY SILT&SILT
15.28	13.06	0.23	1.73	0.18	CLAYEY SANDY SILT&SILT
15.35	13.35	0.22	1.62	0.17	CLAYEY SANDY SILT&SILT
15.42	13.41	0.21	1.53	0.18	CLAYEY SANDY SILT&SILT
15.48	13.64	0.21	1.51	0.17	CLAYEY SANDY SILT&SILT
15.55	13.44	0.2	1.42	0.18	CLAYEY SANDY SILT&SILT
15.61	13.06	0.19	1.31	0.18	CLAYEY SANDY SILT&SILT
15.68	13.28	0.19	1.27	0.17	CLAYEY SANDY SILT&SILT
15.74	13.79	0.2	1.22	0.18	CLAYEY SANDY SILT&SILT
15.81	15.1	0.23	1.37	0.17	CLAYEY SANDY SILT&SILT
15.88	15.65	0.26	1.47	0.17	CLAYEY SANDY SILT&SILT
15.94	16	0.3	1.58	0.18	CLAYEY SANDY SILT&SILT
16.01	17.28	0.34	1.64	0.17	CLAYEY SANDY SILT&SILT
16.07	18.27	0.35	1.61	0.17	CLAYEY SANDY SILT&SILT
16.14	19.52	0.35	1.54	0.18	CLAYEY SANDY SILT&SILT
16.2	21.12	0.35	1.46	0.17	CLAYEY SANDY SILT&SILT
16.27	22.53	0.35	1.41	0.17	CLAYEY SANDY SILT&SILT
16.33	24	0.34	1.3	0.16	SILTY SAND
16.4	24.96	0.32	1.2	0.16	SILTY SAND
16.47	25.8	0.3	1.1	0.16	SILTY SAND
16.53	26.34	0.23	0.84	0.17	SILTY SAND
16.6	27.11	0.23	0.8	0.17	SILTY SAND
16.66	27.72	0.22	0.77	0.18	SILTY SAND

US EPA ARCHIVE DOCUMENT

16.73	28.29	0.23	0.77	0.16	SILTY SAND
16.79	28.71	0.23	0.76	0.16	SILTY SAND
16.86	28.93	0.23	0.75	0.17	SILTY SAND
16.92	29.64	0.24	0.74	0.16	SILTY SAND
16.99	30.31	0.24	0.72	0.16	SILTY SAND
17.06	30.98	0.24	0.71	0.17	SILTY SAND
17.12	32.13	0.25	0.7	0.16	SILTY SAND
17.19	33.82	0.26	0.72	0.17	SILTY SAND
17.25	35.81	0.27	0.75	0.17	SILTY SAND
17.32	37.47	0.29	0.8	0.17	SILTY SAND
17.38	37.83	0.3	0.84	0.17	SILTY SAND
17.45	37.29	0.31	0.9	0.17	SILTY SAND
17.52	36.26	0.31	0.95	0.17	SILTY SAND
17.58	34.72	0.3	0.95	0.16	SILTY SAND
17.65	33.09	0.28	0.94	0.17	SILTY SAND
17.71	31.91	0.27	0.91	0.16	SILTY SAND
17.78	30.53	0.24	0.86	0.16	SILTY SAND
17.84	29.19	0.24	0.84	0.17	SILTY SAND
17.91	28.58	0.22	0.81	0.16	SILTY SAND
17.97	27.84	0.22	0.82	0.17	SILTY SAND
18.04	27.81	0.21	0.79	0.16	SILTY SAND
18.11	27.55	0.2	0.76	0.16	SILTY SAND
18.17	27.14	0.19	0.73	0.17	SILTY SAND
18.24	27.05	0.19	0.73	0.16	SILTY SAND
18.3	26.78	0.18	0.73	0.16	SILTY SAND
18.37	26.08	0.18	0.75	0.17	SILTY SAND
18.43	25.35	0.17	0.75	0.17	SILTY SAND
18.5	24.74	0.17	0.76	0.16	SILTY SAND
18.56	23.88	0.16	0.76	0.17	SILTY SAND
18.63	23.01	0.15	0.73	0.16	SILTY SAND
18.7	21.92	0.15	0.7	0.16	SILTY SAND
18.76	20.71	0.15	0.68	0.17	SILTY SAND
18.83	19.84	0.15	0.64	0.16	SILTY SAND
18.89	19.68	0.15	0.58	0.16	SILTY SAND
18.96	20.19	0.15	0.5	0.16	SILTY SAND
19.02	22.18	0.15	0.44	0.16	SILTY SAND
19.09	25.28	0.17	0.43	0.16	SILTY SAND
19.16	29.44	0.19	0.43	0.16	SILTY SAND
19.22	34.91	0.21	0.43	0.17	SILTY SAND
19.29	40.96	0.24	0.43	0.17	SANDS
19.35	46.98	0.27	0.45	0.16	SANDS
19.42	52.51	0.3	0.47	0.16	SANDS
19.48	57.38	0.35	0.51	0.17	SANDS
19.55	62.5	0.42	0.57	0.16	SANDS
19.61	66.71	0.48	0.63	0.17	SANDS
19.68	70.93	0.48	0.6	0.17	SANDS
19.75	75.14	0.49	0.58	0.16	SANDS
19.81	78.69	0.49	0.56	0.16	SANDS
19.88	82.15	0.49	0.54	0.17	SANDS
19.94	86.09	0.53	0.56	0.17	SANDS
20.01	89.54	0.58	0.59	0.16	SANDS
20.07	93	0.65	0.64	0.16	SANDS

US EPA ARCHIVE DOCUMENT

20.14	96.45	0.73	0.7	0.17	SANDS
20.2	99.91	0.81	0.75	0.16	SANDS
20.27	102.95	0.87	0.79	0.16	SANDS
20.34	105.67	0.94	0.84	0.16	SANDS
20.4	108.42	1.01	0.89	0.16	SANDS
20.47	111.46	1.08	0.94	0.17	SANDS
20.53	113.74	1.16	1	0.17	SANDS
20.6	115.72	1.23	1.06	0.16	SANDS
20.66	116.81	1.29	1.1	0.16	SANDS
20.73	116.87	1.34	1.15	0.17	SANDS
20.8	116.39	1.37	1.17	0.16	SANDS
20.86	115.81	1.41	1.18	0.17	SANDS
20.93	116.1	1.46	1.21	0.17	SANDS
20.99	117.06	1.49	1.21	0.17	SANDS
21.06	118.86	1.53	1.22	0.16	SANDS
21.12	121.29	1.57	1.24	0.17	SANDS
21.19	124.36	1.59	1.24	0.16	SANDS
21.25	126.66	1.6	1.23	0.17	SANDS
21.32	128.62	1.58	1.21	0.18	SANDS
21.39	130.72	1.58	1.21	0.17	SANDS
21.45	131.53	1.56	1.2	0.18	SANDS
21.52	131.91	1.52	1.18	0.19	SANDS
21.58	131.82	1.47	1.15	0.17	SANDS
21.65	130.18	1.43	1.12	0.18	SANDS
21.71	128.39	1.42	1.12	0.18	SANDS
21.78	126.95	1.44	1.14	0.18	SANDS
21.84	126.21	1.46	1.14	0.18	SANDS
21.91	125.96	1.48	1.15	0.17	SANDS
21.98	126.38	1.51	1.15	0.18	SANDS
22.04	127.21	1.55	1.16	0.19	SANDS
22.11	128.71	1.58	1.15	0.19	SANDS
22.17	131.21	1.6	1.13	0.18	SANDS
22.24	134.28	1.57	1.09	0.19	SANDS
22.3	139.05	1.55	1.05	0.19	SANDS
22.37	144.07	1.54	1.04	0.2	SANDS
22.44	148.43	1.53	1.03	0.19	SANDS
22.5	150.92	1.52	1.04	0.19	SANDS
22.57	151.53	1.51	1.05	0.2	SANDS
22.63	149.42	1.51	1.08	0.2	SANDS
22.7	146.05	1.54	1.12	0.2	SANDS
22.76	142.41	1.59	1.19	0.19	SANDS
22.83	138.25	1.62	1.23	0.2	SANDS
22.89	133.99	1.54	1.18	0.21	SANDS
22.96	131.05	1.46	1.13	0.21	SANDS
23.03	129.7	1.38	1.07	0.2	SANDS
23.09	130.12	1.31	1.01	0.21	SANDS
23.16	129.96	1.23	0.95	0.21	SANDS
23.22	129.8	1.29	1.01	0.21	SANDS
23.29	129.64	1.31	1.04	0.22	SANDS
23.35	129.48	1.32	1.07	0.23	SANDS
23.42	127.21	1.32	1.09	0.23	SANDS
23.48	125.1	1.34	1.13	0.22	SANDS

US EPA ARCHIVE DOCUMENT

23.55	122.34	1.37	1.19	0.23	SANDS
23.62	119.62	1.4	1.24	0.24	SANDS
23.68	117.03	1.39	1.28	0.23	SANDS
23.75	114.31	1.39	1.32	0.23	SANDS
23.81	111.43	1.39	1.37	0.23	SANDS
23.88	107.68	1.38	1.4	0.23	SANDS
23.94	102.79	1.37	1.43	0.24	SANDS
24.01	98.95	1.33	1.44	0.25	SANDS
24.08	95.97	1.27	1.41	0.24	SILTY SAND
24.14	93.8	1.19	1.37	0.25	SANDS
24.21	92.42	1.1	1.31	0.25	SANDS
24.27	90.21	0.99	1.23	0.24	SANDS
24.34	86.25	0.94	1.22	0.24	SANDS
24.4	81.92	0.91	1.23	0.25	SILTY SAND
24.47	77.7	0.9	1.26	0.25	SILTY SAND
24.53	74.44	0.92	1.32	0.25	SILTY SAND
24.6	71.91	0.95	1.37	0.25	SILTY SAND
24.67	69.48	0.94	1.36	0.25	SILTY SAND
24.73	68.1	0.92	1.32	0.25	SILTY SAND
24.8	67.81	0.92	1.3	0.25	SILTY SAND
24.86	68.51	0.91	1.26	0.25	SILTY SAND
24.93	69.64	0.88	1.2	0.25	SILTY SAND
24.99	70.66	0.86	1.15	0.26	SILTY SAND
25.06	72.13	0.84	1.11	0.25	SILTY SAND
25.12	74.08	0.83	1.1	0.25	SANDS
25.19	75.78	0.83	1.1	0.26	SANDS
25.26	77.16	0.82	1.09	0.25	SANDS
25.32	77.06	0.81	1.1	0.26	SANDS
25.39	76.04	0.81	1.11	0.26	SANDS
25.45	74.47	0.8	1.1	0.25	SANDS
25.52	72.49	0.79	1.08	0.25	SANDS
25.58	70.98	0.78	1.05	0.26	SANDS
25.65	70.79	0.76	1.02	0.26	SANDS
25.72	72.49	0.76	1.01	0.26	SANDS
25.78	75.49	0.77	1.04	0.26	SANDS
25.85	77.64	0.79	1.07	0.27	SANDS
25.91	77.25	0.81	1.13	0.26	SANDS
25.98	75.11	0.83	1.18	0.26	SILTY SAND
26.04	72.65	0.81	1.17	0.27	SILTY SAND
26.11	69.96	0.8	1.16	0.27	SILTY SAND
26.17	68.42	0.79	1.16	0.27	SILTY SAND
26.24	68.1	0.77	1.14	0.26	SILTY SAND
26.31	68.1	0.66	0.99	0.27	SANDS
26.37	68.2	0.55	0.84	0.27	SANDS
26.44	67.81	0.45	0.68	0.27	SANDS
26.5	66.55	0.47	0.73	0.26	SANDS
26.57	65.29	0.49	0.77	0.27	SANDS
26.63	64.04	0.51	0.8	0.26	SANDS
26.7	63.81	0.55	0.85	0.27	SANDS
26.76	64.04	0.59	0.89	0.26	SANDS
26.83	63.97	0.62	0.91	0.26	SANDS
26.9	63.94	0.65	0.92	0.27	SANDS

US EPA ARCHIVE DOCUMENT

26.96	65.57	0.7	0.96	0.26	SANDS
27.03	68.32	0.75	1.01	0.27	SANDS
27.09	71.78	0.82	1.09	0.27	SILTY SAND
27.16	74.82	0.91	1.22	0.26	SILTY SAND
27.22	77.03	0.99	1.36	0.26	SILTY SAND
27.29	77.47	1.06	1.5	0.26	SILTY SAND
27.36	75.97	1.11	1.64	0.27	SILTY SAND
27.42	73.09	1.16	1.79	0.27	SILTY SAND
27.49	69.45	1.21	1.96	0.26	SILTY SAND
27.55	66.08	1.25	2.11	0.26	SILTY SAND
27.62	62.34	1.28	2.24	0.27	SILTY SAND
27.68	59.75	1.29	2.33	0.27	SILTY SAND
27.75	58.05	1.34	2.5	0.25	CLAYEY SANDY SILT&SILT
27.81	56.07	1.44	2.76	0.26	CLAYEY SANDY SILT&SILT
27.88	53.6	1.61	3.16	0.27	CLAYEY SANDY SILT&SILT
27.95	52.23	1.78	3.54	0.25	CLAYEY SANDY SILT&SILT
28.01	51.46	1.91	3.86	0.26	CLAYEY SANDY SILT&SILT
28.08	50.4	2.01	4.11	0.27	CLAYEY SILT&SILTY CLAYS
28.14	49.57	2.06	4.26	0.27	CLAYEY SILT&SILTY CLAYS
28.21	49.28	2.06	4.31	0.27	CLAYEY SILT&SILTY CLAYS
28.27	48.81	2.04	4.33	0.28	CLAYEY SILT&SILTY CLAYS
28.34	48.17	2.04	4.38	0.29	CLAYEY SILT&SILTY CLAYS
28.4	47.75	2.06	4.5	0.28	CLAYEY SILT&SILTY CLAYS
28.47	46.82	2.1	4.66	0.3	CLAYEY SILT&SILTY CLAYS
28.54	46.34	2.14	4.85	0.29	CLAYEY SILT&SILTY CLAYS
28.6	45.48	2.19	5.04	0.31	CLAYEY SILT&SILTY CLAYS
28.67	44.64	2.23	5.17	0.32	CLAYEY SILT&SILTY CLAYS
28.73	43.59	2.26	5.26	0.33	CLAYEY SILT&SILTY CLAYS
28.8	42.72	2.26	5.27	0.33	CLAYEY SILT&SILTY CLAYS
28.86	42.31	2.27	5.27	0.36	CLAYEY SILT&SILTY CLAYS
28.93	42.4	2.28	5.25	0.36	CLAYEY SILT&SILTY CLAYS
29	43.14	2.27	5.19	0.35	CLAYEY SILT&SILTY CLAYS
29.06	43.46	2.25	5.1	0.35	CLAYEY SILT&SILTY CLAYS
29.13	43.52	2.22	4.97	0.35	CLAYEY SILT&SILTY CLAYS
29.19	43.94	2.18	4.83	0.35	CLAYEY SILT&SILTY CLAYS
29.26	44.19	2.15	4.71	0.36	CLAYEY SILT&SILTY CLAYS
29.32	44.74	1.99	4.31	0.34	CLAYEY SILT&SILTY CLAYS
29.39	45.31	1.83	3.94	0.34	CLAYEY SILT&SILTY CLAYS
29.45	46.05	1.76	3.66	0.33	CLAYEY SANDY SILT&SILT
29.52	46.5	1.68	3.41	0.3	CLAYEY SANDY SILT&SILT
29.59	46.95	1.6	3.17	0.22	CLAYEY SANDY SILT&SILT
29.65	47.17	1.59	3.09	0.21	CLAYEY SANDY SILT&SILT
29.72	47.39	1.54	2.93	0.2	CLAYEY SANDY SILT&SILT
29.78	53.41	1.53	2.88	0.15	CLAYEY SANDY SILT&SILT
29.85	53.86	1.58	2.98	0.11	CLAYEY SANDY SILT&SILT
29.91	53.7	1.66	3.17	0.13	CLAYEY SANDY SILT&SILT
29.98	53.41	1.75	3.39	0.17	CLAYEY SANDY SILT&SILT
30.04	52.96	1.81	3.6	0.17	CLAYEY SANDY SILT&SILT
30.11	52.32	1.88	3.84	0.19	CLAYEY SANDY SILT&SILT
30.18	51.78	1.96	4.17	0.19	CLAYEY SILT&SILTY CLAYS
30.24	50.18	2.06	4.61	0.18	CLAYEY SILT&SILTY CLAYS
30.31	48.58	2.15	5.1	0.16	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

30.37	46.44	2.22	5.6	0.17	CLAYS
30.44	43.65	2.26	6.08	0.17	CLAYS
30.5	40.86	2.31	6.61	0.19	CLAYS
30.57	38.02	2.34	7.06	0.22	CLAYS
30.64	35.62	2.32	7.34	0.24	CLAYS
30.7	33.48	2.28	7.47	0.24	CLAYS
30.77	31.84	2.19	7.37	0.24	CLAYS
30.83	30.37	2.05	7.04	0.25	CLAYS
30.9	29.31	1.9	6.56	0.26	CLAYS
30.96	28.93	1.76	6.09	0.26	CLAYS
31.03	28.93	1.63	5.62	0.26	CLAYS
31.09	28.64	1.55	5.31	0.26	CLAYS
31.16	28.9	1.52	5.18	0.25	CLAYS
31.23	28.87	1.52	5.09	0.26	CLAYS
31.29	29.19	1.51	4.98	0.27	CLAYEY SILT&SILTY CLAYS
31.36	29.47	1.48	4.8	0.26	CLAYEY SILT&SILTY CLAYS
31.42	29.64	1.48	4.74	0.27	CLAYEY SILT&SILTY CLAYS
31.49	30.34	1.54	4.81	0.27	CLAYEY SILT&SILTY CLAYS
31.55	31.26	1.59	4.84	0.27	CLAYEY SILT&SILTY CLAYS
31.62	31.68	1.62	4.84	0.26	CLAYEY SILT&SILTY CLAYS
31.68	31.97	1.69	4.95	0.27	CLAYEY SILT&SILTY CLAYS
31.75	32.9	1.79	5.13	0.26	CLAYEY SILT&SILTY CLAYS
31.82	34.12	1.89	5.33	0.26	CLAYS
31.88	34.98	1.99	5.53	0.26	CLAYS
31.95	35.36	2.05	5.69	0.26	CLAYS
32.01	35.84	2.17	6.01	0.23	CLAYS
32.08	36.16	2.29	6.41	0.22	CLAYS
32.14	36.65	2.41	6.86	0.21	CLAYS
32.21	36.39	2.51	7.3	0.22	CLAYS
32.28	36.26	2.61	7.81	0.2	CLAYS
32.34	35.04	2.68	8.25	0.21	CLAYS
32.41	33.67	2.72	8.58	0.2	CLAYS
32.47	32.67	2.76	8.86	0.19	CLAYS
32.54	31.87	2.72	8.87	0.21	CLAYS
32.6	31.2	2.63	8.74	0.22	CLAYS
32.67	30.53	2.54	8.56	0.22	CLAYS
32.73	30.43	2.47	8.42	0.21	CLAYS
32.8	30.02	2.33	8.05	0.23	CLAYS
32.87	29.73	2.29	7.98	0.22	CLAYS
32.93	28.93	2.21	7.8	0.23	CLAYS
33	28.45	2.17	7.72	0.25	CLAYS
33.06	28.39	2.15	7.69	0.25	CLAYS
33.13	28.29	2.12	7.61	0.26	CLAYS
33.19	27.97	2.1	7.57	0.28	CLAYS
33.26	27.84	2.04	7.35	0.28	CLAYS
33.32	27.75	1.98	7.1	0.29	CLAYS
33.39	27.65	1.96	7.01	0.29	CLAYS
33.46	27.75	1.93	6.91	0.29	CLAYS
33.52	27.72	1.91	6.82	0.3	CLAYS
33.59	28.1	1.9	6.74	0.3	CLAYS
33.65	28.26	1.89	6.69	0.3	CLAYS
33.72	28.03	1.87	6.56	0.31	CLAYS

US EPA ARCHIVE DOCUMENT

33.78	27.97	1.86	6.43	0.32	CLAYS
33.85	28.03	1.84	6.29	0.32	CLAYS
33.92	28.45	1.83	6.13	0.32	CLAYS
33.98	28.97	1.81	5.93	0.33	CLAYS
34.05	29.67	1.79	5.69	0.32	CLAYS
34.11	29.89	1.83	5.61	0.33	CLAYS
34.18	30.43	1.88	5.46	0.33	CLAYS
34.24	31.46	1.94	5.28	0.32	CLAYS
34.31	32.84	2.01	5.05	0.32	CLAYEY SILT&SILTY CLAYS
34.37	34.46	2.09	4.8	0.33	CLAYEY SILT&SILTY CLAYS
34.44	37.29	2.17	4.52	0.31	CLAYEY SILT&SILTY CLAYS
34.51	40.49	2.25	4.22	0.3	CLAYEY SILT&SILTY CLAYS
34.57	44.42	2.28	3.87	0.29	CLAYEY SILT&SILTY CLAYS
34.64	49.41	2.24	3.47	0.26	CLAYEY SANDY SILT&SILT
34.7	55.17	2.16	3.11	0.21	CLAYEY SANDY SILT&SILT
34.77	61.57	2.05	2.8	0.19	CLAYEY SANDY SILT&SILT
34.83	68.39	1.88	2.48	0.18	SILTY SAND
34.9	74.08	1.68	2.18	0.18	SILTY SAND
34.96	77.96	1.48	1.91	0.18	SILTY SAND
35.03	79.02	1.29	1.68	0.18	SILTY SAND
35.1	78.5	1.07	1.4	0.16	SILTY SAND
35.16	77	0.91	1.18	0.16	SILTY SAND
35.23	75.72	0.81	1.03	0.17	SANDS
35.29	75.14	0.74	0.93	0.17	SANDS
35.36	75.88	0.71	0.85	0.16	SANDS
35.42	77.92	0.7	0.82	0.16	SANDS
35.49	80.81	0.7	0.8	0.17	SANDS
35.56	84.71	0.72	0.82	0.16	SANDS
35.62	87.91	0.75	0.84	0.17	SANDS
35.69	90.6	0.79	0.89	0.17	SANDS
35.75	90.22	0.82	0.93	0.16	SANDS
35.82	89.84	0.85	0.98	0.17	SANDS
35.88	89.47	0.87	1.02	0.17	SANDS
35.95	89.09	0.81	0.97	0.16	SANDS
36.01	86.37	0.75	0.91	0.17	SANDS
36.08	84.14	0.69	0.84	0.17	SANDS
36.15	82.53	0.64	0.77	0.16	SANDS
36.21	81.8	0.61	0.73	0.16	SANDS
36.28	79.43	0.6	0.7	0.16	SANDS
36.34	82.15	0.62	0.71	0.16	SANDS
36.41	84.61	0.64	0.72	0.16	SANDS
36.47	87.11	0.67	0.73	0.17	SANDS
36.54	89.25	0.7	0.77	0.17	SANDS
36.6	90.92	0.76	0.82	0.17	SANDS
36.67	92.07	0.8	0.87	0.17	SANDS
36.74	92.58	0.85	0.92	0.17	SANDS
36.8	92.61	0.86	0.94	0.17	SANDS
36.87	92.49	0.86	0.94	0.17	SANDS
36.93	92.07	0.86	0.93	0.17	SANDS
37	92.16	0.85	0.92	0.16	SANDS
37.06	92.23	0.84	0.92	0.17	SANDS
37.13	92.23	0.85	0.92	0.16	SANDS

US EPA ARCHIVE DOCUMENT

37.2	91.85	0.85	0.93	0.16	SANDS
37.26	91.55	0.86	0.93	0.16	SANDS
37.33	91.52	0.87	0.93	0.17	SANDS
37.39	91.91	0.87	0.92	0.17	SANDS
37.46	92.58	0.87	0.91	0.16	SANDS
37.52	93.38	0.86	0.9	0.17	SANDS
37.59	94.47	0.86	0.89	0.16	SANDS
37.65	95.49	0.86	0.88	0.17	SANDS
37.72	96.49	0.86	0.88	0.18	SANDS
37.79	97.45	0.86	0.88	0.18	SANDS
37.85	98.38	0.87	0.89	0.18	SANDS
37.92	98.79	0.88	0.91	0.18	SANDS
37.98	98.44	0.9	0.94	0.18	SANDS
38.05	97.57	0.91	0.96	0.17	SANDS
38.11	96.1	0.92	0.97	0.18	SANDS
38.18	94.85	0.94	0.99	0.18	SANDS
38.24	93.93	0.94	1	0.18	SANDS
38.31	94.02	0.96	1.02	0.17	SANDS
38.38	94.28	0.98	1.04	0.18	SANDS
38.44	94.79	1.01	1.07	0.17	SANDS
38.51	94.72	1.04	1.1	0.19	SANDS
38.57	94.6	1.07	1.14	0.19	SANDS
38.64	94.38	1.09	1.16	0.19	SANDS
38.7	94.05	1.11	1.19	0.18	SANDS
38.77	93.51	1.13	1.22	0.19	SANDS
38.84	93.35	1.2	1.3	0.17	SANDS
38.9	93.19	1.31	1.42	0.17	SILTY SAND
38.97	92.68	1.38	1.49	0.16	SILTY SAND
39.03	91.68	1.43	1.54	0.17	SILTY SAND
39.1	91.75	1.47	1.57	0.16	SILTY SAND
39.16	91.97	1.47	1.55	0.16	SILTY SAND
39.23	92.77	1.46	1.52	0.17	SILTY SAND
39.29	94.34	1.35	1.4	0.17	SILTY SAND
39.36	96.2	1.24	1.29	0.16	SANDS
39.43	97.38	1.13	1.18	0.16	SANDS
39.49	96.61	1.07	1.13	0.17	SANDS
39.56	95.85	1.01	1.07	0.19	SANDS
39.62	95.08	0.98	1.05	0.19	SANDS
39.69	94.31	0.98	1.05	0.18	SANDS
39.75	93.57	0.99	1.05	0.18	SANDS
39.82	92.87	0.97	1.03	0.18	SANDS
39.88	92.87	0.99	1.04	0.18	SANDS
39.95	92.87	1.03	1.07	0.19	SANDS
40.02	93.64	1.04	1.07	0.19	SANDS
40.08	95.62	1.03	1.06	0.19	SANDS
40.15	97.61	1.03	1.06	0.19	SANDS
40.21	98.47	1.03	1.06	0.19	SANDS
40.28	97.99	1.03	1.06	0.19	SANDS
40.34	96.42	1.04	1.07	0.2	SANDS
40.41	95.56	1.06	1.08	0.19	SANDS
40.48	96.04	1.07	1.08	0.18	SANDS
40.54	97.54	1.06	1.07	0.19	SANDS

US EPA ARCHIVE DOCUMENT

40.61	99.66	1.06	1.07	0.2	SANDS
40.67	100.64	1.08	1.11	0.2	SANDS
40.74	100.68	1.12	1.17	0.2	SANDS
40.8	99.66	1.16	1.25	0.19	SANDS
40.87	97.8	1.2	1.32	0.19	SANDS
40.93	95.02	1.2	1.37	0.18	SANDS
41	91.91	1.19	1.4	0.19	SILTY SAND
41.07	89.73	1.22	1.48	0.18	SILTY SAND
41.13	87.01	1.29	1.59	0.19	SILTY SAND
41.2	83.53	1.4	1.76	0.19	SILTY SAND
41.26	80.81	1.51	1.9	0.19	SILTY SAND
41.33	78.44	1.61	2	0.18	SILTY SAND
41.39	77	1.67	2.03	0.19	SILTY SAND
41.46	77.35	1.72	2.01	0.18	SILTY SAND
41.52	80.07	1.83	2.03	0.18	SILTY SAND
41.59	83.23	1.93	2.01	0.15	SILTY SAND
41.66	85.67	1.91	1.86	0.16	SILTY SAND
41.72	90.82	1.9	1.71	0.16	SILTY SAND
41.79	96.74	1.88	1.56	0.16	SILTY SAND
41.85	104.14	1.72	1.32	0.18	SANDS
41.92	113.83	1.61	1.15	0.2	SANDS
41.98	124.93	1.54	1.03	0.19	SANDS
42.05	136.36	1.46	0.93	0.2	SANDS
42.12	146.76	1.36	0.82	0.2	SANDS
42.18	154.95	1.31	0.76	0.2	SANDS
42.25	161.67	1.31	0.73	0.19	SANDS
42.31	168.42	1.36	0.74	0.2	SANDS
42.38	175.59	1.44	0.76	0.21	SANDS
42.44	183.3	1.53	0.79	0.2	SANDS
42.51	188.62	1.59	0.8	0.21	SANDS
42.57	191.72	1.57	0.77	0.21	SANDS
42.64	194.41	1.56	0.73	0.21	SANDS
42.71	197.39	1.54	0.7	0.21	SANDS
42.77	206.27	1.52	0.66	0.21	SANDS
42.84	215.16	1.63	0.68	0.22	SANDS
42.9	224.05	1.76	0.7	0.21	SANDS
42.97	232.94	1.84	0.71	0.21	SANDS
43.03	245.67	1.92	0.71	0.23	SANDS
43.1	257.39	2.06	0.75	0.23	SANDS
43.16	267.79	2.26	0.8	0.23	SANDS
43.23	275.82	2.46	0.86	0.22	SANDS
43.3	280.88	2.63	0.92	0.22	SANDS
43.36	284.62	2.72	0.95	0.23	SANDS
43.43	287.41	2.8	0.98	0.23	SANDS
43.49	288.91	2.89	1.02	0.22	SANDS
43.56	289.26	2.96	1.06	0.23	SANDS
43.62	286.51	2.98	1.08	0.24	SANDS
43.69	282.73	2.99	1.11	0.24	SANDS
43.76	278.16	3.04	1.16	0.23	SANDS
43.82	273.39	3.16	1.23	0.24	SANDS
43.89	267.47	3.23	1.3	0.24	SANDS
43.95	260.59	3.26	1.35	0.24	SANDS

US EPA ARCHIVE DOCUMENT

44.02	252.78	3.25	1.39	0.25	SANDS
44.08	244.36	3.22	1.41	0.25	SANDS
44.15	236.49	3.13	1.41	0.25	SANDS
44.21	229.51	3.03	1.39	0.24	SANDS
44.28	223.75	2.89	1.35	0.25	SANDS
44.35	219.05	2.73	1.29	0.25	SANDS
44.41	215.73	2.61	1.25	0.25	SANDS
44.48	212.46	2.54	1.23	0.25	SANDS
44.54	209.23	2.51	1.24	0.25	SANDS
44.61	206.38	2.52	1.25	0.25	SANDS
44.67	203.47	2.53	1.26	0.25	SANDS
44.74	201.48	2.53	1.27	0.27	SANDS
44.8	200.07	2.47	1.24	0.26	SANDS
44.87	198.54	2.4	1.19	0.27	SANDS
44.94	197.61	2.32	1.14	0.27	SANDS
45	198.15	2.23	1.08	0.28	SANDS
45.07	200.87	2.16	1.04	0.28	SANDS
45.13	204.3	2.12	1.01	0.28	SANDS
45.2	208.17	2.1	0.99	0.29	SANDS
45.26	210.25	2.09	0.98	0.29	SANDS
45.33	211.25	2.08	0.97	0.29	SANDS
45.4	212.53	2.08	0.98	0.29	SANDS
45.46	213.93	2.11	0.99	0.3	SANDS
45.53	215.18	2.11	0.99	0.3	SANDS
45.59	214.67	2.09	0.99	0.29	SANDS
45.66	213.03	2.03	0.97	0.3	SANDS
45.72	211.12	1.97	0.95	0.29	SANDS
45.79	209.03	1.91	0.93	0.31	SANDS
45.85	208.36	1.84	0.9	0.3	SANDS
45.92	207.28	1.78	0.88	0.31	SANDS
45.99	205.24	1.72	0.86	0.31	SANDS
46.05	203.21	1.77	0.89	0.3	SANDS
46.12	201.18	1.75	0.88	0.32	SANDS
46.18	199.15	1.76	0.89	0.32	SANDS
46.25	198.89	1.76	0.88	0.34	SANDS
46.31	198.67	1.72	0.86	0.34	SANDS
46.38	198.18	1.74	0.86	0.34	SANDS
46.45	198.25	1.81	0.89	0.33	SANDS
46.51	199.37	1.87	0.91	0.33	SANDS
46.58	201.04	1.89	0.9	0.35	SANDS
46.64	203.34	1.9	0.89	0.34	SANDS
46.71	206.25	1.92	0.87	0.34	SANDS
46.77	210.31	1.93	0.86	0.35	SANDS
46.84	216.3	1.97	0.86	0.35	SANDS
46.9	222.41	1.98	0.85	0.35	SANDS
46.97	228.17	2.03	0.85	0.36	SANDS
47.04	232.75	2.05	0.84	0.35	SANDS
47.1	235.6	2.07	0.84	0.36	SANDS
47.17	241.58	2.13	0.85	0.35	SANDS
47.23	245.84	2.19	0.87	0.36	SANDS
47.3	249.74	2.25	0.89	0.35	SANDS
47.36	252.52	2.33	0.93	0.36	SANDS

US EPA ARCHIVE DOCUMENT

47.43	254.29	2.42	0.97	0.36	SANDS
47.49	253.74	2.54	1.04	0.37	SANDS
47.56	251.76	2.62	1.09	0.36	SANDS
47.63	248.53	2.71	1.18	0.37	SANDS
47.69	246.41	2.86	1.31	0.37	SANDS
47.76	240.91	2.96	1.45	0.39	SANDS
47.82	231.5	3.01	1.62	0.39	SANDS
47.89	217.93	3.03	1.82	0.39	SANDS
47.95	198.92	2.95	1.99	0.39	SANDS
48.02	178.09	2.86	2.19	0.39	SILTY SAND
48.09	155.78	2.8	2.43	0.4	SILTY SAND
48.15	134.44	2.71	2.65	0.39	SILTY SAND
48.22	116.84	2.67	2.9	0.37	SILTY SAND
48.28	104.26	2.66	3.18	0.39	CLAYEY SANDY SILT&SILT
48.35	94.76	2.55	3.35	0.37	CLAYEY SANDY SILT&SILT
48.41	84.71	2.45	3.55	0.39	CLAYEY SANDY SILT&SILT
48.48	78.53	2.58	4.08	0.39	CLAYEY SANDY SILT&SILT
48.54	72.84	2.66	4.59	0.38	CLAYEY SILT&SILTY CLAYS
48.61	66.63	2.7	5.08	0.39	CLAYEY SILT&SILTY CLAYS
48.68	58.82	2.8	5.66	0.39	CLAYEY SILT&SILTY CLAYS
48.74	53.06	2.91	6.19	0.39	CLAYS
48.81	50.24	2.83	6.22	0.38	CLAYS
48.87	46.69	2.6	5.89	0.4	CLAYS
48.94	44.16	2.4	5.55	0.42	CLAYS
49	43.84	2.23	5.21	0.41	CLAYEY SILT&SILTY CLAYS
49.07	44.29	2.1	4.97	0.41	CLAYEY SILT&SILTY CLAYS
49.13	43.59	2	4.79	0.41	CLAYEY SILT&SILTY CLAYS
49.2	42.4	1.87	4.53	0.42	CLAYEY SILT&SILTY CLAYS
49.27	41.67	1.81	4.44	0.41	CLAYEY SILT&SILTY CLAYS
49.33	41.25	1.8	4.43	0.42	CLAYEY SILT&SILTY CLAYS
49.4	40.96	1.82	4.52	0.41	CLAYEY SILT&SILTY CLAYS
49.46	40.9	1.88	4.69	0.4	CLAYEY SILT&SILTY CLAYS
49.53	40.42	1.94	4.89	0.41	CLAYEY SILT&SILTY CLAYS
49.59	40	1.95	4.97	0.41	CLAYEY SILT&SILTY CLAYS
49.66	39.81	1.97	5.06	0.41	CLAYEY SILT&SILTY CLAYS
49.73	39.68	1.97	5.1	0.4	CLAYEY SILT&SILTY CLAYS
49.79	39.2	1.96	5.12	0.41	CLAYEY SILT&SILTY CLAYS
49.86	38.53	1.93	5.07	0.41	CLAYEY SILT&SILTY CLAYS
49.92	38.12	1.91	5.03	0.4	CLAYEY SILT&SILTY CLAYS
49.99	38.02	1.89	5	0.4	CLAYEY SILT&SILTY CLAYS
50.05	38.15	1.88	4.98	0.39	CLAYEY SILT&SILTY CLAYS
50.12	38.02	1.85	4.9	0.4	CLAYEY SILT&SILTY CLAYS
50.18	37.89	1.8	4.78	0.39	CLAYEY SILT&SILTY CLAYS
50.25	37.54	1.77	4.7	0.4	CLAYEY SILT&SILTY CLAYS
50.32	37.54	1.75	4.59	0.39	CLAYEY SILT&SILTY CLAYS
50.38	37.66	1.7	4.41	0.38	CLAYEY SILT&SILTY CLAYS
50.45	37.41	1.66	4.2	0.39	CLAYEY SILT&SILTY CLAYS
50.51	37.66	1.62	3.99	0.38	CLAYEY SILT&SILTY CLAYS
50.58	38.37	1.6	3.8	0.38	CLAYEY SILT&SILTY CLAYS
50.64	39.75	1.59	3.63	0.37	CLAYEY SANDY SILT&SILT
50.71	41.09	1.58	3.48	0.38	CLAYEY SANDY SILT&SILT
50.77	42.75	1.59	3.37	0.37	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

50.84	44.61	1.61	3.3	0.37	CLAYEY SANDY SILT&SILT
50.91	46.28	1.65	3.28	0.37	CLAYEY SANDY SILT&SILT
50.97	47.75	1.75	3.39	0.37	CLAYEY SANDY SILT&SILT
51.04	49.54	1.86	3.52	0.35	CLAYEY SANDY SILT&SILT
51.1	51.27	1.99	3.71	0.35	CLAYEY SANDY SILT&SILT
51.17	52.71	2.17	4.01	0.34	CLAYEY SILT&SILTY CLAYS
51.23	54.18	2.32	4.27	0.33	CLAYEY SILT&SILTY CLAYS
51.3	54.63	2.5	4.59	0.34	CLAYEY SILT&SILTY CLAYS
51.37	54.31	2.66	4.89	0.34	CLAYEY SILT&SILTY CLAYS
51.43	54.34	2.81	5.13	0.34	CLAYEY SILT&SILTY CLAYS
51.5	54.31	2.92	5.3	0.33	CLAYEY SILT&SILTY CLAYS
51.56	54.37	3	5.38	0.32	CLAYEY SILT&SILTY CLAYS
51.63	54.66	3.05	5.4	0.33	CLAYEY SILT&SILTY CLAYS
51.69	55.01	3.04	5.34	0.34	CLAYEY SILT&SILTY CLAYS
51.76	55.94	3	5.3	0.33	CLAYEY SILT&SILTY CLAYS
51.82	56.87	2.91	5.21	0.33	CLAYEY SILT&SILTY CLAYS
51.89	58.08	2.87	5.27	0.31	CLAYEY SILT&SILTY CLAYS
51.96	58.15	2.83	5.39	0.2	CLAYEY SILT&SILTY CLAYS
52.02	56.96	2.93	5.78	0.15	CLAYS
52.09	53.83	3.04	6.25	0.13	CLAYS
52.15	51.36	3.1	6.56	0.14	CLAYS
52.22	48.29	3.1	6.69	0.17	CLAYS
52.28	46.76	3.17	6.93	0.18	CLAYS
52.35	46.21	3.19	7.03	0.18	CLAYS
52.41	45.57	3.16	7.03	0.18	CLAYS
52.48	45.48	2.72	6.11	0.19	CLAYS
52.55	45.7	2.73	6.18	0.2	CLAYS
52.61	44.67	2.67	6.13	0.2	CLAYS
52.68	44.8	2.63	6.04	0.18	CLAYS
52.74	43.17	2.62	6.01	0.19	CLAYS
52.81	43.2	2.62	5.83	0.18	CLAYS
52.87	43.08	2.64	5.58	0.19	CLAYS
52.94	42.95	2.65	5.31	0.19	CLAYEY SILT&SILTY CLAYS
53.01	43.65	2.61	4.94	0.18	CLAYEY SILT&SILTY CLAYS
53.07	46.05	2.55	4.58	0.18	CLAYEY SILT&SILTY CLAYS
53.14	51.14	2.46	4.22	0.19	CLAYEY SILT&SILTY CLAYS
53.2	56.9	2.46	4.07	0.19	CLAYEY SILT&SILTY CLAYS
53.27	59.08	2.6	4.2	0.2	CLAYEY SILT&SILTY CLAYS
53.33	59.65	2.8	4.37	0.17	CLAYEY SILT&SILTY CLAYS
53.4	60.9	3.05	4.58	0.16	CLAYEY SILT&SILTY CLAYS
53.46	62.31	3.3	4.71	0.18	CLAYEY SILT&SILTY CLAYS
53.53	63.87	3.5	4.69	0.19	CLAYEY SILT&SILTY CLAYS
53.6	66.56	3.65	4.57	0.18	CLAYEY SILT&SILTY CLAYS
53.66	70.66	3.73	4.34	0.17	CLAYEY SILT&SILTY CLAYS
53.73	75.4	3.67	3.98	0.17	CLAYEY SANDY SILT&SILT
53.79	81.64	3.41	3.47	0.16	CLAYEY SANDY SILT&SILT
53.86	88.81	3.15	3.04	0.16	CLAYEY SANDY SILT&SILT
53.92	96.13	2.92	2.71	0.19	SILTY SAND
53.99	102.53	2.69	2.44	0.19	SILTY SAND
54.05	108.07	2.39	2.14	0.21	SILTY SAND
54.12	112.29	2.11	1.88	0.2	SILTY SAND
54.19	114.02	1.87	1.67	0.2	SILTY SAND

US EPA ARCHIVE DOCUMENT

54.25	113.51	1.62	1.44	0.2	SANDS
54.32	111.59	1.44	1.28	0.22	SANDS
54.38	110.44	1.32	1.17	0.22	SANDS
54.45	110.82	1.24	1.11	0.21	SANDS
54.51	112.42	1.22	1.09	0.2	SANDS
54.58	113.89	1.3	1.16	0.21	SANDS
54.65	113.48	1.35	1.21	0.21	SANDS
54.71	111.43	1.37	1.24	0.2	SANDS
54.78	110.66	1.35	1.24	0.21	SANDS
54.84	111.62	1.35	1.25	0.21	SANDS
54.91	110.38	1.29	1.2	0.21	SANDS
54.97	109.16	1.24	1.17	0.2	SANDS
55.04	107.34	1.16	1.13	0.19	SANDS
55.1	106.44	1.1	1.13	0.2	SANDS
55.17	105.99	1.06	1.17	0.19	SANDS
55.24	104.07	1.1	1.33	0.2	SANDS
55.3	99.43	1.23	1.64	0.2	SILTY SAND
55.37	91.17	1.38	2.01	0.19	SILTY SAND
55.43	79.11	1.42	2.23	0.2	SILTY SAND
55.5	65.45	1.39	2.36	0.2	SILTY SAND
55.56	57.67	1.52	2.69	0.2	CLAYEY SANDY SILT&SILT
55.63	57.51	1.62	3.02	0.2	CLAYEY SANDY SILT&SILT
55.69	61.99	1.73	3.44	0.21	CLAYEY SANDY SILT&SILT
55.76	59.39	1.84	4.03	0.2	CLAYEY SANDY SILT&SILT
55.83	53.09	1.94	4.67	0.23	CLAYEY SILT&SILTY CLAYS
55.89	49.06	1.94	5.02	0.2	CLAYEY SILT&SILTY CLAYS
55.96	41.99	1.97	5.35	0.18	CLAYEY SILT&SILTY CLAYS
56.02	36.8	1.98	5.37	0.19	CLAYS
56.09	34.56	1.92	5	0.19	CLAYEY SILT&SILTY CLAYS
56.15	33.96	1.86	4.56	0.2	CLAYEY SILT&SILTY CLAYS
56.22	35.49	1.83	4.21	0.2	CLAYEY SILT&SILTY CLAYS
56.29	38.47	1.7	3.72	0.19	CLAYEY SILT&SILTY CLAYS
56.35	41.7	1.55	3.29	0.18	CLAYEY SANDY SILT&SILT
56.42	45.95	1.42	3.01	0.18	CLAYEY SANDY SILT&SILT
56.48	48.67	1.28	2.75	0.18	CLAYEY SANDY SILT&SILT
56.55	50.08	1.2	2.67	0.18	CLAYEY SANDY SILT&SILT
56.61	49.15	1.15	2.72	0.19	CLAYEY SANDY SILT&SILT
56.68	46.66	1.08	2.73	0.18	CLAYEY SANDY SILT&SILT
56.74	43.75	1	2.72	0.17	CLAYEY SANDY SILT&SILT
56.81	41.09	0.94	2.73	0.18	CLAYEY SANDY SILT&SILT
56.88	38.27	0.75	2.36	0.17	CLAYEY SANDY SILT&SILT
56.94	34.88	0.72	2.4	0.17	CLAYEY SANDY SILT&SILT
57.01	32.29	0.81	2.88	0.17	CLAYEY SANDY SILT&SILT
57.07	30.72	0.94	3.56	0.17	CLAYEY SILT&SILTY CLAYS
57.14	28.67	1.08	4.4	0.17	CLAYEY SILT&SILTY CLAYS
57.2	26.98	1.25	5.44	0.16	CLAYS
57.27	25.57	1.38	6.42	0.16	CLAYS
57.33	24.03	1.38	6.81	0.17	CLAYS
57.4	22.08	1.3	6.75	0.18	CLAYS
57.47	20.22	1.31	6.96	0.13	CLAYS
57.53	18.72	1.28	6.82	0.12	CLAYS
57.6	18.18	1.24	6.55	0.14	CLAYS

US EPA ARCHIVE DOCUMENT

57.66	18.27	1.21	6.21	0.2	CLAYS
57.73	18.4	1.17	5.78	0.21	CLAYS
57.79	18.98	1.11	5.19	0.22	CLAYS
57.86	19.68	1.08	4.8	0.22	CLAYS
57.93	20.42	1.09	4.58	0.22	CLAYEY SILT&SILTY CLAYS
57.99	21.25	1.14	4.57	0.19	CLAYEY SILT&SILTY CLAYS
58.06	23.01	1.23	4.72	0.17	CLAYEY SILT&SILTY CLAYS
58.12	24.83	1.35	5.02	0.19	CLAYS
58.19	26.05	1.48	5.41	0.2	CLAYS
58.25	26.92	1.62	5.89	0.22	CLAYS
58.32	27.78	1.7	6.19	0.21	CLAYS
58.38	27.91	1.78	6.54	0.21	CLAYS
58.45	27.84	1.84	6.86	0.19	CLAYS
58.52	27.52	1.88	7.09	0.19	CLAYS
58.58	26.98	1.91	7.34	0.18	CLAYS
58.65	26.66	1.95	7.58	0.19	CLAYS
58.71	26.28	1.98	7.8	0.2	CLAYS
58.78	25.92	1.97	7.83	0.22	CLAYS
58.84	25.54	1.93	7.76	0.23	CLAYS
58.91	25.06	1.9	7.65	0.24	CLAYS
58.97	24.83	1.85	7.44	0.24	CLAYS
59.04	24.67	1.8	7.13	0.24	CLAYS
59.11	24.61	1.75	6.46	0.25	CLAYS
59.17	24.77	1.67	5.48	0.26	CLAYS
59.24	24.8	1.64	4.71	0.26	CLAYEY SILT&SILTY CLAYS
59.3	25.28	1.67	4.18	0.26	CLAYEY SILT&SILTY CLAYS
59.37	27.62	1.72	3.81	0.28	CLAYEY SILT&SILTY CLAYS
59.43	35.62	1.62	3.25	0.28	CLAYEY SANDY SILT&SILT
59.5	44.45	1.83	3.42	0.31	CLAYEY SANDY SILT&SILT
59.57	51.2	2.13	3.8	0.3	CLAYEY SANDY SILT&SILT
59.63	55.37	2.41	4.2	0.2	CLAYEY SILT&SILTY CLAYS
59.7	55.81	2.71	4.63	0.2	CLAYEY SILT&SILTY CLAYS
59.76	56.71	3	5.01	0.21	CLAYEY SILT&SILTY CLAYS
59.83	57.73	3.25	5.27	0.24	CLAYEY SILT&SILTY CLAYS
59.89	59.14	3.44	5.37	0.24	CLAYEY SILT&SILTY CLAYS
59.96	60.07	3.53	5.27	0.25	CLAYEY SILT&SILTY CLAYS
60.02	61.35	3.58	5.07	0.25	CLAYEY SILT&SILTY CLAYS
60.09	64.04	3.63	4.94	0.25	CLAYEY SILT&SILTY CLAYS
60.16	67.62	3.7	4.91	0.25	CLAYEY SILT&SILTY CLAYS
60.22	72.26	3.76	5	0.25	CLAYEY SILT&SILTY CLAYS
60.29	77.1	3.81	5.15	0.26	CLAYEY SILT&SILTY CLAYS
60.35	80.52	3.8	5.33	0.25	CLAYEY SILT&SILTY CLAYS
60.42	79.56	3.7	5.49	0.25	CLAYEY SILT&SILTY CLAYS
60.48	74.28	3.62	5.71	0.31	CLAYEY SILT&SILTY CLAYS
60.55	68.1	3.56	5.89	0.2	CLAYS
60.61	64.42	3.63	6.04	0.1	CLAYS
60.68	60.77	3.71	5.98	0.12	CLAYS
60.75	57.22	3.72	5.59	0.15	CLAYEY SILT&SILTY CLAYS
60.81	55.17	3.72	5.08	0.15	CLAYEY SILT&SILTY CLAYS
60.88	57.32	3.73	4.56	0.16	CLAYEY SILT&SILTY CLAYS
60.94	65.51	3.5	3.8	0.17	CLAYEY SANDY SILT&SILT
61.01	76.1	3.25	3.13	0.18	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

61.07	87.78	3.24	2.77	0.17	SILTY SAND
61.14	98.41	3.48	2.66	0.12	SILTY SAND
61.21	105.42	3.8	2.61	0.12	SILTY SAND
61.27	118.95	4	2.51	0.15	SILTY SAND
61.34	136.11	4.25	2.5	0.16	SILTY SAND
61.4	155.72	4.43	2.52	0.16	SILTY SAND
61.47	170.86	4.31	2.45	0.13	SILTY SAND
61.53	186.79	4.09	2.39	0.15	SILTY SAND
61.6	189.87	3.71	2.29	0.16	SILTY SAND
61.66	182.06	3.31	2.19	0.15	SILTY SAND
61.73	169.22	2.96	2.12	0.15	SILTY SAND
61.8	155.88	2.54	1.96	0.15	SILTY SAND
61.86	143.49	1.98	1.63	0.14	SANDS
61.93	132.58	1.52	1.34	0.14	SANDS
61.99	122.47	1.24	1.16	0.15	SANDS
62.06	115.24	1.03	1.01	0.14	SANDS
62.12	109.41	0.82	0.83	0.15	SANDS
62.19	103.98	0.61	0.63	0.15	SANDS
62.25	98.63	0.52	0.54	0.14	SANDS
62.32	94.47	0.5	0.52	0.14	SANDS
62.39	93.06	0.54	0.55	0.15	SANDS
62.45	94.72	0.51	0.51	0.15	SANDS
62.52	97.38	0.48	0.46	0.14	SANDS
62.58	97.25	0.5	0.47	0.14	SANDS
62.65	99.02	0.49	0.44	0.15	SANDS
62.71	102.02	0.46	0.39	0.14	SANDS
62.78	106.12	0.45	0.36	0.14	SANDS
62.85	113.18	0.45	0.34	0.15	SANDS
62.91	120.23	0.5	0.36	0.15	SANDS
62.98	127.29	0.52	0.35	0.15	SANDS
63.04	134.35	0.51	0.33	0.16	SANDS
63.11	141.41	0.54	0.33	0.16	SANDS
63.17	148.47	0.59	0.35	0.17	SANDS
63.24	155.53	0.7	0.41	0.17	SANDS
63.3	169.93	0.78	0.46	0.18	SANDS
63.37	180.65	0.93	0.58	0.17	SANDS
63.44	182.95	1.1	0.75	0.18	SANDS
63.5	176.39	1.17	0.91	0.17	SANDS
63.57	162.15	1.21	1.11	0.17	SANDS
63.63	142.98	1.27	1.4	0.18	SANDS
63.7	120.58	1.31	1.78	0.17	SILTY SAND
63.76	96	1.43	2.38	0.18	SILTY SAND
63.83	73.44	1.56	3.07	0.17	CLAYEY SANDY SILT&SILT
63.89	58.88	1.62	3.59	0.18	CLAYEY SANDY SILT&SILT
63.96	50.08	1.61	3.81	0.17	CLAYEY SANDY SILT&SILT
64.03	43.46	1.68	4.09	0.18	CLAYEY SILT&SILTY CLAYS
64.09	39.75	1.69	4.12	0.17	CLAYEY SILT&SILTY CLAYS
64.16	39.43	1.71	4.17	0.17	CLAYEY SILT&SILTY CLAYS
64.22	39.71	1.72	4.29	0.18	CLAYEY SILT&SILTY CLAYS
64.29	40.8	1.73	4.5	0.18	CLAYEY SILT&SILTY CLAYS
64.35	43.94	1.74	4.82	0.19	CLAYEY SILT&SILTY CLAYS
64.42	43.24	1.82	5.52	0.2	CLAYS

US EPA ARCHIVE DOCUMENT

64.49	38.47	1.89	6.37	0.2	CLAYS
64.55	34.34	1.91	7.1	0.2	CLAYS
64.62	30.24	1.88	7.66	0.19	CLAYS
64.68	26.98	1.84	8.05	0.2	CLAYS
64.75	24.71	1.71	7.91	0.19	CLAYS
64.81	23.01	1.52	7.39	0.2	CLAYS
64.88	21.76	1.37	6.92	0.22	CLAYS
64.94	20.74	1.22	6.36	0.23	CLAYS
65.01	20.07	1.1	5.93	0.23	CLAYS
65.08	19.3	1.02	5.6	0.23	CLAYS
65.14	18.85	0.97	5.31	0.22	CLAYS
65.21	18.21	0.93	4.96	0.23	CLAYS
65.27	17.83	0.91	4.57	0.23	CLAYS
65.34	17.54	0.9	4.08	0.23	CLAYEY SILT&SILTY CLAYS
65.4	17.95	0.89	3.47	0.23	CLAYEY SILT&SILTY CLAYS
65.47	19.2	0.9	2.89	0.23	CLAYEY SANDY SILT&SILT
65.53	21.41	0.92	2.38	0.22	CLAYEY SANDY SILT&SILT
65.6	24.96	0.92	1.96	0.23	CLAYEY SANDY SILT&SILT
65.67	31.04	0.95	1.68	0.23	CLAYEY SANDY SILT&SILT
65.73	39.85	1	1.54	0.25	SILTY SAND
65.8	51.23	1.02	1.41	0.23	SILTY SAND
65.86	63.14	1.03	1.32	0.17	SILTY SAND
65.93	73.13	1.04	1.28	0.11	SILTY SAND
65.99	79.2	0.98	1.18	0.18	SANDS
66.06	82.63	0.79	0.94	0.17	SANDS
66.13	84.04	0.77	0.9	0.18	SANDS
66.19	84.78	0.75	0.86	0.17	SANDS
66.26	82.28	0.69	0.78	0.18	SANDS
66.32	85.99	0.65	0.71	0.19	SANDS
66.39	87.34	0.67	0.72	0.2	SANDS
66.45	89.29	0.71	0.74	0.18	SANDS
66.52	91.52	0.78	0.8	0.19	SANDS
66.58	93.96	0.86	0.86	0.19	SANDS
66.65	96.71	0.94	0.91	0.18	SANDS
66.72	99.14	0.98	0.93	0.19	SANDS
66.78	101.22	1.02	0.94	0.19	SANDS
66.85	103.34	1.04	0.93	0.19	SANDS
66.91	106.12	1.06	0.92	0.18	SANDS
66.98	109.35	1.12	0.94	0.19	SANDS
67.04	113.83	1.17	0.96	0.17	SANDS
67.11	118.09	1.23	0.98	0.18	SANDS
67.17	121.89	1.29	1.01	0.19	SANDS
67.24	125.19	1.33	1.03	0.18	SANDS
67.31	127.46	1.39	1.05	0.18	SANDS
67.37	129.58	1.41	1.07	0.17	SANDS
67.44	131.27	1.44	1.08	0.17	SANDS
67.5	132.81	1.46	1.09	0.18	SANDS
67.57	134.09	1.47	1.1	0.17	SANDS
67.63	134.47	1.46	1.09	0.18	SANDS
67.7	134.31	1.45	1.1	0.17	SANDS
67.77	133.67	1.46	1.1	0.17	SANDS
67.83	132.81	1.46	1.1	0.17	SANDS

US EPA ARCHIVE DOCUMENT

67.9	132.07	1.46	1.1	0.18	SANDS
67.96	131.59	1.45	1.1	0.18	SANDS
68.03	131.56	1.44	1.09	0.18	SANDS
68.09	132.04	1.43	1.07	0.17	SANDS
68.16	132.26	1.4	1.04	0.18	SANDS
68.22	132.68	1.37	1	0.17	SANDS
68.29	133	1.34	0.97	0.18	SANDS
68.36	134.44	1.32	0.94	0.18	SANDS
68.42	136.58	1.31	0.92	0.18	SANDS
68.49	138.89	1.3	0.89	0.18	SANDS
68.55	141.19	1.31	0.88	0.18	SANDS
68.62	143.53	1.31	0.86	0.18	SANDS
68.68	146.22	1.36	0.88	0.17	SANDS
68.75	149.74	1.39	0.87	0.18	SANDS
68.81	153.45	1.42	0.88	0.19	SANDS
68.88	157.39	1.45	0.88	0.19	SANDS
68.95	161.61	1.52	0.91	0.19	SANDS
69.01	164.94	1.57	0.93	0.19	SANDS
69.08	167.56	1.62	0.95	0.18	SANDS
69.14	168.78	1.65	0.96	0.19	SANDS
69.21	169.67	1.68	0.98	0.18	SANDS
69.27	170.38	1.7	0.98	0.18	SANDS
69.34	170.95	1.71	0.98	0.19	SANDS
69.41	172.36	1.62	0.91	0.2	SANDS
69.47	174.57	1.59	0.88	0.19	SANDS
69.54	176.9	1.56	0.85	0.19	SANDS
69.6	174.03	1.54	0.82	0.19	SANDS
69.67	181.61	1.56	0.82	0.2	SANDS
69.73	186.5	1.62	0.84	0.2	SANDS
69.8	190.38	1.64	0.85	0.21	SANDS
69.86	194.15	1.69	0.89	0.19	SANDS
69.93	195.85	1.79	0.96	0.21	SANDS
70	195.31	1.84	1.02	0.2	SANDS
70.06	191.75	1.9	1.09	0.2	SANDS
70.13	185.93	1.92	1.16	0.21	SANDS
70.19	178.86	1.91	1.21	0.2	SANDS
70.26	169.96	1.85	1.24	0.2	SANDS
70.32	161.42	1.83	1.3	0.21	SANDS
70.39	153.51	1.76	1.35	0.22	SANDS
70.45	146.12	1.73	1.44	0.21	SANDS
70.52	138.44	1.79	1.65	0.2	SANDS
70.59	128.26	1.87	1.94	0.21	SILTY SAND
70.65	115.05	2.03	2.41	0.2	SILTY SAND
70.72	102.15	2.29	3.12	0.2	CLAYEY SANDY SILT&SILT
70.78	89.93	2.67	4.19	0.21	CLAYEY SANDY SILT&SILT
70.85	77.06	3.05	5.47	0.21	CLAYEY SILT&SILTY CLAYS
70.91	65.99	3.39	6.87	0.22	CLAYS
70.98	55.55	3.52	7.88	0.23	CLAYS
71.05	49.32	3.54	8.58	0.24	CLAYS
71.11	44.19	3.41	8.88	0.26	CLAYS
71.18	41.7	3.24	9.01	0.26	CLAYS
71.24	39.59	3.11	9.19	0.28	CLAYS

US EPA ARCHIVE DOCUMENT

71.31	37.66	2.99	9.37	0.28	CLAYS
71.37	34.82	2.84	9.38	0.3	CLAYS
71.44	32.2	2.65	9.11	0.31	CLAYS
71.5	29.89	2.46	8.68	0.33	CLAYS
71.57	28.8	2.32	8.24	0.35	CLAYS
71.64	28.23	2.22	7.86	0.35	CLAYS
71.7	27.81	2.15	7.65	0.36	CLAYS
71.77	27.65	2.12	7.59	0.35	CLAYS
71.83	28	2.14	7.67	0.34	CLAYS
71.9	28.74	2.15	7.66	0.33	CLAYS
71.96	28.87	2.14	7.54	0.32	CLAYS
72.03	27.52	2.11	7.26	0.33	CLAYS
72.09	26.95	2.09	6.96	0.32	CLAYS
72.16	27.42	2.07	6.55	0.32	CLAYS
72.23	29.03	1.96	5.86	0.32	CLAYS
72.29	30.89	1.77	5.06	0.32	CLAYEY SILT&SILTY CLAYS
72.36	32.42	1.64	4.44	0.31	CLAYEY SILT&SILTY CLAYS
72.42	33.76	1.64	4.2	0.31	CLAYEY SILT&SILTY CLAYS
72.49	36.26	1.64	3.92	0.3	CLAYEY SILT&SILTY CLAYS
72.55	37.66	1.66	3.71	0.3	CLAYEY SILT&SILTY CLAYS
72.62	39.17	1.71	3.59	0.3	CLAYEY SANDY SILT&SILT
72.69	41.5	1.82	3.59	0.28	CLAYEY SANDY SILT&SILT
72.75	45.38	1.8	3.36	0.27	CLAYEY SANDY SILT&SILT
72.82	50.92	2.06	3.72	0.27	CLAYEY SANDY SILT&SILT
72.88	54.66	2.18	3.9	0.28	CLAYEY SANDY SILT&SILT
72.95	54.69	2.43	4.37	0.26	CLAYEY SILT&SILTY CLAYS
73.01	57.83	2.68	4.88	0.19	CLAYEY SILT&SILTY CLAYS
73.08	57.73	2.9	5.49	0.17	CLAYEY SILT&SILTY CLAYS
73.14	56.04	2.95	5.85	0.16	CLAYS
73.21	54.91	2.97	6.17	0.14	CLAYS
73.28	52.87	2.99	6.54	0.07	CLAYS
73.34	49.54	3.04	6.96	0.08	CLAYS
73.41	45.76	3	7	0.06	CLAYS
73.47	43.65	3.01	6.88	0	CLAYS
73.54	41.96	3.15	6.86	-0.06	CLAYS
73.6	40.9	3.09	6.26	-0.03	CLAYS
73.67	40.71	3.08	5.73	0.05	CLAYS
73.73	43.97	2.98	5.08	0.14	CLAYEY SILT&SILTY CLAYS
73.8	51.14	2.93	4.6	0.15	CLAYEY SILT&SILTY CLAYS
73.87	56.77	2.96	4.36	0.14	CLAYEY SILT&SILTY CLAYS
73.93	62.63	2.87	4	0.14	CLAYEY SANDY SILT&SILT
74	67.2	2.81	3.76	0.16	CLAYEY SANDY SILT&SILT
74.06	70.79	2.83	3.65	0.16	CLAYEY SANDY SILT&SILT
74.13	73.93	2.96	3.71	0.18	CLAYEY SANDY SILT&SILT
74.19	76.68	3.08	3.76	0.19	CLAYEY SANDY SILT&SILT
74.26	79.49	3.23	3.87	0.18	CLAYEY SANDY SILT&SILT
74.32	80.9	3.35	3.97	0.2	CLAYEY SANDY SILT&SILT
74.39	82.95	3.55	4.16	0.21	CLAYEY SANDY SILT&SILT
74.46	84.64	3.83	4.47	0.2	CLAYEY SILT&SILTY CLAYS
74.52	86.43	4.01	4.7	0.2	CLAYEY SILT&SILTY CLAYS
74.59	86.09	4.15	4.9	0.2	CLAYEY SILT&SILTY CLAYS
74.65	85.67	4.29	5.12	0.21	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

74.72	85.51	4.48	5.41	0.19	CLAYEY SILT&SILTY CLAYS
74.78	84.74	4.55	5.57	0.2	CLAYEY SILT&SILTY CLAYS
74.85	83.62	4.6	5.68	0.21	CLAYEY SILT&SILTY CLAYS
74.92	82.53	4.54	5.63	0.2	CLAYEY SILT&SILTY CLAYS
74.98	80.97	4.46	5.52	0.2	CLAYEY SILT&SILTY CLAYS
75.05	79.46	4.36	5.39	0.19	CLAYEY SILT&SILTY CLAYS
75.11	78.92	4.26	5.31	0.2	CLAYEY SILT&SILTY CLAYS
75.18	79.94	4.24	5.36	0.19	CLAYEY SILT&SILTY CLAYS
75.24	81.77	4.4	5.69	0.19	CLAYEY SILT&SILTY CLAYS
75.31	84.17	4.59	6.14	0.18	CLAYS
75.37	81.73	4.69	6.6	0.16	CLAYS
75.44	75.65	4.77	7.05	0.15	CLAYS
75.51	71.46	4.93	7.51	0.16	CLAYS
75.57	69.22	5.02	7.71	0.19	CLAYS
75.64	65.83	4.97	7.5	0.22	CLAYS
75.7	62.47	4.81	6.82	0.24	CLAYS
75.77	61.73	4.54	5.79	0.25	CLAYS
75.83	63.46	4.27	4.75	0.26	CLAYEY SILT&SILTY CLAYS
75.9	67.56	4.06	3.87	0.27	CLAYEY SANDY SILT&SILT
75.96	76.49	3.92	3.2	0.28	CLAYEY SANDY SILT&SILT
76.03	90.92	4.09	2.91	0.28	SILTY SAND
76.1	110.69	3.89	2.46	0.28	SILTY SAND
76.16	130.69	3.6	2.06	0.23	SILTY SAND
76.23	153.45	3.36	1.78	0.12	SANDS
76.29	171.66	3.24	1.61	0.12	SANDS
76.36	185.71	3.08	1.46	0.12	SANDS
76.42	197.42	2.96	1.34	0.12	SANDS
76.49	207.53	2.92	1.27	0.12	SANDS
76.56	216.43	2.7	1.13	0.12	SANDS
76.62	225.58	2.51	1.01	0.13	SANDS
76.69	234.76	2.5	0.97	0.13	SANDS
76.75	244.36	2.58	0.97	0.13	SANDS
76.82	254.09	2.66	0.97	0.13	SANDS
76.88	262.22	2.71	0.97	0.14	SANDS
76.95	270.57	2.78	0.97	0.13	SANDS
77.01	277.81	2.86	0.98	0.14	SANDS
77.08	284.27	2.95	0.99	0.13	SANDS
77.15	289.65	3.03	1	0.15	SANDS
77.21	295.47	3.15	1.02	0.14	SANDS
77.28	300.75	3.24	1.04	0.15	SANDS
77.34	305.97	3.35	1.06	0.15	SANDS
77.41	311.41	3.45	1.08	0.15	SANDS
77.47	315.79	3.57	1.11	0.15	SANDS
77.54	319.37	3.7	1.14	0.15	SANDS
77.6	321.78	3.8	1.17	0.15	SANDS
77.67	323.89	3.91	1.2	0.15	SANDS
77.74	325.2	3.97	1.21	0.16	SANDS
77.8	326.74	4.11	1.25	0.15	SANDS
77.87	327.38	4.14	1.26	0.15	SANDS
77.93	327.54	4.17	1.27	0.17	SANDS
78	328.15	4.22	1.29	0.17	SANDS
78.06	327.99	4.24	1.3	0.17	SANDS

US EPA ARCHIVE DOCUMENT

78.13	328.08	4.32	1.33	0.17	SANDS
78.2	327.31	4.35	1.35	0.16	SANDS
78.26	326.23	4.37	1.37	0.17	SANDS
78.33	324.05	4.37	1.39	0.16	SANDS
78.39	321.01	4.37	1.4	0.17	SANDS
78.46	317.97	4.36	1.41	0.17	SANDS
78.52	313.71	4.26	1.41	0.19	SANDS
78.59	310.67	4.13	1.38	0.18	SANDS
78.65	306.83	3.98	1.37	0.18	SANDS
78.72	301.9	3.87	1.36	0.19	SANDS
78.79	297	3.78	1.37	0.19	SANDS
78.85	290.09	3.68	1.37	0.19	SANDS
78.92	281.36	3.64	1.4	0.2	SANDS
78.98	272.27	3.53	1.4	0.19	SANDS
79.05	263.66	3.41	1.38	0.2	SANDS
79.11	255.28	3.25	1.35	0.21	SANDS
79.18	248.59	3.11	1.32	0.21	SANDS
79.24	242.32	2.98	1.29	0.22	SANDS
79.31	237.16	2.65	1.16	0.22	SANDS
79.38	233.23	2.52	1.12	0.21	SANDS
79.44	229.59	2.45	1.1	0.22	SANDS
79.51	225.95	2.39	1.09	0.24	SANDS
79.57	222.31	2.36	1.09	0.27	SANDS
79.64	218.67	2.42	1.12	0.28	SANDS
79.7	217.07	2.42	1.13	0.27	SANDS
79.77	215.76	2.45	1.14	0.28	SANDS
79.84	215.53	2.53	1.18	0.28	SANDS
79.9	215.12	2.62	1.23	0.29	SANDS
79.97	214.25	2.67	1.26	0.29	SANDS
80.03	213.74	2.71	1.28	0.3	SANDS
80.1	213.17	2.73	1.29	0.29	SANDS
80.16	212.23	2.7	1.28	0.29	SANDS
80.23	211.25	2.68	1.27	0.29	SANDS
80.29	209.9	2.65	1.25	0.3	SANDS
80.36	210	2.63	1.23	0.29	SANDS
80.43	210.64	2.62	1.22	0.3	SANDS
80.49	212.49	2.6	1.2	0.3	SANDS
80.56	213.51	2.6	1.18	0.32	SANDS
80.62	215.53	2.6	1.16	0.32	SANDS
80.69	217.65	2.63	1.15	0.32	SANDS
80.75	220.68	2.65	1.14	0.32	SANDS
80.82	224.72	2.7	1.13	0.33	SANDS
80.88	229.51	2.75	1.12	0.32	SANDS
80.95	235.43	2.83	1.12	0.33	SANDS
81.02	241.9	2.89	1.11	0.32	SANDS
81.08	248.37	2.97	1.11	0.33	SANDS
81.15	255.47	3.07	1.1	0.34	SANDS
81.21	263.15	3.17	1.1	0.34	SANDS
81.28	271.5	3.25	1.09	0.34	SANDS
81.34	281.17	3.34	1.07	0.35	SANDS
81.41	292.21	3.45	1.07	0.34	SANDS
81.48	303.98	3.59	1.07	0.35	SANDS

US EPA ARCHIVE DOCUMENT

81.54	316.94	3.68	1.06	0.35	SANDS
81.61	330.64	3.8	1.06	0.34	SANDS
81.67	344.43	3.89	1.05	0.36	SANDS
81.74	356.78	4.09	1.08	0.36	SANDS
81.8	366.9	4.28	1.11	0.35	SANDS
81.87	376.11	4.5	1.14	0.35	SANDS
81.93	383.32	4.69	1.17	0.36	SANDS
82	389.62	4.81	1.17	0.36	SANDS
82.07	395.12	4.93	1.17	0.37	SANDS
82.13	402.49	5.04	1.17	0.37	SANDS
82.2	412.76	5.08	1.14	0.36	SANDS
82.26	423.96	5.06	1.11	0.36	SANDS
82.33	437.85	5.03	1.08	0.38	SANDS
82.39	451.06	5.07	1.06	0.38	SANDS
82.46	465.84	5.11	1.05	0.38	SANDS
82.52	474.96	5.15	1.03	0.39	SANDS
82.59	484.08	5.26	1.04	0.38	SANDS
82.66	493.19	5.4	1.05	0.41	SANDS
82.72	502.31	5.6	1.07	0.43	SANDS
82.79	511.42	5.78	1.1	0.42	SANDS
82.85	521.62	6.03	1.14	0.44	SANDS
82.92	527.67	6.27	1.18	0.44	SANDS
82.98	534.3	6.5	1.22	0.43	SANDS
83.05	535.52	6.87	1.3	0.45	SANDS
83.12	534.75	7.08	1.36	0.43	SANDS
83.18	531.67	7.41	1.43	0.44	SANDS
83.25	525.85	7.82	1.53	0.45	SANDS
83.31	521.95	8.13	1.62	0.44	SANDS
83.38	515.67	8.28	1.67	0.44	SANDS
83.44	507.06	8.3	1.71	0.45	SANDS
83.51	498.68	8.32	1.74	0.46	SANDS
83.57	490.84	8.22	1.75	0.45	SANDS
83.64	481.43	7.99	1.73	0.45	SANDS
83.71	472.41	7.69	1.7	0.45	SANDS
83.77	463.35	7.24	1.62	0.45	SANDS
83.84	456.95	6.84	1.56	0.44	SANDS
83.9	449.46	6.7	1.55	0.44	SANDS
83.97	442.58	6.56	1.55	0.46	SANDS
84.03	436.09	6.54	1.57	0.45	SANDS
84.1	429.49	6.86	1.67	0.46	SANDS
84.16	420.08	7.37	1.81	0.45	SANDS
84.23	411.09	7.78	1.91	0.47	SANDS
84.3	405.49	7.85	1.93	0.47	SANDS
84.36	404.24	8.04	1.97	0.46	SANDS
84.43	403.16	7.83	1.92	0.47	SANDS
84.49	405.91	7.63	1.86	0.46	SANDS
84.56	407.89	7.42	1.81	0.46	SANDS
84.62	411.03	7.21	1.75	0.48	SANDS
84.69	411.19	6.88	1.67	0.48	SANDS
84.75	411.35	6.58	1.59	0.52	SANDS
84.82	411.51	6.38	1.55	0.51	SANDS
84.89	411.67	6.08	1.47	0.52	SANDS

US EPA ARCHIVE DOCUMENT

84.95	415.67	5.64	1.37	0.52	SANDS
85.02	413.37	5.21	1.28	0.54	SANDS
85.08	414.45	4.95	1.22	0.54	SANDS
85.15	409.87	4.76	1.18	0.55	SANDS
85.21	407.31	4.65	1.16	0.54	SANDS
85.28	405.01	4.55	1.14	0.55	SANDS
85.35	402.29	4.42	1.11	0.55	SANDS
85.41	399.35	4.26	1.07	0.56	SANDS
85.48	397.27	4.19	1.05	0.54	SANDS
85.54	396.02	4.17	1.04	0.56	SANDS
85.61	398.23	4.11	1.03	0.55	SANDS
85.67	401.71	4.1	1.02	0.56	SANDS
85.74	402.58	4.14	1.04	0.56	SANDS
85.8	401.36	4.26	1.08	0.56	SANDS
85.87	401.4	4.39	1.11	0.56	SANDS
85.94	399.67	4.51	1.15	0.56	SANDS
86	396.06	4.63	1.19	0.58	SANDS
86.07	392.45	4.52	1.17	0.59	SANDS
86.13	388.84	4.45	1.16	0.6	SANDS
86.2	385.24	4.43	1.15	0.6	SANDS
86.26	383.38	4.36	1.14	0.59	SANDS
86.33	382.58	4.38	1.14	0.6	SANDS
86.39	384.43	4.57	1.19	0.6	SANDS
86.46	383.6	4.59	1.2	0.59	SANDS
86.53	385.36	4.56	1.19	0.6	SANDS
86.59	382.96	4.59	1.2	0.6	SANDS
86.66	382.23	4.51	1.18	0.6	SANDS
86.72	382.19	4.52	1.18	0.6	SANDS
86.79	381.46	4.49	1.18	0.6	SANDS
86.85	381.84	4.47	1.17	0.59	SANDS
86.92	380.88	4.58	1.2	0.6	SANDS
86.99	382.96	4.62	1.21	0.6	SANDS
87.05	383.8	4.86	1.27	0.61	SANDS
87.12	381.49	5.03	1.31	0.61	SANDS
87.18	380.37	5.13	1.33	0.6	SANDS
87.25	380.76	5.34	1.38	0.6	SANDS
87.31	381.62	5.49	1.41	0.6	SANDS
87.38	385.97	5.55	1.41	0.61	SANDS
87.44	387.03	5.75	1.44	0.61	SANDS
87.51	390.83	5.95	1.47	0.62	SANDS
87.58	396.18	6.15	1.5	0.62	SANDS
87.64	399.51	6.47	1.55	0.62	SANDS
87.71	404.98	6.81	1.6	0.61	SANDS
87.77	411.22	7.05	1.63	0.61	SANDS
87.84	418.32	7.28	1.66	0.6	SANDS
87.9	427.73	7.24	1.62	0.61	SANDS
87.97	438.97	7.19	1.58	0.62	SANDS
88.03	445.07	7.14	1.55	0.63	SANDS
88.1	451.17	7.1	1.53	0.62	SANDS
88.17	457.28	7.05	1.51	0.65	SANDS
88.23	463.39	7.45	1.59	0.63	SANDS
88.3	469.49	7.99	1.7	0.65	SANDS

US EPA ARCHIVE DOCUMENT

88.36	471.96	8.44	1.8	0.65	SANDS
88.43	472.44	9.05	1.93	0.64	SANDS
88.49	470.23	9.69	2.06	0.65	SANDS
88.56	466.23	10.08	2.14	0.65	SANDS
88.63	465.69	10.12	2.13	0.64	SANDS
88.69	464.7	9.81	2.05	0.65	SANDS
88.76	470.62	9.31	1.92	0.64	SANDS
88.82	476.89	8.91	1.83	0.65	SANDS
88.89	480.83	8.56	1.75	0.64	SANDS
88.95	489.08	8.38	1.71	0.64	SANDS
89.02	492.38	8.49	1.73	0.65	SANDS
89.08	493.05	8.72	1.78	0.65	SANDS
89.15	491.03	8.93	1.82	0.64	SANDS
89.22	486.9	9.25	1.88	0.66	SANDS
89.28	488.31	9.68	1.96	0.64	SANDS
89.35	489.34	9.98	2.01	0.65	SANDS
89.41	491.23	9.98	2.01	0.65	SANDS
89.48	494.87	9.78	1.96	0.65	SANDS
89.54	499.42	9.82	1.98	0.66	SANDS
89.61	503.1	10.25	2.08	0.65	SANDS
89.67	501.11	10.52	2.15	0.65	SANDS
89.74	496.31	10.6	2.17	0.66	SANDS
89.81	491.58	10.68	2.19	0.67	SANDS
89.87	487.73	10.75	2.19	0.67	SANDS
89.94	474.07	10.83	2.17	0.69	SANDS
90	485.24	10.02	1.97	0.69	SANDS
90.07	495.58	9.27	1.78	0.71	SANDS
90.13	484.6	8.48	1.58	0.71	SANDS
90.2	520.47	7.84	1.41	0.7	SANDS
90.27	529.43	7.34	1.29	0.71	SANDS
90.33	543.16	7.11	1.21	0.72	SANDS
90.4	559.93	7.27	1.21	0.72	SANDS
90.46	580.76	7.68	1.25	0.72	SANDS
90.53	599.01	8.61	1.38	0.71	SANDS
90.59	613.85	8.85	1.41	0.71	SANDS
90.66	629.82	9.57	1.52	0.71	SANDS
90.72	629.73	10.5	1.65	0.7	SANDS
90.79	629.63	11.48	1.79	0.71	SANDS
90.86	629.53	11.98	1.86	0.71	SANDS
90.92	629.44	12.21	1.89	0.71	SANDS
90.99	640.16	12.17	1.88	0.71	SANDS
91.05	654.43	12.16	1.9	0.71	SANDS
91.12	659.74	12.2	1.94	0.71	SANDS
91.18	654.3	12.64	2.05	0.72	SANDS
91.25	642.21	13.06	2.18	0.71	SANDS
91.31	625.98	13.55	2.32	0.71	SANDS
91.38	606.59	13.98	2.47	0.71	SANDS
91.45	592.64	14.24	2.58	0.71	SANDS
91.51	574.11	14.2	2.64	0.72	SANDS
91.58	557.08	13.61	2.59	0.72	SANDS
91.64	541.24	12.64	2.46	0.71	SANDS
91.71	527.13	11.48	2.29	0.72	SANDS

US EPA ARCHIVE DOCUMENT

91.77	520.41	10.33	2.11	0.71	SANDS
91.84	509.49	9.34	1.97	0.71	SANDS
91.91	497.5	8.14	1.77	0.72	SANDS
91.97	486.65	7.07	1.6	0.71	SANDS
92.04	471.38	6.36	1.49	0.73	SANDS
92.1	453.88	5.89	1.44	0.73	SANDS
92.17	431.48	5.61	1.43	0.71	SANDS
92.23	414.23	5.26	1.39	0.72	SANDS
92.3	399.15	5.41	1.47	0.73	SANDS
92.36	384.24	5.68	1.59	0.73	SANDS
92.43	368.63	5.94	1.7	0.72	SANDS
92.5	355.25	6.2	1.8	0.74	SANDS
92.56	350.22	5.92	1.71	0.74	SANDS
92.63	345.2	5.66	1.6	0.73	SANDS
92.69	340.18	5.6	1.54	0.73	SANDS
92.76	335.15	5.59	1.46	0.74	SANDS
92.82	346.16	5.46	1.34	0.73	SANDS
92.89	363.66	5.29	1.22	0.73	SANDS
92.95	387.6	5.43	1.18	0.71	SANDS
93.02	415.57	5.63	1.14	0.7	SANDS
93.09	446.36	5.86	1.12	0.67	SANDS
93.15	476.15	6.22	1.14	0.67	SANDS
93.22	506.46	6.63	1.16	0.72	SANDS
93.28	537.34	6.92	1.16	0.72	SANDS
93.35	567.71	6.98	1.14	0.71	SANDS
93.41	589.98	7.17	1.14	0.72	SANDS
93.48	607.52	7.46	1.16	0.71	SANDS
93.55	625.5	7.75	1.18	0.71	SANDS
93.61	638.01	8.19	1.23	0.72	SANDS
93.68	652.1	8.58	1.27	0.7	SANDS
93.74	663.17	8.87	1.29	0.7	SANDS
93.81	674.85	9.72	1.41	0.7	SANDS
93.87	682.53	10.93	1.59	0.71	SANDS
93.94	695.81	12.16	1.79	0.7	SANDS
94	700.16	13.24	1.97	0.69	SANDS
94.07	695.97	14.08	2.12	0.69	SANDS
94.14	678.33	14.32	2.16	0.7	SANDS
94.2	660.86	14.12	2.13	0.7	SANDS
94.27	650.11	13.28	2	0.69	SANDS
94.33	648.61	11.89	1.79	0.7	SANDS
94.4	660.8	10.76	1.62	0.69	SANDS
94.46	675.9	9.75	1.47	0.7	SANDS
94.53	677.38	9.08	1.36	0.7	SANDS
94.59	664.86	8.84	1.41	0.69	SANDS
94.66	653.41	8.66	1.37	0.69	SANDS
94.73	650.18	8.09	1.25	0.7	SANDS
94.79	660.29	9	1.34	0.71	SANDS
94.86	686.08	8.51	1.23	0.69	SANDS
94.92	434.13	8.02	1.12	0.76	SANDS
94.99	709.48	7.78	1	0.77	SANDS
95.05	758.56	6.73	0.85	0.76	SANDS
95.12	777.54	6.49	0.8	0.77	SANDS

US EPA ARCHIVE DOCUMENT

95.18	787.43	6.25	0.76	0.78	SANDS
95.25	809.7	6	0.73	0.78	SANDS
95.32	815.98	5.76	0.69	0.77	SANDS
95.38	822.26	5.43	0.65	0.78	SANDS
95.45	828.54	5.15	0.61	0.79	SANDS
95.51	834.82	5.07	0.59	0.79	SANDS
95.58	841.1	4.99	0.57	0.79	SANDS
95.64	854.63	4.91	0.56	0.79	SANDS
95.71	864.2	4.83	0.54	0.77	SANDS
95.78	873.77	4.74	0.52	0.78	SANDS
95.84	883.34	4.74	0.51	0.78	SANDS
95.91	892.91	4.77	0.51	0.78	SANDS
95.97	926.76	4.72	0.5	0.77	SANDS
96.04	948.49	4.77	0.5	0.76	SANDS
96.1	938.45	4.73	0.6	0.78	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-11-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 01A

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0.04	0	CLAYS
0.13	0	0	0.03	0	CLAYS
0.2	0	0.01	0.26	0	CLAYS
0.26	0.03	0.04	0.52	-0.01	CLAYS
0.33	6.3	0.07	0.7	-0.02	CLAYEY SANDY SILT&SILT
0.39	7.55	0.1	0.86	-0.04	CLAYEY SANDY SILT&SILT
0.46	8.83	0.14	1.09	-0.04	CLAYEY SANDY SILT&SILT
0.52	11.3	0.18	1.25	-0.04	CLAYEY SANDY SILT&SILT
0.59	12.93	0.24	1.48	-0.04	CLAYEY SANDY SILT&SILT
0.66	13.86	0.3	1.68	-0.03	CLAYEY SANDY SILT&SILT
0.72	15.07	0.35	1.81	-0.04	CLAYEY SANDY SILT&SILT
0.79	16.42	0.42	1.99	-0.01	CLAYEY SANDY SILT&SILT
0.85	18.27	0.45	2.01	0.01	CLAYEY SANDY SILT&SILT
0.92	20.13	0.46	1.9	0.01	CLAYEY SANDY SILT&SILT
0.98	21.95	0.46	1.85	0.02	CLAYEY SANDY SILT&SILT
1.05	23.58	0.49	1.88	-0.09	CLAYEY SANDY SILT&SILT
1.12	24.99	0.5	1.87	-0.07	CLAYEY SANDY SILT&SILT
1.18	25.95	0.51	1.88	-0.05	CLAYEY SANDY SILT&SILT
1.25	26.88	0.54	1.95	-0.05	CLAYEY SANDY SILT&SILT
1.31	27.39	0.56	2.02	-0.05	CLAYEY SANDY SILT&SILT
1.38	27.68	0.59	2.15	-0.04	CLAYEY SANDY SILT&SILT
1.44	27.49	0.62	2.26	-0.03	CLAYEY SANDY SILT&SILT
1.51	27.84	0.66	2.38	-0.01	CLAYEY SANDY SILT&SILT
1.57	27.45	0.67	2.37	0.02	CLAYEY SANDY SILT&SILT
1.64	27.42	0.73	2.56	0.02	CLAYEY SANDY SILT&SILT
1.71	27.36	0.82	2.8	0.02	CLAYEY SANDY SILT&SILT
1.77	28.03	0.91	3.01	0.04	CLAYEY SANDY SILT&SILT
1.84	28.8	0.97	3.14	0.02	CLAYEY SANDY SILT&SILT
1.9	29.37	1.05	3.3	-0.01	CLAYEY SANDY SILT&SILT
1.97	30.08	1.14	3.47	0	CLAYEY SILT&SILTY CLAYS
2.03	31.71	1.22	3.62	0	CLAYEY SILT&SILTY CLAYS
2.1	32.54	1.35	3.92	0	CLAYEY SILT&SILTY CLAYS
2.16	33.41	1.44	4.09	-0.02	CLAYEY SILT&SILTY CLAYS
2.23	34.5	1.54	4.31	-0.1	CLAYEY SILT&SILTY CLAYS
2.3	34.72	1.6	4.45	-0.11	CLAYEY SILT&SILTY CLAYS
2.36	35.84	1.67	4.58	-0.13	CLAYEY SILT&SILTY CLAYS
2.43	36.13	1.69	4.61	-0.14	CLAYEY SILT&SILTY CLAYS
2.49	36	1.71	4.66	-0.1	CLAYEY SILT&SILTY CLAYS
2.56	36.42	1.77	4.79	-0.11	CLAYEY SILT&SILTY CLAYS
2.62	37.06	1.78	4.76	-0.11	CLAYEY SILT&SILTY CLAYS
2.69	37.15	1.86	4.9	-0.08	CLAYEY SILT&SILTY CLAYS
2.76	36.64	1.91	4.93	-0.07	CLAYEY SILT&SILTY CLAYS
2.82	37.12	1.95	4.94	-0.06	CLAYEY SILT&SILTY CLAYS
2.89	37.73	2.01	4.97	-0.04	CLAYEY SILT&SILTY CLAYS
2.95	39.07	2.14	5.16	-0.03	CLAYEY SILT&SILTY CLAYS
3.02	40.35	2.11	5.02	-0.02	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

3.08	41.38	2.29	5.38	-0.01	CLAYS
3.15	41.96	2.44	5.66	-0.04	CLAYS
3.21	42.53	2.63	6.04	-0.05	CLAYS
3.28	43.11	2.78	6.35	-0.09	CLAYS
3.35	43.2	2.9	6.57	-0.09	CLAYS
3.41	43.42	3.06	6.87	-0.08	CLAYS
3.48	44.16	3.18	7.03	-0.07	CLAYS
3.54	44.29	3.19	6.97	-0.06	CLAYS
3.61	44.39	3.12	6.72	-0.06	CLAYS
3.67	45.28	2.93	6.2	-0.08	CLAYS
3.74	46.11	2.83	5.93	-0.15	CLAYS
3.8	46.82	2.66	5.51	-0.15	CLAYS
3.87	47.68	2.48	5.08	-0.15	CLAYEY SILT&SILTY CLAYS
3.94	48.51	2.25	4.58	-0.11	CLAYEY SILT&SILTY CLAYS
4	48.8	1.98	3.98	-0.11	CLAYEY SILT&SILTY CLAYS
4.07	48.45	1.72	3.44	-0.12	CLAYEY SANDY SILT&SILT
4.13	49.18	1.48	2.92	-0.08	CLAYEY SANDY SILT&SILT
4.2	49.86	1.32	2.59	-0.07	CLAYEY SANDY SILT&SILT
4.26	50.47	1.15	2.25	-0.07	CLAYEY SANDY SILT&SILT
4.33	51.2	0.94	1.82	-0.06	SILTY SAND
4.4	51.07	0.81	1.57	-0.08	SILTY SAND
4.46	51.46	0.71	1.37	-0.08	SILTY SAND
4.53	51.56	0.58	1.1	-0.08	SILTY SAND
4.59	52.2	0.56	1.07	-0.08	SILTY SAND
4.66	52.61	0.52	1	-0.06	SILTY SAND
4.72	52.68	0.47	0.91	-0.06	SILTY SAND
4.79	52.74	0.46	0.9	-0.08	SILTY SAND
4.85	52.2	0.43	0.85	-0.06	SILTY SAND
4.92	51.43	0.42	0.87	-0.06	SILTY SAND
4.99	50.92	0.42	0.88	-0.08	SILTY SAND
5.05	49.76	0.44	0.96	-0.06	SILTY SAND
5.12	48.42	0.46	1.05	-0.06	SILTY SAND
5.18	46.37	0.51	1.2	-0.06	SILTY SAND
5.25	44.58	0.57	1.39	-0.05	SILTY SAND
5.31	43.14	0.65	1.66	-0.06	SILTY SAND
5.38	41.83	0.78	2.07	-0.06	CLAYEY SANDY SILT&SILT
5.44	40.38	0.88	2.44	-0.05	CLAYEY SANDY SILT&SILT
5.51	39.4	1.02	2.94	-0.06	CLAYEY SANDY SILT&SILT
5.58	37.35	1.12	3.36	-0.06	CLAYEY SANDY SILT&SILT
5.64	35.01	1.14	3.52	-0.06	CLAYEY SANDY SILT&SILT
5.71	33.28	1.11	3.48	-0.08	CLAYEY SANDY SILT&SILT
5.77	31.84	1.1	3.46	-0.08	CLAYEY SILT&SILTY CLAYS
5.84	31.29	1.13	3.56	-0.08	CLAYEY SILT&SILTY CLAYS
5.9	31.29	1.09	3.4	-0.07	CLAYEY SANDY SILT&SILT
5.97	31.52	1.06	3.29	-0.07	CLAYEY SANDY SILT&SILT
6.04	31.94	1.05	3.3	-0.08	CLAYEY SANDY SILT&SILT
6.1	32.64	1.11	3.51	-0.09	CLAYEY SILT&SILTY CLAYS
6.17	32.58	1.18	3.78	-0.08	CLAYEY SILT&SILTY CLAYS
6.23	32.26	1.24	4.06	-0.11	CLAYEY SILT&SILTY CLAYS
6.3	31.29	1.3	4.38	-0.13	CLAYEY SILT&SILTY CLAYS
6.36	30.66	1.35	4.63	-0.12	CLAYEY SILT&SILTY CLAYS
6.43	29.98	1.32	4.57	-0.05	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

6.49	29.89	1.45	5.02	-0.04	CLAYEY SILT&SILTY CLAYS
6.56	29.47	1.51	5.23	-0.03	CLAYS
6.63	26.66	1.58	5.44	-0.02	CLAYS
6.69	28.8	1.66	5.54	-0.04	CLAYS
6.76	28.9	1.71	5.58	-0.01	CLAYS
6.82	29.28	1.75	5.56	0	CLAYS
6.89	29.95	1.72	5.32	-0.01	CLAYS
6.95	30.92	1.67	5.03	-0.01	CLAYEY SILT&SILTY CLAYS
7.02	31.97	1.65	4.87	-0.04	CLAYEY SILT&SILTY CLAYS
7.08	32.87	1.66	4.9	-0.08	CLAYEY SILT&SILTY CLAYS
7.15	33.7	1.66	4.96	-0.07	CLAYEY SILT&SILTY CLAYS
7.22	34.34	1.68	5.12	-0.07	CLAYEY SILT&SILTY CLAYS
7.28	35.04	1.73	5.38	-0.08	CLAYS
7.35	34.75	1.78	5.66	-0.09	CLAYS
7.41	32.93	1.81	5.88	-0.12	CLAYS
7.48	30.34	1.82	6.03	-0.06	CLAYS
7.54	29.98	1.82	6.04	0	CLAYS
7.61	30.24	1.81	6.08	0.01	CLAYS
7.68	30.21	1.8	6.13	0.04	CLAYS
7.74	30.56	1.79	6.21	0.03	CLAYS
7.81	29.86	1.75	6.24	0.01	CLAYS
7.87	29.54	1.69	6.11	0	CLAYS
7.94	28.42	1.62	5.91	0.02	CLAYS
8	27.78	1.56	5.62	0.02	CLAYS
8.07	26.69	1.59	5.59	-0.01	CLAYS
8.13	26.14	1.58	5.35	0	CLAYS
8.2	27.08	1.52	4.92	0.01	CLAYEY SILT&SILTY CLAYS
8.27	28.55	1.45	4.55	0.02	CLAYEY SILT&SILTY CLAYS
8.33	29.95	1.48	4.6	0.04	CLAYEY SILT&SILTY CLAYS
8.4	32.13	1.52	4.67	0	CLAYEY SILT&SILTY CLAYS
8.46	33.48	1.59	4.96	-0.02	CLAYEY SILT&SILTY CLAYS
8.53	33.99	1.69	5.41	0	CLAYS
8.59	32.9	1.74	5.71	0	CLAYS
8.66	31.29	1.79	5.96	0.02	CLAYS
8.72	30.79	1.81	6	0.06	CLAYS
8.79	29.5	1.75	5.77	0.06	CLAYS
8.86	28.77	1.72	5.6	0.06	CLAYS
8.92	29.7	1.62	5.23	0.06	CLAYS
8.99	30.62	1.52	4.88	0.05	CLAYEY SILT&SILTY CLAYS
9.05	31.29	1.43	4.62	0.05	CLAYEY SILT&SILTY CLAYS
9.12	32.42	1.45	4.74	0.04	CLAYEY SILT&SILTY CLAYS
9.18	31.81	1.51	4.99	0.04	CLAYEY SILT&SILTY CLAYS
9.25	30.5	1.53	5.09	0.02	CLAYS
9.32	29.92	1.55	5.14	0.03	CLAYS
9.38	29.79	1.57	5.16	0.04	CLAYS
9.45	29.44	1.58	5.12	0.06	CLAYS
9.51	29.79	1.59	5.03	0.05	CLAYEY SILT&SILTY CLAYS
9.58	30.5	1.61	5.02	0.04	CLAYEY SILT&SILTY CLAYS
9.64	31.39	1.6	4.96	-0.01	CLAYEY SILT&SILTY CLAYS
9.71	31.59	1.61	5	-0.01	CLAYEY SILT&SILTY CLAYS
9.77	32.93	1.61	5.07	0.02	CLAYEY SILT&SILTY CLAYS
9.84	33.85	1.61	5.16	0.01	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

9.91	32.84	1.69	5.5	0.01	CLAYS
9.97	31.68	1.74	5.69	0.02	CLAYS
10.04	29.86	1.77	5.84	0.06	CLAYS
10.1	29.25	1.79	5.91	0.07	CLAYS
10.17	29.76	1.77	5.88	0.09	CLAYS
10.23	31.17	1.67	5.63	0.1	CLAYS
10.3	31.62	1.65	5.67	0.09	CLAYS
10.36	30.4	1.54	5.38	0.07	CLAYS
10.43	29.12	1.52	5.32	0.02	CLAYS
10.5	28.19	1.49	5.18	0.05	CLAYS
10.56	27.87	1.48	5.07	0.08	CLAYS
10.63	27.58	1.5	5.09	0.1	CLAYS
10.69	28.83	1.53	5.13	0.07	CLAYS
10.76	29.6	1.55	5.14	0.08	CLAYS
10.82	30.5	1.57	5.13	0.09	CLAYS
10.89	30.53	1.61	5.23	0.08	CLAYS
10.96	29.98	1.65	5.32	0.08	CLAYS
11.02	29.95	1.67	5.38	0.07	CLAYS
11.09	30.34	1.68	5.42	0.1	CLAYS
11.15	31.94	1.71	5.57	0.09	CLAYS
11.22	32.54	1.71	5.64	0.09	CLAYS
11.28	31.75	1.7	5.63	0.06	CLAYS
11.35	30.14	1.7	5.69	0.07	CLAYS
11.41	29.03	1.73	5.8	0.09	CLAYS
11.48	28.74	1.7	5.73	0.12	CLAYS
11.55	30.18	1.6	5.34	0.11	CLAYS
11.61	31.2	1.52	5.09	0.1	CLAYS
11.68	30.4	1.49	5.07	0.1	CLAYS
11.74	29.09	1.47	5.05	0.08	CLAYS
11.81	28.7	1.51	5.21	0.09	CLAYS
11.87	29.79	1.54	5.39	0.1	CLAYS
11.94	29.73	1.49	5.41	0.11	CLAYS
12	29.22	1.48	5.55	0.12	CLAYS
12.07	28.74	1.46	5.66	0.1	CLAYS
12.14	27.55	1.41	5.7	0.11	CLAYS
12.2	25.79	1.42	5.93	0.11	CLAYS
12.27	24.55	1.47	6.28	0.1	CLAYS
12.33	23.78	1.45	6.26	0.12	CLAYS
12.4	23.84	1.33	5.79	0.1	CLAYS
12.46	23.24	1.22	5.33	0.11	CLAYS
12.53	22.15	1.15	5.06	0.12	CLAYS
12.6	22.56	1.14	4.99	0.1	CLAYS
12.66	23.11	1.06	4.6	0.11	CLAYEY SILT&SILTY CLAYS
12.73	23.33	1.03	4.44	0.1	CLAYEY SILT&SILTY CLAYS
12.79	22.66	1.02	4.43	0.1	CLAYEY SILT&SILTY CLAYS
12.86	22.21	0.97	4.19	0.11	CLAYEY SILT&SILTY CLAYS
12.92	23.01	0.91	3.9	0.09	CLAYEY SILT&SILTY CLAYS
12.99	23.43	0.78	3.33	0.1	CLAYEY SILT&SILTY CLAYS
13.05	23.84	0.83	3.52	0.11	CLAYEY SILT&SILTY CLAYS
13.12	22.97	0.91	3.85	0.11	CLAYEY SILT&SILTY CLAYS
13.19	22.88	0.99	4.14	0.09	CLAYEY SILT&SILTY CLAYS
13.25	23.84	1.03	4.26	0.09	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

13.32	23.87	1.04	4.22	0.09	CLAYEY SILT&SILTY CLAYS
13.38	23.74	1.05	4.22	0.1	CLAYEY SILT&SILTY CLAYS
13.45	23.91	1.05	4.21	0.11	CLAYEY SILT&SILTY CLAYS
13.51	24.61	1.04	4.13	0.1	CLAYEY SILT&SILTY CLAYS
13.58	25.38	1.02	4.08	0.1	CLAYEY SILT&SILTY CLAYS
13.64	25.76	1.05	4.27	0.09	CLAYEY SILT&SILTY CLAYS
13.71	25.35	1.08	4.5	0.1	CLAYEY SILT&SILTY CLAYS
13.78	25.06	1.09	4.63	0.09	CLAYEY SILT&SILTY CLAYS
13.84	24.48	1.06	4.61	0.08	CLAYEY SILT&SILTY CLAYS
13.91	23.71	1.04	4.59	0.09	CLAYEY SILT&SILTY CLAYS
13.97	23.01	1.03	4.63	0.1	CLAYEY SILT&SILTY CLAYS
14.04	22.59	1.02	4.64	0.1	CLAYEY SILT&SILTY CLAYS
14.1	22.59	0.98	4.5	0.09	CLAYEY SILT&SILTY CLAYS
14.17	22.05	0.94	4.38	0.08	CLAYEY SILT&SILTY CLAYS
14.24	21.66	0.93	4.28	0.09	CLAYEY SILT&SILTY CLAYS
14.3	21.22	0.9	4.12	0.1	CLAYEY SILT&SILTY CLAYS
14.37	21.32	0.91	4.03	0.08	CLAYEY SILT&SILTY CLAYS
14.43	21.32	0.92	3.94	0.08	CLAYEY SILT&SILTY CLAYS
14.5	21.79	0.93	3.85	0.08	CLAYEY SILT&SILTY CLAYS
14.56	22.53	0.96	3.86	0.08	CLAYEY SILT&SILTY CLAYS
14.63	23.65	1.01	4.02	0.09	CLAYEY SILT&SILTY CLAYS
14.69	25.06	1.1	4.33	0.06	CLAYEY SILT&SILTY CLAYS
14.76	26.02	1.19	4.71	0.07	CLAYEY SILT&SILTY CLAYS
14.83	26.11	1.19	4.81	0.08	CLAYEY SILT&SILTY CLAYS
14.89	25.41	1.27	5.18	0.08	CLAYS
14.96	24.74	1.34	5.58	0.08	CLAYS
15.02	24.39	1.35	5.76	0.08	CLAYS
15.09	24.19	1.33	5.83	0.08	CLAYS
15.15	24.22	1.22	5.55	0.09	CLAYS
15.22	23.65	1.12	5.33	0.09	CLAYS
15.28	22.56	1.1	5.5	0.09	CLAYS
15.35	21.47	1.16	6.01	0.08	CLAYS
15.42	20.38	1.17	6.27	0.08	CLAYS
15.48	19.58	1.15	6.26	0.08	CLAYS
15.55	18.08	1.12	6.15	0.09	CLAYS
15.61	17.99	1.08	5.91	0.1	CLAYS
15.68	17.89	1	5.42	0.08	CLAYS
15.74	18.02	0.91	4.76	0.09	CLAYS
15.81	18.53	0.84	4.32	0.08	CLAYEY SILT&SILTY CLAYS
15.88	18.59	0.82	4.14	0.08	CLAYEY SILT&SILTY CLAYS
15.94	18.69	0.8	3.95	0.09	CLAYEY SILT&SILTY CLAYS
16.01	19.52	0.78	3.8	0.09	CLAYEY SILT&SILTY CLAYS
16.07	20.74	0.76	3.7	0.08	CLAYEY SILT&SILTY CLAYS
16.14	20.66	0.77	3.77	0.07	CLAYEY SILT&SILTY CLAYS
16.2	20.58	0.75	3.72	0.09	CLAYEY SILT&SILTY CLAYS
16.27	20.48	0.74	3.69	0.09	CLAYEY SILT&SILTY CLAYS
16.33	20.51	0.72	3.68	0.08	CLAYEY SILT&SILTY CLAYS
16.4	20	0.72	3.75	0.08	CLAYEY SILT&SILTY CLAYS
16.47	20.13	0.71	3.79	0.07	CLAYEY SILT&SILTY CLAYS
16.53	19.65	0.72	3.89	0.07	CLAYEY SILT&SILTY CLAYS
16.6	19.04	0.72	3.96	0.07	CLAYEY SILT&SILTY CLAYS
16.66	18.27	0.76	4.15	0.08	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

16.73	18.18	0.75	4.07	0.08	CLAYEY SILT&SILTY CLAYS
16.79	17.95	0.72	3.88	0.09	CLAYEY SILT&SILTY CLAYS
16.86	18.05	0.68	3.64	0.07	CLAYEY SILT&SILTY CLAYS
16.92	18.21	0.65	3.48	0.08	CLAYEY SILT&SILTY CLAYS
16.99	18.88	0.63	3.38	0.07	CLAYEY SILT&SILTY CLAYS
17.06	18.85	0.62	3.35	0.08	CLAYEY SILT&SILTY CLAYS
17.12	18.79	0.65	3.54	0.08	CLAYEY SILT&SILTY CLAYS
17.19	18.94	0.67	3.67	0.07	CLAYEY SILT&SILTY CLAYS
17.25	18.37	0.66	3.64	0.08	CLAYEY SILT&SILTY CLAYS
17.32	18.05	0.66	3.65	0.07	CLAYEY SILT&SILTY CLAYS
17.38	17.76	0.66	3.6	0.07	CLAYEY SILT&SILTY CLAYS
17.45	17.89	0.64	3.47	0.08	CLAYEY SILT&SILTY CLAYS
17.52	18.02	0.63	3.41	0.08	CLAYEY SILT&SILTY CLAYS
17.58	18.05	0.64	3.46	0.08	CLAYEY SILT&SILTY CLAYS
17.65	18.63	0.67	3.57	0.06	CLAYEY SILT&SILTY CLAYS
17.71	18.98	0.66	3.54	0.07	CLAYEY SILT&SILTY CLAYS
17.78	19.13	0.62	3.31	0.06	CLAYEY SILT&SILTY CLAYS
17.84	18.46	0.56	3	0.08	CLAYEY SILT&SILTY CLAYS
17.91	18.43	0.61	3.22	0.06	CLAYEY SILT&SILTY CLAYS
17.97	18.59	0.64	3.31	0.07	CLAYEY SILT&SILTY CLAYS
18.04	18.82	0.62	3.16	0.07	CLAYEY SILT&SILTY CLAYS
18.11	19.2	0.61	3.03	0.06	CLAYEY SILT&SILTY CLAYS
18.17	19.3	0.62	3	0.07	CLAYEY SILT&SILTY CLAYS
18.24	19.87	0.62	2.94	0.06	CLAYEY SANDY SILT&SILT
18.3	20.45	0.63	2.89	0.06	CLAYEY SANDY SILT&SILT
18.37	20.77	0.62	2.81	0.07	CLAYEY SANDY SILT&SILT
18.43	21.35	0.64	2.87	0.07	CLAYEY SANDY SILT&SILT
18.5	22.08	0.66	3.01	0.07	CLAYEY SANDY SILT&SILT
18.56	22.75	0.69	3.2	0.07	CLAYEY SILT&SILTY CLAYS
18.63	23.17	0.7	3.34	0.06	CLAYEY SILT&SILTY CLAYS
18.7	22.43	0.73	3.57	0.07	CLAYEY SILT&SILTY CLAYS
18.76	21.35	0.75	3.73	0.06	CLAYEY SILT&SILTY CLAYS
18.83	20.35	0.77	3.87	0.06	CLAYEY SILT&SILTY CLAYS
18.89	19.62	0.76	3.78	0.08	CLAYEY SILT&SILTY CLAYS
18.96	19.43	0.74	3.67	0.08	CLAYEY SILT&SILTY CLAYS
19.02	19.52	0.69	3.34	0.07	CLAYEY SILT&SILTY CLAYS
19.09	20.16	0.66	3.13	0.06	CLAYEY SILT&SILTY CLAYS
19.16	20.45	0.62	2.89	0.08	CLAYEY SANDY SILT&SILT
19.22	20.86	0.6	2.69	0.06	CLAYEY SANDY SILT&SILT
19.29	20.93	0.58	2.53	0.08	CLAYEY SANDY SILT&SILT
19.35	21.6	0.57	2.44	0.06	CLAYEY SANDY SILT&SILT
19.42	22.37	0.55	2.3	0.07	CLAYEY SANDY SILT&SILT
19.48	23.3	0.51	2.1	0.07	CLAYEY SANDY SILT&SILT
19.55	24.13	0.47	1.93	0.06	CLAYEY SANDY SILT&SILT
19.61	24.64	0.43	1.77	0.07	CLAYEY SANDY SILT&SILT
19.68	24.69	0.49	2	0.08	CLAYEY SANDY SILT&SILT
19.75	24.75	0.5	2.07	0.07	CLAYEY SANDY SILT&SILT
19.81	24.8	0.51	2.15	0.06	CLAYEY SANDY SILT&SILT
19.88	24.29	0.52	2.24	0.07	CLAYEY SANDY SILT&SILT
19.94	23.71	0.54	2.37	0.07	CLAYEY SANDY SILT&SILT
20.01	23.46	0.56	2.51	0.07	CLAYEY SANDY SILT&SILT
20.07	22.47	0.57	2.59	0.08	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

20.14	22.27	0.56	2.62	0.07	CLAYEY SANDY SILT&SILT
20.2	22.02	0.58	2.73	0.06	CLAYEY SANDY SILT&SILT
20.27	21.6	0.59	2.81	0.08	CLAYEY SANDY SILT&SILT
20.34	21.41	0.58	2.83	0.08	CLAYEY SANDY SILT&SILT
20.4	21.22	0.55	2.71	0.06	CLAYEY SANDY SILT&SILT
20.47	20.61	0.53	2.66	0.07	CLAYEY SANDY SILT&SILT
20.53	20.48	0.52	2.64	0.06	CLAYEY SANDY SILT&SILT
20.6	20.1	0.52	2.67	0.07	CLAYEY SANDY SILT&SILT
20.66	19.81	0.51	2.67	0.06	CLAYEY SANDY SILT&SILT
20.73	19.43	0.5	2.68	0.07	CLAYEY SANDY SILT&SILT
20.8	19.43	0.5	2.69	0.06	CLAYEY SANDY SILT&SILT
20.86	19.01	0.5	2.74	0.05	CLAYEY SANDY SILT&SILT
20.93	18.4	0.49	2.76	0.07	CLAYEY SANDY SILT&SILT
20.99	18.05	0.5	2.85	0.07	CLAYEY SANDY SILT&SILT
21.06	18.05	0.51	2.94	0.05	CLAYEY SILT&SILTY CLAYS
21.12	17.98	0.52	3.04	0.05	CLAYEY SILT&SILTY CLAYS
21.19	17.54	0.53	3.18	0.07	CLAYEY SILT&SILTY CLAYS
21.25	17.15	0.53	3.21	0.06	CLAYEY SILT&SILTY CLAYS
21.32	16.9	0.53	3.22	0.05	CLAYEY SILT&SILTY CLAYS
21.39	16.19	0.54	3.28	0.06	CLAYEY SILT&SILTY CLAYS
21.45	16.03	0.54	3.25	0.06	CLAYEY SILT&SILTY CLAYS
21.52	16.23	0.53	3.14	0.05	CLAYEY SILT&SILTY CLAYS
21.58	16.26	0.53	3.05	0.05	CLAYEY SILT&SILTY CLAYS
21.65	16.45	0.53	3.01	0.04	CLAYEY SILT&SILTY CLAYS
21.71	17.25	0.56	3.12	0.04	CLAYEY SILT&SILTY CLAYS
21.78	17.82	0.61	3.38	0.06	CLAYEY SILT&SILTY CLAYS
21.84	18.11	0.65	3.54	0.05	CLAYEY SILT&SILTY CLAYS
21.91	18.21	0.7	3.77	0.05	CLAYEY SILT&SILTY CLAYS
21.98	18.27	0.75	4.01	0.05	CLAYEY SILT&SILTY CLAYS
22.04	18.4	0.79	4.16	0.05	CLAYEY SILT&SILTY CLAYS
22.11	18.3	0.82	4.22	0.05	CLAYEY SILT&SILTY CLAYS
22.17	18.72	0.82	4.11	0.04	CLAYEY SILT&SILTY CLAYS
22.24	19.07	0.81	3.99	0.05	CLAYEY SILT&SILTY CLAYS
22.3	19.74	0.79	3.86	0.04	CLAYEY SILT&SILTY CLAYS
22.37	20.07	0.78	3.8	0.06	CLAYEY SILT&SILTY CLAYS
22.44	20.8	0.76	3.8	0.05	CLAYEY SILT&SILTY CLAYS
22.5	21.32	0.74	3.81	0.05	CLAYEY SILT&SILTY CLAYS
22.57	21.15	0.72	3.83	0.04	CLAYEY SILT&SILTY CLAYS
22.63	20.29	0.7	3.9	0.05	CLAYEY SILT&SILTY CLAYS
22.7	18.91	0.69	4	0.06	CLAYEY SILT&SILTY CLAYS
22.76	18.21	0.67	3.95	0.05	CLAYEY SILT&SILTY CLAYS
22.83	17.21	0.66	3.95	0.05	CLAYEY SILT&SILTY CLAYS
22.89	17.06	0.63	3.79	0.04	CLAYEY SILT&SILTY CLAYS
22.96	16.61	0.61	3.67	0.05	CLAYEY SILT&SILTY CLAYS
23.03	16.19	0.6	3.61	0.05	CLAYEY SILT&SILTY CLAYS
23.09	16.58	0.58	3.48	0.04	CLAYEY SILT&SILTY CLAYS
23.16	16.54	0.57	3.39	0.05	CLAYEY SILT&SILTY CLAYS
23.22	16.8	0.56	3.31	0.04	CLAYEY SILT&SILTY CLAYS
23.29	16.64	0.54	3.21	0.05	CLAYEY SILT&SILTY CLAYS
23.35	16.67	0.53	3.17	0.05	CLAYEY SILT&SILTY CLAYS
23.42	16.84	0.53	3.18	0.04	CLAYEY SILT&SILTY CLAYS
23.48	16.9	0.53	3.16	0.04	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

23.55	16.87	0.52	3.14	0.03	CLAYEY SILT&SILTY CLAYS
23.62	16.61	0.51	3.09	0.04	CLAYEY SILT&SILTY CLAYS
23.68	16.42	0.51	3.09	0.05	CLAYEY SILT&SILTY CLAYS
23.75	16.61	0.5	3.01	0.03	CLAYEY SILT&SILTY CLAYS
23.81	16.42	0.49	2.94	0.05	CLAYEY SILT&SILTY CLAYS
23.88	16.54	0.48	2.88	0.03	CLAYEY SILT&SILTY CLAYS
23.94	16.32	0.47	2.78	0.05	CLAYEY SANDY SILT&SILT
24.01	16.54	0.46	2.69	0.05	CLAYEY SANDY SILT&SILT
24.08	16.74	0.46	2.64	0.04	CLAYEY SANDY SILT&SILT
24.14	16.96	0.46	2.58	0.04	CLAYEY SANDY SILT&SILT
24.21	17.09	0.46	2.45	0.03	CLAYEY SANDY SILT&SILT
24.27	17.51	0.47	2.36	0.04	CLAYEY SANDY SILT&SILT
24.34	18.21	0.47	2.15	0.03	CLAYEY SANDY SILT&SILT
24.4	18.85	0.46	1.89	0.03	CLAYEY SANDY SILT&SILT
24.47	19.36	0.46	1.65	0.04	CLAYEY SANDY SILT&SILT
24.53	21.35	0.46	1.46	0.04	CLAYEY SANDY SILT&SILT
24.6	24.83	0.47	1.37	0.04	SILTY SAND
24.67	28.45	0.52	1.38	0.04	SILTY SAND
24.73	34.4	0.66	1.62	0.04	SILTY SAND
24.8	39.3	0.83	1.85	0.02	SILTY SAND
24.86	40.8	0.93	1.89	0.02	SILTY SAND
24.93	39.62	1.01	1.81	-0.01	SILTY SAND
24.99	41.5	1.06	1.64	-0.02	SILTY SAND
25.06	49.38	1.22	1.66	0	SILTY SAND
25.12	56.96	1.43	1.74	-0.04	SILTY SAND
25.19	65.51	1.5	1.69	-0.01	SILTY SAND
25.26	81.89	1.85	1.97	0.02	SILTY SAND
25.32	93.32	2.07	2.16	-0.02	SILTY SAND
25.39	96.39	2.11	2.23	-0.12	SILTY SAND
25.45	98.69	2.21	2.38	-0.13	SILTY SAND
25.52	98.53	2.27	2.52	-0.11	SILTY SAND
25.58	95.72	2.38	2.75	-0.11	SILTY SAND
25.65	92.04	2.51	3.01	-0.11	CLAYEY SANDY SILT&SILT
25.72	87.94	2.44	3.04	-0.15	CLAYEY SANDY SILT&SILT
25.78	84.39	2.31	2.98	-0.18	CLAYEY SANDY SILT&SILT
25.85	81.31	2.16	2.91	-0.18	CLAYEY SANDY SILT&SILT
25.91	78.66	2.08	2.95	-0.16	CLAYEY SANDY SILT&SILT
25.98	76.16	2.04	3.08	-0.17	CLAYEY SANDY SILT&SILT
26.04	73.57	2.19	3.54	-0.17	CLAYEY SANDY SILT&SILT
26.11	70.66	2.35	4.02	-0.2	CLAYEY SANDY SILT&SILT
26.17	64.51	2.52	4.5	-0.21	CLAYEY SILT&SILTY CLAYS
26.24	58.75	2.57	4.72	-0.2	CLAYEY SILT&SILTY CLAYS
26.31	54.79	2.79	5.13	-0.2	CLAYEY SILT&SILTY CLAYS
26.37	49.06	2.94	5.33	-0.18	CLAYEY SILT&SILTY CLAYS
26.44	53.89	3.12	5.49	-0.21	CLAYEY SILT&SILTY CLAYS
26.5	54.47	3.29	5.74	-0.2	CLAYS
26.57	55.84	3.3	5.74	-0.2	CLAYS
26.63	58.24	3.41	5.99	-0.27	CLAYS
26.7	59.72	3.52	6.32	-0.31	CLAYS
26.76	58.63	3.59	6.63	-0.2	CLAYS
26.83	56.96	3.59	6.86	-0.15	CLAYS
26.9	55.14	3.65	7.24	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

26.96	52.99	3.64	7.49	-0.12	CLAYS
27.03	51.14	3.44	7.33	-0.11	CLAYS
27.09	49.83	3.28	7.19	-0.1	CLAYS
27.16	47.97	3.14	7.09	-0.14	CLAYS
27.22	45.25	3	6.94	-0.14	CLAYS
27.29	44.13	2.84	6.68	-0.13	CLAYS
27.36	43.14	2.72	6.5	-0.14	CLAYS
27.42	43.04	2.71	6.55	-0.13	CLAYS
27.49	42.24	2.73	6.65	-0.15	CLAYS
27.55	41.47	2.75	6.77	-0.12	CLAYS
27.62	41.06	2.71	6.69	-0.08	CLAYS
27.68	40.61	2.65	6.54	-0.06	CLAYS
27.75	40.26	2.61	6.41	-0.01	CLAYS
27.81	40.22	2.63	6.46	0	CLAYS
27.88	40.45	2.51	6.17	-0.01	CLAYS
27.95	40.32	2.36	5.84	0	CLAYS
28.01	40.68	2.11	5.27	0.01	CLAYEY SILT&SILTY CLAYS
28.08	42.21	1.96	5.02	0	CLAYEY SILT&SILTY CLAYS
28.14	40.1	1.97	5.23	-0.01	CLAYEY SILT&SILTY CLAYS
28.21	40.42	2.06	5.68	-0.05	CLAYS
28.27	39.04	2.1	6.09	-0.05	CLAYS
28.34	37.73	2.12	6.48	-0.04	CLAYS
28.4	35.23	2.1	6.76	0	CLAYS
28.47	33.25	2.08	7.02	0.01	CLAYS
28.54	31.56	2.08	7.36	0.01	CLAYS
28.6	30.34	2	7.44	0.01	CLAYS
28.67	28.67	1.9	7.41	0.04	CLAYS
28.73	27.45	1.79	7.32	0.03	CLAYS
28.8	26.5	1.7	7.21	0.04	CLAYS
28.86	24.77	1.59	6.99	0.04	CLAYS
28.93	23.55	1.48	6.64	0.03	CLAYS
29	22.56	1.37	6.21	0.05	CLAYS
29.06	22.11	1.26	5.75	0.04	CLAYS
29.13	21.66	1.18	5.39	0.03	CLAYS
29.19	21.6	1.14	5.15	0.04	CLAYS
29.26	22.02	1.13	5.1	0.04	CLAYS
29.32	22.15	1.14	5.16	0.04	CLAYS
29.39	22.15	1.11	5.02	0.05	CLAYS
29.45	22.15	1.09	4.95	0.05	CLAYS
29.52	22.18	1.11	5.04	0.04	CLAYS
29.59	21.95	1.1	4.95	0.05	CLAYS
29.65	21.89	1.09	4.82	0.04	CLAYS
29.72	21.82	1.07	4.67	0.04	CLAYEY SILT&SILTY CLAYS
29.78	22.05	1.07	4.52	0.04	CLAYEY SILT&SILTY CLAYS
29.85	22.56	1.05	4.29	0.04	CLAYEY SILT&SILTY CLAYS
29.91	23.17	1.03	4.04	0.04	CLAYEY SILT&SILTY CLAYS
29.98	23.71	1.03	3.91	0.05	CLAYEY SILT&SILTY CLAYS
30.04	24.89	1.07	3.95	0.04	CLAYEY SILT&SILTY CLAYS
30.11	26.08	1.15	4.16	0.04	CLAYEY SILT&SILTY CLAYS
30.18	27.08	1.21	4.33	0.05	CLAYEY SILT&SILTY CLAYS
30.24	27.75	1.29	4.52	0.04	CLAYEY SILT&SILTY CLAYS
30.31	28.06	1.3	4.54	0.04	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

30.37	27.97	1.3	4.49	0.05	CLAYEY SILT&SILTY CLAYS
30.44	28.19	1.38	4.73	0.05	CLAYEY SILT&SILTY CLAYS
30.5	29.09	1.45	4.97	0.04	CLAYEY SILT&SILTY CLAYS
30.57	29.54	1.48	5.08	0.05	CLAYS
30.64	29.37	1.49	5.18	0.03	CLAYS
30.7	29.31	1.5	5.27	0.03	CLAYS
30.77	29.03	1.5	5.31	0.04	CLAYS
30.83	29.09	1.5	5.35	0.03	CLAYS
30.9	28	1.5	5.37	0.05	CLAYS
30.96	27.58	1.51	5.36	0.04	CLAYS
31.03	27.87	1.6	5.6	0.04	CLAYS
31.09	28.1	1.57	5.41	0.03	CLAYS
31.16	28	1.52	5.17	0.05	CLAYS
31.23	28.51	1.5	5.05	0.04	CLAYS
31.29	29.41	1.5	5.01	0.04	CLAYEY SILT&SILTY CLAYS
31.36	30.05	1.48	4.98	0.04	CLAYEY SILT&SILTY CLAYS
31.42	30.08	1.42	4.81	0.04	CLAYEY SILT&SILTY CLAYS
31.49	30.21	1.46	5.01	0.04	CLAYEY SILT&SILTY CLAYS
31.55	30.14	1.51	5.23	0.04	CLAYS
31.62	29.63	1.51	5.33	0.04	CLAYS
31.68	28.7	1.47	5.24	0.03	CLAYS
31.75	28.13	1.47	5.26	0.05	CLAYS
31.82	28.1	1.43	5.14	0.05	CLAYS
31.88	28.03	1.43	5.15	0.04	CLAYS
31.95	27.84	1.4	5.1	0.03	CLAYS
32.01	27.75	1.39	5.1	0.03	CLAYS
32.08	27.36	1.4	5.16	0.04	CLAYS
32.14	27.58	1.39	5.16	0.04	CLAYS
32.21	27.52	1.41	5.24	0.03	CLAYS
32.28	26.88	1.4	5.22	0.04	CLAYS
32.34	26.69	1.37	5.09	0.03	CLAYS
32.41	26.56	1.34	4.95	0.04	CLAYS
32.47	26.95	1.31	4.86	0.03	CLAYEY SILT&SILTY CLAYS
32.54	26.72	1.29	4.73	0.04	CLAYEY SILT&SILTY CLAYS
32.6	26.95	1.28	4.62	0.04	CLAYEY SILT&SILTY CLAYS
32.67	27.33	1.26	4.47	0.04	CLAYEY SILT&SILTY CLAYS
32.73	27.23	1.2	4.16	0.04	CLAYEY SILT&SILTY CLAYS
32.8	27.27	1.3	4.38	0.04	CLAYEY SILT&SILTY CLAYS
32.87	28.23	1.33	4.36	0.04	CLAYEY SILT&SILTY CLAYS
32.93	28.77	1.32	4.24	0.04	CLAYEY SILT&SILTY CLAYS
33	30.08	1.39	4.38	0.02	CLAYEY SILT&SILTY CLAYS
33.06	31.14	1.49	4.66	0.04	CLAYEY SILT&SILTY CLAYS
33.13	32.16	1.63	5.06	0.04	CLAYEY SILT&SILTY CLAYS
33.19	32.16	1.73	5.39	0.04	CLAYS
33.26	32.26	1.82	5.67	0.03	CLAYS
33.32	32.26	1.89	5.86	0.02	CLAYS
33.39	32.2	1.96	6.05	0.03	CLAYS
33.46	32.06	2.03	6.1	0.04	CLAYS
33.52	32.1	2.09	6.01	0.04	CLAYS
33.59	32.16	2.18	5.85	0.04	CLAYS
33.65	32.45	2.2	5.49	0.03	CLAYS
33.72	33.89	2.26	5.23	0.04	CLAYS

US EPA ARCHIVE DOCUMENT

33.78	37.25	2.23	4.83	0.04	CLAYEY SILT&SILTY CLAYS
33.85	41.19	2.27	4.63	0.05	CLAYEY SILT&SILTY CLAYS
33.92	46.31	2.33	4.52	0.04	CLAYEY SILT&SILTY CLAYS
33.98	49.79	2.45	4.56	0.02	CLAYEY SILT&SILTY CLAYS
34.05	51.17	2.55	4.59	-0.02	CLAYEY SILT&SILTY CLAYS
34.11	51.75	2.62	4.57	-0.02	CLAYEY SILT&SILTY CLAYS
34.18	53.86	2.71	4.61	0	CLAYEY SILT&SILTY CLAYS
34.24	56.52	2.84	4.71	0.04	CLAYEY SILT&SILTY CLAYS
34.31	58.91	2.98	4.77	0.04	CLAYEY SILT&SILTY CLAYS
34.37	60.93	3.1	4.71	0.04	CLAYEY SILT&SILTY CLAYS
34.44	61.92	3.25	4.56	0.04	CLAYEY SILT&SILTY CLAYS
34.51	60.9	3.29	4.17	0.06	CLAYEY SILT&SILTY CLAYS
34.57	62.85	3.4	3.8	0.08	CLAYEY SANDY SILT&SILT
34.64	69.06	3.4	3.33	0.09	CLAYEY SANDY SILT&SILT
34.7	79.33	3.3	2.87	0.11	CLAYEY SANDY SILT&SILT
34.77	93.57	3.04	2.38	0.09	SILTY SAND
34.83	108.52	2.79	2.01	0.04	SILTY SAND
34.9	123.4	2.59	1.75	0	SILTY SAND
34.96	136.97	2.41	1.55	-0.05	SANDS
35.03	147.43	2.29	1.42	-0.08	SANDS
35.1	154.7	2.19	1.33	-0.1	SANDS
35.16	160.62	2.09	1.24	-0.11	SANDS
35.23	165	2.04	1.19	-0.14	SANDS
35.29	167.97	2.06	1.19	-0.15	SANDS
35.36	170.28	2.11	1.2	-0.14	SANDS
35.42	172.33	2.15	1.21	-0.13	SANDS
35.49	174.44	2.2	1.22	-0.13	SANDS
35.56	176.71	2.26	1.24	-0.13	SANDS
35.62	179.15	2.31	1.25	-0.14	SANDS
35.69	181.8	2.38	1.27	-0.15	SANDS
35.75	183.75	2.43	1.29	-0.14	SANDS
35.82	185.86	2.48	1.3	-0.15	SANDS
35.88	187.69	2.54	1.32	-0.16	SANDS
35.95	189.45	2.36	1.22	-0.15	SANDS
36.01	191.72	2.17	1.11	-0.15	SANDS
36.08	194.31	1.8	0.9	-0.15	SANDS
36.15	196.97	1.93	0.96	-0.14	SANDS
36.21	191.47	2.06	1	-0.16	SANDS
36.28	196.62	2.17	1.04	-0.13	SANDS
36.34	204.62	2.3	1.08	-0.13	SANDS
36.41	210.41	2.37	1.1	-0.14	SANDS
36.47	214.22	2.39	1.11	-0.13	SANDS
36.54	216.14	2.46	1.14	-0.12	SANDS
36.6	217.23	2.53	1.19	-0.14	SANDS
36.67	216.94	2.57	1.22	-0.14	SANDS
36.74	215.62	2.57	1.24	-0.13	SANDS
36.8	213.48	2.56	1.26	-0.13	SANDS
36.87	209.87	2.53	1.28	-0.13	SANDS
36.93	205.32	2.51	1.3	-0.12	SANDS
37	200.68	2.5	1.33	-0.13	SANDS
37.06	195.4	2.48	1.36	-0.13	SANDS
37.13	190.03	2.44	1.38	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

37.2	184.1	2.42	1.4	-0.11	SANDS
37.26	179.43	2.38	1.41	-0.12	SANDS
37.33	174.41	2.37	1.43	-0.11	SANDS
37.39	169.58	2.36	1.44	-0.12	SANDS
37.46	165.83	2.35	1.44	-0.12	SANDS
37.52	162.51	2.32	1.42	-0.11	SANDS
37.59	160.97	2.27	1.38	-0.11	SANDS
37.65	161.42	2.25	1.36	-0.1	SANDS
37.72	163.72	2.29	1.38	-0.11	SANDS
37.79	165.61	2.32	1.39	-0.11	SANDS
37.85	165.96	2.3	1.37	-0.1	SANDS
37.92	166.44	2.3	1.37	-0.11	SANDS
37.98	166.95	2.36	1.41	-0.09	SANDS
38.05	168.3	2.45	1.47	-0.1	SANDS
38.11	168.33	2.55	1.55	-0.08	SANDS
38.18	168.65	2.58	1.61	-0.1	SANDS
38.24	167.88	2.56	1.66	-0.08	SANDS
38.31	166.05	2.56	1.75	-0.09	SANDS
38.38	162.06	2.56	1.88	-0.09	SANDS
38.44	154.86	2.5	2.01	-0.09	SILTY SAND
38.51	143.72	2.43	2.17	-0.08	SILTY SAND
38.57	130.5	2.4	2.42	-0.09	SILTY SAND
38.64	118.18	2.39	2.74	-0.08	SILTY SAND
38.7	107.71	2.41	3.16	-0.07	CLAYEY SANDY SILT&SILT
38.77	92.9	2.56	3.85	-0.08	CLAYEY SANDY SILT&SILT
38.84	78.63	2.74	4.66	-0.08	CLAYEY SILT&SILTY CLAYS
38.9	66.79	2.91	5.47	-0.07	CLAYEY SILT&SILTY CLAYS
38.97	58.15	3.06	6.22	-0.08	CLAYS
39.03	53.18	3.14	6.78	-0.07	CLAYS
39.1	49.67	3.23	7.35	-0.07	CLAYS
39.16	46.72	3.29	7.83	-0.07	CLAYS
39.23	45.06	3.11	7.68	-0.07	CLAYS
39.29	42.5	2.93	7.5	-0.04	CLAYS
39.36	40.86	2.9	7.65	-0.04	CLAYS
39.43	39.04	2.79	7.57	-0.04	CLAYS
39.49	38.15	2.69	7.44	-0.05	CLAYS
39.56	37.32	2.55	7.15	-0.06	CLAYS
39.62	36.29	2.43	6.88	-0.05	CLAYS
39.69	35.59	2.3	6.57	-0.05	CLAYS
39.75	35.07	2.16	6.18	-0.04	CLAYS
39.82	35.01	2.05	5.85	-0.06	CLAYS
39.88	34.79	1.95	5.58	-0.05	CLAYS
39.95	34.95	1.91	5.46	-0.05	CLAYS
40.02	35.01	1.87	5.34	-0.05	CLAYS
40.08	35.3	1.78	5.11	-0.05	CLAYEY SILT&SILTY CLAYS
40.15	35.07	1.77	5.07	-0.05	CLAYEY SILT&SILTY CLAYS
40.21	35.1	1.83	5.22	-0.06	CLAYS
40.28	34.66	1.86	5.26	-0.05	CLAYS
40.34	34.56	1.85	5.21	-0.07	CLAYS
40.41	34.43	1.82	5.07	-0.05	CLAYEY SILT&SILTY CLAYS
40.48	35.84	1.78	4.95	-0.06	CLAYEY SILT&SILTY CLAYS
40.54	36.23	1.78	4.95	-0.05	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

40.61	36.26	1.81	5.02	-0.05	CLAYEY SILT&SILTY CLAYS
40.67	35.87	1.94	5.33	-0.06	CLAYS
40.74	36.45	1.98	5.4	-0.07	CLAYS
40.8	35.59	1.96	5.35	-0.06	CLAYS
40.87	35.14	1.95	5.32	-0.06	CLAYS
40.93	36.58	1.95	5.31	-0.06	CLAYS
41	38.43	1.89	5.17	-0.07	CLAYEY SILT&SILTY CLAYS
41.07	37.51	1.94	5.4	-0.07	CLAYS
41.13	36.58	1.94	5.48	-0.08	CLAYS
41.2	35.74	1.93	5.49	-0.07	CLAYS
41.26	35.43	1.94	5.55	-0.08	CLAYS
41.33	35.46	1.91	5.54	-0.07	CLAYS
41.39	35.26	1.91	5.61	-0.08	CLAYS
41.46	34.5	1.87	5.61	-0.07	CLAYS
41.52	34.5	1.83	5.59	-0.08	CLAYS
41.59	34.15	1.82	5.65	-0.08	CLAYS
41.66	33.21	1.8	5.68	-0.08	CLAYS
41.72	32.26	1.77	5.68	-0.09	CLAYS
41.79	31.39	1.77	5.75	-0.08	CLAYS
41.85	31.26	1.78	5.82	-0.07	CLAYS
41.92	31.33	1.76	5.83	-0.09	CLAYS
41.98	30.75	1.72	5.76	-0.08	CLAYS
42.05	30.4	1.67	5.68	-0.09	CLAYS
42.12	30.08	1.65	5.67	-0.09	CLAYS
42.18	29.7	1.63	5.63	-0.08	CLAYS
42.25	29.22	1.59	5.49	-0.08	CLAYS
42.31	28.64	1.56	5.39	-0.08	CLAYS
42.38	28.51	1.53	5.27	-0.09	CLAYS
42.44	28.64	1.52	5.2	-0.1	CLAYS
42.51	28.83	1.54	5.18	-0.09	CLAYS
42.57	29.28	1.58	5.24	-0.1	CLAYS
42.64	29.44	1.44	4.69	-0.11	CLAYEY SILT&SILTY CLAYS
42.71	29.22	1.51	4.79	-0.09	CLAYEY SILT&SILTY CLAYS
42.77	29.89	1.55	4.75	-0.11	CLAYEY SILT&SILTY CLAYS
42.84	31.36	1.55	4.62	-0.13	CLAYEY SILT&SILTY CLAYS
42.9	31.75	1.61	4.7	-0.11	CLAYEY SILT&SILTY CLAYS
42.97	32.74	1.75	5	-0.13	CLAYEY SILT&SILTY CLAYS
43.03	34.24	1.85	5.21	-0.14	CLAYS
43.1	35.26	1.92	5.37	-0.14	CLAYS
43.16	35.59	2.01	5.63	-0.14	CLAYS
43.23	35.94	2.07	5.81	-0.13	CLAYS
43.3	36.23	2.14	6.04	-0.15	CLAYS
43.36	35.78	2.21	6.29	-0.15	CLAYS
43.43	35.36	2.23	6.44	-0.16	CLAYS
43.49	35.2	2.22	6.54	-0.16	CLAYS
43.56	34.75	2.23	6.8	-0.13	CLAYS
43.62	35.04	2.24	7.16	-0.13	CLAYS
43.69	34.5	2.25	7.64	-0.14	CLAYS
43.76	33.15	2.25	8.19	-0.15	CLAYS
43.82	31.01	2.22	8.71	-0.13	CLAYS
43.89	28.29	2.16	9.08	-0.12	CLAYS
43.95	25.89	2.09	9.29	-0.1	CLAYS

US EPA ARCHIVE DOCUMENT

44.02	23.94	2.01	9.41	-0.1	CLAYS
44.08	22.4	1.93	9.35	-0.09	CLAYS
44.15	21.35	1.84	9.08	-0.09	CLAYS
44.21	20.93	1.72	8.58	-0.1	CLAYS
44.28	20.26	1.59	7.96	-0.1	CLAYS
44.35	19.36	1.47	7.3	-0.09	CLAYS
44.41	19.74	1.38	6.69	-0.11	CLAYS
44.48	19.94	1.32	6.27	-0.1	CLAYS
44.54	20.13	1.29	5.96	-0.1	CLAYS
44.61	20.64	1.28	5.7	-0.1	CLAYS
44.67	21.19	1.29	5.57	-0.1	CLAYS
44.74	21.89	1.28	5.32	-0.1	CLAYS
44.8	22.82	1.26	5.04	-0.11	CLAYS
44.87	23.52	1.26	4.83	-0.1	CLAYS
44.94	24.77	1.29	4.81	-0.11	CLAYEY SILT&SILTY CLAYS
45	25.19	1.33	4.88	-0.11	CLAYS
45.07	26.31	1.38	5	-0.12	CLAYS
45.13	28.03	1.42	5.11	-0.12	CLAYS
45.2	28.96	1.44	5.2	-0.1	CLAYS
45.26	28	1.5	5.46	-0.1	CLAYS
45.33	27.11	1.61	5.81	-0.1	CLAYS
45.4	27.71	1.68	5.92	-0.12	CLAYS
45.46	27.3	1.7	5.75	-0.1	CLAYS
45.53	27.33	1.64	5.3	-0.11	CLAYS
45.59	27.42	1.6	4.87	-0.1	CLAYEY SILT&SILTY CLAYS
45.66	29.31	1.61	4.54	-0.11	CLAYEY SILT&SILTY CLAYS
45.72	31.75	1.62	4.26	-0.11	CLAYEY SILT&SILTY CLAYS
45.79	34.02	1.67	4.14	-0.11	CLAYEY SILT&SILTY CLAYS
45.85	36.23	1.77	4.14	-0.11	CLAYEY SILT&SILTY CLAYS
45.92	38.91	1.72	3.86	-0.16	CLAYEY SILT&SILTY CLAYS
45.99	41.99	1.86	4.08	-0.19	CLAYEY SILT&SILTY CLAYS
46.05	44.55	1.97	4.26	-0.19	CLAYEY SILT&SILTY CLAYS
46.12	46.69	2.04	4.4	-0.17	CLAYEY SILT&SILTY CLAYS
46.18	47.87	2.12	4.56	-0.2	CLAYEY SILT&SILTY CLAYS
46.25	47.23	2.21	4.66	-0.23	CLAYEY SILT&SILTY CLAYS
46.31	45.73	2.34	4.71	-0.24	CLAYEY SILT&SILTY CLAYS
46.38	44.93	2.48	4.63	-0.24	CLAYEY SILT&SILTY CLAYS
46.45	44.93	2.59	4.44	-0.21	CLAYEY SILT&SILTY CLAYS
46.51	47.65	2.64	4.16	-0.14	CLAYEY SILT&SILTY CLAYS
46.58	53.54	2.51	3.68	-0.11	CLAYEY SANDY SILT&SILT
46.64	61.76	2.28	3.18	-0.12	CLAYEY SANDY SILT&SILT
46.71	68.67	2.09	2.84	-0.16	CLAYEY SANDY SILT&SILT
46.77	73.19	1.93	2.61	-0.15	SILTY SAND
46.84	75.49	1.76	2.43	-0.14	SILTY SAND
46.9	76.42	1.59	2.29	-0.15	SILTY SAND
46.97	75.14	1.49	2.26	-0.14	SILTY SAND
47.04	73.06	1.47	2.37	-0.14	SILTY SAND
47.1	69.92	1.58	2.69	-0.16	CLAYEY SANDY SILT&SILT
47.17	64.51	1.75	3.14	-0.15	CLAYEY SANDY SILT&SILT
47.23	57.96	1.91	3.54	-0.16	CLAYEY SANDY SILT&SILT
47.3	54.31	2.12	3.97	-0.15	CLAYEY SANDY SILT&SILT
47.36	52.61	2.29	4.27	-0.15	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

47.43	52.64	2.43	4.49	-0.16	CLAYEY SILT&SILTY CLAYS
47.49	52.74	2.54	4.74	-0.15	CLAYEY SILT&SILTY CLAYS
47.56	53.63	2.56	4.92	-0.16	CLAYEY SILT&SILTY CLAYS
47.63	54.85	2.5	5.02	-0.18	CLAYEY SILT&SILTY CLAYS
47.69	55.81	2.46	5.22	-0.26	CLAYEY SILT&SILTY CLAYS
47.76	54.34	2.47	5.57	-0.28	CLAYEY SILT&SILTY CLAYS
47.82	49.95	2.51	5.92	-0.28	CLAYS
47.89	44.03	2.55	5.98	-0.25	CLAYS
47.95	40.07	2.58	5.63	-0.21	CLAYS
48.02	38.3	2.61	5.15	-0.16	CLAYEY SILT&SILTY CLAYS
48.09	39.01	2.58	4.6	-0.11	CLAYEY SILT&SILTY CLAYS
48.15	42.75	2.52	4.09	-0.08	CLAYEY SILT&SILTY CLAYS
48.22	51.62	2.27	3.41	-0.11	CLAYEY SANDY SILT&SILT
48.28	63.27	1.97	2.8	-0.13	CLAYEY SANDY SILT&SILT
48.35	69.31	1.77	2.45	-0.16	SILTY SAND
48.41	71.17	1.58	2.13	-0.16	SILTY SAND
48.48	71.84	1.38	1.83	-0.15	SILTY SAND
48.54	72.42	1.28	1.66	-0.15	SILTY SAND
48.61	73.92	1.23	1.57	-0.16	SILTY SAND
48.68	75.97	1.16	1.47	-0.16	SILTY SAND
48.74	78.02	1.16	1.45	-0.15	SILTY SAND
48.81	79.78	1.17	1.47	-0.14	SILTY SAND
48.87	80.74	1.19	1.48	-0.16	SILTY SAND
48.94	80.67	1.19	1.5	-0.16	SILTY SAND
49	80.1	1.2	1.51	-0.14	SILTY SAND
49.07	79.59	1.2	1.53	-0.14	SILTY SAND
49.13	79.52	1.21	1.56	-0.16	SILTY SAND
49.2	79.46	1.09	1.41	-0.16	SILTY SAND
49.27	79.08	0.96	1.27	-0.15	SILTY SAND
49.33	78.37	0.99	1.33	-0.14	SILTY SAND
49.4	75.04	1.01	1.38	-0.14	SILTY SAND
49.46	75.2	1.01	1.42	-0.14	SILTY SAND
49.53	74.6	1.01	1.47	-0.15	SILTY SAND
49.59	72.74	1	1.52	-0.14	SILTY SAND
49.66	70.92	0.98	1.55	-0.15	SILTY SAND
49.73	68.51	0.97	1.61	-0.14	SILTY SAND
49.79	65.41	0.98	1.72	-0.14	SILTY SAND
49.86	62.11	0.96	1.75	-0.15	SILTY SAND
49.92	58.18	0.93	1.72	-0.16	SILTY SAND
49.99	54.43	0.95	1.76	-0.14	SILTY SAND
50.05	52.16	0.99	1.77	-0.14	SILTY SAND
50.12	50.37	1.08	1.82	-0.14	SILTY SAND
50.18	52.04	1.14	1.78	-0.15	SILTY SAND
50.25	55.46	1.14	1.66	-0.14	SILTY SAND
50.32	60	1.12	1.51	-0.15	SILTY SAND
50.38	66.28	1.11	1.41	-0.15	SILTY SAND
50.45	72.04	1.09	1.29	-0.14	SILTY SAND
50.51	77.41	1.05	1.18	-0.16	SILTY SAND
50.58	82.24	1.03	1.1	-0.15	SANDS
50.64	86.63	1.02	1.04	-0.14	SANDS
50.71	91.17	1.05	1.02	-0.15	SANDS
50.77	95.59	1.09	1.02	-0.14	SANDS

US EPA ARCHIVE DOCUMENT

50.84	100.13	1.15	1.03	-0.13	SANDS
50.91	105.22	1.21	1.05	-0.13	SANDS
50.97	110.6	1.27	1.07	-0.15	SANDS
51.04	115.49	1.32	1.11	-0.14	SANDS
51.1	119.24	1.36	1.15	-0.13	SANDS
51.17	121.64	1.39	1.19	-0.13	SANDS
51.23	121.16	1.41	1.23	-0.13	SANDS
51.3	119.2	1.42	1.25	-0.14	SANDS
51.37	116.17	1.43	1.27	-0.13	SANDS
51.43	113.41	1.45	1.31	-0.13	SANDS
51.5	111.11	1.48	1.33	-0.13	SANDS
51.56	110.09	1.53	1.37	-0.14	SANDS
51.63	109.9	1.62	1.44	-0.13	SANDS
51.69	111.24	1.7	1.49	-0.14	SANDS
51.76	112.13	1.78	1.55	-0.13	SANDS
51.82	113.57	1.84	1.59	-0.14	SANDS
51.89	114.37	1.89	1.62	-0.13	SILTY SAND
51.96	115.27	1.95	1.66	-0.13	SILTY SAND
52.02	116.49	1.96	1.66	-0.12	SILTY SAND
52.09	117.31	1.91	1.61	-0.12	SANDS
52.15	118.18	1.86	1.57	-0.13	SANDS
52.22	119.11	1.79	1.51	-0.14	SANDS
52.28	119.43	1.73	1.49	-0.12	SANDS
52.35	119.62	1.69	1.48	-0.13	SANDS
52.41	118.98	1.54	1.39	-0.13	SANDS
52.48	117.25	1.38	1.32	-0.12	SANDS
52.55	115.24	1.23	1.27	-0.12	SANDS
52.61	109.37	1.37	1.56	-0.13	SILTY SAND
52.68	103.51	1.49	1.9	-0.12	SILTY SAND
52.74	97.64	1.65	2.37	-0.12	SILTY SAND
52.81	84.87	1.89	3.11	-0.11	CLAYEY SANDY SILT&SILT
52.87	70.85	2.15	3.95	-0.11	CLAYEY SANDY SILT&SILT
52.94	60.52	2.31	4.55	-0.12	CLAYEY SILT&SILTY CLAYS
53.01	54.02	2.31	4.66	-0.12	CLAYEY SILT&SILTY CLAYS
53.07	49.25	2.11	4.19	-0.12	CLAYEY SILT&SILTY CLAYS
53.14	45.47	1.9	3.58	-0.12	CLAYEY SANDY SILT&SILT
53.2	46.08	1.77	3.16	-0.11	CLAYEY SANDY SILT&SILT
53.27	49.18	1.86	3.16	-0.09	CLAYEY SANDY SILT&SILT
53.33	53.38	2.1	3.43	-0.09	CLAYEY SANDY SILT&SILT
53.4	59.17	2.42	3.83	-0.09	CLAYEY SANDY SILT&SILT
53.46	64.71	2.72	4.2	-0.11	CLAYEY SILT&SILTY CLAYS
53.53	64.32	2.98	4.52	-0.09	CLAYEY SILT&SILTY CLAYS
53.6	62.15	3.27	4.85	-0.09	CLAYEY SILT&SILTY CLAYS
53.66	63.3	3.53	5.09	-0.08	CLAYEY SILT&SILTY CLAYS
53.73	65.64	3.76	5.25	-0.08	CLAYEY SILT&SILTY CLAYS
53.79	68.9	3.99	5.4	-0.1	CLAYEY SILT&SILTY CLAYS
53.86	71.01	4.15	5.44	-0.11	CLAYEY SILT&SILTY CLAYS
53.92	72.99	4.14	5.25	-0.11	CLAYEY SILT&SILTY CLAYS
53.99	74.95	4.26	5.27	-0.15	CLAYEY SILT&SILTY CLAYS
54.05	76.07	4.42	5.37	-0.13	CLAYEY SILT&SILTY CLAYS
54.12	79.24	4.57	5.45	-0.15	CLAYEY SILT&SILTY CLAYS
54.19	83.27	4.75	5.59	-0.15	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

54.25	86.05	4.9	5.7	-0.15	CLAYEY SILT&SILTY CLAYS
54.32	84.74	5.06	5.81	-0.14	CLAYEY SILT&SILTY CLAYS
54.38	84.64	5.2	5.84	-0.11	CLAYEY SILT&SILTY CLAYS
54.45	85	5.29	5.81	-0.09	CLAYEY SILT&SILTY CLAYS
54.51	86.5	5.27	5.68	-0.07	CLAYEY SILT&SILTY CLAYS
54.58	89.16	5.21	5.52	-0.07	CLAYEY SILT&SILTY CLAYS
54.65	92.32	5.16	5.4	-0.05	CLAYEY SILT&SILTY CLAYS
54.71	95.94	5.07	5.25	-0.11	CLAYEY SILT&SILTY CLAYS
54.78	97.09	5	5.15	-0.17	CLAYEY SILT&SILTY CLAYS
54.84	95.97	4.92	5.05	-0.17	CLAYEY SILT&SILTY CLAYS
54.91	95.59	4.96	5.02	-0.16	CLAYEY SILT&SILTY CLAYS
54.97	96.64	5.03	5.02	-0.16	CLAYEY SILT&SILTY CLAYS
55.04	97.83	5.12	5.06	-0.15	CLAYEY SILT&SILTY CLAYS
55.1	98.66	5	4.89	-0.14	CLAYEY SILT&SILTY CLAYS
55.17	100.39	4.83	4.72	-0.14	CLAYEY SILT&SILTY CLAYS
55.24	103.33	4.73	4.63	-0.14	CLAYEY SANDY SILT&SILT
55.3	104.07	4.7	4.61	-0.14	CLAYEY SANDY SILT&SILT
55.37	103.78	4.71	4.61	-0.16	CLAYEY SANDY SILT&SILT
55.43	102.22	4.74	4.63	-0.16	CLAYEY SANDY SILT&SILT
55.5	100.67	4.69	4.57	-0.15	CLAYEY SANDY SILT&SILT
55.56	99.69	4.54	4.44	-0.15	CLAYEY SANDY SILT&SILT
55.63	101.51	4.39	4.35	-0.16	CLAYEY SANDY SILT&SILT
55.69	104.58	4.23	4.3	-0.13	CLAYEY SANDY SILT&SILT
55.76	106.02	3.74	3.94	-0.14	CLAYEY SANDY SILT&SILT
55.83	103.56	3.46	3.81	-0.15	CLAYEY SANDY SILT&SILT
55.89	98.47	3.14	3.63	-0.14	CLAYEY SANDY SILT&SILT
55.96	90.34	2.8	3.41	-0.1	CLAYEY SANDY SILT&SILT
56.02	87.11	2.5	3.21	-0.1	CLAYEY SANDY SILT&SILT
56.09	84.23	2.23	3.03	-0.11	CLAYEY SANDY SILT&SILT
56.15	81.28	2.14	3.08	-0.1	CLAYEY SANDY SILT&SILT
56.22	77.96	2.16	3.27	-0.1	CLAYEY SANDY SILT&SILT
56.29	72.77	2.15	3.41	-0.11	CLAYEY SANDY SILT&SILT
56.35	64.2	2.25	3.7	-0.11	CLAYEY SANDY SILT&SILT
56.42	60.55	2.37	3.94	-0.1	CLAYEY SANDY SILT&SILT
56.48	61.16	2.63	4.37	-0.11	CLAYEY SILT&SILTY CLAYS
56.55	59.72	2.79	4.66	-0.1	CLAYEY SILT&SILTY CLAYS
56.61	59.43	2.89	4.84	-0.07	CLAYEY SILT&SILTY CLAYS
56.68	59.33	2.99	5.03	-0.08	CLAYEY SILT&SILTY CLAYS
56.74	60.26	3.06	5.19	-0.11	CLAYEY SILT&SILTY CLAYS
56.81	60.36	2.91	5	-0.18	CLAYEY SILT&SILTY CLAYS
56.88	60	2.87	5.01	-0.17	CLAYEY SILT&SILTY CLAYS
56.94	58.57	2.86	5.07	-0.13	CLAYEY SILT&SILTY CLAYS
57.01	58.02	2.93	5.32	-0.14	CLAYEY SILT&SILTY CLAYS
57.07	56.68	3.09	5.81	-0.13	CLAYS
57.14	55.94	3.18	6.21	-0.08	CLAYS
57.2	54.98	3.19	6.54	-0.04	CLAYS
57.27	53.83	3.15	6.81	-0.04	CLAYS
57.33	50.53	3.14	7.21	-0.08	CLAYS
57.4	47.3	3.05	7.41	-0.13	CLAYS
57.47	44.13	3.02	7.69	-0.13	CLAYS
57.53	42.08	3	7.83	-0.16	CLAYS
57.6	40.07	2.9	7.68	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

57.66	37.54	2.82	7.46	-0.1	CLAYS
57.73	36.1	2.74	7.18	-0.06	CLAYS
57.79	35.9	2.58	6.64	-0.03	CLAYS
57.86	38.15	2.49	6.27	-0.02	CLAYS
57.93	39.04	2.41	6	-0.02	CLAYS
57.99	40.13	2.34	5.75	-0.05	CLAYS
58.06	39.81	2.29	5.55	-0.06	CLAYS
58.12	39.97	2.25	5.38	-0.04	CLAYS
58.19	40.74	2.28	5.39	-0.04	CLAYS
58.25	41.67	2.28	5.36	-0.03	CLAYEY SILT&SILTY CLAYS
58.32	42.4	2.35	5.49	-0.03	CLAYS
58.38	42.91	2.42	5.62	-0.06	CLAYS
58.45	42.72	2.47	5.76	-0.06	CLAYS
58.52	42.72	2.54	5.93	-0.06	CLAYS
58.58	43.17	2.59	6.09	-0.05	CLAYS
58.65	43.42	2.62	6.25	-0.04	CLAYS
58.71	43.17	2.67	6.44	-0.04	CLAYS
58.78	42.63	2.71	6.67	-0.05	CLAYS
58.84	41.6	2.7	6.74	-0.05	CLAYS
58.91	40.8	2.67	6.75	-0.04	CLAYS
58.97	40.19	2.66	6.79	-0.02	CLAYS
59.04	39.94	2.59	6.62	-0.03	CLAYS
59.11	38.91	2.54	6.46	-0.01	CLAYS
59.17	38.66	2.49	6.26	-0.03	CLAYS
59.24	38.53	2.43	5.99	-0.02	CLAYS
59.3	38.69	2.4	5.75	-0.01	CLAYS
59.37	39.71	2.4	5.53	-0.01	CLAYS
59.43	41.28	2.4	5.26	-0.03	CLAYEY SILT&SILTY CLAYS
59.5	42.37	2.24	4.62	-0.02	CLAYEY SILT&SILTY CLAYS
59.57	43.27	2.23	4.31	-0.01	CLAYEY SILT&SILTY CLAYS
59.63	45.54	2.23	4	-0.03	CLAYEY SILT&SILTY CLAYS
59.7	48.64	2.22	3.71	-0.01	CLAYEY SANDY SILT&SILT
59.76	53.25	2.29	3.57	-0.02	CLAYEY SANDY SILT&SILT
59.83	57.86	2.31	3.4	-0.07	CLAYEY SANDY SILT&SILT
59.89	62.47	2.27	3.2	-0.1	CLAYEY SANDY SILT&SILT
59.96	66.08	2.24	3.05	-0.1	CLAYEY SANDY SILT&SILT
60.02	70.69	2.24	2.98	-0.12	CLAYEY SANDY SILT&SILT
60.09	74.43	2.23	2.92	-0.16	CLAYEY SANDY SILT&SILT
60.16	75.55	2.21	2.88	-0.2	CLAYEY SANDY SILT&SILT
60.22	76.77	2.19	2.85	-0.21	CLAYEY SANDY SILT&SILT
60.29	76.96	2.17	2.81	-0.19	CLAYEY SANDY SILT&SILT
60.35	77.06	2.23	2.88	-0.19	CLAYEY SANDY SILT&SILT
60.42	76.83	2.28	2.94	-0.18	CLAYEY SANDY SILT&SILT
60.48	76.49	2.32	2.98	-0.15	CLAYEY SANDY SILT&SILT
60.55	76.96	2.31	2.95	-0.15	CLAYEY SANDY SILT&SILT
60.61	77.54	2.3	2.91	-0.13	CLAYEY SANDY SILT&SILT
60.68	78.79	2.32	2.93	-0.16	CLAYEY SANDY SILT&SILT
60.75	79.3	2.37	2.98	-0.17	CLAYEY SANDY SILT&SILT
60.81	79.27	2.39	3	-0.19	CLAYEY SANDY SILT&SILT
60.88	79.17	2.42	3.05	-0.16	CLAYEY SANDY SILT&SILT
60.94	79.97	2.46	3.11	-0.14	CLAYEY SANDY SILT&SILT
61.01	80	2.54	3.27	-0.13	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

61.07	79.88	2.67	3.52	-0.11	CLAYEY SANDY SILT&SILT
61.14	79.05	2.76	3.78	-0.09	CLAYEY SANDY SILT&SILT
61.21	77.92	2.84	4.11	-0.06	CLAYEY SANDY SILT&SILT
61.27	76.68	2.91	4.51	-0.07	CLAYEY SILT&SILTY CLAYS
61.34	73.41	3.04	5.12	-0.08	CLAYEY SILT&SILTY CLAYS
61.4	68.48	3.15	5.83	-0.05	CLAYEY SILT&SILTY CLAYS
61.47	62.31	3.25	6.57	-0.06	CLAYS
61.53	55.55	3.33	7.26	-0.03	CLAYS
61.6	50.11	3.34	7.75	-0.03	CLAYS
61.66	45.6	3.34	8.07	-0.03	CLAYS
61.73	42.6	3.27	8.06	-0.01	CLAYS
61.8	40.99	3.11	7.68	0	CLAYS
61.86	40.1	2.93	7.11	-0.02	CLAYS
61.93	39.27	2.79	6.5	-0.01	CLAYS
61.99	39.91	2.68	5.87	-0.03	CLAYS
62.06	40.52	2.53	5.1	-0.01	CLAYEY SILT&SILTY CLAYS
62.12	42.05	2.45	4.51	-0.02	CLAYEY SILT&SILTY CLAYS
62.19	45.12	2.43	4.05	-0.02	CLAYEY SILT&SILTY CLAYS
62.25	50.37	2.45	3.73	-0.02	CLAYEY SANDY SILT&SILT
62.32	56.45	2.53	3.53	-0.01	CLAYEY SANDY SILT&SILT
62.39	62.82	2.61	3.4	-0.01	CLAYEY SANDY SILT&SILT
62.45	69.22	2.73	3.33	-0.02	CLAYEY SANDY SILT&SILT
62.52	75.33	2.86	3.32	-0.05	CLAYEY SANDY SILT&SILT
62.58	80.36	2.92	3.27	-0.06	CLAYEY SANDY SILT&SILT
62.65	84.97	2.93	3.19	-0.05	CLAYEY SANDY SILT&SILT
62.71	89.16	2.93	3.13	-0.04	CLAYEY SANDY SILT&SILT
62.78	92.68	2.99	3.13	-0.06	CLAYEY SANDY SILT&SILT
62.85	94.05	2.82	2.89	-0.04	SILTY SAND
62.91	94.47	2.65	2.66	-0.04	SILTY SAND
62.98	95.65	2.73	2.67	-0.02	SILTY SAND
63.04	96.42	2.8	2.68	-0.02	SILTY SAND
63.11	100.55	2.86	2.66	-0.01	SILTY SAND
63.17	104.26	2.91	2.63	-0.04	SILTY SAND
63.24	106.85	2.96	2.6	-0.05	SILTY SAND
63.3	109.09	2.94	2.51	-0.09	SILTY SAND
63.37	110.79	2.83	2.36	-0.11	SILTY SAND
63.44	113.83	2.68	2.19	-0.11	SILTY SAND
63.5	118.89	2.61	2.07	-0.11	SILTY SAND
63.57	124.07	2.75	2.13	-0.12	SILTY SAND
63.63	125.96	3.06	2.31	-0.12	SILTY SAND
63.7	125.86	3.15	2.31	-0.14	SILTY SAND
63.76	126.73	3.07	2.18	-0.11	SILTY SAND
63.83	134.09	3.01	2.06	-0.08	SILTY SAND
63.89	139.53	2.99	1.99	-0.1	SILTY SAND
63.96	143.68	3.01	1.95	-0.1	SILTY SAND
64.03	147.97	3.01	1.89	-0.1	SILTY SAND
64.09	152.3	2.89	1.77	-0.11	SANDS
64.16	157.03	2.75	1.64	-0.12	SANDS
64.22	161.35	2.69	1.56	-0.12	SANDS
64.29	166.02	2.68	1.52	-0.13	SANDS
64.35	170.63	2.72	1.51	-0.12	SANDS
64.42	174.76	2.79	1.52	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

64.49	178.28	2.85	1.52	-0.11	SANDS
64.55	181.87	2.9	1.52	-0.11	SANDS
64.62	185.19	2.95	1.52	-0.11	SANDS
64.68	188.39	3	1.52	-0.11	SANDS
64.75	192.11	3.06	1.54	-0.13	SANDS
64.81	195.72	3.12	1.56	-0.11	SANDS
64.88	199.62	3.21	1.59	-0.12	SANDS
64.94	201.51	3.31	1.65	-0.11	SANDS
65.01	202.63	3.42	1.72	-0.12	SANDS
65.08	202.25	3.57	1.81	-0.11	SANDS
65.14	201.45	3.68	1.89	-0.12	SANDS
65.21	199.79	3.76	1.96	-0.12	SANDS
65.27	196.93	3.83	2.03	-0.11	SANDS
65.34	193.96	3.86	2.08	-0.12	SANDS
65.4	190.41	3.92	2.14	-0.13	SANDS
65.47	186.96	3.93	2.16	-0.12	SILTY SAND
65.53	183.69	3.95	2.18	-0.12	SILTY SAND
65.6	180.49	3.87	2.14	-0.11	SILTY SAND
65.67	178.92	3.79	2.08	-0.12	SANDS
65.73	179.15	3.66	1.99	-0.12	SANDS
65.8	181.06	3.6	1.95	-0.12	SANDS
65.86	183.18	3.52	1.91	-0.1	SANDS
65.93	185.13	3.47	1.88	-0.1	SANDS
65.99	186.06	3.46	1.88	-0.1	SANDS
66.06	186.32	3.43	1.88	-0.11	SANDS
66.13	185.22	3.25	1.8	-0.1	SANDS
66.19	184.1	3.08	1.72	-0.09	SANDS
66.26	181.99	3.16	1.77	-0.09	SANDS
66.32	180.22	3.27	1.84	-0.11	SANDS
66.39	178.46	3.41	1.9	-0.08	SANDS
66.45	176.69	3.54	1.96	-0.07	SANDS
66.52	174.92	3.66	2	-0.08	SANDS
66.58	177.35	3.74	2	-0.06	SANDS
66.65	180.84	3.79	2	-0.06	SANDS
66.72	185.32	3.89	2.02	-0.08	SANDS
66.78	189.29	3.89	2.02	-0.06	SANDS
66.85	193	3.87	2.01	-0.07	SANDS
66.91	195.31	3.82	2.01	-0.05	SANDS
66.98	195.62	3.83	2.05	-0.05	SANDS
67.04	194.15	3.82	2.1	-0.06	SANDS
67.11	190.38	3.85	2.19	-0.05	SILTY SAND
67.17	186.02	3.87	2.28	-0.06	SILTY SAND
67.24	180.23	3.87	2.38	-0.04	SILTY SAND
67.31	173.39	3.76	2.41	-0.05	SILTY SAND
67.37	165.74	3.66	2.44	-0.05	SILTY SAND
67.44	158.67	3.59	2.47	-0.06	SILTY SAND
67.5	152.36	3.47	2.47	-0.05	SILTY SAND
67.57	146.21	3.35	2.45	-0.04	SILTY SAND
67.63	141.54	3.19	2.38	-0.05	SILTY SAND
67.7	137.13	3.1	2.35	-0.06	SILTY SAND
67.77	133.96	3.03	2.32	-0.04	SILTY SAND
67.83	131.49	3	2.32	-0.04	SILTY SAND

US EPA ARCHIVE DOCUMENT

67.9	130.25	2.97	2.31	-0.05	SILTY SAND
67.96	129.61	2.95	2.29	-0.04	SILTY SAND
68.03	129.48	2.88	2.25	-0.06	SILTY SAND
68.09	128.26	2.8	2.18	-0.07	SILTY SAND
68.16	127.88	2.7	2.1	-0.07	SILTY SAND
68.22	127.69	2.6	2.01	-0.05	SILTY SAND
68.29	128.07	2.51	1.93	-0.04	SILTY SAND
68.36	128.74	2.41	1.84	-0.04	SILTY SAND
68.42	129.54	2.3	1.75	-0.04	SILTY SAND
68.49	130.08	2.22	1.67	-0.02	SANDS
68.55	130.98	2.17	1.63	-0.02	SANDS
68.62	131.78	2.16	1.6	-0.02	SANDS
68.68	132.87	2.15	1.58	-0.03	SANDS
68.75	133.64	2.15	1.55	-0.02	SANDS
68.81	135.08	2.15	1.53	-0.03	SANDS
68.88	136.48	2.16	1.51	-0.02	SANDS
68.95	138.63	2.15	1.48	-0.02	SANDS
69.01	140.9	2.13	1.43	-0.01	SANDS
69.08	143.81	2.11	1.39	-0.02	SANDS
69.14	146.37	2.12	1.36	-0.01	SANDS
69.21	149.77	2.11	1.32	0	SANDS
69.27	153.54	2.1	1.29	-0.02	SANDS
69.34	156.94	2.09	1.26	0	SANDS
69.41	160.93	1.88	1.12	-0.01	SANDS
69.47	165.16	1.68	0.98	-0.02	SANDS
69.54	169.1	1.47	0.85	-0.01	SANDS
69.6	172.84	1.56	0.88	0	SANDS
69.67	172.62	1.65	0.92	-0.01	SANDS
69.73	170.7	1.74	0.95	0.01	SANDS
69.8	176.11	1.84	0.99	0	SANDS
69.86	181.51	1.94	1.02	-0.01	SANDS
69.93	186.92	2.03	1.06	0.01	SANDS
70	189.74	2.11	1.09	0.01	SANDS
70.06	191.95	2.23	1.15	0	SANDS
70.13	193.9	2.33	1.19	0	SANDS
70.19	194.73	2.43	1.24	0.01	SANDS
70.26	195.69	2.51	1.28	-0.01	SANDS
70.32	195.85	2.58	1.31	0.01	SANDS
70.39	196.36	2.65	1.34	0.01	SANDS
70.45	196.9	2.72	1.38	0.01	SANDS
70.52	197.64	2.76	1.41	0	SANDS
70.59	198.38	2.8	1.43	0	SANDS
70.65	198.25	2.84	1.47	0.01	SANDS
70.72	197.35	2.85	1.49	0	SANDS
70.78	195.21	2.86	1.51	0.01	SANDS
70.85	192.68	2.87	1.52	0.01	SANDS
70.91	189.86	2.86	1.53	0	SANDS
70.98	187.56	2.84	1.52	0	SANDS
71.05	186.41	2.84	1.53	0.01	SANDS
71.11	186.63	2.84	1.54	0	SANDS
71.18	187.02	2.85	1.57	-0.01	SANDS
71.24	186.99	2.91	1.63	0	SANDS

US EPA ARCHIVE DOCUMENT

71.31	185.19	2.96	1.69	0.01	SANDS
71.37	182.09	3	1.77	0	SANDS
71.44	178.25	3.02	1.83	0	SANDS
71.5	172.78	3.05	1.91	0.01	SANDS
71.57	167.37	3.03	1.97	0.01	SANDS
71.64	161.73	3.01	2.04	0.01	SILTY SAND
71.7	156.26	2.98	2.1	0.01	SILTY SAND
71.77	151.3	2.99	2.2	0	SILTY SAND
71.83	145.13	3.03	2.32	0.02	SILTY SAND
71.9	139.27	3.1	2.49	0.01	SILTY SAND
71.96	134.12	3.19	2.68	0	SILTY SAND
72.03	126.79	3.25	2.87	0.01	SILTY SAND
72.09	121.35	3.36	3.14	0	SILTY SAND
72.16	115.88	3.44	3.43	0.02	CLAYEY SANDY SILT&SILT
72.23	110.92	3.48	3.73	0	CLAYEY SANDY SILT&SILT
72.29	105.12	3.46	4	0.02	CLAYEY SANDY SILT&SILT
72.36	98.63	3.53	4.39	0.01	CLAYEY SANDY SILT&SILT
72.42	90.09	3.66	4.84	0	CLAYEY SILT&SILTY CLAYS
72.49	79.97	3.81	5.23	0.01	CLAYEY SILT&SILTY CLAYS
72.55	74.56	3.85	5.33	0.01	CLAYEY SILT&SILTY CLAYS
72.62	71.27	3.53	4.83	0	CLAYEY SILT&SILTY CLAYS
72.69	68.13	3.21	4.27	0.01	CLAYEY SILT&SILTY CLAYS
72.75	69.48	2.88	3.7	0.02	CLAYEY SANDY SILT&SILT
72.82	73.44	2.75	3.41	0.02	CLAYEY SANDY SILT&SILT
72.88	76.73	2.63	3.18	-0.01	CLAYEY SANDY SILT&SILT
72.95	80.01	2.48	2.96	-0.06	CLAYEY SANDY SILT&SILT
73.01	83.3	2.38	2.82	-0.03	CLAYEY SANDY SILT&SILT
73.08	84.64	2.28	2.73	0	SILTY SAND
73.14	85.19	2.18	2.65	0.02	SILTY SAND
73.21	85.86	2.08	2.6	0	SILTY SAND
73.28	84.42	2.04	2.62	0	SILTY SAND
73.34	82.08	2.09	2.76	-0.02	SILTY SAND
73.41	78.75	2.23	3.02	-0.02	CLAYEY SANDY SILT&SILT
73.47	75.68	2.36	3.27	-0.01	CLAYEY SANDY SILT&SILT
73.54	73.03	2.41	3.41	0.04	CLAYEY SANDY SILT&SILT
73.6	73.09	2.45	3.51	0.07	CLAYEY SANDY SILT&SILT
73.67	71.97	2.55	3.7	0.06	CLAYEY SANDY SILT&SILT
73.73	71.04	2.65	3.89	0.04	CLAYEY SANDY SILT&SILT
73.8	68.81	2.75	4.04	0.06	CLAYEY SANDY SILT&SILT
73.87	66.92	2.74	4.02	0.06	CLAYEY SANDY SILT&SILT
73.93	67.04	2.69	3.91	0.07	CLAYEY SANDY SILT&SILT
74	67.08	2.65	3.83	0.06	CLAYEY SANDY SILT&SILT
74.06	67.81	2.58	3.66	0.08	CLAYEY SANDY SILT&SILT
74.13	69.57	2.59	3.6	0.08	CLAYEY SANDY SILT&SILT
74.19	71.04	2.66	3.62	0.08	CLAYEY SANDY SILT&SILT
74.26	70.69	2.68	3.58	0.08	CLAYEY SANDY SILT&SILT
74.32	69.92	2.65	3.44	0.09	CLAYEY SANDY SILT&SILT
74.39	72.93	2.56	3.23	0.09	CLAYEY SANDY SILT&SILT
74.46	76.55	2.49	3.07	0.1	CLAYEY SANDY SILT&SILT
74.52	79.11	2.41	2.94	0.07	CLAYEY SANDY SILT&SILT
74.59	80.96	2.32	2.81	0.01	CLAYEY SANDY SILT&SILT
74.65	82.56	2.21	2.69	-0.01	SILTY SAND

US EPA ARCHIVE DOCUMENT

74.72	83.17	2.12	2.61	0	SILTY SAND
74.78	83.69	2.04	2.58	-0.02	SILTY SAND
74.85	82.95	2	2.65	-0.01	SILTY SAND
74.92	81.38	2.03	2.92	-0.02	CLAYEY SANDY SILT&SILT
74.98	79.43	2.15	3.44	-0.03	CLAYEY SANDY SILT&SILT
75.05	76.49	2.31	4.22	-0.04	CLAYEY SANDY SILT&SILT
75.11	70.88	2.49	5.29	-0.01	CLAYEY SILT&SILTY CLAYS
75.18	61.73	2.63	6.45	0.02	CLAYS
75.24	48.16	2.69	7.24	0.03	CLAYS
75.31	38.15	2.63	7.14	0.06	CLAYS
75.37	32.77	2.42	6.09	0.1	CLAYS
75.44	30.69	2.18	4.89	0.12	CLAYEY SILT&SILTY CLAYS
75.51	33.18	1.89	3.73	0.11	CLAYEY SILT&SILTY CLAYS
75.57	39.65	1.76	3.05	0.1	CLAYEY SANDY SILT&SILT
75.64	46.62	1.77	2.74	0.1	CLAYEY SANDY SILT&SILT
75.7	55.11	1.91	2.69	0.1	CLAYEY SANDY SILT&SILT
75.77	61.73	1.95	2.55	0.08	CLAYEY SANDY SILT&SILT
75.83	68.13	1.92	2.36	0.1	SILTY SAND
75.9	74.31	1.94	2.27	0.08	SILTY SAND
75.96	80.45	1.97	2.24	0.06	SILTY SAND
76.03	85.25	1.75	1.95	0.04	SILTY SAND
76.1	88.42	1.53	1.68	0.04	SILTY SAND
76.16	90.91	1.31	1.43	0.04	SILTY SAND
76.23	91.27	1.41	1.54	0.01	SILTY SAND
76.29	91.62	1.5	1.65	-0.03	SILTY SAND
76.36	91.97	1.62	1.8	-0.01	SILTY SAND
76.42	92.45	1.74	2	-0.02	SILTY SAND
76.49	91.94	1.84	2.18	-0.03	SILTY SAND
76.56	90.76	1.86	2.31	-0.04	SILTY SAND
76.62	87.84	1.91	2.47	-0.03	SILTY SAND
76.69	83.23	2.06	2.74	-0.05	SILTY SAND
76.75	77.5	2.36	3.21	-0.05	CLAYEY SANDY SILT&SILT
76.82	74.43	2.6	3.59	-0.06	CLAYEY SANDY SILT&SILT
76.88	70.63	2.62	3.67	-0.01	CLAYEY SANDY SILT&SILT
76.95	70.79	2.53	3.57	0.04	CLAYEY SANDY SILT&SILT
77.01	73.7	2.51	3.58	0.05	CLAYEY SANDY SILT&SILT
77.08	73.99	2.59	3.83	0.01	CLAYEY SANDY SILT&SILT
77.15	70.98	2.74	4.2	0.02	CLAYEY SANDY SILT&SILT
77.21	68.58	2.73	4.32	0.02	CLAYEY SILT&SILTY CLAYS
77.28	67.46	2.64	4.21	0.05	CLAYEY SANDY SILT&SILT
77.34	64.61	2.72	4.11	0.08	CLAYEY SANDY SILT&SILT
77.41	61.12	2.85	3.82	0.07	CLAYEY SANDY SILT&SILT
77.47	58.18	2.93	3.34	0.09	CLAYEY SANDY SILT&SILT
77.54	58.6	2.99	2.83	0.11	CLAYEY SANDY SILT&SILT
77.6	66.53	2.92	2.3	0.1	SILTY SAND
77.67	87.65	2.8	1.86	0.1	SILTY SAND
77.74	115.56	2.72	1.57	0.08	SANDS
77.8	140.84	2.67	1.38	0.05	SANDS
77.87	164.23	2.58	1.22	0.02	SANDS
77.93	186.66	2.57	1.12	-0.02	SANDS
78	206.89	2.64	1.08	-0.08	SANDS
78.06	223.72	2.73	1.05	-0.08	SANDS

US EPA ARCHIVE DOCUMENT

78.13	238.47	2.87	1.05	-0.07	SANDS
78.2	252.62	3.01	1.05	-0.06	SANDS
78.26	266.22	3.14	1.05	-0.05	SANDS
78.33	279.66	3.3	1.05	-0.05	SANDS
78.39	293.55	3.49	1.08	-0.06	SANDS
78.46	307.85	3.69	1.11	-0.06	SANDS
78.52	320.91	3.92	1.16	-0.05	SANDS
78.59	332.05	4.18	1.22	-0.06	SANDS
78.65	340.85	4.5	1.31	-0.05	SANDS
78.72	346.26	4.78	1.39	-0.06	SANDS
78.79	347.69	4.99	1.46	-0.06	SANDS
78.85	346.64	5.13	1.52	-0.04	SANDS
78.92	344.98	5.25	1.57	-0.05	SANDS
78.98	340.95	5.33	1.62	-0.06	SANDS
79.05	335.34	5.38	1.65	-0.06	SANDS
79.11	330.29	5.45	1.69	-0.06	SANDS
79.18	326.41	5.49	1.71	-0.06	SANDS
79.24	322	5.53	1.74	-0.04	SANDS
79.31	320.59	5.59	1.76	-0.06	SANDS
79.38	319.15	5.01	1.59	-0.05	SANDS
79.44	319.09	4.9	1.56	-0.05	SANDS
79.51	316.83	4.72	1.52	-0.06	SANDS
79.57	314.59	4.45	1.45	-0.04	SANDS
79.64	312.33	4.24	1.4	-0.04	SANDS
79.7	311.24	3.95	1.32	-0.03	SANDS
79.77	307.57	3.63	1.24	-0.03	SANDS
79.84	302.45	3.47	1.2	-0.02	SANDS
79.9	295.72	3.38	1.19	-0.03	SANDS
79.97	289.65	3.31	1.19	-0.03	SANDS
80.03	284.46	3.27	1.19	-0.02	SANDS
80.1	280.43	3.26	1.2	-0.01	SANDS
80.16	276.72	3.32	1.23	-0.01	SANDS
80.23	273.2	3.45	1.3	-0.02	SANDS
80.29	270.89	3.72	1.42	-0.01	SANDS
80.36	268.17	4.15	1.6	-0.01	SANDS
80.43	265.45	4.74	1.85	0	SANDS
80.49	260.85	5.14	2.03	0	SANDS
80.56	257.71	5.4	2.14	-0.02	SANDS
80.62	253.68	5.67	2.26	0.01	SANDS
80.69	251.46	5.88	2.33	-0.01	SANDS
80.75	249.29	5.99	2.34	0.01	SANDS
80.82	249.13	5.97	2.27	0.01	SANDS
80.88	250.09	5.93	2.17	0.01	SANDS
80.95	254.63	5.82	2.01	0.02	SANDS
81.02	260.46	5.74	1.84	0.01	SANDS
81.08	270.96	5.63	1.67	0.02	SANDS
81.15	289.39	5.64	1.53	0.02	SANDS
81.21	314.57	5.7	1.41	0.01	SANDS
81.28	348.02	5.83	1.33	0.02	SANDS
81.34	384.82	6.07	1.28	0.03	SANDS
81.41	419.63	6.32	1.25	0.07	SANDS
81.48	459.19	6.56	1.22	0.07	SANDS

US EPA ARCHIVE DOCUMENT

81.54	497.88	6.87	1.23	0.06	SANDS
81.61	526.46	7.18	1.24	0.05	SANDS
81.67	554.75	7.46	1.27	0.04	SANDS
81.74	578.62	7.82	1.32	0.05	SANDS
81.8	597.98	8.2	1.38	0.06	SANDS
81.87	607.03	8.48	1.43	0.05	SANDS
81.93	607	8.94	1.52	0.07	SANDS
82	592.06	9.44	1.6	0.06	SANDS
82.07	583.65	9.43	1.6	0.07	SANDS
82.13	581.76	9.42	1.59	0.07	SANDS
82.2	586.05	9.41	1.59	0.06	SANDS
82.26	590.35	9.49	1.59	0.07	SANDS
82.33	594.64	9.69	1.61	0.08	SANDS
82.39	598.94	9.82	1.62	0.07	SANDS
82.46	594.23	9.88	1.62	0.09	SANDS
82.52	596.45	9.62	1.55	0.09	SANDS
82.59	603.74	9.36	1.49	0.07	SANDS
82.66	616.45	9.1	1.43	0.09	SANDS
82.72	624.06	8.84	1.36	0.08	SANDS
82.79	631.68	8.52	1.3	0.2	SANDS
82.85	639.29	8.27	1.25	0.22	SANDS
82.92	646.91	7.89	1.19	0.2	SANDS
82.98	668.73	7.55	1.14	0.21	SANDS
83.05	677.72	7.67	1.17	0.22	SANDS
83.12	679.52	7.98	1.23	0.21	SANDS
83.18	659.68	8.13	1.28	0.22	SANDS
83.25	645.85	8.33	1.34	0.22	SANDS
83.31	641.79	8.41	1.38	0.21	SANDS
83.38	637.54	8.32	1.39	0.2	SANDS
83.44	629.66	8.11	1.37	0.22	SANDS
83.51	601.31	7.84	1.33	0.21	SANDS
83.57	577.82	7.64	1.28	0.2	SANDS
83.64	563.96	7.49	1.23	0.21	SANDS
83.71	572.03	7.22	1.16	0.22	SANDS
83.77	596.06	7.06	1.12	0.22	SANDS
83.84	628.09	6.76	1.07	0.23	SANDS
83.9	650.27	6.5	1.05	0.21	SANDS
83.97	654.37	6.3	1.04	0.23	SANDS
84.03	644.64	6.39	1.09	0.23	SANDS
84.1	618.49	6.35	1.1	0.22	SANDS
84.16	596.06	6.43	1.14	0.23	SANDS
84.23	563.51	6.71	1.2	0.22	SANDS
84.3	558.14	6.62	1.2	0.22	SANDS
84.36	551.16	6.53	1.2	0.23	SANDS
84.43	562.74	6.14	1.15	0.24	SANDS
84.49	564.41	5.65	1.09	0.24	SANDS
84.56	553.08	5.26	1.07	0.23	SANDS
84.62	532.22	5.57	1.19	0.25	SANDS
84.69	514.39	5.49	1.24	0.25	SANDS
84.75	487.73	5.23	1.24	0.24	SANDS
84.82	448.79	5.02	1.24	0.26	SANDS
84.89	423.03	4.79	1.22	0.26	SANDS

US EPA ARCHIVE DOCUMENT

84.95	404.18	4.7	1.22	0.25	SANDS
85.02	389.49	4.45	1.16	0.27	SANDS
85.08	380.46	4.17	1.08	0.27	SANDS
85.15	376.37	3.96	1.02	0.26	SANDS
85.21	376.43	3.64	0.93	0.28	SANDS
85.28	384.69	3.37	0.85	0.27	SANDS
85.35	390.86	3.21	0.8	0.27	SANDS
85.41	397.03	2.96	0.74	0.32	SANDS
85.48	403.19	2.89	0.73	0.31	SANDS
85.54	409.36	2.76	0.71	0.32	SANDS
85.61	407.44	2.64	0.69	0.32	SANDS
85.67	395.95	2.54	0.69	0.32	SANDS
85.74	388.4	2.5	0.71	0.33	SANDS
85.8	381.62	2.56	0.74	0.33	SANDS
85.87	360.59	2.38	0.71	0.34	SANDS
85.94	341.07	2.33	0.7	0.33	SANDS
86	327.21	2.26	0.68	0.34	SANDS
86.07	324.08	2.24	0.67	0.34	SANDS
86.13	329.77	2.32	0.69	0.35	SANDS
86.2	332.24	2.37	0.7	0.34	SANDS
86.26	331.12	2.39	0.7	0.36	SANDS
86.33	336.62	2.41	0.71	0.36	SANDS
86.39	342.06	2.43	0.71	0.36	SANDS
86.46	343.6	2.44	0.71	0.35	SANDS
86.53	339.98	2.46	0.71	0.37	SANDS
86.59	340.88	2.48	0.71	0.36	SANDS
86.66	342.9	2.5	0.72	0.35	SANDS
86.72	351.28	2.52	0.73	0.36	SANDS
86.79	357.46	2.47	0.73	0.36	SANDS
86.85	356.85	2.51	0.76	0.36	SANDS
86.92	342.26	2.42	0.76	0.37	SANDS
86.99	333.78	2.55	0.82	0.37	SANDS
87.05	322.06	2.56	0.85	0.36	SANDS
87.12	313.29	2.4	0.81	0.36	SANDS
87.18	306.86	2.3	0.79	0.36	SANDS
87.25	300.59	2.15	0.74	0.38	SANDS
87.31	292.24	2.14	0.73	0.37	SANDS
87.38	280.75	2.03	0.66	0.37	SANDS
87.44	278.35	2.17	0.66	0.38	SANDS
87.51	289.52	2.07	0.57	0.37	SANDS
87.58	305.58	2.16	0.53	0.38	SANDS
87.64	324.21	2.21	0.48	0.37	SANDS
87.71	364.37	2.37	0.46	0.38	SANDS
87.77	422.32	2.42	0.43	0.37	SANDS
87.84	488.37	2.49	0.41	0.39	SANDS
87.9	540.82	2.52	0.39	0.38	SANDS
87.97	596.76	2.54	0.38	0.39	SANDS
88.03	653.24	2.56	0.37	0.39	SANDS
88.1	684.19	3.56	0.5	0.38	SANDS
88.17	692.35	3.58	0.5	0.39	SANDS
88.23	713.76	4.11	0.57	0.4	SANDS
88.3	719.01	4.66	0.65	0.4	SANDS

US EPA ARCHIVE DOCUMENT

88.36	724.19	5.22	0.73	0.4	SANDS
88.43	729.76	5.8	0.83	0.38	SANDS
88.49	725.48	6.33	0.92	0.4	SANDS
88.56	710.82	6.37	0.95	0.39	SANDS
88.63	697.82	6.28	0.97	0.4	SANDS
88.69	683.17	6.57	1.05	0.4	SANDS
88.76	667.74	6.32	1.04	0.39	SANDS
88.82	646.05	6.21	1.06	0.38	SANDS
88.89	616.57	5.94	1.04	0.39	SANDS
88.95	584.35	5.63	1.01	0.4	SANDS
89.02	570.88	5.35	0.97	0.39	SANDS
89.08	552.8	4.84	0.89	0.39	SANDS
89.15	541.05	4.95	0.92	0.4	SANDS
89.22	546.1	4.85	0.92	0.39	SANDS
89.28	546.59	4.77	0.93	0.38	SANDS
89.35	543.74	4.64	0.94	0.39	SANDS
89.41	535.77	4.47	0.96	0.39	SANDS
89.48	517.69	3.87	0.88	0.4	SANDS
89.54	485.62	3.86	0.94	0.39	SANDS
89.61	454.16	3.86	0.99	0.4	SANDS
89.67	409.75	4.01	1.07	0.43	SANDS
89.74	386.86	4.06	1.11	0.42	SANDS
89.81	370.03	4.03	1.12	0.43	SANDS
89.87	359.89	3.78	1.05	0.43	SANDS
89.94	357.62	3.61	0.99	0.42	SANDS
90	358.03	3.67	0.99	0.44	SANDS
90.07	358.35	3.78	0.98	0.44	SANDS
90.13	361.87	3.76	0.92	0.44	SANDS
90.2	369.52	3.8	0.87	0.44	SANDS
90.27	381.84	3.95	0.84	0.44	SANDS
90.33	406	4.1	0.8	0.44	SANDS
90.4	439.44	4.19	0.76	0.45	SANDS
90.46	478.97	4.35	0.73	0.44	SANDS
90.53	530.13	4.46	0.7	0.45	SANDS
90.59	584.6	4.45	0.66	0.46	SANDS
90.66	623.23	4.74	0.66	0.46	SANDS
90.72	660.64	5.05	0.68	0.44	SANDS
90.79	701.89	5.39	0.7	0.45	SANDS
90.86	736.48	5.66	0.72	0.45	SANDS
90.92	765.89	6.3	0.8	0.45	SANDS
90.99	791.36	6.88	0.86	0.45	SANDS
91.05	805.86	7.45	0.93	0.45	SANDS
91.12	793.95	7.91	0.99	0.47	SANDS
91.18	795.11	8.29	1.03	0.47	SANDS
91.25	796.26	8.45	1.06	0.47	SANDS
91.31	807.97	8.58	1.08	0.48	SANDS
91.38	811.27	8.84	1.12	0.46	SANDS
91.45	807.05	8.08	1.03	0.47	SANDS
91.51	793.32	8.12	1.05	0.48	SANDS
91.58	784.96	7.81	1.01	0.47	SANDS
91.64	776.6	7.46	0.97	0.5	SANDS
91.71	768.23	7.05	0.92	0.52	SANDS

US EPA ARCHIVE DOCUMENT

91.77	759.87	7.03	0.92	0.52	SANDS
91.84	777.22	7.18	0.95	0.51	SANDS
91.91	771.3	7.42	1.01	0.52	SANDS
91.97	772.29	7.77	1.09	0.51	SANDS
92.04	760.64	8.31	1.22	0.51	SANDS
92.1	736.67	8.66	1.34	0.53	SANDS
92.17	703.01	8.86	1.46	0.53	SANDS
92.23	665.34	8.76	1.55	0.52	SANDS
92.3	629.76	8.59	1.65	0.53	SANDS
92.36	590.17	8.07	1.7	0.53	SANDS
92.43	544.18	7.58	1.77	0.53	SANDS
92.5	498.45	7.21	1.89	0.54	SANDS
92.56	455.09	6.68	1.96	0.54	SANDS
92.63	406.35	5.84	1.93	0.55	SANDS
92.69	354.45	5.18	1.92	0.54	SANDS
92.76	308.85	4.73	1.94	0.55	SANDS
92.82	272.52	3.62	1.62	0.55	SANDS
92.89	244.11	3.56	1.73	0.54	SANDS
92.95	228.37	3.5	1.82	0.54	SANDS
93.02	212.63	3.41	1.89	0.56	SANDS
93.09	196.9	3.48	2.04	0.57	SANDS
93.15	181.16	3.61	2.22	0.57	SILTY SAND
93.22	171.37	3.69	2.36	0.58	SILTY SAND
93.28	164.62	3.89	2.59	0.57	SILTY SAND
93.35	158.44	4.03	2.8	0.57	SILTY SAND
93.41	152.23	4.19	3.04	0.56	SILTY SAND
93.48	147.69	4.33	3.3	0.54	SILTY SAND
93.55	142.34	4.45	3.59	0.53	CLAYEY SANDY SILT&SILT
93.61	135.5	4.53	3.92	0.55	CLAYEY SANDY SILT&SILT
93.68	128.74	4.62	4.31	0.59	CLAYEY SANDY SILT&SILT
93.74	120.42	4.67	4.72	0.58	CLAYEY SANDY SILT&SILT
93.81	111.72	4.71	5.15	0.58	CLAYEY SILT&SILTY CLAYS
93.87	103.53	4.82	5.67	0.57	CLAYEY SILT&SILTY CLAYS
93.94	93.44	4.94	6.17	0.6	CLAYEY SILT&SILTY CLAYS
94	85	4.86	6.28	0.61	CLAYS
94.07	78.66	4.72	6.14	0.59	CLAYS
94.14	75.65	4.6	5.88	0.59	CLAYEY SILT&SILTY CLAYS
94.2	73.96	4.54	5.62	0.59	CLAYEY SILT&SILTY CLAYS
94.27	73.89	4.48	5.31	0.58	CLAYEY SILT&SILTY CLAYS
94.33	77.44	4.36	4.92	0.57	CLAYEY SILT&SILTY CLAYS
94.4	81.83	4.23	4.52	0.57	CLAYEY SILT&SILTY CLAYS
94.46	86.43	4.13	4.18	0.56	CLAYEY SANDY SILT&SILT
94.53	90.82	4.05	3.87	0.56	CLAYEY SANDY SILT&SILT
94.59	95.49	3.93	3.54	0.54	CLAYEY SANDY SILT&SILT
94.66	100.33	3.77	3.21	0.54	CLAYEY SANDY SILT&SILT
94.73	106.47	3.63	2.91	0.54	SILTY SAND
94.79	113.7	3.51	2.65	0.54	SILTY SAND
94.86	120.93	3.38	2.4	0.51	SILTY SAND
94.92	128.29	3.32	2.22	0.51	SILTY SAND
94.99	135.88	3.24	2.04	0.51	SILTY SAND
95.05	144.2	3.35	1.98	0.5	SILTY SAND
95.12	151.72	3.5	1.96	0.5	SILTY SAND

US EPA ARCHIVE DOCUMENT

95.18	162.66	3.66	1.95	0.49	SANDS
95.25	174.76	3.84	1.97	0.48	SANDS
95.32	185.13	3.88	1.95	0.51	SANDS
95.38	193.67	4.01	2	0.54	SANDS
95.45	202.35	4.27	2.17	0.53	SANDS
95.51	207.17	4.57	2.39	0.54	SILTY SAND
95.58	206.89	4.7	2.56	0.52	SILTY SAND
95.64	199.91	4.75	2.68	0.53	SILTY SAND
95.71	190.12	4.81	2.78	0.51	SILTY SAND
95.78	174.34	4.91	2.91	0.52	SILTY SAND
95.84	165.9	4.83	2.82	0.51	SILTY SAND
95.91	164.07	4.74	2.67	0.49	SILTY SAND
95.97	169.13	5.03	2.71	0.48	SILTY SAND
96.04	172.78	5.28	2.71	0.5	SILTY SAND
96.1	167.05	5.68	2.79	0.42	SILTY SAND
96.17	188.46	5.78	2.7	0.44	SILTY SAND
96.23	204.07	5.64	2.55	0.43	SILTY SAND
96.3	214.95	5.47	2.44	0.42	SILTY SAND
96.37	221.77	5.11	2.27	0.42	SANDS
96.43	227.69	4.97	2.2	0.43	SANDS
96.5	228.33	4.88	2.16	0.41	SANDS
96.56	227.05	4.83	2.13	0.41	SANDS
96.63	224.94	4.67	2.04	0.41	SANDS
96.69	224.17	4.51	1.95	0.39	SANDS
96.76	224.62	4.35	1.85	0.41	SANDS
96.82	227.63	4.2	1.76	0.41	SANDS
96.89	232.11	3.98	1.65	0.4	SANDS
96.96	237.8	3.8	1.56	0.39	SANDS
97.02	242.41	3.73	1.51	0.38	SANDS
97.09	245.93	3.77	1.52	0.39	SANDS
97.15	245.52	4.02	1.61	0.39	SANDS
97.22	246.67	4.39	1.74	0.39	SANDS
97.28	248.14	4.8	1.89	0.37	SANDS
97.35	250.09	5.3	2.08	0.38	SANDS
97.42	253.26	5.71	2.22	0.37	SANDS
97.48	254.96	6.03	2.34	0.38	SANDS
97.55	257.1	6.09	2.37	0.37	SANDS
97.61	258.96	6.05	2.36	0.37	SANDS
97.68	259.28	5.91	2.32	0.37	SANDS
97.74	257.9	5.59	2.2	0.37	SANDS
97.81	255.4	5.23	2.06	0.37	SANDS
97.87	253.2	5.02	1.99	0.35	SANDS
97.94	252.68	4.87	1.93	0.36	SANDS
98.01	252.59	4.66	1.86	0.34	SANDS
98.07	252.46	4.52	1.82	0.34	SANDS
98.14	253.23	4.8	1.97	0.33	SANDS
98.2	254.22	5.01	2.1	0.34	SANDS
98.27	246.83	5.2	2.25	0.34	SANDS
98.33	243.02	5.62	2.53	0.33	SILTY SAND
98.4	237.26	6.01	2.82	0.32	SILTY SAND
98.46	228.49	6.13	3	0.34	SILTY SAND
98.53	219.91	6.03	3.08	0.33	SILTY SAND

US EPA ARCHIVE DOCUMENT

98.6	208.3	5.7	3.01	0.33	SILTY SAND
98.66	196.9	5.35	2.9	0.33	SILTY SAND
98.73	187.43	4.95	2.73	0.32	SILTY SAND
98.79	183.43	4.59	2.54	0.32	SILTY SAND
98.86	180.01	4.21	2.33	0.33	SILTY SAND
98.92	179.53	3.84	2.11	0.31	SILTY SAND
98.99	179.34	3.59	1.95	0.33	SANDS
99.06	180.68	3.44	1.85	0.31	SANDS
99.12	181.1	2.63	1.4	0.31	SANDS
99.19	184.87	2.7	1.41	0.32	SANDS
99.25	187.19	2.74	1.42	0.31	SANDS
99.32	189.49	2.77	1.42	0.29	SANDS
99.38	191.81	2.8	1.42	0.31	SANDS
99.45	194.12	2.82	1.42	0.3	SANDS
99.51	196.29	2.79	1.38	0.31	SANDS
99.58	198.25	2.87	1.39	0.3	SANDS
99.65	199.59	2.98	1.41	0.31	SANDS
99.71	202.22	3.1	1.43	0.3	SANDS
99.78	205.74	3.2	1.43	0.29	SANDS
99.84	210.73	3.26	1.4	0.3	SANDS
99.91	218.32	3.33	1.36	0.28	SANDS
99.97	226.73	3.39	1.31	0.3	SANDS
100.04	236.07	3.44	1.25	0.3	SANDS
100.1	247.85	3.56	1.21	0.3	SANDS
100.17	262.77	3.67	1.17	0.28	SANDS
100.24	281.39	3.79	1.15	0.28	SANDS
100.3	302.86	3.95	1.14	0.3	SANDS
100.37	325.36	4.13	1.15	0.3	SANDS
100.43	344.43	4.3	1.17	0.3	SANDS
100.5	358.8	4.42	1.19	0.28	SANDS
100.56	369.58	4.56	1.22	0.28	SANDS
100.63	375.89	4.62	1.25	0.27	SANDS
100.7	378.87	4.6	1.27	0.29	SANDS
100.76	379.67	4.63	1.32	0.27	SANDS
100.83	372.59	4.59	1.36	0.29	SANDS
100.89	361.36	4.62	1.41	0.27	SANDS
100.96	343.85	4.74	1.49	0.28	SANDS
101.02	329.36	4.63	1.47	0.28	SANDS
101.09	314.61	4.63	1.47	0.27	SANDS
101.15	308.85	4.61	1.43	0.28	SANDS
101.22	304.14	4.59	1.39	0.27	SANDS
101.29	309.16	4.55	1.33	0.27	SANDS
101.35	320.65	4.38	1.25	0.27	SANDS
101.42	336.43	4.26	1.18	0.26	SANDS
101.48	350.77	4.01	1.1	0.28	SANDS
101.55	362.26	3.88	1.06	0.28	SANDS
101.61	370.32	3.74	1.02	0.28	SANDS
101.68	370.77	3.57	0.98	0.28	SANDS
101.74	369.42	3.32	0.92	0.26	SANDS
101.81	364.18	3.09	0.86	0.26	SANDS
101.88	362.1	3.03	0.84	0.27	SANDS
101.94	358.51	3	0.84	0.27	SANDS

US EPA ARCHIVE DOCUMENT

102.01	360.66	3	0.84	0.28	SANDS
102.07	358.83	2.99	0.85	0.28	SANDS
102.14	361.59	2.96	0.86	0.27	SANDS
102.2	359.79	3.04	0.91	0.26	SANDS
102.27	356.4	2.99	0.94	0.27	SANDS
102.34	350.16	2.94	0.99	0.28	SANDS
102.4	334.77	2.97	1.09	0.27	SANDS
102.47	313.01	2.93	1.2	0.26	SANDS
102.53	289.62	2.79	1.29	0.27	SANDS
102.6	260.14	2.55	1.35	0.26	SANDS
102.66	228.91	2.1	1.3	0.28	SANDS
102.73	200.3	1.99	1.46	0.27	SANDS
102.79	173.51	1.96	1.72	0.27	SANDS
102.86	146.63	1.91	1.99	0.27	SILTY SAND
102.93	121.76	2.07	2.39	0.26	SILTY SAND
102.99	96.36	2.2	2.55	0.28	SILTY SAND
103.06	78.98	1.97	2.05	0.26	SILTY SAND
103.12	66.88	1.89	1.66	0.27	SILTY SAND
103.19	66.05	2.08	1.51	0.28	SILTY SAND
103.25	88.48	2.11	1.25	0.28	SANDS
103.32	122.44	2.12	1.06	0.28	SANDS
103.38	154.66	2.2	0.95	0.28	SANDS
103.45	184.49	2.28	0.87	0.27	SANDS
103.52	210.47	2.31	0.8	0.27	SANDS
103.58	247.66	2.43	0.77	0.23	SANDS
103.65	281.8	2.61	0.78	0.28	SANDS
103.71	312.4	2.77	0.79	0.28	SANDS
103.78	334.1	2.95	0.81	0.3	SANDS
103.84	349.78	3.21	0.86	0.3	SANDS
103.91	364.18	3.38	0.89	0.3	SANDS
103.98	371.15	3.55	0.92	0.28	SANDS
104.04	374.83	3.55	0.91	0.28	SANDS
104.11	381.33	3.66	0.92	0.3	SANDS
104.17	387.73	3.68	0.91	0.3	SANDS
104.24	394.45	3.75	0.9	0.28	SANDS
104.3	395.28	3.75	0.88	0.3	SANDS
104.37	401.65	3.71	0.85	0.3	SANDS
104.43	414.77	3.65	0.81	0.29	SANDS
104.5	432.89	3.6	0.78	0.28	SANDS
104.57	447.51	3.13	0.67	0.28	SANDS
104.63	457.33	3.15	0.67	0.27	SANDS
104.7	470.84	3.15	0.67	0.29	SANDS
104.76	482.2	3.16	0.67	0.28	SANDS
104.83	476.57	3.16	0.69	0.29	SANDS
104.89	484.92	3.16	0.7	0.27	SANDS
104.96	470.71	3.29	0.76	0.29	SANDS
105.02	456.63	3.38	0.81	0.27	SANDS
105.09	439.03	3.33	0.84	0.28	SANDS
105.16	425.65	3.33	0.88	0.29	SANDS
105.22	413.56	3.51	0.97	0.27	SANDS
105.29	391.19	3.25	0.93	0.28	SANDS
105.35	368.14	3.17	0.93	0.27	SANDS

US EPA ARCHIVE DOCUMENT

105.42	348.85	3	0.89	0.28	SANDS
105.48	333.55	2.92	0.85	0.28	SANDS
105.55	323.4	2.77	0.77	0.29	SANDS
105.61	325.39	3.24	0.84	0.29	SANDS
105.68	340.18	2.4	0.57	0.29	SANDS
105.75	356.14	2.25	0.49	0.29	SANDS
105.81	379.89	2.26	0.47	0.27	SANDS
105.88	431.83	2.07	0.4	0.28	SANDS
105.94	488.47	1.68	0.31	0.29	SANDS
106.01	537.47	2.7	0.47	0.29	SANDS
106.07	565.88	2.97	0.5	0.3	SANDS
106.14	515.51	3.2	0.53	0.3	SANDS
106.21	578.46	3.47	0.55	0.3	SANDS
106.27	607.39	4.18	0.65	0.3	SANDS
106.34	637.73	4.73	0.72	0.32	SANDS
106.4	646.56	5.28	0.8	0.32	SANDS
106.47	663.1	5.99	0.9	0.32	SANDS
106.53	658.4	6.29	0.94	0.32	SANDS
106.6	654.27	6.55	0.97	0.31	SANDS
106.66	658.24	6.9	1	0.3	SANDS
106.73	664.58	6.72	0.96	0.32	SANDS
106.8	675.55	6.7	0.95	0.32	SANDS
106.86	693.44	6.98	0.98	0.31	SANDS
106.93	713.5	7.11	1	0.32	SANDS
106.99	731.17	7.42	1.06	0.31	SANDS
107.06	728.68	7.47	1.08	0.32	SANDS
107.12	703.93	7.34	1.07	0.33	SANDS
107.19	689.02	7.52	1.1	0.32	SANDS
107.25	678.62	7.44	1.08	0.33	SANDS
107.32	674.46	7.3	1.04	0.33	SANDS
107.39	679.84	7.19	1	0.31	SANDS
107.45	686.69	7.04	0.96	0.33	SANDS
107.52	700.22	7.26	0.97	0.33	SANDS
107.58	721.06	7.49	0.98	0.32	SANDS
107.65	742.37	8.11	1.05	0.34	SANDS
107.71	767.88	8.69	1.11	0.32	SANDS
107.78	775.75	9.46	1.2	0.31	SANDS
107.85	778.4	10.1	1.28	0.3	SANDS
107.91	781.96	10.07	1.27	0.33	SANDS
107.98	786.72	10.03	1.24	0.33	SANDS
108.04	803.78	9.99	1.22	0.34	SANDS
108.11	800.68	9.87	1.18	0.36	SANDS
108.17	797.57	10.08	1.19	0.35	SANDS
108.24	794.47	10.07	1.17	0.45	SANDS
108.3	854.92	9.9	1.13	0.44	SANDS
108.37	874.44	9.57	1.09	0.45	SANDS
108.44	882.95	9.23	1.05	0.44	SANDS
108.5	895.37	8.98	1.03	0.43	SANDS
108.57	882.34	9.1	1.06	0.44	SANDS
108.63	872.77	9.53	1.13	0.43	SANDS
108.7	868.42	10.44	1.25	0.44	SANDS
108.76	868.81	10.67	1.3	0.44	SANDS

US EPA ARCHIVE DOCUMENT

108.83	862.28	10.52	1.31	0.44	SANDS
108.89	802.76	9.89	1.27	0.43	SANDS
108.96	801.35	8.87	1.17	0.42	SANDS
109.03	799.14	8.16	1.11	0.43	SANDS
109.09	783.3	7.51	1.06	0.43	SANDS
109.16	752.48	6.9	1.02	0.42	SANDS
109.22	722.75	6.65	1.06	0.43	SANDS
109.29	694.21	6.83	1.18	0.43	SANDS
109.35	670.08	6.58	1.27	0.43	SANDS
109.42	637.31	6.34	1.39	0.44	SANDS
109.49	569.88	6.1	1.58	0.43	SANDS
109.55	475.03	5.85	1.86	0.44	SANDS
109.62	414.12	5.5	2.16	0.44	SANDS
109.68	353.21	5.37	2.66	0.46	SANDS
109.75	292.3	5.26	3.37	0.46	SILTY SAND
109.81	207.81	5.37	4.52	0.47	CLAYEY SANDY SILT&SILT
109.88	148.04	5.36	5.63	0.47	CLAYEY SILT&SILTY CLAYS
109.94	115.39	5.5	6.67	0.46	CLAYS
110.01	93.7	4.96	6.53	0.46	CLAYS
110.08	81	4.3	5.8	0.45	CLAYEY SILT&SILTY CLAYS
110.14	66.63	3.71	4.86	0.46	CLAYEY SILT&SILTY CLAYS
110.21	67.08	3.32	3.95	0.47	CLAYEY SANDY SILT&SILT
110.27	70.98	2.84	3	0.48	CLAYEY SANDY SILT&SILT
110.34	76.49	2.21	2.01	0.48	SILTY SAND
110.4	82.72	1.84	1.39	0.5	SILTY SAND
110.47	94.15	2.12	1.28	0.53	SANDS
110.53	112.68	2.59	1.24	0.55	SANDS
110.6	131.69	2.74	1.08	0.64	SANDS
110.67	160.59	3.03	1	0.7	SANDS
110.73	211.75	3.68	1.04	0.78	SANDS
110.8	284.33	4.52	1.12	0.79	SANDS
110.86	349.2	5.45	1.23	0.85	SANDS
110.93	388.66	6.13	1.27	0.82	SANDS
110.99	422.64	6.51	1.26	0.82	SANDS
111.06	467.51	6.5	1.19	0.72	SANDS
111.13	503.86	6.72	1.16	0.56	SANDS
111.19	536.47	6.9	1.14	0.49	SANDS
111.26	564.22	7.07	1.12	0.48	SANDS
111.32	593.21	6.5	0.99	0.48	SANDS
111.39	620.29	6.27	0.93	0.49	SANDS
111.45	649.18	6.29	0.91	0.48	SANDS
111.52	670.91	5.91	0.84	0.47	SANDS
111.58	686.75	5.44	0.77	0.47	SANDS
111.65	702.53	4.24	0.6	0.47	SANDS
111.72	722.56	4.3	0.61	0.46	SANDS
111.78	714.6	4.5	0.65	0.46	SANDS
111.85	706.64	4.7	0.69	0.43	SANDS
111.91	698.68	4.91	0.72	0.44	SANDS
111.98	690.72	5.11	0.76	0.42	SANDS
112.04	673.5	5.32	0.79	0.42	SANDS
112.11	670.79	5.57	0.83	0.41	SANDS
112.17	668.08	5.66	0.85	0.41	SANDS

US EPA ARCHIVE DOCUMENT

112.24	665.37	5.74	0.86	0.39	SANDS
112.31	668.57	5.76	0.87	0.41	SANDS
112.37	671.87	5.92	0.9	0.39	SANDS
112.44	667.11	5.67	0.87	0.4	SANDS
112.5	661.5	5.31	0.82	0.39	SANDS
112.57	648.96	5.17	0.8	0.39	SANDS
112.63	646.97	4.82	0.75	0.36	SANDS
112.7	638.33	4.45	0.7	0.37	SANDS
112.77	642.66	4.19	0.67	0.32	SANDS
112.83	642.28	3.85	0.63	0.3	SANDS
112.9	641.91	3.51	0.58	0.25	SANDS
112.96	641.53	3.17	0.53	0.25	SANDS
113.03	585.75	3.25	0.55	0.44	SANDS
113.09	590.75	3.27	0.55	0.36	SANDS
113.16	583.01	3.18	0.52	0.36	SANDS
113.22	579.84	3	0.48	0.27	SANDS
113.29	587.52	2.9	0.45	0.26	SANDS
113.36	607.77	2.99	0.45	0.25	SANDS
113.42	628.58	2.63	0.38	0.23	SANDS
113.49	657.69	2.56	0.37	0.24	SANDS
113.55	682.02	2.91	0.41	0.19	SANDS
113.62	705.79	3.11	0.44	0.13	SANDS
113.68	713.63	3.65	0.52	0.1	SANDS
113.75	716.32	4.02	0.57	0.05	SANDS
113.81	709.09	4.51	0.64	-0.05	SANDS
113.88	702.47	5.21	0.75	-0.08	SANDS
113.95	701.83	5.56	0.8	-0.01	SANDS
114.01	703.11	5.59	0.81	0.13	SANDS
114.08	698.56	5.63	0.82	0.15	SANDS
114.14	691.65	5.64	0.83	0.16	SANDS
114.21	684.93	5.5	0.81	0.22	SANDS
114.27	677.69	5.25	0.77	0.29	SANDS
114.34	677.05	4.95	0.73	0.31	SANDS
114.41	681.92	4.6	0.68	0.29	SANDS
114.47	686.24	4.43	0.66	0.29	SANDS
114.54	681.86	4.37	0.65	0.29	SANDS
114.6	670.53	4.33	0.64	0.27	SANDS
114.67	665.37	4.29	0.63	0.33	SANDS
114.73	665.28	4.18	0.6	0.34	SANDS
114.8	673.37	4.05	0.57	0.29	SANDS
114.86	687.49	4.05	0.56	0.27	SANDS
114.93	704.39	4.02	0.55	0.26	SANDS
115	716.48	3.87	0.52	0.25	SANDS
115.06	729.15	3.3	0.44	0.24	SANDS
115.13	743.07	2.73	0.36	0.23	SANDS
115.19	750.9	2.89	0.39	0.2	SANDS
115.26	758.72	3.15	0.42	0.19	SANDS
115.32	748.29	3.38	0.45	0.15	SANDS
115.39	749.73	3.71	0.49	0.14	SANDS
115.45	745.57	3.84	0.5	0.11	SANDS
115.52	747.65	3.93	0.51	0.09	SANDS
115.59	761.54	3.68	0.47	0.07	SANDS

US EPA ARCHIVE DOCUMENT

115.65	784.93	3.6	0.46	0.07	SANDS
115.72	788.74	3.5	0.46	0.03	SANDS
115.78	790.5	3.39	0.45	0	SANDS
115.85	786.98	3.46	0.48	0.01	SANDS
115.91	776.87	3.53	0.5	-0.02	SANDS
115.98	747.59	3.76	0.55	-0.02	SANDS
116.05	710.91	3.82	0.58	-0.05	SANDS
116.11	678.21	3.92	0.61	-0.04	SANDS
116.18	651.84	4.01	0.63	-0.04	SANDS
116.24	637.15	3.76	0.59	-0.04	SANDS
116.31	637.92	3.68	0.57	-0.06	SANDS
116.37	631.58	3.34	0.52	-0.06	SANDS
116.44	642.66	2.92	0.45	-0.08	SANDS
116.5	647.2	2.55	0.4	-0.07	SANDS
116.57	652.03	3.28	0.52	-0.07	SANDS
116.64	655.39	3.62	0.58	-0.05	SANDS
116.7	655.9	3.96	0.65	-0.05	SANDS
116.77	614.65	3.58	0.61	-0.06	SANDS
116.83	612.06	3.62	0.63	-0.05	SANDS
116.9	599.93	3.47	0.62	-0.04	SANDS
116.96	584.92	3.39	0.62	-0.04	SANDS
117.03	570.49	2.86	0.54	-0.05	SANDS
117.09	558.23	2.72	0.53	-0.05	SANDS
117.16	541.66	2.68	0.54	-0.06	SANDS
117.23	522.58	2.53	0.52	-0.05	SANDS
117.29	501.27	2.67	0.55	-0.05	SANDS
117.36	488.18	1.87	0.38	-0.05	SANDS
117.42	479.58	1.75	0.34	-0.04	SANDS
117.49	465.24	1.77	0.33	-0.05	SANDS
117.55	474.55	1.76	0.31	-0.09	SANDS
117.62	512.25	1.73	0.29	-0.09	SANDS
117.68	549.88	1.81	0.29	-0.08	SANDS
117.75	587.39	1.93	0.3	-0.08	SANDS
117.82	618.59	2.26	0.34	-0.1	SANDS
117.88	649.4	3.12	0.47	-0.1	SANDS
117.95	669.85	3.63	0.55	-0.09	SANDS
118.01	682.53	3.68	0.56	-0.09	SANDS
118.08	670.56	3.74	0.58	-0.1	SANDS
118.14	667.17	3.8	0.6	-0.1	SANDS
118.21	646.08	3.85	0.63	-0.1	SANDS
118.28	640.73	3.91	0.65	-0.09	SANDS
118.34	623.1	3.52	0.6	-0.09	SANDS
118.41	604.25	3.68	0.64	-0.09	SANDS
118.47	589.66	3.72	0.65	-0.09	SANDS
118.54	578.56	3.68	0.66	-0.08	SANDS
118.6	576.67	3.39	0.61	-0.09	SANDS
118.67	560.12	3.03	0.55	-0.08	SANDS
118.73	548.51	2.78	0.51	-0.09	SANDS
118.8	551.71	2.71	0.5	-0.1	SANDS
118.87	551.9	2.6	0.48	-0.1	SANDS
118.93	552.8	2.42	0.45	-0.09	SANDS
119	544.92	2.49	0.46	-0.09	SANDS

US EPA ARCHIVE DOCUMENT

119.06	539.64	2.44	0.45	-0.11	SANDS
119.13	538.9	2.73	0.5	-0.1	SANDS
119.19	540.22	2.79	0.51	-0.1	SANDS
119.26	546.2	2.68	0.5	-0.13	SANDS
119.32	542.29	2.37	0.44	-0.14	SANDS
119.39	543.67	2.42	0.45	-0.13	SANDS
119.46	539.74	2.31	0.43	-0.14	SANDS
119.52	535.8	2.35	0.44	-0.18	SANDS
119.59	531.86	2.36	0.44	-0.18	SANDS
119.65	527.93	2.73	0.51	-0.18	SANDS
119.72	531.1	2.91	0.55	-0.17	SANDS
119.78	533.53	3.2	0.6	-0.18	SANDS
119.85	531.32	3.37	0.63	-0.18	SANDS
119.92	528.89	3.58	0.67	-0.18	SANDS
119.98	529.82	3.69	0.69	-0.18	SANDS
120.05	533.66	3.97	0.74	-0.2	SANDS
120.11	534.24	4.29	0.79	-0.18	SANDS
120.18	538.81	4.33	0.8	-0.18	SANDS
120.24	540.86	4.34	0.81	-0.19	SANDS
120.31	545.91	4.52	0.85	-0.18	SANDS
120.37	548.15	4.54	0.87	-0.2	SANDS
120.44	543.45	4.59	0.9	-0.19	SANDS
120.51	527.74	4.57	0.93	-0.18	SANDS
120.57	514.33	4.41	0.93	-0.19	SANDS
120.64	503.06	4.4	0.96	-0.17	SANDS
120.7	490.87	4.17	0.95	-0.18	SANDS
120.77	471.45	4.27	1.02	-0.2	SANDS
120.83	452.31	4.36	1.08	-0.19	SANDS
120.9	423.32	3.95	1.01	-0.21	SANDS
120.96	402.55	3.55	0.91	-0.22	SANDS
121.03	387.67	2.79	0.71	-0.23	SANDS
121.1	376.24	2.92	0.72	-0.23	SANDS
121.16	378.03	2.87	0.68	-0.23	SANDS
121.23	387.57	2.8	0.63	-0.24	SANDS
121.29	405.36	2.77	0.58	-0.23	SANDS
121.36	430.42	2.65	0.52	-0.23	SANDS
121.42	456.02	2.66	0.5	-0.24	SANDS
121.49	487.22	2.47	0.44	-0.25	SANDS
121.56	521.88	2.65	0.45	-0.27	SANDS
121.62	557.66	2.79	0.45	-0.26	SANDS
121.69	586.49	2.88	0.44	-0.28	SANDS
121.75	598.01	2.94	0.43	-0.27	SANDS
121.82	628.03	3.15	0.45	-0.26	SANDS
121.88	670.62	3.28	0.45	-0.24	SANDS
121.95	701.92	3.66	0.5	-0.25	SANDS
122.01	724.99	4.03	0.55	-0.24	SANDS
122.08	738.88	4.43	0.6	-0.25	SANDS
122.15	747.24	4.55	0.62	-0.25	SANDS
122.21	747.78	4.68	0.65	-0.23	SANDS
122.28	744.77	4.81	0.68	-0.25	SANDS
122.34	725.63	5.21	0.76	-0.24	SANDS
122.41	704.67	5.53	0.82	-0.19	SANDS

US EPA ARCHIVE DOCUMENT

122.47	700.93	5.83	0.89	-0.19	SANDS
122.54	686.65	6.39	0.99	-0.2	SANDS
122.6	668.8	6.46	1.02	-0.19	SANDS
122.67	639.55	5.97	0.94	-0.21	SANDS
122.74	628.12	5.59	0.88	-0.21	SANDS
122.8	616.54	5.47	0.84	-0.21	SANDS
122.87	624.03	5.28	0.8	-0.23	SANDS
122.93	636.86	4.81	0.72	-0.23	SANDS
123	653.31	4.34	0.65	-0.22	SANDS
123.06	673.31	4.09	0.61	-0.24	SANDS
123.13	681.44	3.91	0.59	-0.24	SANDS
123.2	678.08	3.95	0.6	-0.24	SANDS
123.26	666.17	3.86	0.58	-0.24	SANDS
123.33	653.82	4.04	0.61	-0.24	SANDS
123.39	648.38	4.21	0.62	-0.24	SANDS
123.46	656.03	4.58	0.67	-0.24	SANDS
123.52	670.08	4.7	0.67	-0.24	SANDS
123.59	681.92	4.81	0.67	-0.22	SANDS
123.65	689.92	4.87	0.67	-0.24	SANDS
123.72	697.6	5.03	0.67	-0.24	SANDS
123.79	715.2	5.11	0.68	-0.24	SANDS
123.85	738.27	5.09	0.67	-0.24	SANDS
123.92	765.12	5.08	0.68	-0.23	SANDS
123.98	781.93	5.08	0.7	-0.22	SANDS
124.05	777.73	5.07	0.73	-0.23	SANDS
124.11	750.3	5.07	0.76	-0.22	SANDS
124.18	712.55	5.04	0.78	-0.22	SANDS
124.24	671.23	5.11	0.82	-0.21	SANDS
124.31	645.98	5.33	0.87	-0.21	SANDS
124.38	630.11	5.14	0.85	-0.22	SANDS
124.44	610.11	4.9	0.82	-0.2	SANDS
124.51	596.99	4.13	0.69	-0.2	SANDS
124.57	593.59	3.59	0.6	-0.2	SANDS
124.64	593.08	3.58	0.58	-0.21	SANDS
124.7	592.57	3.68	0.59	-0.14	SANDS
124.77	592.06	3.77	0.59	-0.15	SANDS
124.84	608.7	3.93	0.6	-0.16	SANDS
124.9	633.85	3.98	0.6	-0.15	SANDS
124.97	659.84	3.91	0.58	-0.15	SANDS
125.03	671.42	3.75	0.55	-0.16	SANDS
125.1	677.05	3.68	0.54	-0.16	SANDS
125.16	678.62	3.7	0.54	-0.18	SANDS
125.23	680.28	3.62	0.53	-0.17	SANDS
125.29	682.72	3.49	0.52	-0.18	SANDS
125.36	680.55	3.42	0.53	-0.17	SANDS
125.43	685.89	3.12	0.5	-0.19	SANDS
125.49	684.42	2.84	0.48	-0.21	SANDS
125.56	659.36	2.41	0.44	-0.22	SANDS
125.62	623.77	2.53	0.5	-0.23	SANDS
125.69	566.94	2.55	0.54	-0.21	SANDS
125.75	516.92	2.4	0.54	-0.21	SANDS
125.82	485.08	2.39	0.57	-0.21	SANDS

US EPA ARCHIVE DOCUMENT

125.88	448.05	2.23	0.56	-0.19	SANDS
125.95	419.57	2.33	0.61	-0.2	SANDS
126.02	401.62	2.24	0.6	-0.19	SANDS
126.08	383.83	1.94	0.53	-0.2	SANDS
126.15	369.87	1.93	0.53	-0.18	SANDS
126.21	360.21	1.91	0.53	-0.19	SANDS
126.28	356.98	1.9	0.53	-0.2	SANDS
126.34	358.93	1.65	0.46	-0.19	SANDS
126.41	359.44	1.46	0.4	-0.19	SANDS
126.48	361.38	1.38	0.38	-0.2	SANDS
126.54	363.32	1.38	0.38	-0.18	SANDS
126.61	365.26	1.27	0.35	-0.19	SANDS
126.67	358.93	1.19	0.33	-0.2	SANDS
126.74	356.75	1.21	0.33	-0.2	SANDS
126.8	355.86	1.2	0.32	-0.19	SANDS
126.87	355.98	1.28	0.33	-0.21	SANDS
126.93	363.18	1.47	0.35	-0.2	SANDS
127	373.2	1.55	0.35	-0.19	SANDS
127.07	391.76	1.71	0.36	-0.2	SANDS
127.13	423.57	1.73	0.34	-0.2	SANDS
127.2	458.8	1.73	0.32	-0.21	SANDS
127.26	494.52	1.89	0.34	-0.2	SANDS
127.33	526.39	2.05	0.35	-0.22	SANDS
127.39	551.16	2.24	0.38	-0.22	SANDS
127.46	583.13	2.49	0.41	-0.21	SANDS
127.52	607.36	2.68	0.44	-0.22	SANDS
127.59	609.44	2.71	0.44	-0.22	SANDS
127.66	603.32	2.84	0.45	-0.22	SANDS
127.72	605.6	2.91	0.45	-0.22	SANDS
127.79	621.02	3.01	0.45	-0.24	SANDS
127.85	636.51	3.14	0.46	-0.24	SANDS
127.92	658.14	3.31	0.48	-0.23	SANDS
127.98	674.72	3.52	0.5	-0.24	SANDS
128.05	685.47	3.64	0.51	-0.23	SANDS
128.11	707.36	3.64	0.51	-0.24	SANDS
128.18	722.14	3.74	0.53	-0.24	SANDS
128.25	728.51	3.67	0.53	-0.24	SANDS
128.31	725.63	3.49	0.52	-0.25	SANDS
128.38	708.67	3.54	0.54	-0.24	SANDS
128.44	681.6	3.89	0.61	-0.25	SANDS
128.51	656.93	3.71	0.59	-0.26	SANDS
128.57	632.45	3.47	0.56	-0.24	SANDS
128.64	618.65	3.18	0.51	-0.24	SANDS
128.71	614.99	2.89	0.45	-0.25	SANDS
128.77	611.34	2.6	0.39	-0.26	SANDS
128.84	607.67	2.75	0.4	-0.1	SANDS
128.9	642.75	2.75	0.37	-0.1	SANDS
128.97	670.94	2.7	0.35	-0.12	SANDS
129.03	703.39	3.1	0.38	-0.12	SANDS
129.1	749.96	3.4	0.4	-0.16	SANDS
129.16	795.24	3.84	0.44	-0.17	SANDS
129.23	836.42	3.86	0.44	-0.2	SANDS

US EPA ARCHIVE DOCUMENT

129.3	873.23	4.23	0.47	-0.2	SANDS
129.36	895.37	4.38	0.49	-0.22	SANDS
129.43	915.56	4.1	0.46	-0.23	SANDS
129.49	907.18	4.6	0.52	-0.23	SANDS
129.56	899.08	5.08	0.57	-0.25	SANDS
129.62	886.57	5.08	0.57	-0.25	SANDS
129.69	881.42	4.61	0.52	-0.25	SANDS
129.75	883.37	4.15	0.47	-0.26	SANDS
129.82	888.56	4.09	0.47	-0.26	SANDS
129.89	895.34	4.03	0.46	-0.26	SANDS
129.95	902.06	3.97	0.46	-0.25	SANDS
130.02	874.43	4.15	0.49	-0.25	SANDS
130.08	862.14	4.53	0.54	-0.22	SANDS
130.15	849.86	4.73	0.58	-0.21	SANDS
130.21	837.57	4.78	0.6	-0.21	SANDS
130.28	825.28	5.14	0.66	-0.2	SANDS
130.35	813	5.52	0.72	-0.23	SANDS
130.41	800.71	5.87	0.78	-0.25	SANDS
130.48	766.05	6.32	0.85	-0.25	SANDS
130.54	742.62	6.57	0.89	-0.25	SANDS
130.61	732.71	6.44	0.87	-0.25	SANDS
130.67	725.18	6.32	0.84	-0.25	SANDS
130.74	737.19	5.41	0.71	-0.25	SANDS
130.8	749.76	4.98	0.65	-0.26	SANDS
130.87	753.38	4.95	0.63	-0.25	SANDS
130.94	758.66	4.65	0.58	-0.24	SANDS
131	773.57	4.21	0.52	-0.26	SANDS
131.07	784.07	4.19	0.51	-0.24	SANDS
131.13	803.43	3.45	0.41	-0.23	SANDS
131.2	831.14	2.71	0.32	-0.24	SANDS
131.26	841.21	3.15	0.37	-0.23	SANDS
131.33	851.28	3.24	0.38	-0.12	SANDS
131.39	861.35	3.66	0.43	-0.11	SANDS
131.46	866.79	3.89	0.46	-0.12	SANDS
131.53	866.63	4.19	0.5	-0.11	SANDS
131.59	857.74	4.28	0.51	-0.14	SANDS
131.66	843.21	4.43	0.54	-0.14	SANDS
131.72	825.92	4.57	0.55	-0.16	SANDS
131.79	825.58	4.45	0.54	-0.16	SANDS
131.85	818.37	4.01	0.49	-0.17	SANDS
131.92	825.86	3.91	0.49	-0.17	SANDS
131.99	827.14	3.74	0.48	-0.16	SANDS
132.05	832.68	3.72	0.48	-0.18	SANDS
132.12	812.97	3.44	0.46	-0.19	SANDS
132.18	782.24	3.34	0.45	-0.18	SANDS
132.25	737.12	3.47	0.47	-0.17	SANDS
132.31	724.99	3.63	0.49	-0.19	SANDS
132.38	730.34	3.75	0.5	-0.18	SANDS
132.44	744.61	3.84	0.51	-0.18	SANDS
132.51	751.39	3.89	0.52	-0.19	SANDS
132.58	759.78	3.97	0.53	-0.2	SANDS
132.64	751.91	4.15	0.56	-0.2	SANDS

US EPA ARCHIVE DOCUMENT

132.71	748.64	3.45	0.47	-0.18	SANDS
132.77	749.73	3.09	0.42	-0.19	SANDS
132.84	746.5	2.72	0.37	-0.18	SANDS
132.9	738.62	2.35	0.33	-0.18	SANDS
132.97	730.74	2.19	0.31	-0.06	SANDS
133.03	722.86	2.46	0.36	-0.08	SANDS
133.1	714.98	2.94	0.45	-0.07	SANDS
133.17	707.1	3.04	0.48	-0.08	SANDS
133.23	674.88	3.42	0.56	-0.09	SANDS
133.3	633.37	3.54	0.6	-0.09	SANDS
133.36	602.36	3.47	0.61	-0.09	SANDS
133.43	583.48	3.54	0.63	-0.12	SANDS
133.49	572.6	3.41	0.61	-0.13	SANDS
133.56	563.61	3.35	0.6	-0.11	SANDS
133.63	557.72	3.31	0.6	-0.13	SANDS
133.69	549.72	3.04	0.55	-0.14	SANDS
133.76	547.87	2.99	0.53	-0.12	SANDS
133.82	547.48	3	0.52	-0.13	SANDS
133.89	555.96	3.01	0.51	-0.13	SANDS
133.95	561.69	2.84	0.46	-0.14	SANDS
134.02	575.83	2.74	0.43	-0.14	SANDS
134.08	598.27	2.73	0.42	-0.14	SANDS
134.15	624.77	2.58	0.39	-0.15	SANDS
134.22	652.29	2.5	0.38	-0.15	SANDS
134.28	671.13	2.48	0.38	-0.13	SANDS
134.35	674.72	2.43	0.38	-0.13	SANDS
134.41	670.27	2.47	0.39	-0.14	SANDS
134.48	646.91	2.62	0.43	-0.13	SANDS
134.54	627.39	2.61	0.43	-0.13	SANDS
134.61	616.25	2.59	0.43	-0.14	SANDS
134.67	600.6	2.7	0.46	-0.14	SANDS
134.74	599.61	2.67	0.45	-0.13	SANDS
134.81	595.61	2.68	0.46	-0.12	SANDS
134.87	582.36	2.65	0.45	-0.14	SANDS
134.94	579.48	2.54	0.43	-0.13	SANDS
135	580.57	2.4	0.41	-0.14	SANDS
135.07	584.86	2.27	0.38	-0.12	SANDS
135.13	586.51	2.13	0.36	-0.12	SANDS
135.2	588.16	1.99	0.33	-0.12	SANDS
135.27	589.82	1.98	0.33	-0.02	SANDS
135.33	591.46	2.18	0.36	-0.01	SANDS
135.4	593.12	2.15	0.35	-0.03	SANDS
135.46	603.55	2.24	0.35	-0.02	SANDS
135.53	615.17	2.32	0.36	-0.02	SANDS
135.59	629.95	2.54	0.38	-0.04	SANDS
135.66	638.37	2.7	0.4	-0.1	SANDS
135.72	656.29	2.64	0.37	-0.09	SANDS
135.79	666.59	2.8	0.39	-0.11	SANDS
135.86	681.12	2.83	0.38	-0.1	SANDS
135.92	709.35	3.08	0.41	-0.11	SANDS
135.99	742.75	3.19	0.42	-0.13	SANDS
136.05	769.99	3.19	0.42	-0.13	SANDS

US EPA ARCHIVE DOCUMENT

136.12	772.52	3.35	0.45	-0.13	SANDS
136.18	755.04	3.72	0.51	-0.14	SANDS
136.25	752.45	4.01	0.55	-0.15	SANDS
136.31	738.5	4.16	0.57	-0.15	SANDS
136.38	730.91	4.36	0.6	-0.16	SANDS
136.45	720.1	4.2	0.58	-0.16	SANDS
136.51	718.69	4.02	0.56	-0.16	SANDS
136.58	720.19	4.03	0.57	-0.16	SANDS
136.64	729.73	3.95	0.56	-0.16	SANDS
136.71	730.4	3.87	0.56	-0.16	SANDS
136.77	715.46	3.79	0.57	-0.16	SANDS
136.84	696.86	3.68	0.57	-0.17	SANDS
136.91	679.26	3.57	0.57	-0.16	SANDS
136.97	656.26	3.46	0.57	-0.18	SANDS
137.04	641.12	3.35	0.57	-0.16	SANDS
137.1	621.21	3.07	0.53	-0.17	SANDS
137.17	595.96	2.93	0.52	-0.17	SANDS
137.23	573.21	2.31	0.42	-0.16	SANDS
137.3	558.46	2.05	0.37	-0.2	SANDS
137.36	555.28	1.96	0.35	-0.19	SANDS
137.43	552.1	2.05	0.36	0.07	SANDS
137.5	548.93	2.01	0.34	-0.08	SANDS
137.56	545.76	2.04	0.34	-0.67	SANDS
137.63	575.55	2.1	0.34	-0.71	SANDS
137.69	608.92	2.18	0.35	-0.73	SANDS
137.76	628.95	2.44	0.39	-0.77	SANDS
137.82	639.96	2.68	0.43	-0.79	SANDS
137.89	641.82	2.59	0.41	-0.79	SANDS
137.95	630.43	2.69	0.43	-0.83	SANDS
138.02	615.17	2.71	0.44	-0.85	SANDS
138.09	615.01	2.5	0.4	-0.87	SANDS
138.15	619.23	2.48	0.4	-0.87	SANDS
138.22	627	2.53	0.4	-0.88	SANDS
138.28	628.89	2.6	0.42	-0.89	SANDS
138.35	623.42	2.45	0.39	-0.89	SANDS
138.41	624.89	2.61	0.42	-0.88	SANDS
138.48	619.36	2.46	0.39	-0.88	SANDS
138.54	624.96	2.5	0.39	-0.85	SANDS
138.61	620.93	2.6	0.4	-0.85	SANDS
138.68	622.11	2.76	0.41	-0.84	SANDS
138.74	637.79	2.89	0.43	-0.84	SANDS
138.81	660.28	3.03	0.44	-0.84	SANDS
138.87	684.22	3.35	0.48	-0.84	SANDS
138.94	696.29	3.62	0.52	-0.82	SANDS
139	702.78	3.76	0.54	-0.81	SANDS
139.07	693.41	4.03	0.59	-0.81	SANDS
139.14	688.7	4.03	0.59	-0.82	SANDS
139.2	689.92	4.07	0.6	-0.81	SANDS
139.27	688.26	4.12	0.61	-0.81	SANDS
139.33	680.86	3.38	0.51	-0.8	SANDS
139.4	675.06	3.35	0.5	-0.78	SANDS
139.46	669.26	3.25	0.49	0	SANDS

US EPA ARCHIVE DOCUMENT

139.53	663.46	3.04	0.45	0.01	SANDS
139.59	657.66	3.11	0.46	-0.24	SANDS
139.66	670.17	2.98	0.44	-0.27	SANDS
139.73	676.1	2.74	0.41	-0.34	SANDS
139.79	674.21	2.69	0.4	-0.35	SANDS
139.86	677.54	2.79	0.42	-0.35	SANDS
139.92	675.16	2.78	0.42	-0.36	SANDS
139.99	671.9	2.98	0.45	-0.36	SANDS
140.05	666.24	3.16	0.49	-0.36	SANDS
140.12	663.52	3.37	0.54	-0.36	SANDS
140.18	658.97	3.56	0.59	-0.34	SANDS
140.25	646.24	3.66	0.62	-0.36	SANDS
140.32	621.53	3.56	0.63	-0.39	SANDS
140.38	593.5	3.51	0.63	-0.4	SANDS
140.45	572.54	3.12	0.57	-0.43	SANDS
140.51	552.73	2.92	0.54	-0.43	SANDS
140.58	540.63	2.73	0.5	-0.43	SANDS
140.64	532.57	2.59	0.47	-0.43	SANDS
140.71	532.63	2.37	0.43	-0.43	SANDS
140.78	536.89	2.33	0.41	-0.4	SANDS
140.84	548.15	2.41	0.41	-0.4	SANDS
140.91	559.13	2.27	0.38	-0.37	SANDS
140.97	563.64	2.43	0.39	-0.38	SANDS
141.04	574.14	2.48	0.38	-0.35	SANDS
141.1	603.45	2.5	0.37	-0.33	SANDS
141.17	633.76	2.51	0.36	-0.34	SANDS
141.23	681.22	2.53	0.35	-0.33	SANDS
141.3	699.8	2.54	0.34	-0.3	SANDS
141.37	718.39	2.56	0.34	-0.05	SANDS
141.43	736.97	2.96	0.38	0.29	SANDS
141.5	755.56	3.91	0.5	0.32	SANDS
141.56	775.75	4.92	0.62	0.01	SANDS
141.63	780.32	5.7	0.71	-0.3	SANDS
141.69	780.39	6.3	0.79	-0.38	SANDS
141.76	791.3	7.14	0.89	-0.44	SANDS
141.82	800.84	8.86	1.1	-0.46	SANDS
141.89	814.63	10.34	1.29	-0.44	SANDS
141.96	817.03	11.15	1.4	-0.42	SANDS
142.02	807.91	11.24	1.71	-0.3	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-13-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 02

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0.03	3.33	0	CLAYS
0.13	0	0.03	1.69	0	CLAYS
0.2	0	0.03	0.84	0	CLAYS
0.26	0.03	2.1	10	0	CLAYS
0.33	1.94	4.18	10	0	CLAYS
0.39	3.86	4.13	10	0	CLAYS
0.46	5.77	4.01	10	0	CLAYS
0.52	7.68	3.77	10	-0.01	CLAYS
0.59	9.05	3.57	10	0	CLAYS
0.66	10.34	3.2	10	0.01	CLAYS
0.72	12.25	2.1	10	0.01	CLAYS
0.79	14.85	1.85	8.13	0	CLAYS
0.85	18.59	1.61	6.38	0.01	CLAYS
0.92	22.08	1.36	5.03	0.02	CLAYS
0.98	25.28	1.12	3.92	0	CLAYEY SILT&SILTY CLAYS
1.05	27.17	1.35	4.53	0	CLAYEY SILT&SILTY CLAYS
1.12	28.8	1.53	4.93	-0.01	CLAYEY SILT&SILTY CLAYS
1.18	29.22	1.72	5.19	-0.01	CLAYS
1.25	29.98	1.84	5.16	-0.01	CLAYS
1.31	30.75	1.95	5.06	-0.01	CLAYEY SILT&SILTY CLAYS
1.38	32.42	2.12	5.07	-0.01	CLAYEY SILT&SILTY CLAYS
1.44	35.55	2.23	4.89	0	CLAYEY SILT&SILTY CLAYS
1.51	40.86	2.28	4.61	0	CLAYEY SILT&SILTY CLAYS
1.57	44.74	2.16	4.12	-0.01	CLAYEY SILT&SILTY CLAYS
1.64	46.91	2.14	3.88	0	CLAYEY SILT&SILTY CLAYS
1.71	49.98	2.26	3.97	0	CLAYEY SILT&SILTY CLAYS
1.77	55.59	2.33	4.01	-0.04	CLAYEY SANDY SILT&SILT
1.84	58.91	2.46	4.2	-0.05	CLAYEY SILT&SILTY CLAYS
1.9	59.24	2.63	4.51	-0.08	CLAYEY SILT&SILTY CLAYS
1.97	59.17	2.8	4.83	-0.08	CLAYEY SILT&SILTY CLAYS
2.03	58.6	3	5.2	-0.06	CLAYEY SILT&SILTY CLAYS
2.1	57.79	3.14	5.45	-0.06	CLAYEY SILT&SILTY CLAYS
2.16	57.44	3.28	5.69	-0.04	CLAYS
2.23	57.35	3.33	5.78	-0.04	CLAYS
2.3	57.35	3.45	5.95	-0.04	CLAYS
2.36	57.47	3.42	5.86	-0.03	CLAYS
2.43	57.73	3.32	5.61	-0.03	CLAYEY SILT&SILTY CLAYS
2.49	57.92	3.16	5.28	-0.03	CLAYEY SILT&SILTY CLAYS
2.56	58.02	3	4.93	-0.05	CLAYEY SILT&SILTY CLAYS
2.62	58.88	2.82	4.55	-0.03	CLAYEY SILT&SILTY CLAYS
2.69	60.52	2.75	4.36	-0.04	CLAYEY SILT&SILTY CLAYS
2.76	61.53	2.47	3.84	-0.04	CLAYEY SANDY SILT&SILT
2.82	62.43	1.66	2.55	-0.04	CLAYEY SANDY SILT&SILT
2.89	63.04	1.56	2.37	-0.03	SILTY SAND
2.95	65.12	1.58	2.4	-0.03	SILTY SAND
3.02	65.22	1.51	2.29	-0.01	SILTY SAND

US EPA ARCHIVE DOCUMENT

3.08	67.84	1.51	2.27	-0.02	SILTY SAND
3.15	66.62	1.63	2.45	-0.02	SILTY SAND
3.21	65.41	1.84	2.76	-0.01	CLAYEY SANDY SILT&SILT
3.28	65.67	2.11	3.16	-0.02	CLAYEY SANDY SILT&SILT
3.35	66.56	2.36	3.53	-0.01	CLAYEY SANDY SILT&SILT
3.41	66.98	2.53	3.76	-0.03	CLAYEY SANDY SILT&SILT
3.48	67.04	2.82	4.18	-0.03	CLAYEY SANDY SILT&SILT
3.54	67.17	3.1	4.57	-0.05	CLAYEY SILT&SILTY CLAYS
3.61	67.08	3.51	5.13	-0.05	CLAYEY SILT&SILTY CLAYS
3.67	66.82	3.76	5.43	-0.05	CLAYEY SILT&SILTY CLAYS
3.74	67.9	3.98	5.68	-0.07	CLAYEY SILT&SILTY CLAYS
3.8	68.03	4.24	6.01	-0.05	CLAYS
3.87	69.79	4.17	5.85	-0.05	CLAYEY SILT&SILTY CLAYS
3.94	71.3	4.6	6.42	-0.05	CLAYS
4	71.68	4.95	6.88	-0.04	CLAYS
4.07	71.43	4.95	6.85	-0.04	CLAYS
4.13	71.59	5.06	6.98	-0.03	CLAYS
4.2	71.94	5.03	6.9	-0.03	CLAYS
4.26	72.45	4.99	6.8	-0.02	CLAYS
4.33	72.9	4.91	6.67	-0.01	CLAYS
4.4	73.22	4.83	6.52	-0.01	CLAYS
4.46	73.35	4.6	6.21	-0.01	CLAYS
4.53	73.99	4.4	5.93	-0.01	CLAYEY SILT&SILTY CLAYS
4.59	74.18	4.4	5.93	-0.02	CLAYEY SILT&SILTY CLAYS
4.66	74.43	4.29	5.79	-0.03	CLAYEY SILT&SILTY CLAYS
4.72	74.76	4.26	5.83	-0.02	CLAYEY SILT&SILTY CLAYS
4.79	74.47	4.3	5.93	-0.02	CLAYEY SILT&SILTY CLAYS
4.85	74.12	3.62	5.04	-0.03	CLAYEY SILT&SILTY CLAYS
4.92	73.6	3.63	5.09	-0.06	CLAYEY SILT&SILTY CLAYS
4.99	73.12	3.54	4.96	-0.08	CLAYEY SILT&SILTY CLAYS
5.05	68.71	3.38	4.74	-0.05	CLAYEY SILT&SILTY CLAYS
5.12	70.34	3.28	4.57	-0.04	CLAYEY SILT&SILTY CLAYS
5.18	70.82	3.24	4.53	-0.04	CLAYEY SILT&SILTY CLAYS
5.25	71.87	3.23	4.56	-0.05	CLAYEY SILT&SILTY CLAYS
5.31	72.87	3.29	4.72	-0.07	CLAYEY SILT&SILTY CLAYS
5.38	73.22	3.44	5.05	-0.08	CLAYEY SILT&SILTY CLAYS
5.44	71.56	3.63	5.48	-0.08	CLAYEY SILT&SILTY CLAYS
5.51	69.15	3.77	5.83	-0.07	CLAYEY SILT&SILTY CLAYS
5.58	66.56	3.8	5.98	-0.05	CLAYS
5.64	64.77	3.76	5.98	-0.04	CLAYS
5.71	62.91	3.67	5.89	-0.04	CLAYS
5.77	62.27	3.54	5.71	-0.05	CLAYEY SILT&SILTY CLAYS
5.84	62.18	3.46	5.64	-0.04	CLAYEY SILT&SILTY CLAYS
5.9	62.37	3.26	5.41	-0.03	CLAYEY SILT&SILTY CLAYS
5.97	63.08	3.18	5.44	-0.03	CLAYEY SILT&SILTY CLAYS
6.04	61.12	3.2	5.67	0	CLAYEY SILT&SILTY CLAYS
6.1	61.09	3.27	6.02	-0.06	CLAYS
6.17	58.43	3.29	6.3	-0.1	CLAYS
6.23	55.2	3.23	6.4	-0.1	CLAYS
6.3	52.13	3.15	6.41	-0.09	CLAYS
6.36	50.27	3.14	6.48	-0.08	CLAYS
6.43	48.96	3.15	6.58	-0.08	CLAYS

US EPA ARCHIVE DOCUMENT

6.49	48.42	3.13	6.58	-0.08	CLAYS
6.56	47.94	3.2	6.76	-0.08	CLAYS
6.63	47.49	3.2	6.77	-0.08	CLAYS
6.69	47.23	3.18	6.75	-0.08	CLAYS
6.76	46.82	3.11	6.65	-0.08	CLAYS
6.82	47.08	3.04	6.58	-0.07	CLAYS
6.89	47.39	2.96	6.55	-0.07	CLAYS
6.95	47.42	2.89	6.59	-0.07	CLAYS
7.02	46.78	2.94	6.97	-0.07	CLAYS
7.08	45.03	3.01	7.44	-0.06	CLAYS
7.15	43.2	3.08	7.9	-0.07	CLAYS
7.22	41.76	3.14	8.31	-0.07	CLAYS
7.28	39.33	3.13	8.42	-0.06	CLAYS
7.35	37.35	2.97	8.04	-0.06	CLAYS
7.41	35.97	2.75	7.43	-0.05	CLAYS
7.48	35.97	2.59	6.98	-0.06	CLAYS
7.54	36.67	2.52	6.7	-0.05	CLAYS
7.61	37.79	2.43	6.42	-0.05	CLAYS
7.68	37.92	2.39	6.24	-0.05	CLAYS
7.74	37.35	2.39	6.14	-0.06	CLAYS
7.81	37.41	2.39	6.07	-0.05	CLAYS
7.87	38.27	2.46	6.26	-0.05	CLAYS
7.94	38.79	2.45	6.31	-0.06	CLAYS
8	39.84	2.47	6.52	-0.05	CLAYS
8.07	41.86	2.52	6.88	-0.06	CLAYS
8.13	40.32	2.58	7.38	-0.08	CLAYS
8.2	37.02	2.62	7.76	-0.06	CLAYS
8.27	34.56	2.64	7.92	-0.07	CLAYS
8.33	33.85	2.58	7.75	-0.07	CLAYS
8.4	32.45	2.43	7.29	-0.07	CLAYS
8.46	31.75	2.34	6.98	-0.07	CLAYS
8.53	33.18	2.23	6.62	-0.07	CLAYS
8.59	34.56	2.13	6.29	-0.07	CLAYS
8.66	33.89	2.12	6.3	-0.07	CLAYS
8.72	34.18	2.16	6.37	-0.07	CLAYS
8.79	33.67	2.17	6.4	-0.07	CLAYS
8.86	32.96	2.19	6.45	-0.06	CLAYS
8.92	33.47	2.2	6.49	-0.06	CLAYS
8.99	33.85	2.23	6.69	-0.06	CLAYS
9.05	35.23	2.27	6.92	-0.07	CLAYS
9.12	34.56	2.33	7.33	-0.09	CLAYS
9.18	33.54	2.36	7.72	-0.07	CLAYS
9.25	32.39	2.31	7.84	-0.08	CLAYS
9.32	30.91	2.31	8.06	-0.08	CLAYS
9.38	29.95	2.2	7.76	-0.08	CLAYS
9.45	28.96	2.08	7.33	-0.08	CLAYS
9.51	27.3	2.02	7.09	-0.08	CLAYS
9.58	27.36	1.93	6.69	-0.08	CLAYS
9.64	27.75	1.84	6.35	-0.08	CLAYS
9.71	28.9	1.72	5.89	-0.08	CLAYS
9.77	29.76	1.67	5.71	-0.08	CLAYS
9.84	29.5	1.63	5.56	-0.07	CLAYS

US EPA ARCHIVE DOCUMENT

9.91	29.34	1.58	5.4	-0.07	CLAYS
9.97	29.02	1.53	5.28	-0.08	CLAYS
10.04	28.58	1.59	5.52	-0.08	CLAYS
10.1	29.54	1.71	6	-0.07	CLAYS
10.17	29.54	1.8	6.44	-0.08	CLAYS
10.23	29.47	1.88	6.78	-0.08	CLAYS
10.3	28.38	1.94	7	-0.08	CLAYS
10.36	27.14	1.9	6.8	-0.07	CLAYS
10.43	26.53	1.84	6.5	-0.08	CLAYS
10.5	26.94	1.75	6.13	-0.07	CLAYS
10.56	28.29	1.64	5.75	-0.08	CLAYS
10.63	29.15	1.68	5.95	-0.08	CLAYS
10.69	29.63	1.7	6.02	-0.08	CLAYS
10.76	29.41	1.75	6.15	-0.09	CLAYS
10.82	27.97	1.78	6.23	-0.08	CLAYS
10.89	27.04	1.79	6.15	-0.07	CLAYS
10.96	26.11	1.82	6.15	-0.08	CLAYS
11.02	29.41	1.81	5.98	-0.08	CLAYS
11.09	30.27	1.82	6.02	-0.08	CLAYS
11.15	30.75	1.87	6.23	-0.1	CLAYS
11.22	30.65	1.92	6.47	-0.09	CLAYS
11.28	30.65	2	6.82	-0.09	CLAYS
11.35	30.05	1.98	6.88	-0.08	CLAYS
11.41	29.15	1.97	6.98	-0.09	CLAYS
11.48	28.7	1.98	7.22	-0.09	CLAYS
11.55	28.64	1.94	7.31	-0.09	CLAYS
11.61	28.55	1.89	7.39	-0.09	CLAYS
11.68	27.75	1.86	7.51	-0.09	CLAYS
11.74	26.43	1.82	7.45	-0.09	CLAYS
11.81	24.45	1.75	7.24	-0.09	CLAYS
11.87	23.23	1.69	6.95	-0.09	CLAYS
11.94	23.07	1.62	6.66	-0.09	CLAYS
12	23.33	1.57	6.45	-0.08	CLAYS
12.07	25.73	1.51	6.25	-0.09	CLAYS
12.14	25.41	1.48	6.23	-0.09	CLAYS
12.2	24.71	1.56	6.59	-0.1	CLAYS
12.27	23.81	1.52	6.32	-0.1	CLAYS
12.33	23.23	1.47	6	-0.1	CLAYS
12.4	22.27	1.43	5.72	-0.1	CLAYS
12.46	22.97	1.38	5.47	-0.09	CLAYS
12.53	25.19	1.31	5.14	-0.1	CLAYS
12.6	26.53	1.35	5.42	-0.1	CLAYS
12.66	27.17	1.43	5.99	-0.1	CLAYS
12.73	25.73	1.39	6.02	-0.09	CLAYS
12.79	24.41	1.35	6.06	-0.1	CLAYS
12.86	23.27	1.32	6.09	-0.09	CLAYS
12.92	22.27	1.28	6.09	-0.09	CLAYS
12.99	20.22	1.24	6.06	-0.1	CLAYS
13.05	22.59	1.21	5.96	-0.1	CLAYS
13.12	21.18	1.25	6.39	-0.11	CLAYS
13.19	20.22	1.32	6.96	-0.11	CLAYS
13.25	19.68	1.34	7.19	-0.11	CLAYS

US EPA ARCHIVE DOCUMENT

13.32	19.17	1.25	6.78	-0.1	CLAYS
13.38	18.53	1.11	6.04	-0.1	CLAYS
13.45	18.24	1.01	5.55	-0.11	CLAYS
13.51	18.3	0.96	5.29	-0.11	CLAYS
13.58	18.18	0.93	5.12	-0.1	CLAYS
13.64	18.4	0.92	5.06	-0.11	CLAYS
13.71	18.4	0.9	4.84	-0.11	CLAYS
13.78	18.21	0.9	4.73	-0.1	CLAYS
13.84	17.95	0.92	4.75	-0.11	CLAYS
13.91	17.98	0.95	4.83	-0.11	CLAYS
13.97	18.15	1.01	5.12	-0.11	CLAYS
14.04	21.15	1.05	5.26	-0.11	CLAYS
14.1	20.57	1.09	5.57	-0.11	CLAYS
14.17	20	1.13	5.94	-0.12	CLAYS
14.24	19.55	1.15	6.16	-0.11	CLAYS
14.3	19.49	1.18	6.38	-0.12	CLAYS
14.37	18.72	1.18	6.5	-0.11	CLAYS
14.43	18.69	1.14	6.3	-0.12	CLAYS
14.5	18.18	1.09	6.06	-0.12	CLAYS
14.56	17.76	1.06	5.82	-0.13	CLAYS
14.63	17.92	1.02	5.51	-0.12	CLAYS
14.69	17.95	0.98	5.1	-0.11	CLAYS
14.76	18.05	1	4.99	-0.11	CLAYS
14.83	18.24	1.02	4.91	-0.11	CLAYS
14.89	18.94	1.04	4.86	-0.12	CLAYS
14.96	19.97	1.06	4.87	-0.12	CLAYS
15.02	22.59	1.07	4.93	-0.13	CLAYS
15.09	22.59	1.17	5.46	-0.13	CLAYS
15.15	22.18	1.27	6.06	-0.13	CLAYS
15.22	21.85	1.35	6.52	-0.13	CLAYS
15.28	20.93	1.37	6.62	-0.12	CLAYS
15.35	20.51	1.37	6.52	-0.12	CLAYS
15.42	20.19	1.35	6.33	-0.13	CLAYS
15.48	20.03	1.32	6.07	-0.12	CLAYS
15.55	20.8	1.3	5.86	-0.13	CLAYS
15.61	21.73	1.31	5.82	-0.12	CLAYS
15.68	22.75	1.31	5.78	-0.13	CLAYS
15.74	22.59	1.34	5.9	-0.12	CLAYS
15.81	22.56	1.36	6	-0.12	CLAYS
15.88	22.85	1.32	5.84	-0.13	CLAYS
15.94	22.91	1.29	5.8	-0.12	CLAYS
16.01	22.3	1.32	6.07	-0.13	CLAYS
16.07	23.3	1.36	6.38	-0.13	CLAYS
16.14	22.49	1.39	6.72	-0.13	CLAYS
16.2	21.63	1.42	7.07	-0.13	CLAYS
16.27	20.7	1.45	7.4	-0.13	CLAYS
16.33	20	1.48	7.74	-0.13	CLAYS
16.4	19.71	1.47	7.77	-0.13	CLAYS
16.47	19.52	1.43	7.68	-0.13	CLAYS
16.53	19.04	1.38	7.54	-0.14	CLAYS
16.6	18.56	1.32	7.31	-0.13	CLAYS
16.66	18.27	1.28	7.16	-0.12	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	18.27	1.27	6.98	-0.14	CLAYS
16.79	18.08	1.24	6.72	-0.12	CLAYS
16.86	17.66	1.21	6.52	-0.13	CLAYS
16.92	17.66	1.18	6.31	-0.14	CLAYS
16.99	17.44	1.15	6.14	-0.13	CLAYS
17.06	20.22	1.2	6.43	-0.15	CLAYS
17.12	19.68	1.24	6.9	-0.14	CLAYS
17.19	18.65	1.28	7.3	-0.14	CLAYS
17.25	18.4	1.3	7.6	-0.15	CLAYS
17.32	17.66	1.3	7.8	-0.14	CLAYS
17.38	17.06	1.28	7.84	-0.14	CLAYS
17.45	16.67	1.24	7.74	-0.14	CLAYS
17.52	16.57	1.18	7.43	-0.14	CLAYS
17.58	16.06	1.12	7.14	-0.14	CLAYS
17.65	15.71	1.07	6.89	-0.14	CLAYS
17.71	15.58	1.03	6.57	-0.14	CLAYS
17.78	15.65	0.99	6.23	-0.13	CLAYS
17.84	15.55	0.94	5.76	-0.14	CLAYS
17.91	15.29	0.96	5.79	-0.13	CLAYS
17.97	15.62	1	5.99	-0.14	CLAYS
18.04	16.36	1.05	6.27	-0.16	CLAYS
18.11	17.11	1.12	6.72	-0.14	CLAYS
18.17	17.85	1.16	7.04	-0.15	CLAYS
18.24	16.86	1.18	7.23	-0.15	CLAYS
18.3	16.26	1.17	7.2	-0.15	CLAYS
18.37	15.93	1.17	7.24	-0.16	CLAYS
18.43	15.71	1.15	7.1	-0.14	CLAYS
18.5	16.54	1.11	6.84	-0.15	CLAYS
18.56	16.48	1.07	6.63	-0.14	CLAYS
18.63	16.29	1.03	6.42	-0.15	CLAYS
18.7	15.96	1.02	6.37	-0.14	CLAYS
18.76	16.32	1	6.17	-0.15	CLAYS
18.83	16.03	0.97	5.96	-0.14	CLAYS
18.89	15.74	0.95	5.77	-0.15	CLAYS
18.96	15.68	0.93	5.59	-0.15	CLAYS
19.02	16.29	0.99	5.92	-0.16	CLAYS
19.09	16.9	1.04	6.29	-0.15	CLAYS
19.16	17.51	1.11	6.85	-0.15	CLAYS
19.22	16.83	1.16	7.34	-0.15	CLAYS
19.29	16.61	1.17	7.54	-0.15	CLAYS
19.35	15.87	1.14	7.47	-0.15	CLAYS
19.42	15.29	1.1	7.25	-0.15	CLAYS
19.48	15.01	1.07	7	-0.15	CLAYS
19.55	15.23	1	6.46	-0.14	CLAYS
19.61	15.2	0.98	6.26	-0.16	CLAYS
19.68	15.04	0.98	6.14	-0.15	CLAYS
19.75	15.65	0.9	5.55	-0.16	CLAYS
19.81	15.74	0.92	5.54	-0.15	CLAYS
19.88	15.84	0.94	5.49	-0.15	CLAYS
19.94	16.38	0.96	5.48	-0.15	CLAYS
20.01	16.7	0.97	5.51	-0.15	CLAYS
20.07	17.28	0.99	5.55	-0.16	CLAYS

US EPA ARCHIVE DOCUMENT

20.14	17.85	1.05	5.84	-0.16	CLAYS
20.2	18.43	1.11	6.2	-0.15	CLAYS
20.27	18.01	1.16	6.56	-0.16	CLAYS
20.34	17.79	1.14	6.49	-0.15	CLAYS
20.4	17.76	1.03	5.91	-0.15	CLAYS
20.47	17.73	0.93	5.44	-0.15	CLAYS
20.53	17.79	0.83	4.99	-0.15	CLAYS
20.6	17.51	0.8	4.91	-0.16	CLAYS
20.66	17.09	0.78	4.86	-0.16	CLAYS
20.73	16.51	0.76	4.62	-0.15	CLAYS
20.8	15.93	0.71	4.2	-0.16	CLAYEY SILT&SILTY CLAYS
20.86	15.55	0.61	3.58	-0.16	CLAYEY SILT&SILTY CLAYS
20.93	15.26	0.65	3.83	-0.15	CLAYEY SILT&SILTY CLAYS
20.99	15.42	0.75	4.42	-0.15	CLAYS
21.06	19.74	0.8	4.75	-0.15	CLAYS
21.12	18.78	0.84	5.23	-0.16	CLAYS
21.19	16.96	0.92	6	-0.15	CLAYS
21.25	15.96	0.99	6.67	-0.16	CLAYS
21.32	15.36	0.97	6.67	-0.16	CLAYS
21.39	14.88	0.9	6.26	-0.16	CLAYS
21.45	14.53	0.78	5.48	-0.16	CLAYS
21.52	14.11	0.68	4.77	-0.15	CLAYS
21.58	14.3	0.71	4.99	-0.16	CLAYS
21.65	14.3	0.68	4.83	-0.15	CLAYS
21.71	14.4	0.69	4.87	-0.15	CLAYS
21.78	13.95	0.72	5.05	-0.16	CLAYS
21.84	14.24	0.69	4.82	-0.16	CLAYS
21.91	13.89	0.66	4.63	-0.16	CLAYS
21.98	13.57	0.69	4.79	-0.16	CLAYS
22.04	15.17	0.7	4.79	-0.16	CLAYS
22.11	14.68	0.73	5.06	-0.16	CLAYS
22.17	14.08	0.75	5.17	-0.16	CLAYS
22.24	14.17	0.76	5.27	-0.16	CLAYS
22.3	14.46	0.77	5.41	-0.15	CLAYS
22.37	14.81	0.78	5.57	-0.16	CLAYS
22.44	14.72	0.79	5.76	-0.17	CLAYS
22.5	14.4	0.79	5.94	-0.16	CLAYS
22.57	14.08	0.77	5.85	-0.16	CLAYS
22.63	13.31	0.74	5.73	-0.15	CLAYS
22.7	12.73	0.73	5.62	-0.16	CLAYS
22.76	12.83	0.71	5.45	-0.17	CLAYS
22.83	12.83	0.7	5.34	-0.16	CLAYS
22.89	12.76	0.68	5.27	-0.16	CLAYS
22.96	12.58	0.67	5.21	-0.16	CLAYS
23.03	13.98	0.66	5.13	-0.16	CLAYS
23.09	13.57	0.67	5.39	-0.16	CLAYS
23.16	12.83	0.66	5.37	-0.17	CLAYS
23.22	12.22	0.64	5.23	-0.16	CLAYS
23.29	12	0.59	4.77	-0.16	CLAYS
23.35	12.13	0.53	4.25	-0.17	CLAYS
23.42	12.16	0.5	3.96	-0.17	CLAYEY SILT&SILTY CLAYS
23.48	12.25	0.48	3.77	-0.16	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

23.55	12.54	0.47	3.61	-0.16	CLAYEY SILT&SILTY CLAYS
23.62	12.73	0.46	3.5	-0.16	CLAYEY SILT&SILTY CLAYS
23.68	12.93	0.46	3.44	-0.17	CLAYEY SILT&SILTY CLAYS
23.75	12.99	0.45	3.26	-0.16	CLAYEY SILT&SILTY CLAYS
23.81	13.28	0.44	3.15	-0.16	CLAYEY SILT&SILTY CLAYS
23.88	13.31	0.4	2.76	-0.16	CLAYEY SILT&SILTY CLAYS
23.94	13.47	0.41	2.79	-0.17	CLAYEY SILT&SILTY CLAYS
24.01	13.89	0.45	3.04	-0.17	CLAYEY SILT&SILTY CLAYS
24.08	15.29	0.49	3.29	-0.16	CLAYEY SILT&SILTY CLAYS
24.14	15.39	0.54	3.67	-0.16	CLAYEY SILT&SILTY CLAYS
24.21	15.2	0.65	4.47	-0.16	CLAYS
24.27	15.04	0.7	4.84	-0.16	CLAYS
24.34	14.88	0.67	4.67	-0.17	CLAYS
24.4	14.3	0.66	4.59	-0.17	CLAYS
24.47	13.92	0.66	4.58	-0.16	CLAYS
24.53	14.34	0.65	4.46	-0.17	CLAYS
24.6	14.4	0.62	4.24	-0.16	CLAYEY SILT&SILTY CLAYS
24.67	14.37	0.59	4.01	-0.16	CLAYEY SILT&SILTY CLAYS
24.73	14.34	0.58	3.86	-0.16	CLAYEY SILT&SILTY CLAYS
24.8	14.62	0.54	3.53	-0.17	CLAYEY SILT&SILTY CLAYS
24.86	14.85	0.5	3.21	-0.17	CLAYEY SILT&SILTY CLAYS
24.93	15.04	0.46	2.9	-0.16	CLAYEY SILT&SILTY CLAYS
24.99	15.14	0.53	3.29	-0.16	CLAYEY SILT&SILTY CLAYS
25.06	15.84	0.58	3.56	-0.15	CLAYEY SILT&SILTY CLAYS
25.12	15.78	0.68	4.07	-0.15	CLAYEY SILT&SILTY CLAYS
25.19	16.09	0.78	4.6	-0.16	CLAYS
25.26	16.64	0.84	4.88	-0.16	CLAYS
25.32	16.77	0.88	5.1	-0.15	CLAYS
25.39	17.21	0.92	5.34	-0.16	CLAYS
25.45	17.31	0.98	5.63	-0.15	CLAYS
25.52	17.79	1.04	5.88	-0.16	CLAYS
25.58	17.85	1.01	5.61	-0.16	CLAYS
25.65	16.96	1.01	5.47	-0.16	CLAYS
25.72	16.51	1.05	5.47	-0.15	CLAYS
25.78	17.82	1.08	5.39	-0.16	CLAYS
25.85	19.1	1.04	5.04	-0.16	CLAYS
25.91	20.03	1.1	5.25	-0.16	CLAYS
25.98	20.38	1.18	5.54	-0.16	CLAYS
26.04	21.18	1.25	5.77	-0.17	CLAYS
26.11	21.73	1.35	6.11	-0.16	CLAYS
26.17	21.35	1.42	6.33	-0.17	CLAYS
26.24	21.47	1.5	6.56	-0.17	CLAYS
26.31	21.85	1.58	6.71	-0.17	CLAYS
26.37	22.82	1.62	6.61	-0.17	CLAYS
26.44	23.07	1.64	6.42	-0.17	CLAYS
26.5	23.55	1.65	6.09	-0.17	CLAYS
26.57	24.16	1.67	5.84	-0.17	CLAYS
26.63	25.6	1.7	5.58	-0.18	CLAYS
26.7	27.49	1.74	5.4	-0.17	CLAYS
26.76	29.67	1.78	5.33	-0.18	CLAYS
26.83	32.03	1.75	5.09	-0.19	CLAYEY SILT&SILTY CLAYS
26.9	33.25	1.78	5.15	-0.2	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

26.96	34.78	1.76	5.07	-0.18	CLAYEY SILT&SILTY CLAYS
27.03	35.42	1.72	4.98	-0.21	CLAYEY SILT&SILTY CLAYS
27.09	35.59	1.63	4.77	-0.2	CLAYEY SILT&SILTY CLAYS
27.16	34.62	1.5	4.51	-0.2	CLAYEY SILT&SILTY CLAYS
27.22	33.98	1.34	4.16	-0.2	CLAYEY SILT&SILTY CLAYS
27.29	34.31	1.17	3.72	-0.2	CLAYEY SILT&SILTY CLAYS
27.36	33.79	1	3.28	-0.2	CLAYEY SANDY SILT&SILT
27.42	32.42	0.82	2.79	-0.21	CLAYEY SANDY SILT&SILT
27.49	30.27	0.7	2.39	-0.2	CLAYEY SANDY SILT&SILT
27.55	29.28	0.73	2.46	-0.2	CLAYEY SANDY SILT&SILT
27.62	28.77	0.83	2.67	-0.19	CLAYEY SANDY SILT&SILT
27.68	27.75	0.87	2.68	-0.2	CLAYEY SANDY SILT&SILT
27.75	28.25	0.9	2.64	-0.2	CLAYEY SANDY SILT&SILT
27.81	30.78	0.93	2.59	-0.2	CLAYEY SANDY SILT&SILT
27.88	34.21	0.92	2.48	-0.2	CLAYEY SANDY SILT&SILT
27.95	36.8	0.93	2.44	-0.19	CLAYEY SANDY SILT&SILT
28.01	37.33	0.88	2.3	-0.19	CLAYEY SANDY SILT&SILT
28.08	37.86	0.79	2.08	-0.2	CLAYEY SANDY SILT&SILT
28.14	38.4	0.72	1.91	-0.2	CLAYEY SANDY SILT&SILT
28.21	38.92	0.68	1.86	-0.19	SILTY SAND
28.27	39.46	0.66	1.88	-0.19	SILTY SAND
28.34	37.54	0.68	2.02	-0.19	CLAYEY SANDY SILT&SILT
28.4	35.65	0.75	2.33	-0.18	CLAYEY SANDY SILT&SILT
28.47	34.21	0.88	2.85	-0.18	CLAYEY SANDY SILT&SILT
28.54	32.93	1.05	3.54	-0.19	CLAYEY SILT&SILTY CLAYS
28.6	31.52	1.25	4.41	-0.19	CLAYEY SILT&SILTY CLAYS
28.67	29.92	1.46	5.35	-0.18	CLAYS
28.73	28.48	1.66	6.28	-0.18	CLAYS
28.8	27.52	1.85	7.1	-0.19	CLAYS
28.86	26.59	1.89	7.38	-0.18	CLAYS
28.93	25.76	2.02	8.03	-0.17	CLAYS
29	25.47	2.07	8.41	-0.17	CLAYS
29.06	25.22	2.07	8.65	-0.17	CLAYS
29.13	25.41	2.05	8.77	-0.16	CLAYS
29.19	24.89	1.98	8.72	-0.17	CLAYS
29.26	23.78	1.87	8.37	-0.17	CLAYS
29.32	22.72	1.73	7.73	-0.18	CLAYS
29.39	21.69	1.59	6.89	-0.17	CLAYS
29.45	21.41	1.43	5.96	-0.18	CLAYS
29.52	21.69	1.32	5.19	-0.18	CLAYS
29.59	22.59	1.23	4.57	-0.18	CLAYEY SILT&SILTY CLAYS
29.65	24.38	1.12	3.92	-0.18	CLAYEY SILT&SILTY CLAYS
29.72	26.33	1.03	3.44	-0.2	CLAYEY SILT&SILTY CLAYS
29.78	27.81	0.99	3.19	-0.18	CLAYEY SANDY SILT&SILT
29.85	29.47	0.87	2.76	-0.19	CLAYEY SANDY SILT&SILT
29.91	31.14	0.87	2.73	-0.19	CLAYEY SANDY SILT&SILT
29.98	32.7	0.86	2.66	-0.19	CLAYEY SANDY SILT&SILT
30.04	32.48	0.8	2.47	-0.19	CLAYEY SANDY SILT&SILT
30.11	32.57	0.73	2.24	-0.19	CLAYEY SANDY SILT&SILT
30.18	31.29	0.67	2.04	-0.19	CLAYEY SANDY SILT&SILT
30.24	31.59	0.66	1.97	-0.19	CLAYEY SANDY SILT&SILT
30.31	32.73	0.69	2.01	-0.2	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

30.37	33.6	0.76	2.17	-0.19	CLAYEY SANDY SILT&SILT
30.44	33.92	0.88	2.48	-0.19	CLAYEY SANDY SILT&SILT
30.5	34.24	0.98	2.72	-0.19	CLAYEY SANDY SILT&SILT
30.57	35.07	1.06	2.88	-0.19	CLAYEY SANDY SILT&SILT
30.64	35.9	1.14	3.07	-0.19	CLAYEY SANDY SILT&SILT
30.7	36.67	1.24	3.31	-0.2	CLAYEY SANDY SILT&SILT
30.77	37.12	1.39	3.65	-0.22	CLAYEY SILT&SILTY CLAYS
30.83	37.73	1.46	3.85	-0.22	CLAYEY SILT&SILTY CLAYS
30.9	38.05	1.49	3.93	-0.22	CLAYEY SILT&SILTY CLAYS
30.96	38.15	1.53	4.08	-0.23	CLAYEY SILT&SILTY CLAYS
31.03	38.08	1.59	4.29	-0.21	CLAYEY SILT&SILTY CLAYS
31.09	38.34	1.65	4.5	-0.26	CLAYEY SILT&SILTY CLAYS
31.16	37.63	1.74	4.8	-0.28	CLAYEY SILT&SILTY CLAYS
31.23	36.99	1.81	5.06	-0.3	CLAYEY SILT&SILTY CLAYS
31.29	36.26	1.9	5.34	-0.32	CLAYS
31.36	35.62	1.96	5.64	-0.31	CLAYS
31.42	35.74	1.98	5.77	-0.31	CLAYS
31.49	35.23	2	5.9	-0.3	CLAYS
31.55	35.55	2.03	5.98	-0.32	CLAYS
31.62	34.62	2.07	6.01	-0.31	CLAYS
31.68	32.45	2.07	5.82	-0.31	CLAYS
31.75	31.81	2.04	5.52	-0.3	CLAYS
31.82	33.41	2.05	5.35	-0.31	CLAYS
31.88	35.84	1.81	4.6	-0.3	CLAYEY SILT&SILTY CLAYS
31.95	38.66	1.62	4.04	-0.31	CLAYEY SILT&SILTY CLAYS
32.01	41.15	1.42	3.53	-0.31	CLAYEY SANDY SILT&SILT
32.08	40.38	1.23	3.03	-0.31	CLAYEY SANDY SILT&SILT
32.14	40.22	1.02	2.48	-0.32	CLAYEY SANDY SILT&SILT
32.21	39.9	0.8	1.86	-0.31	SILTY SAND
32.28	39.84	0.59	1.3	-0.32	SILTY SAND
32.34	40.67	0.45	0.92	-0.32	SILTY SAND
32.41	42.24	0.39	0.73	-0.31	SILTY SAND
32.47	45.03	0.38	0.65	-0.32	SILTY SAND
32.54	49.28	0.42	0.65	-0.31	SANDS
32.6	54.85	0.48	0.69	-0.31	SANDS
32.67	61.35	0.54	0.73	-0.3	SANDS
32.73	68.16	0.59	0.77	-0.31	SANDS
32.8	74.24	0.56	0.71	-0.3	SANDS
32.87	78.69	0.52	0.67	-0.3	SANDS
32.93	81.41	0.61	0.8	-0.3	SANDS
33	79.09	0.67	0.9	-0.3	SANDS
33.06	76.77	0.72	0.98	-0.2	SANDS
33.13	77.47	0.73	1.03	-0.2	SANDS
33.19	75.04	0.72	1.05	-0.2	SANDS
33.26	72.2	0.68	1.04	-0.2	SANDS
33.32	69.28	0.65	1.04	-0.2	SANDS
33.39	66.44	0.65	1.07	-0.19	SILTY SAND
33.46	63.65	0.66	1.11	-0.19	SILTY SAND
33.52	61.41	0.66	1.12	-0.2	SILTY SAND
33.59	59.46	0.64	1.1	-0.2	SILTY SAND
33.65	57.63	0.64	1.07	-0.19	SILTY SAND
33.72	57.19	0.63	1.04	-0.19	SILTY SAND

US EPA ARCHIVE DOCUMENT

33.78	57.69	0.6	0.98	-0.19	SILTY SAND
33.85	59.49	0.6	0.98	-0.2	SILTY SAND
33.92	61.28	0.58	0.93	-0.19	SILTY SAND
33.98	62.94	0.58	0.93	-0.18	SANDS
34.05	62.85	0.59	0.94	-0.19	SILTY SAND
34.11	63.01	0.59	0.95	-0.19	SILTY SAND
34.18	62.59	0.6	0.96	-0.19	SILTY SAND
34.24	62.24	0.6	0.97	-0.19	SILTY SAND
34.31	61.79	0.6	0.96	-0.19	SILTY SAND
34.37	61.92	0.58	0.92	-0.19	SILTY SAND
34.44	62.37	0.54	0.87	-0.2	SANDS
34.51	62.63	0.54	0.85	-0.19	SANDS
34.57	62.69	0.55	0.86	-0.19	SANDS
34.64	62.85	0.57	0.9	-0.18	SANDS
34.7	63.08	0.6	0.93	-0.18	SANDS
34.77	63.46	0.63	0.96	-0.18	SILTY SAND
34.83	64.03	0.68	1.02	-0.18	SILTY SAND
34.9	65	0.67	1	-0.18	SILTY SAND
34.96	66.14	0.66	0.98	-0.17	SANDS
35.03	66.21	0.67	0.98	-0.18	SANDS
35.1	67.9	0.69	1	-0.17	SANDS
35.16	68.51	0.74	1.09	-0.18	SILTY SAND
35.23	68.45	0.78	1.14	-0.17	SILTY SAND
35.29	68.45	0.8	1.17	-0.18	SILTY SAND
35.36	68.58	0.81	1.19	-0.17	SILTY SAND
35.42	68.77	0.81	1.19	-0.18	SILTY SAND
35.49	68.13	0.8	1.16	-0.17	SILTY SAND
35.56	67.56	0.8	1.14	-0.17	SILTY SAND
35.62	66.82	0.78	1.1	-0.17	SILTY SAND
35.69	67.75	0.76	1.07	-0.17	SILTY SAND
35.75	69.76	0.78	1.11	-0.16	SILTY SAND
35.82	73.06	0.74	1.08	-0.16	SANDS
35.88	75.3	0.7	1.07	-0.17	SANDS
35.95	74.02	0.66	1.07	-0.16	SANDS
36.01	67.99	0.75	1.32	-0.16	SILTY SAND
36.08	61.95	0.85	1.61	-0.16	SILTY SAND
36.15	60.1	0.95	1.91	-0.15	SILTY SAND
36.21	55.78	1.03	2.23	-0.14	SILTY SAND
36.28	50.88	1.12	2.56	-0.15	CLAYEY SANDY SILT&SILT
36.34	46.56	1.19	2.8	-0.15	CLAYEY SANDY SILT&SILT
36.41	42.88	1.31	3.11	-0.16	CLAYEY SANDY SILT&SILT
36.47	40.61	1.39	3.26	-0.16	CLAYEY SANDY SILT&SILT
36.54	40.32	1.42	3.27	-0.16	CLAYEY SANDY SILT&SILT
36.6	41.54	1.44	3.25	-0.16	CLAYEY SANDY SILT&SILT
36.67	43.36	1.44	3.21	-0.16	CLAYEY SANDY SILT&SILT
36.74	44.35	1.42	3.14	-0.18	CLAYEY SANDY SILT&SILT
36.8	44.83	1.36	2.99	-0.2	CLAYEY SANDY SILT&SILT
36.87	45.34	1.15	2.53	-0.23	CLAYEY SANDY SILT&SILT
36.93	45.73	1.07	2.36	-0.24	CLAYEY SANDY SILT&SILT
37	45.79	0.99	2.22	-0.25	CLAYEY SANDY SILT&SILT
37.06	45.06	0.96	2.16	-0.16	CLAYEY SANDY SILT&SILT
37.13	45.63	0.96	2.19	-0.19	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

37.2	45.03	0.99	2.29	-0.2	CLAYEY SANDY SILT&SILT
37.26	44.06	1.06	2.46	-0.22	CLAYEY SANDY SILT&SILT
37.33	43.04	1.15	2.61	-0.22	CLAYEY SANDY SILT&SILT
37.39	42.37	1.21	2.69	-0.23	CLAYEY SANDY SILT&SILT
37.46	42.3	1.27	2.72	-0.23	CLAYEY SANDY SILT&SILT
37.52	43.17	1.3	2.62	-0.22	CLAYEY SANDY SILT&SILT
37.59	44.99	1.29	2.46	-0.23	CLAYEY SANDY SILT&SILT
37.65	47.11	1.25	2.25	-0.23	CLAYEY SANDY SILT&SILT
37.72	50.08	1.18	2.01	-0.24	SILTY SAND
37.79	53.57	1.1	1.77	-0.24	SILTY SAND
37.85	57.31	1	1.53	-0.24	SILTY SAND
37.92	60.96	0.94	1.36	-0.24	SILTY SAND
37.98	64.48	0.86	1.18	-0.23	SILTY SAND
38.05	66.21	0.78	1.04	-0.18	SILTY SAND
38.11	70.15	0.74	0.92	-0.18	SANDS
38.18	73.79	0.71	0.85	-0.19	SANDS
38.24	77.5	0.72	0.83	-0.18	SANDS
38.31	81.31	0.75	0.83	-0.17	SANDS
38.38	85.38	0.78	0.83	-0.18	SANDS
38.44	89.12	0.83	0.85	-0.18	SANDS
38.51	92.71	0.87	0.86	-0.17	SANDS
38.57	96.22	0.92	0.89	-0.17	SANDS
38.64	99.59	0.97	0.91	-0.17	SANDS
38.7	102.44	0.94	0.87	-0.16	SANDS
38.77	105.06	0.91	0.83	-0.16	SANDS
38.84	107.59	0.89	0.8	-0.16	SANDS
38.9	110.12	0.86	0.77	-0.17	SANDS
38.97	111.05	0.95	0.83	-0.16	SANDS
39.03	111.98	1.03	0.9	-0.15	SANDS
39.1	112.92	1.07	0.93	-0.15	SANDS
39.16	113.85	1.12	0.96	-0.16	SANDS
39.23	114.79	1.15	0.98	-0.15	SANDS
39.29	116.16	1.17	0.99	-0.16	SANDS
39.36	116.36	1.2	1.02	-0.15	SANDS
39.43	116.8	1.24	1.04	-0.15	SANDS
39.49	117.67	1.25	1.04	-0.15	SANDS
39.56	119.2	1.27	1.05	-0.16	SANDS
39.62	120.36	1.28	1.06	-0.15	SANDS
39.69	121.09	1.3	1.08	-0.15	SANDS
39.75	121.15	1.32	1.11	-0.15	SANDS
39.82	121.09	1.33	1.12	-0.16	SANDS
39.88	120.33	1.34	1.13	-0.15	SANDS
39.95	119.33	1.32	1.12	-0.15	SANDS
40.02	118.34	1.3	1.11	-0.15	SANDS
40.08	117.35	1.29	1.1	-0.15	SANDS
40.15	117.41	1.29	1.11	-0.15	SANDS
40.21	117.22	1.3	1.11	-0.14	SANDS
40.28	117.44	1.3	1.12	-0.15	SANDS
40.34	117.22	1.31	1.13	-0.14	SANDS
40.41	116.71	1.32	1.14	-0.14	SANDS
40.48	116	1.35	1.16	-0.14	SANDS
40.54	115.62	1.37	1.17	-0.15	SANDS

US EPA ARCHIVE DOCUMENT

40.61	115.08	1.38	1.16	-0.13	SANDS
40.67	114.88	1.39	1.15	-0.14	SANDS
40.74	115.59	1.39	1.14	-0.13	SANDS
40.8	117.86	1.3	1.05	-0.14	SANDS
40.87	121.45	1.21	0.97	-0.13	SANDS
40.93	125.79	1.12	0.89	-0.13	SANDS
41	125.89	1.03	0.83	-0.13	SANDS
41.07	125.97	1.18	0.96	-0.13	SANDS
41.13	126.07	1.31	1.11	-0.12	SANDS
41.2	126.15	1.43	1.29	-0.13	SANDS
41.26	126.24	1.48	1.47	-0.12	SANDS
41.33	119.72	1.5	1.69	-0.12	SILTY SAND
41.39	110.56	1.6	2.09	-0.13	SILTY SAND
41.46	98.47	1.69	2.62	-0.13	SILTY SAND
41.52	83.59	1.72	3.18	-0.13	CLAYEY SANDY SILT&SILT
41.59	67.78	1.74	3.81	-0.13	CLAYEY SANDY SILT&SILT
41.66	54.79	1.76	4.4	-0.13	CLAYEY SILT&SILTY CLAYS
41.72	44.16	1.77	4.75	-0.14	CLAYEY SILT&SILTY CLAYS
41.79	38.05	1.77	4.84	-0.13	CLAYEY SILT&SILTY CLAYS
41.85	35.59	1.51	4.09	-0.14	CLAYEY SILT&SILTY CLAYS
41.92	33.73	1.53	4.12	-0.15	CLAYEY SILT&SILTY CLAYS
41.98	32.99	1.57	4.23	-0.15	CLAYEY SILT&SILTY CLAYS
42.05	39.1	1.66	4.46	-0.14	CLAYEY SILT&SILTY CLAYS
42.12	40.04	1.92	5.33	-0.14	CLAYEY SILT&SILTY CLAYS
42.18	40	2.14	6.27	-0.15	CLAYS
42.25	36.77	2.24	7.07	-0.15	CLAYS
42.31	33.63	2.33	7.87	-0.13	CLAYS
42.38	34.15	2.42	8.74	-0.14	CLAYS
42.44	31.87	2.31	9.1	-0.14	CLAYS
42.51	28.58	2.19	9.43	-0.13	CLAYS
42.57	25.44	2.07	9.65	-0.13	CLAYS
42.64	24.03	1.9	9.49	-0.13	CLAYS
42.71	22.21	1.77	9.47	-0.13	CLAYS
42.77	20.45	1.57	8.93	-0.14	CLAYS
42.84	18.82	1.37	8.25	-0.13	CLAYS
42.9	17.47	1.17	7.39	-0.13	CLAYS
42.97	16.85	0.97	6.32	-0.13	CLAYS
43.03	16.24	0.93	6.16	-0.15	CLAYS
43.1	15.62	0.87	5.8	-0.15	CLAYS
43.16	14.56	0.81	5.35	-0.14	CLAYS
43.23	14.24	0.74	4.72	-0.14	CLAYS
43.3	14.65	0.69	4.22	-0.15	CLAYEY SILT&SILTY CLAYS
43.36	15.2	0.63	3.66	-0.15	CLAYEY SILT&SILTY CLAYS
43.43	15.93	0.58	3.21	-0.15	CLAYEY SILT&SILTY CLAYS
43.49	16.7	0.58	3.05	-0.14	CLAYEY SILT&SILTY CLAYS
43.56	17.54	0.57	2.83	-0.14	CLAYEY SANDY SILT&SILT
43.62	18.43	0.57	2.66	-0.14	CLAYEY SANDY SILT&SILT
43.69	19.26	0.57	2.49	-0.14	CLAYEY SANDY SILT&SILT
43.76	20.54	0.7	2.95	-0.14	CLAYEY SANDY SILT&SILT
43.82	22.21	0.83	3.4	-0.15	CLAYEY SILT&SILTY CLAYS
43.89	23.55	0.97	3.87	-0.14	CLAYEY SILT&SILTY CLAYS
43.95	25.15	1.04	4.14	-0.14	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

44.02	26.14	1.15	4.62	-0.17	CLAYEY SILT&SILTY CLAYS
44.08	25.12	1.28	5.28	-0.16	CLAYS
44.15	24.89	1.42	5.99	-0.16	CLAYS
44.21	24.93	1.55	6.66	-0.17	CLAYS
44.28	24.48	1.64	7.09	-0.17	CLAYS
44.35	23.27	1.66	7.05	-0.17	CLAYS
44.41	22.4	1.57	6.44	-0.17	CLAYS
44.48	22.21	1.5	5.86	-0.17	CLAYS
44.54	22.37	1.47	5.49	-0.16	CLAYS
44.61	24.25	1.51	5.37	-0.16	CLAYS
44.67	26.66	1.56	5.38	-0.16	CLAYS
44.74	28.64	1.56	5.26	-0.17	CLAYS
44.8	29.5	1.62	5.43	-0.17	CLAYS
44.87	29.67	1.74	5.85	-0.17	CLAYS
44.94	29.86	1.86	6.3	-0.16	CLAYS
45	29.34	1.88	6.45	-0.17	CLAYS
45.07	30.62	1.87	6.52	-0.18	CLAYS
45.13	30.08	1.89	6.77	-0.18	CLAYS
45.2	28.9	1.91	7.02	-0.17	CLAYS
45.26	28.16	1.95	7.34	-0.18	CLAYS
45.33	27.71	1.91	7.36	-0.17	CLAYS
45.4	26.91	1.84	7.27	-0.17	CLAYS
45.46	25.92	1.77	7.18	-0.18	CLAYS
45.53	25.53	1.72	7.11	-0.17	CLAYS
45.59	25.35	1.62	6.92	-0.17	CLAYS
45.66	24.45	1.57	6.94	-0.17	CLAYS
45.72	23.94	1.55	7.03	-0.18	CLAYS
45.79	23.14	1.55	7.24	-0.17	CLAYS
45.85	22.4	1.68	8.1	-0.18	CLAYS
45.92	21.35	1.57	7.82	-0.17	CLAYS
45.99	20.48	1.6	8.17	-0.17	CLAYS
46.05	20.96	1.53	7.9	-0.17	CLAYS
46.12	20.22	1.43	7.21	-0.18	CLAYS
46.18	19.23	1.31	6.07	-0.18	CLAYS
46.25	18.21	1.21	5.12	-0.17	CLAYS
46.31	18.08	1.13	4.5	-0.18	CLAYEY SILT&SILTY CLAYS
46.38	19.17	1.17	4.53	-0.18	CLAYEY SILT&SILTY CLAYS
46.45	24.16	1.13	4.38	-0.18	CLAYEY SILT&SILTY CLAYS
46.51	30.94	1.18	4.78	-0.18	CLAYEY SILT&SILTY CLAYS
46.58	31.59	1.35	6.06	-0.17	CLAYS
46.64	27.17	1.41	7.15	-0.17	CLAYS
46.71	22.46	1.45	8.07	-0.17	CLAYS
46.77	18.98	1.47	8.66	-0.18	CLAYS
46.84	17.38	1.2	7.37	-0.18	CLAYS
46.9	16.54	1.15	7.21	-0.18	CLAYS
46.97	15.74	1.03	6.67	-0.18	CLAYS
47.04	16.7	0.91	6.01	-0.17	CLAYS
47.1	16.22	0.85	5.76	-0.18	CLAYS
47.17	15.33	0.79	5.52	-0.18	CLAYS
47.23	14.68	0.71	5.14	-0.18	CLAYS
47.3	14.11	0.69	5.04	-0.17	CLAYS
47.36	14.05	0.65	4.78	-0.18	CLAYS

US EPA ARCHIVE DOCUMENT

47.43	13.73	0.59	4.37	-0.17	CLAYS
47.49	13.5	0.54	4.07	-0.18	CLAYEY SILT&SILTY CLAYS
47.56	13.15	0.51	3.81	-0.17	CLAYEY SILT&SILTY CLAYS
47.63	13.37	0.5	3.68	-0.18	CLAYEY SILT&SILTY CLAYS
47.69	13.34	0.49	3.47	-0.18	CLAYEY SILT&SILTY CLAYS
47.76	13.37	0.48	3.29	-0.17	CLAYEY SILT&SILTY CLAYS
47.82	13.66	0.58	3.98	-0.18	CLAYEY SILT&SILTY CLAYS
47.89	13.79	0.56	3.81	-0.18	CLAYEY SILT&SILTY CLAYS
47.95	13.92	0.58	3.92	-0.18	CLAYEY SILT&SILTY CLAYS
48.02	16.13	0.6	4.1	-0.19	CLAYEY SILT&SILTY CLAYS
48.09	15.74	0.62	4.33	-0.17	CLAYEY SILT&SILTY CLAYS
48.15	14.81	0.64	4.57	-0.17	CLAYS
48.22	14.27	0.67	4.82	-0.18	CLAYS
48.28	13.79	0.69	4.91	-0.17	CLAYS
48.35	13.5	0.71	4.85	-0.17	CLAYS
48.41	13.63	0.68	4.48	-0.18	CLAYS
48.48	14.01	0.66	4.11	-0.18	CLAYEY SILT&SILTY CLAYS
48.54	14.56	0.67	4.01	-0.18	CLAYEY SILT&SILTY CLAYS
48.61	15.42	0.72	4.17	-0.18	CLAYEY SILT&SILTY CLAYS
48.68	16.29	0.8	4.38	-0.17	CLAYEY SILT&SILTY CLAYS
48.74	17.44	0.86	4.33	-0.18	CLAYEY SILT&SILTY CLAYS
48.81	18.18	0.92	4.21	-0.17	CLAYEY SILT&SILTY CLAYS
48.87	18.53	0.97	4.11	-0.17	CLAYEY SILT&SILTY CLAYS
48.94	18.05	1.03	3.99	-0.17	CLAYEY SILT&SILTY CLAYS
49	21.63	1.08	3.82	-0.18	CLAYEY SILT&SILTY CLAYS
49.07	25.22	1.26	4.08	-0.18	CLAYEY SILT&SILTY CLAYS
49.13	28.8	1.35	4.05	-0.17	CLAYEY SILT&SILTY CLAYS
49.2	29.73	1.39	3.93	-0.17	CLAYEY SILT&SILTY CLAYS
49.27	31.17	1.44	3.81	-0.16	CLAYEY SILT&SILTY CLAYS
49.33	33.57	1.46	3.63	-0.17	CLAYEY SILT&SILTY CLAYS
49.4	36.51	1.44	3.38	-0.17	CLAYEY SANDY SILT&SILT
49.46	39.4	1.52	3.4	-0.16	CLAYEY SANDY SILT&SILT
49.53	42.3	1.67	3.57	-0.16	CLAYEY SANDY SILT&SILT
49.59	44.48	1.79	3.73	-0.16	CLAYEY SANDY SILT&SILT
49.66	45.7	1.98	4.05	-0.16	CLAYEY SILT&SILTY CLAYS
49.73	47.3	2.27	4.53	-0.16	CLAYEY SILT&SILTY CLAYS
49.79	49.37	2.48	4.85	-0.16	CLAYEY SILT&SILTY CLAYS
49.86	50.98	3.16	6.14	-0.16	CLAYS
49.92	50.56	3.17	6.16	-0.16	CLAYS
49.99	49.67	3.33	6.46	-0.16	CLAYS
50.05	52.54	3.44	6.7	-0.15	CLAYS
50.12	52.99	3.42	6.77	-0.15	CLAYS
50.18	52.2	3.39	6.89	-0.15	CLAYS
50.25	51.01	3.37	7.06	-0.15	CLAYS
50.32	50.47	3.37	7.33	-0.16	CLAYS
50.38	48.73	3.31	7.51	-0.15	CLAYS
50.45	47.42	3.21	7.55	-0.16	CLAYS
50.51	45.28	3.1	7.51	-0.15	CLAYS
50.58	43.14	2.96	7.32	-0.16	CLAYS
50.64	40.93	2.81	7.03	-0.16	CLAYS
50.71	39.26	2.55	6.39	-0.15	CLAYS
50.77	39.36	2.5	6.22	-0.15	CLAYS

US EPA ARCHIVE DOCUMENT

50.84	39.52	2.45	6.08	-0.15	CLAYS
50.91	40.26	2.39	5.99	-0.15	CLAYS
50.97	40.47	2.34	5.95	-0.16	CLAYS
51.04	40.68	2.43	6.28	-0.15	CLAYS
51.1	40.88	2.45	6.45	-0.15	CLAYS
51.17	39.5	2.39	6.51	-0.14	CLAYS
51.23	38.11	2.42	6.72	-0.15	CLAYS
51.3	36.42	2.42	6.8	-0.14	CLAYS
51.37	36.57	2.26	6.39	-0.15	CLAYS
51.43	36	2.19	6.29	-0.16	CLAYS
51.5	34.27	2.23	6.51	-0.15	CLAYS
51.56	34.85	2.29	6.74	-0.14	CLAYS
51.63	35.65	2.31	6.84	-0.15	CLAYS
51.69	34.95	2.34	6.99	-0.15	CLAYS
51.76	33.63	2.36	7.16	-0.14	CLAYS
51.82	32.42	2.33	7.14	-0.15	CLAYS
51.89	32.32	2.42	7.45	-0.15	CLAYS
51.96	33.92	2.35	7.33	-0.14	CLAYS
52.02	33.44	2.26	7.2	-0.15	CLAYS
52.09	32.26	2.26	7.39	-0.15	CLAYS
52.15	31.71	2.23	7.58	-0.14	CLAYS
52.22	31.17	2.22	7.88	-0.14	CLAYS
52.28	30.21	2.2	8.25	-0.14	CLAYS
52.35	29.83	2.13	8.41	-0.15	CLAYS
52.41	28.09	2.1	8.66	-0.14	CLAYS
52.48	25.92	2.06	8.73	-0.14	CLAYS
52.55	23.52	1.98	8.46	-0.14	CLAYS
52.61	22.33	1.88	7.94	-0.14	CLAYS
52.68	22.4	1.7	6.93	-0.15	CLAYS
52.74	23.07	1.58	6.21	-0.15	CLAYS
52.81	24.03	1.27	4.95	-0.15	CLAYS
52.87	25.06	1.31	5.07	-0.15	CLAYS
52.94	24.86	1.34	5.16	-0.14	CLAYS
53.01	27.97	1.41	5.28	-0.15	CLAYS
53.07	27.3	1.55	5.48	-0.15	CLAYS
53.14	25.31	1.71	5.32	-0.15	CLAYS
53.2	24.19	1.74	4.49	-0.14	CLAYEY SILT&SILTY CLAYS
53.27	25.73	1.69	3.51	-0.14	CLAYEY SILT&SILTY CLAYS
53.33	29.57	1.69	2.85	-0.15	CLAYEY SANDY SILT&SILT
53.4	37.54	1.81	2.55	-0.14	CLAYEY SANDY SILT&SILT
53.46	50.66	1.92	2.34	-0.14	CLAYEY SANDY SILT&SILT
53.53	65.19	1.89	2.04	-0.13	SILTY SAND
53.6	80.19	1.98	1.92	-0.13	SILTY SAND
53.66	93.03	2.24	1.99	-0.13	SILTY SAND
53.73	99.01	2.54	2.08	-0.13	SILTY SAND
53.79	104.07	2.83	2.14	-0.13	SILTY SAND
53.86	114.05	2.86	2.01	-0.13	SILTY SAND
53.92	127.88	3.01	2	-0.12	SILTY SAND
53.99	137.92	3.11	2	-0.13	SILTY SAND
54.05	149.96	3.12	1.97	-0.15	SILTY SAND
54.12	160.52	3.03	1.92	-0.16	SANDS
54.19	164.2	2.89	1.86	-0.16	SANDS

US EPA ARCHIVE DOCUMENT

54.25	162.12	2.76	1.81	-0.16	SANDS
54.32	158.09	2.69	1.81	-0.16	SANDS
54.38	153.77	2.53	1.75	-0.16	SANDS
54.45	149.35	2.28	1.63	-0.16	SANDS
54.51	145.64	2.17	1.62	-0.17	SANDS
54.58	143.68	2.08	1.64	-0.17	SANDS
54.65	140.81	2.03	1.74	-0.17	SANDS
54.71	134.69	1.99	1.9	-0.18	SILTY SAND
54.78	126.02	1.98	2.15	-0.18	SILTY SAND
54.84	115.52	2.04	2.55	-0.19	SILTY SAND
54.91	100.23	2.15	3.14	-0.18	CLAYEY SANDY SILT&SILT
54.97	84.23	2.29	3.92	-0.18	CLAYEY SANDY SILT&SILT
55.04	69.41	2.44	4.84	-0.18	CLAYEY SILT&SILTY CLAYS
55.1	57.99	2.57	5.78	-0.19	CLAYS
55.17	51.33	2.54	6.35	-0.18	CLAYS
55.24	46.72	2.45	6.77	-0.19	CLAYS
55.3	40.8	2.35	7.17	-0.19	CLAYS
55.37	36.57	2.3	7.59	-0.19	CLAYS
55.43	33.47	2.26	8.04	-0.18	CLAYS
55.5	30.59	2.17	8.17	-0.18	CLAYS
55.56	28.64	2.03	8.04	-0.18	CLAYS
55.63	26.91	1.85	7.62	-0.18	CLAYS
55.69	25.19	1.67	6.93	-0.18	CLAYS
55.76	24.03	1.16	4.83	-0.18	CLAYEY SILT&SILTY CLAYS
55.83	23.61	1.08	4.51	-0.17	CLAYEY SILT&SILTY CLAYS
55.89	23.27	1.03	4.27	-0.17	CLAYEY SILT&SILTY CLAYS
55.96	22.72	1.01	4.17	-0.16	CLAYEY SILT&SILTY CLAYS
56.02	25.6	1.01	4.09	-0.15	CLAYEY SILT&SILTY CLAYS
56.09	24.89	0.98	3.96	-0.15	CLAYEY SILT&SILTY CLAYS
56.15	24.16	0.98	3.92	-0.15	CLAYEY SILT&SILTY CLAYS
56.22	23.97	0.98	3.8	-0.14	CLAYEY SILT&SILTY CLAYS
56.29	24.51	0.97	3.59	-0.14	CLAYEY SILT&SILTY CLAYS
56.35	25.02	0.96	3.37	-0.14	CLAYEY SILT&SILTY CLAYS
56.42	25.76	0.97	3.16	-0.14	CLAYEY SANDY SILT&SILT
56.48	27.14	0.96	2.88	-0.15	CLAYEY SANDY SILT&SILT
56.55	28.8	0.93	2.55	-0.15	CLAYEY SANDY SILT&SILT
56.61	31.01	0.92	2.28	-0.13	CLAYEY SANDY SILT&SILT
56.68	34.05	0.9	2.03	-0.14	CLAYEY SANDY SILT&SILT
56.74	37.47	0.94	1.96	-0.15	CLAYEY SANDY SILT&SILT
56.81	41.73	1.14	2.25	-0.14	CLAYEY SANDY SILT&SILT
56.88	46.56	1.48	2.85	-0.13	CLAYEY SANDY SILT&SILT
56.94	50.82	1.9	3.67	-0.14	CLAYEY SANDY SILT&SILT
57.01	56.23	2.23	4.47	-0.17	CLAYEY SILT&SILTY CLAYS
57.07	55.55	2.56	5.46	-0.17	CLAYEY SILT&SILTY CLAYS
57.14	53.47	2.88	6.52	-0.17	CLAYS
57.2	49.57	3.09	7.32	-0.17	CLAYS
57.27	44.06	3.16	7.52	-0.16	CLAYS
57.33	39.94	3.04	6.86	-0.17	CLAYS
57.4	38.82	2.91	5.92	-0.17	CLAYS
57.47	39.17	2.74	4.86	-0.17	CLAYEY SILT&SILTY CLAYS
57.53	42.05	2.72	4.15	-0.17	CLAYEY SILT&SILTY CLAYS
57.6	48.16	2.6	3.41	-0.16	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

57.66	57.79	2.34	2.69	-0.16	CLAYEY SANDY SILT&SILT
57.73	69.03	2.06	2.11	-0.16	SILTY SAND
57.79	82.08	1.84	1.72	-0.17	SILTY SAND
57.86	94.15	1.76	1.55	-0.16	SILTY SAND
57.93	105.99	1.68	1.41	-0.16	SANDS
57.99	112.16	1.6	1.32	-0.16	SANDS
58.06	121.25	1.49	1.23	-0.17	SANDS
58.12	124.9	1.44	1.2	-0.16	SANDS
58.19	125.35	1.47	1.25	-0.17	SANDS
58.25	123.4	1.54	1.35	-0.16	SANDS
58.32	119.94	1.62	1.46	-0.16	SANDS
58.38	116.16	1.69	1.59	-0.17	SANDS
58.45	112.29	1.72	1.69	-0.16	SILTY SAND
58.52	108.77	1.65	1.7	-0.18	SILTY SAND
58.58	105.41	1.64	1.77	-0.18	SILTY SAND
58.65	101.03	1.73	1.94	-0.18	SILTY SAND
58.71	95.55	1.83	2.11	-0.18	SILTY SAND
58.78	89.22	1.93	2.25	-0.18	SILTY SAND
58.84	84.48	2.03	2.37	-0.18	SILTY SAND
58.91	81.83	2.13	2.47	-0.18	SILTY SAND
58.97	81.44	2.26	2.6	-0.17	SILTY SAND
59.04	86.43	2.41	2.75	-0.17	SILTY SAND
59.11	91.43	2.5	2.82	-0.18	SILTY SAND
59.17	90.02	2.55	2.84	-0.18	SILTY SAND
59.24	87.53	2.75	2.98	-0.18	CLAYEY SANDY SILT&SILT
59.3	85.64	2.86	2.98	-0.19	CLAYEY SANDY SILT&SILT
59.37	85.89	2.68	2.66	-0.18	SILTY SAND
59.43	91.46	2.53	2.37	-0.19	SILTY SAND
59.5	97.6	2.44	2.16	-0.18	SILTY SAND
59.57	103.97	2.41	2.03	-0.19	SILTY SAND
59.63	109.89	2.37	1.92	-0.17	SILTY SAND
59.7	116.39	2.2	1.71	-0.19	SILTY SAND
59.76	122.53	1.91	1.44	-0.18	SANDS
59.83	127.84	1.75	1.27	-0.17	SANDS
59.89	132.13	1.67	1.18	-0.17	SANDS
59.96	132.71	1.64	1.12	-0.19	SANDS
60.02	138.34	1.6	1.06	-0.18	SANDS
60.09	142.92	1.58	1.01	-0.18	SANDS
60.16	147.88	1.58	0.98	-0.18	SANDS
60.22	154.05	1.62	0.98	-0.17	SANDS
60.29	159.75	1.68	1	-0.17	SANDS
60.35	164.93	1.75	1.03	-0.17	SANDS
60.42	168.49	1.83	1.08	-0.18	SANDS
60.48	170.66	1.92	1.14	-0.17	SANDS
60.55	171.66	2.01	1.2	-0.17	SANDS
60.61	170.73	2.1	1.27	-0.16	SANDS
60.68	168.87	2.16	1.31	-0.17	SANDS
60.75	166.89	2.04	1.26	-0.18	SANDS
60.81	164.36	1.92	1.19	-0.17	SANDS
60.88	162.34	1.8	1.12	-0.17	SANDS
60.94	161.45	1.69	1.05	-0.18	SANDS
61.01	160.55	1.75	1.09	-0.16	SANDS

US EPA ARCHIVE DOCUMENT

61.07	159.65	1.82	1.13	-0.16	SANDS
61.14	158.76	1.88	1.15	-0.16	SANDS
61.21	160.29	1.96	1.19	-0.16	SANDS
61.27	162.24	2.02	1.21	-0.16	SANDS
61.34	164.52	2.12	1.27	-0.16	SANDS
61.4	166.21	2.22	1.33	-0.16	SANDS
61.47	167.59	2.27	1.36	-0.16	SANDS
61.53	167.88	2.31	1.37	-0.16	SANDS
61.6	167.82	2.29	1.36	-0.15	SANDS
61.66	167.72	2.26	1.35	-0.16	SANDS
61.73	167.85	2.22	1.33	-0.16	SANDS
61.8	168.2	2.21	1.32	-0.16	SANDS
61.86	168.97	2.15	1.29	-0.17	SANDS
61.93	168.81	2.11	1.28	-0.16	SANDS
61.99	165.03	2.12	1.32	-0.15	SANDS
62.06	166.54	2.15	1.35	-0.15	SANDS
62.12	164.71	2.19	1.42	-0.16	SANDS
62.19	161.38	2.23	1.48	-0.15	SANDS
62.25	157.83	2.27	1.55	-0.15	SANDS
62.32	153.48	2.3	1.61	-0.16	SANDS
62.39	148.58	2.3	1.65	-0.15	SANDS
62.45	143.65	2.28	1.66	-0.16	SANDS
62.52	139.3	2.22	1.64	-0.16	SANDS
62.58	136.2	2.17	1.6	-0.16	SANDS
62.65	134.37	2.11	1.56	-0.15	SANDS
62.71	134.05	1.92	1.41	-0.16	SANDS
62.78	134.44	1.72	1.26	-0.15	SANDS
62.85	135.59	1.53	1.11	-0.15	SANDS
62.91	136.17	1.33	0.97	-0.16	SANDS
62.98	136.76	1.44	1.04	-0.15	SANDS
63.04	137.34	1.52	1.09	-0.15	SANDS
63.11	137.92	1.59	1.13	-0.15	SANDS
63.17	139.5	1.63	1.15	-0.15	SANDS
63.24	140.29	1.64	1.15	-0.15	SANDS
63.3	140.97	1.68	1.17	-0.15	SANDS
63.37	141.96	1.77	1.21	-0.14	SANDS
63.44	142.98	1.81	1.21	-0.14	SANDS
63.5	144.39	1.84	1.21	-0.14	SANDS
63.57	146.63	1.86	1.19	-0.15	SANDS
63.63	149.61	1.88	1.18	-0.16	SANDS
63.7	153.03	1.93	1.18	-0.15	SANDS
63.76	156.9	1.96	1.17	-0.14	SANDS
63.83	161.09	1.95	1.13	-0.15	SANDS
63.89	165.83	1.96	1.11	-0.15	SANDS
63.96	169.73	1.99	1.11	-0.14	SANDS
64.03	173.62	2.03	1.11	-0.14	SANDS
64.09	177.51	2.09	1.14	-0.14	SANDS
64.16	182.31	2.18	1.18	-0.14	SANDS
64.22	186.22	2.28	1.24	-0.15	SANDS
64.29	187.62	2.39	1.31	-0.14	SANDS
64.35	186.86	2.52	1.39	-0.14	SANDS
64.42	184.17	2.62	1.46	-0.14	SANDS

US EPA ARCHIVE DOCUMENT

64.49	180.71	2.71	1.5	-0.14	SANDS
64.55	178.15	2.76	1.52	-0.14	SANDS
64.62	177.8	2.8	1.52	-0.15	SANDS
64.68	178.73	2.83	1.5	-0.14	SANDS
64.75	181.26	2.86	1.48	-0.13	SANDS
64.81	185.06	2.87	1.45	-0.13	SANDS
64.88	190.22	2.87	1.42	-0.14	SANDS
64.94	196.23	2.88	1.4	-0.14	SANDS
65.01	200.81	2.89	1.39	-0.14	SANDS
65.08	205.38	2.91	1.39	-0.13	SANDS
65.14	209.96	2.94	1.41	-0.12	SANDS
65.21	211.91	3.02	1.45	-0.13	SANDS
65.27	212.17	3.1	1.5	-0.13	SANDS
65.34	210.25	3.19	1.57	-0.12	SANDS
65.4	207.02	3.27	1.62	-0.12	SANDS
65.47	203.91	3.32	1.67	-0.12	SANDS
65.53	202.15	3.35	1.72	-0.12	SANDS
65.6	201	3.36	1.75	-0.13	SANDS
65.67	198.25	3.33	1.77	-0.12	SANDS
65.73	194.47	3.19	1.73	-0.13	SANDS
65.8	189.38	3.06	1.69	-0.12	SANDS
65.86	184.9	2.93	1.64	-0.13	SANDS
65.93	181.84	2.79	1.58	-0.12	SANDS
65.99	178.77	2.66	1.52	-0.13	SANDS
66.06	175.71	2.62	1.51	-0.12	SANDS
66.13	172.64	2.6	1.5	-0.13	SANDS
66.19	173.77	2.57	1.49	-0.12	SANDS
66.26	174.73	2.54	1.49	-0.11	SANDS
66.32	174.86	2.53	1.5	-0.12	SANDS
66.39	173.67	2.58	1.55	-0.12	SANDS
66.45	171.66	2.59	1.59	-0.13	SANDS
66.52	168.39	2.6	1.62	-0.13	SANDS
66.58	164.49	2.62	1.66	-0.12	SANDS
66.65	160.87	2.6	1.69	-0.13	SANDS
66.72	157.96	2.6	1.73	-0.12	SANDS
66.78	156.1	2.48	1.7	-0.12	SANDS
66.85	154.38	2.48	1.77	-0.13	SANDS
66.91	151.65	2.39	1.8	-0.12	SANDS
66.98	142.31	2.33	1.89	-0.12	SILTY SAND
67.04	139.2	2.3	2.03	-0.14	SILTY SAND
67.11	130.88	2.24	2.22	-0.13	SILTY SAND
67.17	121	2.17	2.47	-0.12	SILTY SAND
67.24	109.92	2.14	2.86	-0.13	SILTY SAND
67.31	97.09	2.18	3.48	-0.14	CLAYEY SANDY SILT&SILT
67.37	81.47	2.17	4.19	-0.14	CLAYEY SANDY SILT&SILT
67.44	65.09	2.28	5.26	-0.14	CLAYEY SILT&SILTY CLAYS
67.5	51.26	2.4	6.34	-0.13	CLAYS
67.57	43.04	2.28	6.57	-0.14	CLAYS
67.63	37.02	1.94	5.75	-0.14	CLAYS
67.7	32.64	1.66	4.82	-0.13	CLAYEY SILT&SILTY CLAYS
67.77	30.94	1.57	4.39	-0.14	CLAYEY SILT&SILTY CLAYS
67.83	31.9	1.48	3.94	-0.15	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

67.9	32.64	1.76	4.43	-0.13	CLAYEY SILT&SILTY CLAYS
67.96	37.17	1.99	4.66	-0.09	CLAYEY SILT&SILTY CLAYS
68.03	41.69	2.12	4.56	-0.1	CLAYEY SILT&SILTY CLAYS
68.09	40.13	2.31	4.54	-0.1	CLAYEY SILT&SILTY CLAYS
68.16	41.35	2.41	4.25	-0.1	CLAYEY SILT&SILTY CLAYS
68.22	45.12	2.45	3.86	-0.11	CLAYEY SILT&SILTY CLAYS
68.29	50.85	2.18	3.11	-0.1	CLAYEY SANDY SILT&SILT
68.36	59.84	1.81	2.37	-0.1	SILTY SAND
68.42	68.23	1.53	1.87	-0.1	SILTY SAND
68.49	75.14	1.37	1.59	-0.11	SILTY SAND
68.55	80.93	1.28	1.43	-0.11	SILTY SAND
68.62	85.99	1.27	1.4	-0.12	SILTY SAND
68.68	89.32	1.15	1.25	-0.12	SANDS
68.75	91.59	1.03	1.11	-0.12	SANDS
68.81	92.93	0.91	0.98	-0.12	SANDS
68.88	93.7	0.78	0.85	-0.13	SANDS
68.95	93.04	0.66	0.72	-0.13	SANDS
69.01	92.39	0.75	0.82	-0.13	SANDS
69.08	91.73	0.82	0.89	-0.15	SANDS
69.14	91.07	0.9	0.98	-0.16	SANDS
69.21	92	0.98	1.06	-0.18	SANDS
69.27	92.13	1.06	1.14	-0.17	SANDS
69.34	92.61	1.17	1.25	-0.17	SANDS
69.41	92.83	1.28	1.36	-0.18	SANDS
69.47	93.15	1.35	1.44	-0.17	SILTY SAND
69.54	93.38	1.41	1.48	-0.17	SILTY SAND
69.6	93.79	1.44	1.5	-0.18	SILTY SAND
69.67	94.21	1.45	1.5	-0.18	SILTY SAND
69.73	94.85	1.45	1.48	-0.18	SILTY SAND
69.8	96.1	1.45	1.46	-0.18	SILTY SAND
69.86	97.6	1.4	1.39	-0.18	SANDS
69.93	98.92	1.37	1.34	-0.17	SANDS
70	98.92	1.35	1.31	-0.19	SANDS
70.06	101.73	1.35	1.29	-0.2	SANDS
70.13	102.92	1.35	1.28	-0.19	SANDS
70.19	104.23	1.38	1.29	-0.19	SANDS
70.26	105.09	1.41	1.3	-0.19	SANDS
70.32	106.4	1.44	1.31	-0.19	SANDS
70.39	107.65	1.47	1.32	-0.18	SANDS
70.45	108.99	1.48	1.31	-0.19	SANDS
70.52	110.37	1.5	1.3	-0.19	SANDS
70.59	111.88	1.51	1.29	-0.19	SANDS
70.65	113.7	1.51	1.27	-0.19	SANDS
70.72	115.75	1.52	1.26	-0.19	SANDS
70.78	117.77	1.55	1.27	-0.19	SANDS
70.85	119.91	1.53	1.23	-0.18	SANDS
70.91	122.12	1.5	1.19	-0.18	SANDS
70.98	123.11	1.48	1.16	-0.19	SANDS
71.05	124.13	1.48	1.15	-0.2	SANDS
71.11	126.85	1.49	1.15	-0.2	SANDS
71.18	128.71	1.51	1.15	-0.2	SANDS
71.24	129.89	1.52	1.16	-0.19	SANDS

US EPA ARCHIVE DOCUMENT

71.31	130.69	1.54	1.17	-0.19	SANDS
71.37	131.65	1.59	1.2	-0.19	SANDS
71.44	132.2	1.61	1.21	-0.19	SANDS
71.5	132.71	1.61	1.22	-0.19	SANDS
71.57	132.74	1.63	1.23	-0.19	SANDS
71.64	132.77	1.64	1.25	-0.2	SANDS
71.7	132.23	1.57	1.2	-0.19	SANDS
71.77	131.75	1.49	1.15	-0.19	SANDS
71.83	131.3	1.42	1.1	-0.19	SANDS
71.9	130.09	1.35	1.05	-0.2	SANDS
71.96	128.89	1.41	1.1	-0.19	SANDS
72.03	127.68	1.46	1.14	-0.2	SANDS
72.09	128.23	1.49	1.17	-0.19	SANDS
72.16	128.04	1.51	1.19	-0.2	SANDS
72.23	127.46	1.52	1.2	-0.19	SANDS
72.29	127.24	1.58	1.25	-0.19	SANDS
72.36	126.95	1.63	1.29	-0.19	SANDS
72.42	126.63	1.65	1.3	-0.19	SANDS
72.49	126.76	1.66	1.31	-0.2	SANDS
72.55	126.5	1.66	1.32	-0.2	SANDS
72.62	126.37	1.66	1.32	-0.19	SANDS
72.69	126.06	1.66	1.32	-0.19	SANDS
72.75	126.12	1.66	1.31	-0.19	SANDS
72.82	126.21	1.7	1.34	-0.2	SANDS
72.88	126.63	1.63	1.28	-0.2	SANDS
72.95	127.01	1.62	1.26	-0.19	SANDS
73.01	124.71	1.63	1.26	-0.2	SANDS
73.08	128.42	1.65	1.27	-0.19	SANDS
73.14	129.64	1.68	1.28	-0.2	SANDS
73.21	130.44	1.71	1.3	-0.19	SANDS
73.28	131.21	1.74	1.31	-0.19	SANDS
73.34	131.85	1.77	1.33	-0.19	SANDS
73.41	132.42	1.79	1.35	-0.2	SANDS
73.47	132.64	1.8	1.35	-0.19	SANDS
73.54	132.71	1.79	1.35	-0.19	SANDS
73.6	132.83	1.78	1.35	-0.19	SANDS
73.67	132.64	1.78	1.35	-0.19	SANDS
73.73	132.39	1.59	1.21	-0.19	SANDS
73.8	132.16	1.41	1.07	-0.2	SANDS
73.87	132.23	1.22	0.93	-0.2	SANDS
73.93	131.58	1.32	1.02	-0.19	SANDS
74	130.93	1.4	1.08	-0.19	SANDS
74.06	130.29	1.47	1.14	-0.19	SANDS
74.13	129.64	1.51	1.18	-0.19	SANDS
74.19	129.32	1.55	1.22	-0.19	SANDS
74.26	128.68	1.59	1.26	-0.2	SANDS
74.32	127.81	1.65	1.33	-0.2	SANDS
74.39	126.92	1.72	1.4	-0.2	SANDS
74.46	125.57	1.75	1.46	-0.19	SANDS
74.52	124.32	1.76	1.51	-0.19	SANDS
74.59	122.02	1.75	1.54	-0.19	SANDS
74.65	119.27	1.73	1.58	-0.2	SANDS

US EPA ARCHIVE DOCUMENT

74.72	115.78	1.71	1.62	-0.2	SILTY SAND
74.78	111.81	1.67	1.68	-0.19	SILTY SAND
74.85	108.1	1.58	1.74	-0.19	SILTY SAND
74.92	104.54	1.53	1.89	-0.19	SILTY SAND
74.98	97.47	1.61	2.3	-0.2	SILTY SAND
75.05	93.73	1.79	3.01	-0.2	CLAYEY SANDY SILT&SILT
75.11	80.96	1.97	4.03	-0.2	CLAYEY SANDY SILT&SILT
75.18	61.63	2.17	5.43	-0.2	CLAYEY SILT&SILTY CLAYS
75.24	47.23	2.33	6.85	-0.22	CLAYS
75.31	40.22	2.25	7.43	-0.22	CLAYS
75.37	34.24	2.12	7.63	-0.22	CLAYS
75.44	29.63	1.99	7.53	-0.22	CLAYS
75.51	26.75	1.82	7.06	-0.21	CLAYS
75.57	25.76	1.63	6.38	-0.21	CLAYS
75.64	25.12	1.4	5.47	-0.21	CLAYS
75.7	25.41	1.22	4.73	-0.21	CLAYEY SILT&SILTY CLAYS
75.77	25.6	1.05	4	-0.21	CLAYEY SILT&SILTY CLAYS
75.83	25.73	0.87	3.32	-0.21	CLAYEY SILT&SILTY CLAYS
75.9	25.99	0.89	3.45	-0.21	CLAYEY SILT&SILTY CLAYS
75.96	26.24	0.89	3.51	-0.2	CLAYEY SILT&SILTY CLAYS
76.03	26.5	0.94	3.84	-0.2	CLAYEY SILT&SILTY CLAYS
76.1	26.75	0.98	4.15	-0.19	CLAYEY SILT&SILTY CLAYS
76.16	25.31	1.01	4.43	-0.2	CLAYEY SILT&SILTY CLAYS
76.23	23.78	1.03	4.67	-0.2	CLAYEY SILT&SILTY CLAYS
76.29	22.69	1.03	4.74	-0.2	CLAYEY SILT&SILTY CLAYS
76.36	21.89	0.99	4.6	-0.2	CLAYEY SILT&SILTY CLAYS
76.42	21.69	0.97	4.49	-0.2	CLAYEY SILT&SILTY CLAYS
76.49	21.25	0.94	4.3	-0.19	CLAYEY SILT&SILTY CLAYS
76.56	21.31	0.9	4.01	-0.2	CLAYEY SILT&SILTY CLAYS
76.62	21.44	0.84	3.61	-0.2	CLAYEY SILT&SILTY CLAYS
76.69	21.99	0.78	3.17	-0.21	CLAYEY SILT&SILTY CLAYS
76.75	22.37	0.75	2.81	-0.19	CLAYEY SANDY SILT&SILT
76.82	23.27	0.83	2.94	-0.2	CLAYEY SANDY SILT&SILT
76.88	24.16	1.03	3.52	-0.2	CLAYEY SILT&SILTY CLAYS
76.95	25.66	1.22	4.05	-0.2	CLAYEY SILT&SILTY CLAYS
77.01	30.05	1.38	4.44	-0.2	CLAYEY SILT&SILTY CLAYS
77.08	34.43	1.53	4.76	-0.2	CLAYEY SILT&SILTY CLAYS
77.15	31.49	1.78	5.28	-0.19	CLAYS
77.21	29.25	2.08	5.47	-0.19	CLAYS
77.28	29.41	2.1	4.69	-0.19	CLAYEY SILT&SILTY CLAYS
77.34	31.62	2	3.75	-0.19	CLAYEY SILT&SILTY CLAYS
77.41	36.13	1.91	3.05	-0.2	CLAYEY SANDY SILT&SILT
77.47	44.52	1.78	2.49	-0.19	CLAYEY SANDY SILT&SILT
77.54	57.02	1.68	2.1	-0.19	SILTY SAND
77.6	70.85	1.67	1.93	-0.2	SILTY SAND
77.67	80.48	1.67	1.83	-0.19	SILTY SAND
77.74	86.5	1.67	1.75	-0.2	SILTY SAND
77.8	90.5	1.76	1.78	-0.19	SILTY SAND
77.87	93.83	1.85	1.8	-0.21	SILTY SAND
77.93	96.96	1.8	1.69	-0.21	SILTY SAND
78	99.14	1.77	1.6	-0.21	SILTY SAND
78.06	105.03	1.77	1.54	-0.23	SILTY SAND

US EPA ARCHIVE DOCUMENT

78.13	108.8	1.8	1.5	-0.24	SANDS
78.2	112.68	1.85	1.49	-0.25	SANDS
78.26	116.58	1.91	1.47	-0.25	SANDS
78.33	121.22	1.93	1.43	-0.25	SANDS
78.39	126.53	1.97	1.39	-0.25	SANDS
78.46	131.97	2	1.35	-0.25	SANDS
78.52	137.83	2.03	1.32	-0.25	SANDS
78.59	143.94	2.05	1.27	-0.25	SANDS
78.65	150.28	2.04	1.2	-0.25	SANDS
78.72	157.16	1.95	1.11	-0.24	SANDS
78.79	164.84	1.87	1.02	-0.24	SANDS
78.85	173.19	1.79	0.93	-0.24	SANDS
78.92	180.46	1.7	0.85	-0.25	SANDS
78.98	187.73	1.85	0.89	-0.25	SANDS
79.05	195.01	1.98	0.92	-0.25	SANDS
79.11	202.28	2.14	0.96	-0.24	SANDS
79.18	211.34	2.3	1	-0.23	SANDS
79.24	219.79	2.47	1.04	-0.22	SANDS
79.31	227.66	2.67	1.1	-0.23	SANDS
79.38	234.22	2.9	1.17	-0.22	SANDS
79.44	240.71	3.09	1.22	-0.22	SANDS
79.51	246.6	3.26	1.26	-0.22	SANDS
79.57	251.62	3.44	1.31	-0.21	SANDS
79.64	256.46	3.61	1.36	-0.21	SANDS
79.7	260.07	3.76	1.4	-0.2	SANDS
79.77	264.39	3.91	1.43	-0.2	SANDS
79.84	268.14	3.85	1.4	-0.21	SANDS
79.9	272.14	3.88	1.39	-0.22	SANDS
79.97	276.14	3.96	1.4	-0.21	SANDS
80.03	272.91	4.03	1.41	-0.19	SANDS
80.1	280.65	4.07	1.4	-0.19	SANDS
80.16	284.91	4.12	1.39	-0.18	SANDS
80.23	289.07	4.15	1.39	-0.19	SANDS
80.29	293.32	4.2	1.38	-0.18	SANDS
80.36	298.22	4.27	1.39	-0.19	SANDS
80.43	302.51	4.3	1.4	-0.18	SANDS
80.49	306.92	4.4	1.42	-0.18	SANDS
80.56	307.6	4.52	1.47	-0.19	SANDS
80.62	311.57	4.63	1.51	-0.18	SANDS
80.69	311.21	4.74	1.56	-0.18	SANDS
80.75	309.9	4.53	1.51	-0.18	SANDS
80.82	307.76	4.47	1.51	-0.18	SANDS
80.88	304.36	4.5	1.54	-0.19	SANDS
80.95	291.91	4.58	1.58	-0.15	SANDS
81.02	295.79	4.69	1.62	-0.15	SANDS
81.08	292.62	4.77	1.65	-0.14	SANDS
81.15	287.95	4.84	1.67	-0.15	SANDS
81.21	284.59	4.88	1.67	-0.15	SANDS
81.28	283.82	4.87	1.63	-0.14	SANDS
81.34	286.48	4.78	1.56	-0.15	SANDS
81.41	293.13	4.67	1.48	-0.15	SANDS
81.48	301.87	4.7	1.44	-0.14	SANDS

US EPA ARCHIVE DOCUMENT

81.54	308.84	4.8	1.42	-0.14	SANDS
81.61	318.73	4.97	1.42	-0.15	SANDS
81.67	329.87	5.12	1.42	-0.15	SANDS
81.74	342.86	4.88	1.32	-0.16	SANDS
81.8	355.47	4.65	1.22	-0.2	SANDS
81.87	369.58	4.42	1.13	-0.2	SANDS
81.93	378.23	4.18	1.04	-0.18	SANDS
82	386.86	3.95	0.96	-0.14	SANDS
82.07	395.51	4.21	0.99	-0.11	SANDS
82.13	404.15	4.38	1	-0.12	SANDS
82.2	412.79	4.44	0.99	-0.12	SANDS
82.26	429.72	4.53	0.99	-0.11	SANDS
82.33	445.75	4.6	1	-0.11	SANDS
82.39	458.13	4.8	1.03	-0.11	SANDS
82.46	464.56	5.15	1.09	-0.12	SANDS
82.52	466.77	5.42	1.14	-0.11	SANDS
82.59	468.37	5.7	1.19	-0.11	SANDS
82.66	470.35	6.18	1.29	-0.12	SANDS
82.72	473.2	6.43	1.34	-0.11	SANDS
82.79	482.52	6.68	1.39	-0.11	SANDS
82.85	489.3	6.92	1.43	-0.11	SANDS
82.92	482.74	7.17	1.47	-0.12	SANDS
82.98	476.18	7.1	1.44	-0.09	SANDS
83.05	469.62	6.97	1.39	-0.08	SANDS
83.12	488.85	6.99	1.37	-0.08	SANDS
83.18	499.41	6.98	1.35	-0.08	SANDS
83.25	507.25	6.91	1.33	-0.08	SANDS
83.31	510.93	6.83	1.3	-0.08	SANDS
83.38	521.75	6.76	1.28	-0.09	SANDS
83.44	524.62	6.68	1.26	-0.08	SANDS
83.51	527.49	6.8	1.27	-0.07	SANDS
83.57	530.36	6.92	1.27	-0.08	SANDS
83.64	533.23	6.89	1.25	-0.08	SANDS
83.71	536.1	6.86	1.23	-0.08	SANDS
83.77	538.97	6.98	1.24	-0.08	SANDS
83.84	558.41	6.96	1.28	-0.07	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-15-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 03

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0	0	CLAYS
0.13	0	0	0.01	0	CLAYS
0.2	0	1.51	4.62	0	CLAYS
0.26	0.1	3.02	7.75	-0.01	CLAYS
0.33	41.78	4.53	9.9	-0.02	CLAYS
0.39	83.46	6.03	10	0	CLAYS
0.46	34.24	6.76	10	-0.02	CLAYS
0.52	36.61	7.29	10	-0.02	CLAYS
0.59	37.41	7.63	10	-0.02	CLAYS
0.66	40.93	7.78	10	-0.02	CLAYS
0.72	44.42	5.1	8.09	-0.02	CLAYS
0.79	47.94	1.18	1.67	-0.02	SILTY SAND
0.85	53.99	1.05	1.33	-0.02	SILTY SAND
0.92	66.56	0.75	0.88	-0.02	SANDS
0.98	80.26	0.6	0.67	-0.01	SANDS
1.05	85.09	0.8	0.88	-0.01	SANDS
1.12	91.68	1.03	1.12	-0.02	SANDS
1.18	93.93	1.2	1.31	-0.02	SANDS
1.25	93.54	1.36	1.49	-0.02	SILTY SAND
1.31	90.98	1.53	1.68	-0.02	SILTY SAND
1.38	90.76	1.52	1.67	-0.02	SILTY SAND
1.44	90.37	1.8	1.96	-0.02	SILTY SAND
1.51	91.01	1.93	2.1	-0.03	SILTY SAND
1.57	91.85	1.97	2.14	-0.02	SILTY SAND
1.64	91.91	2.13	2.33	-0.02	SILTY SAND
1.71	93.44	2.15	2.37	-0.02	SILTY SAND
1.77	92.52	2.17	2.41	-0.02	SILTY SAND
1.84	91.3	1.97	2.21	-0.03	SILTY SAND
1.9	90.66	1.81	2.05	-0.02	SILTY SAND
1.97	88.68	1.68	1.93	-0.02	SILTY SAND
2.03	88.32	1.61	1.87	-0.02	SILTY SAND
2.1	88.07	1.52	1.8	-0.02	SILTY SAND
2.16	88	1.38	1.65	-0.02	SILTY SAND
2.23	85.79	1.3	1.56	-0.02	SILTY SAND
2.3	83.11	1.21	1.48	-0.02	SILTY SAND
2.36	81.73	1.16	1.41	-0.02	SILTY SAND
2.43	81.64	1.08	1.32	-0.02	SILTY SAND
2.49	83.05	1.02	1.24	-0.03	SANDS
2.56	82.56	0.97	1.18	-0.02	SANDS
2.62	81.99	0.93	1.12	-0.02	SANDS
2.69	81.67	0.92	1.1	-0.02	SANDS
2.76	81.28	0.94	1.08	-0.02	SANDS
2.82	82.41	0.73	0.81	-0.02	SANDS
2.89	83.91	0.72	0.77	-0.02	SANDS
2.95	87.2	0.77	0.8	-0.03	SANDS
3.02	88.48	0.89	0.89	-0.03	SANDS

US EPA ARCHIVE DOCUMENT

3.08	95.62	1.08	1.05	-0.03	SANDS
3.15	101.28	1.3	1.25	-0.03	SANDS
3.21	104.26	1.61	1.55	-0.04	SILTY SAND
3.28	104.84	1.9	1.84	-0.04	SILTY SAND
3.35	104.93	2.18	2.13	-0.04	SILTY SAND
3.41	104.48	2.41	2.38	-0.03	SILTY SAND
3.48	103.36	2.58	2.57	-0.04	SILTY SAND
3.54	101.64	2.71	2.71	-0.03	SILTY SAND
3.61	100.42	2.8	2.81	-0.04	SILTY SAND
3.67	99.24	2.85	2.88	-0.04	SILTY SAND
3.74	98.76	2.9	2.96	-0.04	SILTY SAND
3.8	99.24	2.94	3.03	-0.04	CLAYEY SANDY SILT&SILT
3.87	99.78	3.04	3.17	-0.04	CLAYEY SANDY SILT&SILT
3.94	99.69	2.99	3.15	-0.05	CLAYEY SANDY SILT&SILT
4	97.19	2.94	3.13	-0.04	CLAYEY SANDY SILT&SILT
4.07	92.77	2.9	3.13	-0.03	CLAYEY SANDY SILT&SILT
4.13	92.93	2.9	3.14	-0.04	CLAYEY SANDY SILT&SILT
4.2	93.44	2.94	3.21	-0.04	CLAYEY SANDY SILT&SILT
4.26	93.76	2.94	3.25	-0.04	CLAYEY SANDY SILT&SILT
4.33	92.52	2.96	3.31	-0.03	CLAYEY SANDY SILT&SILT
4.4	91.52	2.98	3.37	-0.03	CLAYEY SANDY SILT&SILT
4.46	89.89	2.98	3.4	-0.04	CLAYEY SANDY SILT&SILT
4.53	88.45	2.99	3.44	-0.03	CLAYEY SANDY SILT&SILT
4.59	87.43	3	3.44	-0.04	CLAYEY SANDY SILT&SILT
4.66	86.79	2.98	3.43	-0.03	CLAYEY SANDY SILT&SILT
4.72	86.79	2.94	3.4	-0.04	CLAYEY SANDY SILT&SILT
4.79	86.63	2.85	3.3	-0.04	CLAYEY SANDY SILT&SILT
4.85	86.95	2.76	3.21	-0.04	CLAYEY SANDY SILT&SILT
4.92	87.91	2.67	3.12	-0.04	CLAYEY SANDY SILT&SILT
4.99	86.52	2.58	3.03	-0.04	CLAYEY SANDY SILT&SILT
5.05	85.12	2.56	3.02	-0.04	CLAYEY SANDY SILT&SILT
5.12	85.32	2.56	3.03	-0.04	CLAYEY SANDY SILT&SILT
5.18	84.64	2.54	3.03	-0.05	CLAYEY SANDY SILT&SILT
5.25	84.36	2.54	3.03	-0.04	CLAYEY SANDY SILT&SILT
5.31	83.94	2.59	3.1	-0.04	CLAYEY SANDY SILT&SILT
5.38	84.13	2.64	3.16	-0.04	CLAYEY SANDY SILT&SILT
5.44	83.62	2.65	3.18	-0.04	CLAYEY SANDY SILT&SILT
5.51	83.08	2.66	3.19	-0.04	CLAYEY SANDY SILT&SILT
5.58	82.85	2.66	3.2	-0.04	CLAYEY SANDY SILT&SILT
5.64	83.27	2.69	3.24	-0.05	CLAYEY SANDY SILT&SILT
5.71	83.91	2.71	3.29	-0.05	CLAYEY SANDY SILT&SILT
5.77	83.87	2.68	3.28	-0.04	CLAYEY SANDY SILT&SILT
5.84	82.92	2.7	3.32	-0.04	CLAYEY SANDY SILT&SILT
5.9	82.37	2.59	3.21	-0.04	CLAYEY SANDY SILT&SILT
5.97	81.54	2.54	3.14	-0.04	CLAYEY SANDY SILT&SILT
6.04	79.43	2.46	3.06	-0.04	CLAYEY SANDY SILT&SILT
6.1	80.03	2.41	2.99	-0.05	CLAYEY SANDY SILT&SILT
6.17	80.77	2.38	2.96	-0.05	CLAYEY SANDY SILT&SILT
6.23	81.09	2.39	2.98	-0.04	CLAYEY SANDY SILT&SILT
6.3	81.51	2.4	3.01	-0.05	CLAYEY SANDY SILT&SILT
6.36	80.8	2.45	3.09	-0.04	CLAYEY SANDY SILT&SILT
6.43	80.07	2.47	3.13	-0.05	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

6.49	79.36	2.48	3.14	-0.04	CLAYEY SANDY SILT&SILT
6.56	79.04	2.5	3.14	-0.05	CLAYEY SANDY SILT&SILT
6.63	78.6	2.52	3.15	-0.04	CLAYEY SANDY SILT&SILT
6.69	78.85	2.54	3.16	-0.05	CLAYEY SANDY SILT&SILT
6.76	78.98	2.53	3.15	-0.05	CLAYEY SANDY SILT&SILT
6.82	79.52	2.32	2.92	-0.05	CLAYEY SANDY SILT&SILT
6.89	81.35	2.3	2.94	-0.05	CLAYEY SANDY SILT&SILT
6.95	82.85	2.3	3.04	-0.06	CLAYEY SANDY SILT&SILT
7.02	80.42	2.29	3.14	-0.06	CLAYEY SANDY SILT&SILT
7.08	78.6	2.27	3.23	-0.06	CLAYEY SANDY SILT&SILT
7.15	74.63	2.24	3.31	-0.06	CLAYEY SANDY SILT&SILT
7.22	70.79	2.23	3.37	-0.05	CLAYEY SANDY SILT&SILT
7.28	67.49	2.19	3.37	-0.05	CLAYEY SANDY SILT&SILT
7.35	65.38	2.18	3.39	-0.05	CLAYEY SANDY SILT&SILT
7.41	64.48	2.12	3.34	-0.05	CLAYEY SANDY SILT&SILT
7.48	64.58	2.06	3.26	-0.05	CLAYEY SANDY SILT&SILT
7.54	64.16	2	3.22	-0.05	CLAYEY SANDY SILT&SILT
7.61	63.65	1.96	3.21	-0.04	CLAYEY SANDY SILT&SILT
7.68	63.11	1.96	3.26	-0.05	CLAYEY SANDY SILT&SILT
7.74	61.89	1.94	3.29	-0.04	CLAYEY SANDY SILT&SILT
7.81	60.52	1.88	3.23	-0.04	CLAYEY SANDY SILT&SILT
7.87	59.24	1.89	3.28	-0.04	CLAYEY SANDY SILT&SILT
7.94	58.05	1.76	3.06	-0.05	CLAYEY SANDY SILT&SILT
8	57.41	1.67	2.88	-0.06	CLAYEY SANDY SILT&SILT
8.07	56.32	1.57	2.7	-0.06	CLAYEY SANDY SILT&SILT
8.13	57.19	1.5	2.52	-0.06	CLAYEY SANDY SILT&SILT
8.2	57.7	1.48	2.47	-0.05	CLAYEY SANDY SILT&SILT
8.27	58.69	1.51	2.5	-0.05	CLAYEY SANDY SILT&SILT
8.33	59.75	1.57	2.59	-0.05	CLAYEY SANDY SILT&SILT
8.4	60.74	1.64	2.71	-0.05	CLAYEY SANDY SILT&SILT
8.46	61.7	1.71	2.85	-0.05	CLAYEY SANDY SILT&SILT
8.53	61.76	1.76	2.96	-0.05	CLAYEY SANDY SILT&SILT
8.59	60.96	1.79	3.04	-0.06	CLAYEY SANDY SILT&SILT
8.66	59.68	1.8	3.09	-0.05	CLAYEY SANDY SILT&SILT
8.72	58.85	1.79	3.09	-0.06	CLAYEY SANDY SILT&SILT
8.79	58.43	1.75	3.05	-0.05	CLAYEY SANDY SILT&SILT
8.86	57.83	1.8	3.15	-0.05	CLAYEY SANDY SILT&SILT
8.92	57.7	1.72	3.03	-0.06	CLAYEY SANDY SILT&SILT
8.99	57.73	1.66	2.95	-0.05	CLAYEY SANDY SILT&SILT
9.05	57.02	1.63	2.94	-0.06	CLAYEY SANDY SILT&SILT
9.12	56.74	1.59	2.9	-0.07	CLAYEY SANDY SILT&SILT
9.18	55.97	1.55	2.88	-0.07	CLAYEY SANDY SILT&SILT
9.25	55.11	1.52	2.86	-0.06	CLAYEY SANDY SILT&SILT
9.32	54.5	1.51	2.86	-0.07	CLAYEY SANDY SILT&SILT
9.38	53.38	1.5	2.85	-0.06	CLAYEY SANDY SILT&SILT
9.45	52.39	1.48	2.79	-0.06	CLAYEY SANDY SILT&SILT
9.51	52.1	1.46	2.72	-0.06	CLAYEY SANDY SILT&SILT
9.58	52.1	1.44	2.65	-0.07	CLAYEY SANDY SILT&SILT
9.64	52.93	1.44	2.62	-0.07	CLAYEY SANDY SILT&SILT
9.71	54.08	1.43	2.62	-0.07	CLAYEY SANDY SILT&SILT
9.77	55.23	1.45	2.67	-0.06	CLAYEY SANDY SILT&SILT
9.84	56.04	1.36	2.54	-0.06	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

9.91	55.94	1.38	2.62	-0.07	CLAYEY SANDY SILT&SILT
9.97	54.88	1.39	2.69	-0.07	CLAYEY SANDY SILT&SILT
10.04	52.48	1.41	2.76	-0.08	CLAYEY SANDY SILT&SILT
10.1	51.49	1.39	2.74	-0.08	CLAYEY SANDY SILT&SILT
10.17	50.82	1.36	2.68	-0.08	CLAYEY SANDY SILT&SILT
10.23	50.34	1.32	2.6	-0.09	CLAYEY SANDY SILT&SILT
10.3	50.12	1.29	2.54	-0.08	CLAYEY SANDY SILT&SILT
10.36	50.31	1.32	2.61	-0.08	CLAYEY SANDY SILT&SILT
10.43	50.79	1.37	2.72	-0.08	CLAYEY SANDY SILT&SILT
10.5	51.49	1.41	2.83	-0.09	CLAYEY SANDY SILT&SILT
10.56	51.36	1.43	2.94	-0.09	CLAYEY SANDY SILT&SILT
10.63	50.28	1.45	3.05	-0.09	CLAYEY SANDY SILT&SILT
10.69	49	1.49	3.22	-0.08	CLAYEY SANDY SILT&SILT
10.76	48.48	1.53	3.37	-0.09	CLAYEY SANDY SILT&SILT
10.82	47.62	1.55	3.51	-0.08	CLAYEY SANDY SILT&SILT
10.89	46.18	1.46	3.37	-0.09	CLAYEY SANDY SILT&SILT
10.96	44.36	1.38	3.24	-0.08	CLAYEY SANDY SILT&SILT
11.02	42.66	1.32	3.14	-0.1	CLAYEY SANDY SILT&SILT
11.09	42.47	1.27	3.04	-0.1	CLAYEY SANDY SILT&SILT
11.15	42.18	1.21	2.93	-0.09	CLAYEY SANDY SILT&SILT
11.22	41.83	1.16	2.84	-0.1	CLAYEY SANDY SILT&SILT
11.28	41.47	1.11	2.73	-0.1	CLAYEY SANDY SILT&SILT
11.35	41.19	1.12	2.72	-0.1	CLAYEY SANDY SILT&SILT
11.41	40.9	1.12	2.71	-0.1	CLAYEY SANDY SILT&SILT
11.48	40.48	1.11	2.65	-0.11	CLAYEY SANDY SILT&SILT
11.55	40.13	1.12	2.65	-0.11	CLAYEY SANDY SILT&SILT
11.61	41.19	1.16	2.73	-0.11	CLAYEY SANDY SILT&SILT
11.68	43.04	1.2	2.85	-0.11	CLAYEY SANDY SILT&SILT
11.74	43.55	1.26	3.02	-0.11	CLAYEY SANDY SILT&SILT
11.81	43.17	1.27	3.11	-0.11	CLAYEY SANDY SILT&SILT
11.87	42.72	1.32	3.3	-0.11	CLAYEY SANDY SILT&SILT
11.94	42.05	1.33	3.38	-0.11	CLAYEY SANDY SILT&SILT
12	38.63	1.32	3.45	-0.11	CLAYEY SANDY SILT&SILT
12.07	39.91	1.28	3.41	-0.15	CLAYEY SANDY SILT&SILT
12.14	39.14	1.25	3.41	-0.14	CLAYEY SANDY SILT&SILT
12.2	38.34	1.23	3.41	-0.13	CLAYEY SANDY SILT&SILT
12.27	37.25	1.19	3.36	-0.13	CLAYEY SANDY SILT&SILT
12.33	36.16	1.15	3.27	-0.13	CLAYEY SANDY SILT&SILT
12.4	35.1	1.12	3.2	-0.14	CLAYEY SANDY SILT&SILT
12.46	34.46	1.08	3.1	-0.14	CLAYEY SANDY SILT&SILT
12.53	34.46	1.07	3.07	-0.14	CLAYEY SANDY SILT&SILT
12.6	35.01	1.07	3.05	-0.14	CLAYEY SANDY SILT&SILT
12.66	35.17	1.06	3.02	-0.13	CLAYEY SANDY SILT&SILT
12.73	35.14	1.05	3	-0.13	CLAYEY SANDY SILT&SILT
12.79	35.04	1.03	2.93	-0.13	CLAYEY SANDY SILT&SILT
12.86	35.36	0.95	2.72	-0.15	CLAYEY SANDY SILT&SILT
12.92	35.36	0.95	2.74	-0.15	CLAYEY SANDY SILT&SILT
12.99	35.14	0.95	2.74	-0.13	CLAYEY SANDY SILT&SILT
13.05	34.4	0.92	2.66	-0.15	CLAYEY SANDY SILT&SILT
13.12	34.75	0.91	2.62	-0.16	CLAYEY SANDY SILT&SILT
13.19	34.59	0.92	2.66	-0.16	CLAYEY SANDY SILT&SILT
13.25	34.69	0.95	2.77	-0.16	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

13.32	34.79	0.99	2.88	-0.14	CLAYEY SANDY SILT&SILT
13.38	34.59	1.01	2.99	-0.15	CLAYEY SANDY SILT&SILT
13.45	34.15	1.05	3.14	-0.15	CLAYEY SANDY SILT&SILT
13.51	34.21	1.07	3.28	-0.16	CLAYEY SANDY SILT&SILT
13.58	34.12	1.1	3.44	-0.16	CLAYEY SANDY SILT&SILT
13.64	33.57	1.14	3.65	-0.17	CLAYEY SILT&SILTY CLAYS
13.71	32.67	1.18	3.9	-0.17	CLAYEY SILT&SILTY CLAYS
13.78	31.59	1.24	4.22	-0.16	CLAYEY SILT&SILTY CLAYS
13.84	30.56	1.31	4.55	-0.15	CLAYEY SILT&SILTY CLAYS
13.91	29.86	1.33	4.75	-0.16	CLAYEY SILT&SILTY CLAYS
13.97	28.99	1.4	5.06	-0.16	CLAYS
14.04	28.16	1.46	5.35	-0.14	CLAYS
14.1	27.62	1.47	5.36	-0.13	CLAYS
14.17	27.07	1.45	5.23	-0.12	CLAYS
14.24	26.75	1.42	5.05	-0.12	CLAYS
14.3	26.95	1.37	4.78	-0.12	CLAYEY SILT&SILTY CLAYS
14.37	27.55	1.34	4.55	-0.12	CLAYEY SILT&SILTY CLAYS
14.43	28.22	1.31	4.32	-0.12	CLAYEY SILT&SILTY CLAYS
14.5	29.28	1.23	3.98	-0.18	CLAYEY SILT&SILTY CLAYS
14.56	30.05	1.19	3.77	-0.2	CLAYEY SILT&SILTY CLAYS
14.63	30.5	1.14	3.58	-0.17	CLAYEY SILT&SILTY CLAYS
14.69	31.2	1.08	3.35	-0.17	CLAYEY SANDY SILT&SILT
14.76	32.13	1.04	3.23	-0.19	CLAYEY SANDY SILT&SILT
14.83	32.58	0.94	2.93	-0.19	CLAYEY SANDY SILT&SILT
14.89	32.9	0.92	2.9	-0.19	CLAYEY SANDY SILT&SILT
14.96	32.51	0.91	2.93	-0.18	CLAYEY SANDY SILT&SILT
15.02	31.46	0.91	2.97	-0.2	CLAYEY SANDY SILT&SILT
15.09	31.3	0.89	2.96	-0.2	CLAYEY SANDY SILT&SILT
15.15	30.88	0.91	3.08	-0.21	CLAYEY SANDY SILT&SILT
15.22	30.27	0.98	3.34	-0.22	CLAYEY SANDY SILT&SILT
15.28	29.79	1.09	3.73	-0.2	CLAYEY SILT&SILTY CLAYS
15.35	29.28	1.16	4	-0.18	CLAYEY SILT&SILTY CLAYS
15.42	28.8	1.19	4.12	-0.17	CLAYEY SILT&SILTY CLAYS
15.48	28.7	1.2	4.17	-0.16	CLAYEY SILT&SILTY CLAYS
15.55	29.03	1.24	4.38	-0.16	CLAYEY SILT&SILTY CLAYS
15.61	29.1	1.3	4.66	-0.16	CLAYEY SILT&SILTY CLAYS
15.68	29.19	1.35	4.96	-0.21	CLAYEY SILT&SILTY CLAYS
15.74	28.58	1.39	5.23	-0.23	CLAYS
15.81	27.59	1.4	5.45	-0.22	CLAYS
15.88	26.88	1.38	5.51	-0.23	CLAYS
15.94	25.92	1.35	5.58	-0.22	CLAYS
16.01	25.09	1.34	5.76	-0.21	CLAYS
16.07	24.99	1.35	5.97	-0.22	CLAYS
16.14	24.22	1.32	6.03	-0.22	CLAYS
16.2	23.01	1.31	6.11	-0.22	CLAYS
16.27	21.89	1.28	6.04	-0.23	CLAYS
16.33	20.83	1.27	5.99	-0.23	CLAYS
16.4	20.51	1.28	5.96	-0.24	CLAYS
16.47	21.06	1.3	5.97	-0.24	CLAYS
16.53	21.25	1.32	6.01	-0.23	CLAYS
16.6	21.69	1.35	6.03	-0.24	CLAYS
16.66	21.99	1.35	5.95	-0.23	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	22.05	1.35	5.77	-0.23	CLAYS
16.79	22.33	1.38	5.7	-0.24	CLAYS
16.86	22.66	1.17	4.67	-0.23	CLAYEY SILT&SILTY CLAYS
16.92	23.36	1.15	4.46	-0.23	CLAYEY SILT&SILTY CLAYS
16.99	23.78	1.17	4.4	-0.23	CLAYEY SILT&SILTY CLAYS
17.06	25.8	1.2	4.39	-0.25	CLAYEY SILT&SILTY CLAYS
17.12	27.11	1.24	4.45	-0.25	CLAYEY SILT&SILTY CLAYS
17.19	27.49	1.27	4.53	-0.24	CLAYEY SILT&SILTY CLAYS
17.25	27.81	1.28	4.56	-0.25	CLAYEY SILT&SILTY CLAYS
17.32	27.87	1.28	4.6	-0.24	CLAYEY SILT&SILTY CLAYS
17.38	28.16	1.31	4.75	-0.24	CLAYEY SILT&SILTY CLAYS
17.45	28.39	1.35	5.03	-0.25	CLAYS
17.52	28.35	1.4	5.37	-0.26	CLAYS
17.58	27.78	1.46	5.79	-0.26	CLAYS
17.65	26.72	1.47	6.05	-0.26	CLAYS
17.71	25.57	1.49	6.19	-0.26	CLAYS
17.78	24.29	1.53	6.33	-0.26	CLAYS
17.84	23.52	1.37	5.61	-0.25	CLAYS
17.91	23.24	1.33	5.31	-0.25	CLAYS
17.97	22.91	1.31	5.12	-0.25	CLAYS
18.04	25.12	1.31	5.04	-0.26	CLAYS
18.11	26.02	1.33	5.08	-0.26	CLAYS
18.17	26.27	1.38	5.22	-0.26	CLAYS
18.24	26.4	1.4	5.26	-0.26	CLAYS
18.3	26.3	1.44	5.38	-0.26	CLAYS
18.37	26.08	1.48	5.52	-0.26	CLAYS
18.43	26.3	1.47	5.56	-0.26	CLAYS
18.5	27.17	1.46	5.71	-0.26	CLAYS
18.56	27.84	1.45	5.98	-0.26	CLAYS
18.63	27.36	1.44	6.39	-0.25	CLAYS
18.7	25.83	1.47	6.9	-0.25	CLAYS
18.76	23.61	1.38	6.9	-0.25	CLAYS
18.83	21.41	1.3	6.85	-0.25	CLAYS
18.89	19.55	1.28	7.08	-0.25	CLAYS
18.96	17.76	1.27	7.24	-0.25	CLAYS
19.02	19.43	1.24	7.23	-0.25	CLAYS
19.09	18.59	1.21	7.35	-0.25	CLAYS
19.16	17.25	1.2	7.42	-0.26	CLAYS
19.22	16.29	1.16	7.21	-0.25	CLAYS
19.29	15.78	1.1	6.79	-0.25	CLAYS
19.35	15.49	1.06	6.48	-0.25	CLAYS
19.42	15.68	1.03	6.25	-0.25	CLAYS
19.48	16.26	1.01	6.11	-0.25	CLAYS
19.55	16.87	1.04	6.21	-0.25	CLAYS
19.61	16.93	1	6.01	-0.25	CLAYS
19.68	16.51	1.03	6.29	-0.25	CLAYS
19.75	16.23	1.06	6.47	-0.25	CLAYS
19.81	16.83	0.99	6.06	-0.25	CLAYS
19.88	16.93	0.93	5.75	-0.25	CLAYS
19.94	16.58	0.87	5.42	-0.25	CLAYS
20.01	15.59	0.94	5.98	-0.25	CLAYS
20.07	16.05	1.01	6.4	-0.27	CLAYS

US EPA ARCHIVE DOCUMENT

20.14	16.51	1.07	6.82	-0.26	CLAYS
20.2	15.46	1.09	6.97	-0.26	CLAYS
20.27	15.65	1.04	6.55	-0.26	CLAYS
20.34	15.49	0.97	5.98	-0.26	CLAYS
20.4	15.17	0.9	5.43	-0.26	CLAYS
20.47	15.46	0.88	5.19	-0.26	CLAYS
20.53	16.23	0.9	5.17	-0.25	CLAYS
20.6	17.09	0.91	5.2	-0.26	CLAYS
20.66	17.54	0.93	5.26	-0.26	CLAYS
20.73	17.54	0.98	5.47	-0.26	CLAYS
20.8	17.76	1.02	5.69	-0.27	CLAYS
20.86	17.73	1.03	5.76	-0.26	CLAYS
20.93	17.73	1.08	6.1	-0.26	CLAYS
20.99	17.51	1.13	6.51	-0.26	CLAYS
21.06	18.82	1.17	6.92	-0.27	CLAYS
21.12	18.4	1.21	7.52	-0.27	CLAYS
21.19	17.35	1.26	8.2	-0.27	CLAYS
21.25	16.45	1.26	8.5	-0.28	CLAYS
21.32	15.36	1.22	8.51	-0.27	CLAYS
21.39	14.82	1.14	8.09	-0.28	CLAYS
21.45	14.4	1.02	7.42	-0.27	CLAYS
21.52	13.86	0.93	6.91	-0.27	CLAYS
21.58	13.92	0.89	6.67	-0.27	CLAYS
21.65	13.73	0.86	6.58	-0.27	CLAYS
21.71	13.51	0.83	6.26	-0.27	CLAYS
21.78	13.28	0.82	6.05	-0.27	CLAYS
21.84	12.73	0.76	5.6	-0.27	CLAYS
21.91	12.73	0.76	5.58	-0.28	CLAYS
21.98	12.51	0.8	5.92	-0.27	CLAYS
22.04	15.2	0.83	6.21	-0.28	CLAYS
22.11	14.56	0.86	6.81	-0.28	CLAYS
22.17	13.67	0.92	7.79	-0.28	CLAYS
22.24	13.09	0.95	8.43	-0.28	CLAYS
22.3	12.35	0.93	8.76	-0.28	CLAYS
22.37	11.52	0.87	8.61	-0.28	CLAYS
22.44	10.56	0.8	8.31	-0.28	CLAYS
22.5	10.05	0.72	7.67	-0.27	CLAYS
22.57	9.8	0.66	7.17	-0.28	CLAYS
22.63	9.41	0.6	6.52	-0.28	CLAYS
22.7	9.25	0.57	6.03	-0.28	CLAYS
22.76	9.06	0.44	4.53	-0.28	CLAYS
22.83	9.09	0.31	3.11	-0.28	CLAYEY SILT&SILTY CLAYS
22.89	8.93	0.38	3.72	-0.28	CLAYEY SILT&SILTY CLAYS
22.96	9.02	0.44	4.26	-0.28	CLAYS
23.03	11.08	0.47	4.58	-0.29	CLAYS
23.09	10.83	0.51	5.06	-0.29	CLAYS
23.16	10.59	0.59	5.95	-0.29	CLAYS
23.22	10.27	0.59	6.07	-0.29	CLAYS
23.29	9.76	0.54	5.51	-0.28	CLAYS
23.35	9.38	0.48	4.88	-0.29	CLAYS
23.42	9.44	0.44	4.41	-0.28	CLAYS
23.48	9.73	0.43	4.24	-0.28	CLAYS

US EPA ARCHIVE DOCUMENT

23.55	9.89	0.43	4.14	-0.28	CLAYS
23.62	10.21	0.43	4.17	-0.28	CLAYS
23.68	10.31	0.43	4.13	-0.29	CLAYS
23.75	10.31	0.45	4.22	-0.29	CLAYS
23.81	10.34	0.45	4.15	-0.29	CLAYS
23.88	10.66	0.45	4.03	-0.29	CLAYS
23.94	10.62	0.47	4.15	-0.29	CLAYS
24.01	10.56	0.5	4.44	-0.28	CLAYS
24.08	11.81	0.51	4.5	-0.29	CLAYS
24.14	11.68	0.54	4.79	-0.29	CLAYS
24.21	11.26	0.59	5.2	-0.29	CLAYS
24.27	11.42	0.57	5.06	-0.3	CLAYS
24.34	11.17	0.59	5.17	-0.29	CLAYS
24.4	11.08	0.59	5.11	-0.29	CLAYS
24.47	11.39	0.56	4.87	-0.29	CLAYS
24.53	11.36	0.57	4.9	-0.29	CLAYS
24.6	11.52	0.54	4.7	-0.29	CLAYS
24.67	11.65	0.53	4.47	-0.28	CLAYS
24.73	11.75	0.55	4.55	-0.29	CLAYS
24.8	11.62	0.51	4.08	-0.29	CLAYEY SILT&SILTY CLAYS
24.86	11.36	0.47	3.65	-0.29	CLAYEY SILT&SILTY CLAYS
24.93	11.49	0.51	3.87	-0.29	CLAYEY SILT&SILTY CLAYS
24.99	12.82	0.57	4.23	-0.28	CLAYS
25.06	14.14	0.63	4.71	-0.29	CLAYS
25.12	14.14	0.72	5.39	-0.29	CLAYS
25.19	13.76	0.77	5.81	-0.3	CLAYS
25.26	13.09	0.81	6.06	-0.29	CLAYS
25.32	12.54	0.83	6.1	-0.29	CLAYS
25.39	12.93	0.84	6.1	-0.29	CLAYS
25.45	13.28	0.86	6.12	-0.29	CLAYS
25.52	14.14	0.86	6.08	-0.3	CLAYS
25.58	14.59	0.88	6.12	-0.29	CLAYS
25.65	14.14	0.91	6.17	-0.29	CLAYS
25.72	13.86	0.94	6.16	-0.29	CLAYS
25.78	13.86	0.97	6.07	-0.3	CLAYS
25.85	14.4	0.95	5.63	-0.29	CLAYS
25.91	15.49	1.03	5.77	-0.29	CLAYS
25.98	16.38	1.12	5.98	-0.29	CLAYS
26.04	17.15	1.18	6.06	-0.29	CLAYS
26.11	18.53	1.24	6.17	-0.3	CLAYS
26.17	18.94	1.33	6.46	-0.3	CLAYS
26.24	20.13	1.43	6.83	-0.3	CLAYS
26.31	20.99	1.56	7.4	-0.3	CLAYS
26.37	21.32	1.67	7.88	-0.32	CLAYS
26.44	21.09	1.75	8.27	-0.33	CLAYS
26.5	21.09	1.8	8.4	-0.33	CLAYS
26.57	21.06	1.84	8.55	-0.32	CLAYS
26.63	21.19	1.86	8.54	-0.33	CLAYS
26.7	21.28	1.86	8.47	-0.33	CLAYS
26.76	21.6	1.86	8.3	-0.33	CLAYS
26.83	21.92	1.87	8.1	-0.33	CLAYS
26.9	22.15	1.87	7.9	-0.33	CLAYS

US EPA ARCHIVE DOCUMENT

26.96	22.33	1.93	7.93	-0.32	CLAYS
27.03	22.66	1.96	7.82	-0.32	CLAYS
27.09	24.13	1.96	7.55	-0.31	CLAYS
27.16	24.9	2.03	7.55	-0.31	CLAYS
27.22	25.6	2.02	7.14	-0.32	CLAYS
27.29	26.17	2	6.65	-0.31	CLAYS
27.36	26.82	1.98	6.09	-0.31	CLAYS
27.42	28.13	1.9	5.27	-0.32	CLAYS
27.49	29.92	1.77	4.36	-0.3	CLAYEY SILT&SILTY CLAYS
27.55	32.87	1.71	3.71	-0.3	CLAYEY SILT&SILTY CLAYS
27.62	36.32	1.65	3.15	-0.29	CLAYEY SANDY SILT&SILT
27.68	41.32	1.59	2.69	-0.29	CLAYEY SANDY SILT&SILT
27.75	47.65	1.51	2.29	-0.28	CLAYEY SANDY SILT&SILT
27.81	55.11	1.46	2.02	-0.27	SILTY SAND
27.88	63.52	1.27	1.62	-0.27	SILTY SAND
27.95	70.82	1.19	1.43	-0.26	SILTY SAND
28.01	76.96	1.09	1.24	-0.25	SILTY SAND
28.08	80.29	0.98	1.07	-0.24	SANDS
28.14	86.63	0.88	0.93	-0.24	SANDS
28.21	91.3	0.82	0.85	-0.24	SANDS
28.27	94.88	0.79	0.81	-0.23	SANDS
28.34	97.64	0.82	0.85	-0.24	SANDS
28.4	98.82	0.87	0.91	-0.23	SANDS
28.47	99.08	0.92	0.99	-0.24	SANDS
28.54	97.96	0.96	1.07	-0.24	SANDS
28.6	96.1	0.99	1.17	-0.24	SANDS
28.67	92.9	1.01	1.27	-0.23	SANDS
28.73	88.42	1.01	1.38	-0.23	SILTY SAND
28.8	82.85	1	1.48	-0.23	SILTY SAND
28.86	76.83	0.99	1.58	-0.24	SILTY SAND
28.93	70.47	0.9	1.56	-0.24	SILTY SAND
29	64.45	0.82	1.54	-0.24	SILTY SAND
29.06	57.41	0.75	1.5	-0.23	SILTY SAND
29.13	54.18	0.69	1.44	-0.23	SILTY SAND
29.19	50.53	0.63	1.35	-0.23	SILTY SAND
29.26	47.62	0.58	1.24	-0.23	SILTY SAND
29.32	45.64	0.54	1.13	-0.23	SILTY SAND
29.39	44.74	0.5	1.02	-0.23	SILTY SAND
29.45	45.31	0.47	0.93	-0.23	SILTY SAND
29.52	47.11	0.46	0.88	-0.23	SILTY SAND
29.59	49.51	0.49	0.89	-0.23	SILTY SAND
29.65	52.32	0.51	0.91	-0.23	SILTY SAND
29.72	55.07	0.53	0.94	-0.23	SILTY SAND
29.78	56.23	0.55	0.98	-0.23	SILTY SAND
29.85	56.8	0.55	0.98	-0.23	SILTY SAND
29.91	57.12	0.55	0.97	-0.24	SILTY SAND
29.98	57.38	0.55	0.97	-0.23	SILTY SAND
30.04	56.52	0.59	1.03	-0.23	SILTY SAND
30.11	55.65	0.66	1.14	-0.24	SILTY SAND
30.18	54.79	0.75	1.25	-0.23	SILTY SAND
30.24	57.19	0.79	1.3	-0.24	SILTY SAND
30.31	58.47	0.83	1.32	-0.25	SILTY SAND

US EPA ARCHIVE DOCUMENT

30.37	59.94	0.86	1.32	-0.24	SILTY SAND
30.44	62.15	0.86	1.3	-0.24	SILTY SAND
30.5	64.03	0.86	1.27	-0.23	SILTY SAND
30.57	65.98	0.83	1.2	-0.23	SILTY SAND
30.64	67.75	0.78	1.11	-0.23	SILTY SAND
30.7	68.93	0.74	1.05	-0.23	SILTY SAND
30.77	69.83	0.72	1.02	-0.23	SANDS
30.83	70.31	0.74	1.03	-0.23	SANDS
30.9	70.88	0.7	0.96	-0.23	SANDS
30.96	71.91	0.69	0.94	-0.23	SANDS
31.03	70.12	0.7	0.95	-0.23	SANDS
31.09	73.57	0.72	0.97	-0.23	SANDS
31.16	74.44	0.74	1	-0.23	SANDS
31.23	74.82	0.76	1.03	-0.23	SANDS
31.29	74.88	0.78	1.08	-0.23	SANDS
31.36	74.27	0.81	1.12	-0.23	SILTY SAND
31.42	73.15	0.82	1.15	-0.23	SILTY SAND
31.49	71.78	0.82	1.14	-0.23	SILTY SAND
31.55	71.04	0.82	1.14	-0.23	SILTY SAND
31.62	71.23	0.82	1.16	-0.23	SILTY SAND
31.68	72.04	0.85	1.22	-0.23	SILTY SAND
31.75	72.61	0.88	1.31	-0.23	SILTY SAND
31.82	72.32	1.02	1.58	-0.23	SILTY SAND
31.88	70.69	1.33	2.16	-0.24	SILTY SAND
31.95	66.66	1.45	2.49	-0.23	SILTY SAND
32.01	62.59	1.71	3.07	-0.24	CLAYEY SANDY SILT&SILT
32.08	58.82	2.03	3.79	-0.24	CLAYEY SANDY SILT&SILT
32.14	56.58	2.37	4.58	-0.24	CLAYEY SILT&SILTY CLAYS
32.21	53.96	2.73	5.42	-0.24	CLAYEY SILT&SILTY CLAYS
32.28	51.97	3.02	6.17	-0.23	CLAYS
32.34	49.89	3.19	6.7	-0.24	CLAYS
32.41	49.51	3.36	7.18	-0.23	CLAYS
32.47	49.28	3.54	7.57	-0.23	CLAYS
32.54	47.62	3.61	7.64	-0.24	CLAYS
32.6	45.19	3.61	7.43	-0.24	CLAYS
32.67	44.29	3.61	7.08	-0.24	CLAYS
32.73	45.41	3.59	6.76	-0.24	CLAYS
32.8	48.64	3.37	6.05	-0.24	CLAYS
32.87	52.35	2.77	4.79	-0.24	CLAYEY SILT&SILTY CLAYS
32.93	55.84	2.47	4.15	-0.23	CLAYEY SILT&SILTY CLAYS
33	59.33	2.21	3.66	-0.24	CLAYEY SANDY SILT&SILT
33.06	57.38	1.99	3.27	-0.24	CLAYEY SANDY SILT&SILT
33.13	60.9	1.9	3.05	-0.24	CLAYEY SANDY SILT&SILT
33.19	61.83	2.04	3.22	-0.23	CLAYEY SANDY SILT&SILT
33.26	61.54	2.15	3.32	-0.23	CLAYEY SANDY SILT&SILT
33.32	60.74	2.17	3.31	-0.24	CLAYEY SANDY SILT&SILT
33.39	62.24	2.19	3.28	-0.24	CLAYEY SANDY SILT&SILT
33.46	65.83	2.2	3.27	-0.23	CLAYEY SANDY SILT&SILT
33.52	68	2.15	3.21	-0.23	CLAYEY SANDY SILT&SILT
33.59	68.74	2.02	3.07	-0.23	CLAYEY SANDY SILT&SILT
33.65	68.32	1.79	2.77	-0.23	CLAYEY SANDY SILT&SILT
33.72	67.11	1.54	2.44	-0.24	SILTY SAND

US EPA ARCHIVE DOCUMENT

33.78	65.47	1.33	2.15	-0.24	SILTY SAND
33.85	63.59	1.28	2.11	-0.23	SILTY SAND
33.92	62.56	1.21	2.05	-0.23	SILTY SAND
33.98	61.67	1.18	2.05	-0.23	SILTY SAND
34.05	58.91	1.29	2.28	-0.23	SILTY SAND
34.11	59.49	1.43	2.59	-0.25	CLAYEY SANDY SILT&SILT
34.18	57.32	1.55	2.87	-0.25	CLAYEY SANDY SILT&SILT
34.24	55.17	1.64	3.1	-0.25	CLAYEY SANDY SILT&SILT
34.31	54.08	1.74	3.35	-0.27	CLAYEY SANDY SILT&SILT
34.37	52.99	1.84	3.6	-0.28	CLAYEY SANDY SILT&SILT
34.44	52.39	1.94	3.87	-0.3	CLAYEY SANDY SILT&SILT
34.51	51.68	1.99	4.06	-0.3	CLAYEY SILT&SILTY CLAYS
34.57	50.56	1.94	4.09	-0.29	CLAYEY SILT&SILTY CLAYS
34.64	49.76	1.93	4.21	-0.3	CLAYEY SILT&SILTY CLAYS
34.7	48.7	1.96	4.43	-0.3	CLAYEY SILT&SILTY CLAYS
34.77	47.23	1.99	4.64	-0.31	CLAYEY SILT&SILTY CLAYS
34.83	45.34	2.02	4.85	-0.31	CLAYEY SILT&SILTY CLAYS
34.9	43.3	2.05	5.05	-0.3	CLAYEY SILT&SILTY CLAYS
34.96	41.38	2.19	5.47	-0.31	CLAYS
35.03	40.22	2.33	5.82	-0.24	CLAYS
35.1	40.22	2.46	6.12	-0.25	CLAYS
35.16	39.62	2.58	6.38	-0.27	CLAYS
35.23	39.27	2.67	6.53	-0.26	CLAYS
35.29	39.75	2.73	6.54	-0.25	CLAYS
35.36	40.58	2.75	6.4	-0.25	CLAYS
35.42	41.38	2.78	6.19	-0.25	CLAYS
35.49	41.73	2.77	5.81	-0.24	CLAYS
35.56	42.6	2.78	5.41	-0.25	CLAYS
35.62	44.1	2.79	4.97	-0.24	CLAYEY SILT&SILTY CLAYS
35.69	47.49	2.68	4.34	-0.25	CLAYEY SILT&SILTY CLAYS
35.75	51.94	2.49	3.59	-0.24	CLAYEY SANDY SILT&SILT
35.82	57.76	2.32	3.03	-0.25	CLAYEY SANDY SILT&SILT
35.88	64.64	1.39	1.68	-0.24	SILTY SAND
35.95	71.04	1.18	1.34	-0.25	SILTY SAND
36.01	77.03	1.05	1.14	-0.24	SANDS
36.08	93.96	0.98	1.04	-0.23	SANDS
36.15	95.55	0.94	1.02	-0.23	SANDS
36.21	95.81	0.94	1.05	-0.23	SANDS
36.28	94.72	0.96	1.12	-0.23	SANDS
36.34	92.52	0.96	1.19	-0.23	SANDS
36.41	88.87	0.96	1.25	-0.23	SANDS
36.47	84.07	0.95	1.32	-0.23	SILTY SAND
36.54	78.95	0.94	1.37	-0.23	SILTY SAND
36.6	73.63	0.91	1.38	-0.22	SILTY SAND
36.67	68.93	0.86	1.35	-0.22	SILTY SAND
36.74	65.73	0.81	1.3	-0.22	SILTY SAND
36.8	63.49	0.78	1.28	-0.23	SILTY SAND
36.87	61.83	0.68	1.11	-0.22	SILTY SAND
36.93	61.22	0.68	1.1	-0.23	SILTY SAND
37	61.31	0.68	1.08	-0.23	SILTY SAND
37.06	58.37	0.68	1.06	-0.23	SILTY SAND
37.13	62.05	0.69	1.03	-0.23	SILTY SAND

US EPA ARCHIVE DOCUMENT

37.2	63.46	0.69	1	-0.22	SILTY SAND
37.26	65.06	0.69	0.95	-0.23	SANDS
37.33	67.08	0.67	0.88	-0.23	SANDS
37.39	69.54	0.67	0.83	-0.23	SANDS
37.46	72.9	0.66	0.77	-0.23	SANDS
37.52	77.03	0.65	0.71	-0.23	SANDS
37.59	82.21	0.64	0.67	-0.22	SANDS
37.65	88.58	0.66	0.66	-0.23	SANDS
37.72	94.66	0.69	0.67	-0.22	SANDS
37.79	100.29	0.74	0.7	-0.22	SANDS
37.85	104.78	0.85	0.8	-0.22	SANDS
37.92	108.07	0.88	0.83	-0.22	SANDS
37.98	109.19	0.93	0.89	-0.23	SANDS
38.05	105.38	0.97	0.93	-0.23	SANDS
38.11	105.96	0.97	0.93	-0.22	SANDS
38.18	104.93	0.98	0.95	-0.23	SANDS
38.24	103.72	0.98	0.95	-0.22	SANDS
38.31	102.85	0.98	0.95	-0.23	SANDS
38.38	102.56	1	0.96	-0.22	SANDS
38.44	103.23	1.01	0.97	-0.23	SANDS
38.51	103.36	1.03	0.99	-0.22	SANDS
38.57	103.68	1.03	1.01	-0.22	SANDS
38.64	104.04	1.04	1.03	-0.22	SANDS
38.7	105	1.06	1.11	-0.23	SANDS
38.77	104.78	1.1	1.21	-0.22	SANDS
38.84	102.31	1.22	1.43	-0.22	SANDS
38.9	96.64	1.14	1.44	-0.22	SILTY SAND
38.97	89.54	1.1	1.48	-0.23	SILTY SAND
39.03	77.12	1.07	1.5	-0.22	SILTY SAND
39.1	75.52	1.04	1.49	-0.22	SILTY SAND
39.16	69.89	1.02	1.5	-0.22	SILTY SAND
39.23	67.84	1.03	1.51	-0.22	SILTY SAND
39.29	67.97	1.06	1.55	-0.22	SILTY SAND
39.36	67.84	1.09	1.59	-0.22	SILTY SAND
39.43	68	1.1	1.59	-0.22	SILTY SAND
39.49	68.1	1.09	1.57	-0.22	SILTY SAND
39.56	68.48	1.1	1.56	-0.22	SILTY SAND
39.62	69.25	1.06	1.5	-0.23	SILTY SAND
39.69	70.12	0.97	1.38	-0.23	SILTY SAND
39.75	70.47	0.88	1.24	-0.22	SILTY SAND
39.82	71.01	0.61	0.86	-0.22	SANDS
39.88	71.59	0.66	0.92	-0.23	SANDS
39.95	71.97	0.7	0.96	-0.22	SANDS
40.02	68.74	0.72	0.97	-0.22	SANDS
40.08	72.32	0.73	0.96	-0.22	SANDS
40.15	73.86	0.73	0.95	-0.23	SANDS
40.21	75.01	0.73	0.94	-0.22	SANDS
40.28	75.94	0.73	0.93	-0.22	SANDS
40.34	77	0.76	0.95	-0.22	SANDS
40.41	78.11	0.78	0.95	-0.23	SANDS
40.48	79.24	0.8	0.96	-0.22	SANDS
40.54	80.42	0.82	0.96	-0.22	SANDS

US EPA ARCHIVE DOCUMENT

40.61	81.8	0.83	0.95	-0.22	SANDS
40.67	83.17	0.82	0.92	-0.22	SANDS
40.74	85.25	0.83	0.9	-0.22	SANDS
40.8	87.53	0.83	0.87	-0.22	SANDS
40.87	90.63	0.86	0.87	-0.22	SANDS
40.93	93.83	0.83	0.8	-0.22	SANDS
41	97.67	0.84	0.77	-0.22	SANDS
41.07	98.89	0.87	0.76	-0.22	SANDS
41.13	106.18	0.91	0.76	-0.23	SANDS
41.2	111.46	0.96	0.76	-0.22	SANDS
41.26	117.06	1.02	0.78	-0.21	SANDS
41.33	123.08	1.1	0.8	-0.22	SANDS
41.39	128.93	1.18	0.83	-0.21	SANDS
41.46	134.47	1.26	0.86	-0.22	SANDS
41.52	139.5	1.34	0.89	-0.22	SANDS
41.59	144.29	1.4	0.91	-0.22	SANDS
41.66	148.87	1.46	0.92	-0.21	SANDS
41.72	153.25	1.52	0.95	-0.21	SANDS
41.79	156.78	1.58	0.97	-0.21	SANDS
41.85	160.36	1.61	0.97	-0.21	SANDS
41.92	163.3	1.67	1	-0.21	SANDS
41.98	166.05	1.71	1.01	-0.21	SANDS
42.05	165.1	1.78	1.04	-0.21	SANDS
42.12	169.25	1.87	1.08	-0.2	SANDS
42.18	171.37	1.95	1.12	-0.2	SANDS
42.25	172.65	2.02	1.15	-0.2	SANDS
42.31	173.93	2.07	1.18	-0.2	SANDS
42.38	174.89	2.13	1.21	-0.2	SANDS
42.44	175.95	2.16	1.23	-0.2	SANDS
42.51	176.71	2.2	1.25	-0.21	SANDS
42.57	176.97	2.25	1.29	-0.2	SANDS
42.64	176.78	2.3	1.33	-0.2	SANDS
42.71	175.95	2.33	1.37	-0.2	SANDS
42.77	174.67	2.33	1.39	-0.2	SANDS
42.84	173	2.33	1.42	-0.2	SANDS
42.9	171.11	2.33	1.45	-0.21	SANDS
42.97	166.86	2.33	1.49	-0.21	SANDS
43.03	162.61	2.34	1.55	-0.2	SANDS
43.1	158.37	2.32	1.59	-0.19	SANDS
43.16	154.12	2.3	1.64	-0.19	SANDS
43.23	149.03	2.26	1.67	-0.19	SANDS
43.3	143.56	2.19	1.68	-0.2	SANDS
43.36	137.99	2.2	1.75	-0.19	SANDS
43.43	132.49	2.22	1.82	-0.19	SILTY SAND
43.49	126.98	2.17	1.83	-0.2	SILTY SAND
43.56	122.25	2.15	1.84	-0.19	SILTY SAND
43.62	118.72	2.11	1.84	-0.2	SILTY SAND
43.69	116.61	2.08	1.83	-0.2	SILTY SAND
43.76	115.05	2.06	1.83	-0.2	SILTY SAND
43.82	113.89	2.2	1.96	-0.2	SILTY SAND
43.89	113.35	2.16	1.94	-0.2	SILTY SAND
43.95	112.8	2.12	1.91	-0.2	SILTY SAND

US EPA ARCHIVE DOCUMENT

44.02	111.59	2.09	1.89	-0.19	SILTY SAND
44.08	110.37	2.07	1.88	-0.2	SILTY SAND
44.15	110.15	2.03	1.86	-0.19	SILTY SAND
44.21	110.5	1.99	1.85	-0.19	SILTY SAND
44.28	110.76	1.95	1.86	-0.19	SILTY SAND
44.35	109.93	1.92	1.87	-0.19	SILTY SAND
44.41	107.68	1.88	1.89	-0.2	SILTY SAND
44.48	104.14	1.87	1.91	-0.2	SILTY SAND
44.54	100.36	1.87	1.96	-0.19	SILTY SAND
44.61	97.28	1.88	2.02	-0.2	SILTY SAND
44.67	95.33	1.9	2.09	-0.2	SILTY SAND
44.74	94.47	1.99	2.23	-0.2	SILTY SAND
44.8	94.18	2.28	2.58	-0.21	SILTY SAND
44.87	90.37	2.57	2.92	-0.21	CLAYEY SANDY SILT&SILT
44.94	85.86	2.48	2.78	-0.21	SILTY SAND
45	83.01	2.42	2.66	-0.2	SILTY SAND
45.07	86.58	2.37	2.57	-0.22	SILTY SAND
45.13	90.15	2.35	2.54	-0.21	SILTY SAND
45.2	93.7	2.36	2.56	-0.21	SILTY SAND
45.26	95.94	2.37	2.63	-0.21	SILTY SAND
45.33	94.88	2.2	2.52	-0.21	SILTY SAND
45.4	91.49	2.07	2.47	-0.21	SILTY SAND
45.46	89.25	2.01	2.51	-0.21	SILTY SAND
45.53	86.37	1.97	2.6	-0.21	SILTY SAND
45.59	82.92	1.93	2.72	-0.2	SILTY SAND
45.66	79.17	1.91	2.88	-0.21	CLAYEY SANDY SILT&SILT
45.72	74.24	1.85	3	-0.21	CLAYEY SANDY SILT&SILT
45.79	68.48	1.76	3.07	-0.21	CLAYEY SANDY SILT&SILT
45.85	62.37	1.61	2.98	-0.22	CLAYEY SANDY SILT&SILT
45.92	57.86	1.8	3.55	-0.22	CLAYEY SANDY SILT&SILT
45.99	54.31	2.08	4.34	-0.22	CLAYEY SILT&SILTY CLAYS
46.05	51.94	2.43	5.36	-0.23	CLAYEY SILT&SILTY CLAYS
46.12	50.15	2.73	6.43	-0.23	CLAYS
46.18	46.79	3.03	7.75	-0.23	CLAYS
46.25	43.75	3.23	8.99	-0.22	CLAYS
46.31	41.16	3.39	10	-0.22	CLAYS
46.38	38.12	3.51	10	-0.23	CLAYS
46.45	34.43	3.51	10	-0.22	CLAYS
46.51	30.53	3.4	10	-0.22	CLAYS
46.58	27.68	3.25	10	-0.21	CLAYS
46.64	25.57	3	10	-0.21	CLAYS
46.71	24.07	2.68	10	-0.21	CLAYS
46.77	22.46	2.31	10	-0.21	CLAYS
46.84	21.63	1.91	8.39	-0.22	CLAYS
46.9	21.82	1.67	7.18	-0.22	CLAYS
46.97	22.37	1.54	6.4	-0.22	CLAYS
47.04	22.82	1.37	5.53	-0.23	CLAYS
47.1	23.71	1.28	5.03	-0.23	CLAYS
47.17	24.16	1.23	4.69	-0.23	CLAYEY SILT&SILTY CLAYS
47.23	25.09	1.21	4.48	-0.23	CLAYEY SILT&SILTY CLAYS
47.3	25.92	1.22	4.43	-0.23	CLAYEY SILT&SILTY CLAYS
47.36	26.69	1.24	4.49	-0.23	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

47.43	27.2	1.35	4.86	-0.23	CLAYEY SILT&SILTY CLAYS
47.49	28.32	1.47	5.3	-0.23	CLAYS
47.56	28.67	1.53	5.58	-0.23	CLAYS
47.63	28.13	1.64	6.01	-0.23	CLAYS
47.69	27.23	1.7	6.19	-0.23	CLAYS
47.76	26.98	1.69	6.04	-0.23	CLAYS
47.82	26.72	1.67	5.88	-0.23	CLAYS
47.89	26.95	1.69	5.81	-0.23	CLAYS
47.95	27.62	1.75	5.93	-0.23	CLAYS
48.02	29.03	1.82	6.07	-0.24	CLAYS
48.09	30.14	1.93	6.36	-0.24	CLAYS
48.15	30.01	2.02	6.61	-0.24	CLAYS
48.22	30.27	2.11	6.79	-0.24	CLAYS
48.28	30.37	2.17	6.85	-0.25	CLAYS
48.35	30.37	2.13	6.7	-0.24	CLAYS
48.41	30.62	2.19	6.9	-0.24	CLAYS
48.48	31.78	2.23	7.14	-0.24	CLAYS
48.54	33.34	2.25	7.33	-0.25	CLAYS
48.61	33.25	2.3	7.75	-0.24	CLAYS
48.68	31.84	2.35	8.24	-0.24	CLAYS
48.74	29.57	2.41	8.69	-0.24	CLAYS
48.81	27.91	2.49	9.05	-0.24	CLAYS
48.87	27.91	2.14	7.73	-0.24	CLAYS
48.94	27.49	2.09	7.44	-0.24	CLAYS
49	26.17	2.1	7.28	-0.24	CLAYS
49.07	27.49	2.16	7.15	-0.25	CLAYS
49.13	28.39	2.14	6.77	-0.25	CLAYS
49.2	28.99	2.07	6.27	-0.25	CLAYS
49.27	29.89	2	5.82	-0.25	CLAYS
49.33	32.16	2.07	5.82	-0.25	CLAYS
49.4	34.21	2.2	6.07	-0.25	CLAYS
49.46	35.94	2.36	6.4	-0.24	CLAYS
49.53	36.83	2.52	6.72	-0.24	CLAYS
49.59	37.06	2.69	7.03	-0.25	CLAYS
49.66	36.74	2.87	7.28	-0.25	CLAYS
49.73	37.12	3.03	7.44	-0.25	CLAYS
49.79	37.92	3.11	7.33	-0.24	CLAYS
49.86	39.55	3.1	6.98	-0.25	CLAYS
49.92	41.54	3.11	6.66	-0.25	CLAYS
49.99	43.46	3.11	6.32	-0.24	CLAYS
50.05	44.48	3.11	5.99	-0.26	CLAYS
50.12	47.39	3.21	5.8	-0.25	CLAYS
50.18	49.73	3.36	5.76	-0.25	CLAYS
50.25	53.22	3.4	5.58	-0.25	CLAYEY SILT&SILTY CLAYS
50.32	56.64	3.41	5.43	-0.25	CLAYEY SILT&SILTY CLAYS
50.38	60.45	3.37	5.27	-0.24	CLAYEY SILT&SILTY CLAYS
50.45	64.55	3.31	5.15	-0.25	CLAYEY SILT&SILTY CLAYS
50.51	65.51	3.25	5.07	-0.25	CLAYEY SILT&SILTY CLAYS
50.58	65.28	3.15	4.99	-0.25	CLAYEY SILT&SILTY CLAYS
50.64	64.42	3.05	4.97	-0.25	CLAYEY SILT&SILTY CLAYS
50.71	63.55	2.96	5.12	-0.25	CLAYEY SILT&SILTY CLAYS
50.77	63.14	2.86	5.27	-0.24	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

50.84	62.72	2.93	5.81	-0.24	CLAYS
50.91	59.91	2.5	5.4	-0.25	CLAYEY SILT&SILTY CLAYS
50.97	53.76	2.53	5.88	-0.24	CLAYS
51.04	43.3	2.58	6.14	-0.25	CLAYS
51.1	43.14	2.62	5.96	-0.25	CLAYS
51.17	39.3	2.62	5.59	-0.24	CLAYS
51.23	38.15	2.67	5.23	-0.25	CLAYEY SILT&SILTY CLAYS
51.3	40.71	2.73	4.98	-0.24	CLAYEY SILT&SILTY CLAYS
51.37	47.23	2.58	4.57	-0.23	CLAYEY SILT&SILTY CLAYS
51.43	54.79	2.32	4.09	-0.24	CLAYEY SILT&SILTY CLAYS
51.5	61.6	2.15	3.89	-0.24	CLAYEY SANDY SILT&SILT
51.56	64.48	1.97	3.77	-0.24	CLAYEY SANDY SILT&SILT
51.63	59.49	1.96	4.09	-0.24	CLAYEY SILT&SILTY CLAYS
51.69	51.46	1.99	4.48	-0.24	CLAYEY SILT&SILTY CLAYS
51.76	48.06	2.07	4.95	-0.25	CLAYEY SILT&SILTY CLAYS
51.82	47.08	2.19	5.52	-0.24	CLAYS
51.89	43.68	2.17	5.78	-0.24	CLAYS
51.96	37.7	2.26	6.22	-0.25	CLAYS
52.02	37.86	2.42	6.62	-0.24	CLAYS
52.09	36.51	2.51	6.81	-0.24	CLAYS
52.15	34.72	2.55	6.75	-0.24	CLAYS
52.22	34.79	2.54	6.47	-0.24	CLAYS
52.28	36.54	2.54	6.16	-0.25	CLAYS
52.35	38.47	2.55	5.89	-0.24	CLAYS
52.41	40.13	2.57	5.65	-0.24	CLAYS
52.48	41.83	2.58	5.39	-0.24	CLAYS
52.55	44.03	2.55	5.08	-0.24	CLAYEY SILT&SILTY CLAYS
52.61	46.34	2.51	4.8	-0.24	CLAYEY SILT&SILTY CLAYS
52.68	49.12	2.47	4.55	-0.24	CLAYEY SILT&SILTY CLAYS
52.74	51.78	2.44	4.38	-0.25	CLAYEY SILT&SILTY CLAYS
52.81	53.73	2.42	4.2	-0.24	CLAYEY SILT&SILTY CLAYS
52.87	55.49	2.2	3.7	-0.25	CLAYEY SANDY SILT&SILT
52.94	56.8	2.05	3.33	-0.24	CLAYEY SANDY SILT&SILT
53.01	58.21	1.98	3.1	-0.24	CLAYEY SANDY SILT&SILT
53.07	57.83	2	3.03	-0.25	CLAYEY SANDY SILT&SILT
53.14	63.55	2.04	2.98	-0.27	CLAYEY SANDY SILT&SILT
53.2	65.09	1.97	2.82	-0.26	CLAYEY SANDY SILT&SILT
53.27	67.53	1.84	2.63	-0.27	CLAYEY SANDY SILT&SILT
53.33	70.4	1.69	2.46	-0.26	SILTY SAND
53.4	71.75	1.61	2.45	-0.26	SILTY SAND
53.46	72.32	1.59	2.58	-0.27	SILTY SAND
53.53	71.04	1.58	2.79	-0.27	CLAYEY SANDY SILT&SILT
53.6	67.33	1.65	3.25	-0.27	CLAYEY SANDY SILT&SILT
53.66	59.85	1.78	3.88	-0.26	CLAYEY SANDY SILT&SILT
53.73	52.68	2.05	4.67	-0.26	CLAYEY SILT&SILTY CLAYS
53.79	46.24	2.29	5.26	-0.26	CLAYEY SILT&SILTY CLAYS
53.86	41.41	2.04	4.53	-0.26	CLAYEY SILT&SILTY CLAYS
53.92	37.57	2.08	4.34	-0.25	CLAYEY SILT&SILTY CLAYS
53.99	37.89	2.22	4.29	-0.26	CLAYEY SILT&SILTY CLAYS
54.05	46.72	2.33	4.19	-0.26	CLAYEY SILT&SILTY CLAYS
54.12	52.03	2.41	4.11	-0.25	CLAYEY SILT&SILTY CLAYS
54.19	54.88	2.46	4.05	-0.25	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

54.25	58.37	2.53	4.03	-0.25	CLAYEY SANDY SILT&SILT
54.32	60.42	2.55	3.97	-0.25	CLAYEY SANDY SILT&SILT
54.38	61.73	2.47	3.76	-0.25	CLAYEY SANDY SILT&SILT
54.45	63.49	2.41	3.6	-0.25	CLAYEY SANDY SILT&SILT
54.51	65.22	2.38	3.5	-0.25	CLAYEY SANDY SILT&SILT
54.58	66.69	2.35	3.42	-0.25	CLAYEY SANDY SILT&SILT
54.65	67.84	2.32	3.36	-0.24	CLAYEY SANDY SILT&SILT
54.71	68.87	2.27	3.3	-0.25	CLAYEY SANDY SILT&SILT
54.78	69.7	2.23	3.25	-0.25	CLAYEY SANDY SILT&SILT
54.84	69.57	2.14	3.14	-0.25	CLAYEY SANDY SILT&SILT
54.91	69.06	2.08	3.09	-0.25	CLAYEY SANDY SILT&SILT
54.97	68.2	2.03	3.03	-0.25	CLAYEY SANDY SILT&SILT
55.04	66.47	2.01	3.04	-0.25	CLAYEY SANDY SILT&SILT
55.1	68.13	2.04	3.11	-0.26	CLAYEY SANDY SILT&SILT
55.17	67.11	2.08	3.24	-0.26	CLAYEY SANDY SILT&SILT
55.24	65.95	2.12	3.38	-0.25	CLAYEY SANDY SILT&SILT
55.3	64.87	2.13	3.51	-0.26	CLAYEY SANDY SILT&SILT
55.37	64	2.14	3.68	-0.26	CLAYEY SANDY SILT&SILT
55.43	62.72	2.16	3.93	-0.25	CLAYEY SANDY SILT&SILT
55.5	60.74	2.21	4.29	-0.26	CLAYEY SILT&SILTY CLAYS
55.56	57.51	2.27	4.76	-0.25	CLAYEY SILT&SILTY CLAYS
55.63	53.73	2.31	5.27	-0.25	CLAYEY SILT&SILTY CLAYS
55.69	49.48	2.28	5.68	-0.26	CLAYS
55.76	45.5	2.28	6.17	-0.26	CLAYS
55.83	41.57	2.33	6.68	-0.26	CLAYS
55.89	38.02	1.9	5.71	-0.26	CLAYS
55.96	34.43	1.89	5.89	-0.25	CLAYS
56.02	31.14	1.89	5.89	-0.25	CLAYS
56.09	31.14	1.89	5.53	-0.26	CLAYS
56.15	32.99	1.79	4.57	-0.25	CLAYEY SILT&SILTY CLAYS
56.22	32.03	1.76	3.71	-0.26	CLAYEY SILT&SILTY CLAYS
56.29	30.91	2	3.41	-0.26	CLAYEY SANDY SILT&SILT
56.35	34.08	2.01	2.82	-0.25	CLAYEY SANDY SILT&SILT
56.42	44.22	1.79	2.13	-0.26	CLAYEY SANDY SILT&SILT
56.48	60.77	1.57	1.64	-0.25	SILTY SAND
56.55	82.18	1.44	1.37	-0.25	SILTY SAND
56.61	98.63	1.36	1.25	-0.25	SANDS
56.68	107.85	1.32	1.2	-0.25	SANDS
56.74	112.65	1.28	1.18	-0.25	SANDS
56.81	113.74	1.26	1.18	-0.25	SANDS
56.88	112.49	1.38	1.33	-0.26	SANDS
56.94	109.41	1.29	1.27	-0.25	SANDS
57.01	105.67	1.29	1.29	-0.25	SANDS
57.07	97.57	1.27	1.29	-0.25	SANDS
57.14	99.27	1.25	1.25	-0.26	SANDS
57.2	97.92	1.2	1.18	-0.25	SANDS
57.27	97.7	1.16	1.11	-0.26	SANDS
57.33	98.76	1.14	1.06	-0.26	SANDS
57.4	101.09	1.15	1.04	-0.25	SANDS
57.47	104.45	1.21	1.06	-0.25	SANDS
57.53	108.77	1.3	1.1	-0.25	SANDS
57.6	113.51	1.34	1.11	-0.25	SANDS

US EPA ARCHIVE DOCUMENT

57.66	117.77	1.34	1.09	-0.26	SANDS
57.73	120.84	1.36	1.1	-0.25	SANDS
57.79	122.7	1.39	1.11	-0.25	SANDS
57.86	124.1	1.45	1.15	-0.25	SANDS
57.93	124.93	1.42	1.11	-0.25	SANDS
57.99	125.93	1.45	1.13	-0.25	SANDS
58.06	122.4	1.51	1.17	-0.25	SANDS
58.12	128.16	1.58	1.2	-0.24	SANDS
58.19	129.54	1.63	1.23	-0.24	SANDS
58.25	130.92	1.67	1.26	-0.24	SANDS
58.32	132.42	1.72	1.3	-0.24	SANDS
58.38	133.48	1.76	1.34	-0.24	SANDS
58.45	133.51	1.81	1.39	-0.24	SANDS
58.52	132.87	1.83	1.42	-0.24	SANDS
58.58	131.3	1.82	1.43	-0.24	SANDS
58.65	129.57	1.8	1.43	-0.24	SANDS
58.71	127.56	1.76	1.41	-0.24	SANDS
58.78	125.93	1.71	1.37	-0.24	SANDS
58.84	124.49	1.46	1.16	-0.24	SANDS
58.91	123.37	1.4	1.11	-0.24	SANDS
58.97	124.4	1.34	1.05	-0.24	SANDS
59.04	125.43	1.27	0.97	-0.23	SANDS
59.11	126.46	1.24	0.93	-0.24	SANDS
59.17	127.49	1.26	0.92	-0.23	SANDS
59.24	131.59	1.34	0.96	-0.23	SANDS
59.3	136.17	1.45	1.03	-0.23	SANDS
59.37	139.91	1.6	1.14	-0.23	SANDS
59.43	142.12	1.71	1.23	-0.23	SANDS
59.5	142.92	1.78	1.3	-0.23	SANDS
59.57	142.28	1.83	1.37	-0.24	SANDS
59.63	140.14	1.86	1.44	-0.23	SANDS
59.7	136.55	1.89	1.51	-0.24	SANDS
59.76	132.07	1.9	1.57	-0.23	SANDS
59.83	127.18	1.95	1.66	-0.23	SANDS
59.89	122.76	1.88	1.64	-0.23	SANDS
59.96	118.79	1.82	1.62	-0.23	SANDS
60.02	112.04	1.77	1.6	-0.22	SILTY SAND
60.09	112.9	1.74	1.57	-0.22	SANDS
60.16	111.3	1.73	1.56	-0.23	SANDS
60.22	110.24	1.71	1.54	-0.22	SANDS
60.29	109.89	1.71	1.55	-0.22	SANDS
60.35	110.12	1.73	1.55	-0.23	SANDS
60.42	110.44	1.74	1.56	-0.23	SANDS
60.48	110.79	1.73	1.55	-0.22	SANDS
60.55	111.68	1.73	1.54	-0.23	SANDS
60.61	111.94	1.7	1.52	-0.22	SANDS
60.68	112.19	1.66	1.48	-0.22	SANDS
60.75	112.07	1.61	1.44	-0.23	SANDS
60.81	111.62	1.57	1.4	-0.22	SANDS
60.88	111.59	1.46	1.29	-0.22	SANDS
60.94	111.82	1.4	1.23	-0.23	SANDS
61.01	112.49	1.38	1.19	-0.22	SANDS

US EPA ARCHIVE DOCUMENT

61.07	111.94	1.39	1.19	-0.22	SANDS
61.14	114.15	1.4	1.18	-0.22	SANDS
61.21	115.97	1.43	1.19	-0.23	SANDS
61.27	117.32	1.49	1.22	-0.22	SANDS
61.34	118.89	1.54	1.24	-0.22	SANDS
61.4	120.9	1.58	1.26	-0.23	SANDS
61.47	122.6	1.6	1.25	-0.22	SANDS
61.53	124.68	1.6	1.23	-0.23	SANDS
61.6	126.79	1.61	1.22	-0.23	SANDS
61.66	128.8	1.6	1.2	-0.22	SANDS
61.73	131.02	1.6	1.19	-0.22	SANDS
61.8	132.94	1.53	1.13	-0.22	SANDS
61.86	134.95	1.46	1.07	-0.22	SANDS
61.93	136.39	1.39	1.02	-0.22	SANDS
61.99	136.46	1.45	1.06	-0.22	SANDS
62.06	136.54	1.49	1.09	-0.22	SANDS
62.12	136.61	1.53	1.13	-0.21	SANDS
62.19	136.68	1.56	1.16	-0.22	SANDS
62.25	136.1	1.58	1.18	-0.22	SANDS
62.32	135.3	1.59	1.2	-0.22	SANDS
62.39	133.86	1.63	1.24	-0.22	SANDS
62.45	132.23	1.66	1.27	-0.22	SANDS
62.52	130.76	1.67	1.26	-0.22	SANDS
62.58	129.86	1.66	1.23	-0.23	SANDS
62.65	129.61	1.65	1.19	-0.22	SANDS
62.71	130.79	1.64	1.15	-0.22	SANDS
62.78	133.61	1.63	1.09	-0.22	SANDS
62.85	138.06	1.58	0.99	-0.21	SANDS
62.91	144.68	1.56	0.92	-0.21	SANDS
62.98	153.55	1.59	0.88	-0.22	SANDS
63.04	158.44	1.64	0.86	-0.22	SANDS
63.11	173.45	1.71	0.85	-0.21	SANDS
63.17	185.96	1.81	0.85	-0.22	SANDS
63.24	198.15	1.92	0.86	-0.22	SANDS
63.3	209.51	2.04	0.88	-0.22	SANDS
63.37	219.63	2.17	0.91	-0.21	SANDS
63.44	228.81	2.29	0.93	-0.21	SANDS
63.5	237.07	2.4	0.95	-0.22	SANDS
63.57	244.11	2.51	0.97	-0.22	SANDS
63.63	250.45	2.62	1	-0.21	SANDS
63.7	256.33	2.72	1.03	-0.21	SANDS
63.76	260.97	2.79	1.04	-0.21	SANDS
63.83	265	2.85	1.06	-0.21	SANDS
63.89	268.56	2.91	1.08	-0.21	SANDS
63.96	268.68	2.98	1.11	-0.21	SANDS
64.03	268.81	3.06	1.15	-0.2	SANDS
64.09	268.94	3.13	1.18	-0.19	SANDS
64.16	269.07	3.16	1.21	-0.19	SANDS
64.22	268.14	3.17	1.24	-0.19	SANDS
64.29	264.84	3.13	1.24	-0.19	SANDS
64.35	260.21	3.18	1.28	-0.19	SANDS
64.42	254.79	3.27	1.35	-0.19	SANDS

US EPA ARCHIVE DOCUMENT

64.49	249.55	3.29	1.38	-0.2	SANDS
64.55	244.39	3.29	1.4	-0.19	SANDS
64.62	239.91	3.24	1.4	-0.2	SANDS
64.68	235.91	3.16	1.38	-0.19	SANDS
64.75	232.39	3.1	1.36	-0.19	SANDS
64.81	229.55	3.09	1.36	-0.19	SANDS
64.88	227.18	3.08	1.36	-0.19	SANDS
64.94	225.86	3.07	1.36	-0.19	SANDS
65.01	225.57	3.06	1.35	-0.19	SANDS
65.08	225.27	2.96	1.3	-0.17	SANDS
65.14	224.98	2.88	1.26	-0.16	SANDS
65.21	224.68	2.83	1.23	-0.17	SANDS
65.27	226.83	2.82	1.22	-0.16	SANDS
65.34	229.1	2.82	1.21	-0.16	SANDS
65.4	231.31	2.91	1.24	-0.16	SANDS
65.47	232.56	3	1.27	-0.16	SANDS
65.53	233.96	3.09	1.29	-0.16	SANDS
65.6	235.15	3.16	1.31	-0.16	SANDS
65.67	236.78	3.22	1.32	-0.17	SANDS
65.73	239.05	3.27	1.32	-0.16	SANDS
65.8	241.83	3.26	1.3	-0.16	SANDS
65.86	245.58	3.24	1.28	-0.16	SANDS
65.93	250.15	3.23	1.26	-0.16	SANDS
65.99	252.83	3.22	1.24	-0.16	SANDS
66.06	255.5	3.18	1.21	-0.16	SANDS
66.13	258.17	3.12	1.17	-0.15	SANDS
66.19	260.85	3.1	1.16	-0.15	SANDS
66.26	266.35	3.13	1.16	-0.15	SANDS
66.32	268.62	3.17	1.18	-0.15	SANDS
66.39	269.48	3.28	1.21	-0.15	SANDS
66.45	269.48	3.44	1.27	-0.14	SANDS
66.52	268.81	3.53	1.29	-0.15	SANDS
66.58	269	3.53	1.28	-0.15	SANDS
66.65	270.12	3.52	1.26	-0.14	SANDS
66.72	272.75	3.51	1.23	-0.15	SANDS
66.78	275.12	3.52	1.21	-0.15	SANDS
66.85	279.28	3.53	1.19	-0.15	SANDS
66.91	286	3.55	1.16	-0.15	SANDS
66.98	293.3	3.56	1.14	-0.15	SANDS
67.04	300.6	3.52	1.09	-0.13	SANDS
67.11	307.91	3.52	1.06	-0.13	SANDS
67.17	315.21	3.58	1.05	-0.13	SANDS
67.24	326.09	3.7	1.06	-0.13	SANDS
67.31	336.27	3.84	1.07	-0.13	SANDS
67.37	345.2	4.14	1.13	-0.13	SANDS
67.44	351.47	4.57	1.22	-0.13	SANDS
67.5	360.53	4.93	1.29	-0.13	SANDS
67.57	372.75	5.26	1.35	-0.13	SANDS
67.63	383.86	5.45	1.37	-0.12	SANDS
67.7	391.64	5.58	1.39	-0.13	SANDS
67.77	393.11	5.71	1.41	-0.13	SANDS
67.83	400.56	5.83	1.44	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

67.9	404.56	5.95	1.46	-0.12	SANDS
67.96	407.06	6.08	1.49	-0.12	SANDS
68.03	407.02	6.05	1.48	-0.12	SANDS
68.09	406.98	5.93	1.45	-0.1	SANDS
68.16	406.94	5.9	1.45	-0.1	SANDS
68.22	406.9	5.86	1.46	-0.09	SANDS
68.29	409.08	5.8	1.46	-0.09	SANDS
68.36	409.2	5.81	1.49	-0.09	SANDS
68.42	405.88	5.99	1.57	-0.09	SANDS
68.49	398.61	6.33	1.7	-0.09	SANDS
68.55	387.41	6.64	1.84	-0.09	SANDS
68.62	376.92	6.86	1.94	-0.08	SANDS
68.68	364.85	6.87	2	-0.09	SANDS
68.75	354.35	6.76	2.01	-0.08	SANDS
68.81	346.26	6.65	2.03	-0.09	SANDS
68.88	340.01	6.53	2.04	-0.09	SANDS
68.95	333.26	6.42	2.06	-0.09	SANDS
69.01	324.45	6.31	2.07	-0.09	SANDS
69.08	315.63	6.06	2.02	-0.08	SANDS
69.14	306.81	5.81	1.97	-0.07	SANDS
69.21	298	5.58	1.93	-0.07	SANDS
69.27	295.5	5.36	1.87	-0.07	SANDS
69.34	291.63	5.19	1.84	-0.07	SANDS
69.41	288.68	4.99	1.79	-0.07	SANDS
69.47	284.97	5.1	1.86	-0.07	SANDS
69.54	281.1	5.11	1.89	-0.06	SANDS
69.6	276.85	5.08	1.91	-0.07	SANDS
69.67	272.11	5.01	1.91	-0.07	SANDS
69.73	268.24	4.94	1.92	-0.07	SANDS
69.8	264.4	4.87	1.93	-0.07	SANDS
69.86	261	4.79	1.95	-0.07	SANDS
69.93	257.1	4.72	1.97	-0.07	SANDS
70	249.95	4.65	2.01	-0.07	SANDS
70.06	242.8	4.52	2.02	-0.07	SANDS
70.13	235.64	4.44	2.06	-0.06	SANDS
70.19	228.49	4.5	2.17	-0.06	SANDS
70.26	221.19	4.49	2.25	-0.07	SANDS
70.32	211.43	4.38	2.27	-0.06	SANDS
70.39	202.38	4.21	2.25	-0.07	SILTY SAND
70.45	194.03	4.23	2.32	-0.06	SILTY SAND
70.52	187.18	4.3	2.4	-0.06	SILTY SAND
70.59	182.57	4.22	2.39	-0.07	SILTY SAND
70.65	178.92	4.1	2.34	-0.07	SILTY SAND
70.72	176.36	3.98	2.27	-0.07	SILTY SAND
70.78	174.57	3.88	2.21	-0.07	SILTY SAND
70.85	173.93	3.75	2.13	-0.07	SILTY SAND
70.91	174.6	3.61	2.04	-0.07	SANDS
70.98	175.36	3.48	1.94	-0.07	SANDS
71.05	176.12	3.6	1.98	-0.07	SANDS
71.11	176.88	3.58	1.93	-0.08	SANDS
71.18	177.64	3.56	1.89	-0.08	SANDS
71.24	182.54	3.58	1.86	-0.08	SANDS

US EPA ARCHIVE DOCUMENT

71.31	187.08	3.57	1.83	-0.08	SANDS
71.37	191.56	3.6	1.82	-0.08	SANDS
71.44	195.37	3.81	1.92	-0.07	SANDS
71.5	197.77	3.9	1.95	-0.08	SANDS
71.57	198.79	3.92	1.96	-0.08	SANDS
71.64	199.59	3.92	1.94	-0.07	SANDS
71.7	200.49	3.9	1.92	-0.08	SANDS
71.77	200.65	3.85	1.87	-0.08	SANDS
71.83	200.49	3.76	1.8	-0.07	SANDS
71.9	201.48	3.55	1.67	-0.08	SANDS
71.96	205.79	3.53	1.61	-0.08	SANDS
72.03	210.09	3.49	1.55	-0.08	SANDS
72.09	214.39	3.5	1.49	-0.08	SANDS
72.16	218.7	3.51	1.44	-0.08	SANDS
72.23	227.53	3.54	1.39	-0.08	SANDS
72.29	237.48	3.52	1.33	-0.08	SANDS
72.36	248.01	3.58	1.3	-0.08	SANDS
72.42	259.82	3.63	1.26	-0.08	SANDS
72.49	271.95	3.62	1.21	-0.08	SANDS
72.55	282.54	3.62	1.17	-0.07	SANDS
72.62	293.39	3.66	1.15	-0.07	SANDS
72.69	303.6	3.75	1.15	-0.07	SANDS
72.75	312.94	3.85	1.15	-0.08	SANDS
72.82	323.12	3.81	1.12	-0.08	SANDS
72.88	332.72	3.76	1.09	-0.08	SANDS
72.95	341.42	3.71	1.06	-0.08	SANDS
73.01	344.96	3.66	1.04	-0.08	SANDS
73.08	348.5	3.68	1.04	-0.09	SANDS
73.14	352.03	3.69	1.03	-0.07	SANDS
73.21	355.57	3.68	1.03	-0.07	SANDS
73.28	359.57	3.71	1.05	-0.07	SANDS
73.34	359.82	3.77	1.08	-0.07	SANDS
73.41	358.26	4	1.16	-0.07	SANDS
73.47	355.22	4.4	1.3	-0.07	SANDS
73.54	350.54	4.68	1.41	-0.08	SANDS
73.6	343.67	4.85	1.49	-0.08	SANDS
73.67	335.15	5	1.56	-0.07	SANDS
73.73	327.25	5.12	1.62	-0.07	SANDS
73.8	320.62	5.15	1.65	-0.08	SANDS
73.87	315.35	5.25	1.7	-0.07	SANDS
73.93	312.02	5.34	1.74	-0.08	SANDS
74	309.84	5.43	1.77	-0.07	SANDS
74.06	307.62	5.18	1.69	-0.06	SANDS
74.13	305.4	4.95	1.62	-0.05	SANDS
74.19	303.18	4.77	1.55	-0.06	SANDS
74.26	304.72	4.61	1.49	-0.05	SANDS
74.32	306.03	4.46	1.43	-0.05	SANDS
74.39	307.57	4.33	1.38	-0.05	SANDS
74.46	310.8	4.41	1.4	-0.05	SANDS
74.52	314.13	4.57	1.45	-0.05	SANDS
74.59	316.08	4.75	1.51	-0.05	SANDS
74.65	317.61	4.98	1.59	-0.05	SANDS

US EPA ARCHIVE DOCUMENT

74.72	316.94	5.24	1.69	-0.06	SANDS
74.78	314.64	5.31	1.73	-0.05	SANDS
74.85	312.27	5.38	1.77	-0.05	SANDS
74.92	310.29	5.45	1.8	-0.06	SANDS
74.98	306.48	5.52	1.83	-0.06	SANDS
75.05	302.67	5.54	1.84	-0.07	SANDS
75.11	298.86	5.45	1.8	-0.07	SANDS
75.18	295.05	5.32	1.73	-0.05	SANDS
75.24	299.95	5.17	1.66	-0.05	SANDS
75.31	304.14	5.05	1.59	-0.06	SANDS
75.37	308.65	4.91	1.52	-0.05	SANDS
75.44	313.33	5.12	1.55	-0.05	SANDS
75.51	318.73	5.3	1.57	-0.05	SANDS
75.57	325.77	5.37	1.56	-0.05	SANDS
75.64	334.64	5.44	1.56	-0.06	SANDS
75.7	341.93	5.52	1.56	-0.05	SANDS
75.77	348.49	5.63	1.58	-0.05	SANDS
75.83	354.61	5.66	1.59	-0.06	SANDS
75.9	358.58	5.69	1.6	-0.05	SANDS
75.96	360.69	5.73	1.62	-0.05	SANDS
76.03	357.36	5.76	1.65	-0.05	SANDS
76.1	354.03	5.86	1.69	-0.05	SANDS
76.16	350.71	5.92	1.71	-0.05	SANDS
76.23	347.38	5.9	1.7	-0.04	SANDS
76.29	345.46	5.72	1.63	-0.04	SANDS
76.36	342.93	5.52	1.54	-0.04	SANDS
76.42	342.87	5.44	1.49	-0.04	SANDS
76.49	349.1	5.57	1.49	-0.04	SANDS
76.56	358.58	5.53	1.45	-0.04	SANDS
76.62	369.39	5.39	1.39	-0.04	SANDS
76.69	380.56	5.33	1.35	-0.04	SANDS
76.75	389.36	5.31	1.33	-0.04	SANDS
76.82	392.95	5.33	1.32	-0.04	SANDS
76.88	398.2	5.34	1.32	-0.04	SANDS
76.95	404.11	5.35	1.31	-0.04	SANDS
77.01	404.78	5.36	1.31	-0.05	SANDS
77.08	405.44	5.32	1.29	-0.04	SANDS
77.15	406.11	5.39	1.3	-0.03	SANDS
77.21	406.77	5.5	1.32	-0.03	SANDS
77.28	413.62	5.67	1.35	-0.03	SANDS
77.34	415.7	5.98	1.41	-0.04	SANDS
77.41	417.62	6.26	1.47	-0.04	SANDS
77.47	419.22	6.66	1.56	-0.04	SANDS
77.54	423.09	6.93	1.62	-0.04	SANDS
77.6	427.8	7.04	1.65	-0.04	SANDS
77.67	432.66	6.99	1.65	-0.04	SANDS
77.74	434.71	6.95	1.66	-0.04	SANDS
77.8	429.14	7	1.7	-0.04	SANDS
77.87	421.78	7.05	1.74	-0.03	SANDS
77.93	412.98	7.1	1.77	-0.04	SANDS
78	407.1	7.15	1.79	-0.04	SANDS
78.06	401.24	7.02	1.77	-0.03	SANDS

US EPA ARCHIVE DOCUMENT

78.13	395.36	6.75	1.71	-0.02	SANDS
78.2	389.49	6.43	1.64	-0.02	SANDS
78.26	400.37	5.92	1.52	-0.01	SANDS
78.33	403.63	5.53	1.45	-0.01	SANDS
78.39	396.85	5.31	1.42	-0.02	SANDS
78.46	387.66	5.69	1.55	-0.02	SANDS
78.52	376.72	6.04	1.67	-0.02	SANDS
78.59	365.97	6.22	1.73	-0.02	SANDS
78.65	359.7	6.2	1.73	-0.03	SANDS
78.72	355.19	5.96	1.65	-0.02	SANDS
78.79	355.12	5.65	1.55	-0.02	SANDS
78.85	356.81	5.34	1.45	-0.02	SANDS
78.92	360.88	5.03	1.34	-0.01	SANDS
78.98	365.51	4.72	1.24	-0.02	SANDS
79.05	370.15	4.25	1.1	-0.02	SANDS
79.11	374.78	4.12	1.04	-0.01	SANDS
79.18	379.41	4.06	1.01	-0.01	SANDS
79.24	393.39	4.09	1	-0.02	SANDS
79.31	401.1	4.34	1.06	-0.01	SANDS
79.38	406.32	4.63	1.13	-0.01	SANDS
79.44	412.21	5.11	1.25	-0.01	SANDS
79.51	414.9	5.52	1.37	-0.02	SANDS
79.57	413.75	5.84	1.46	-0.01	SANDS
79.64	408.88	6.12	1.56	-0.01	SANDS
79.7	400.21	6.31	1.62	-0.02	SANDS
79.77	392.47	6.48	1.69	-0.01	SANDS
79.84	389.04	6.66	1.75	-0.02	SANDS
79.9	387.66	6.83	1.81	-0.01	SANDS
79.97	383.58	7.01	1.86	-0.01	SANDS
80.03	379.49	6.82	1.82	-0.01	SANDS
80.1	375.4	6.56	1.75	0	SANDS
80.16	371.31	6.27	1.67	-0.01	SANDS
80.23	372.59	6.07	1.61	-0.01	SANDS
80.29	374.06	6.06	1.61	-0.01	SANDS
80.36	377.9	6.28	1.66	-0.01	SANDS
80.43	378.03	6.61	1.74	-0.02	SANDS
80.49	378.74	6.7	1.76	-0.02	SANDS
80.56	378.48	6.59	1.72	-0.01	SANDS
80.62	378.77	6.53	1.7	-0.01	SANDS
80.69	381.39	6.46	1.68	-0.02	SANDS
80.75	383.47	6.53	1.7	-0.02	SANDS
80.82	386.55	6.6	1.72	-0.01	SANDS
80.88	388.88	6.67	1.75	-0.01	SANDS
80.95	385.73	6.74	1.79	-0.01	SANDS
81.02	382.58	6.71	1.8	-0.01	SANDS
81.08	379.42	6.66	1.82	0	SANDS
81.15	376.27	6.7	1.87	0	SANDS
81.21	372.88	6.76	1.95	0	SANDS
81.28	364.85	6.78	2.03	0	SANDS
81.34	355.63	6.76	2.12	-0.01	SANDS
81.41	345.46	6.94	2.3	-0.01	SANDS
81.48	331.72	6.92	2.43	0	SANDS

US EPA ARCHIVE DOCUMENT

81.54	313.81	6.84	2.56	-0.01	SANDS
81.61	292.88	6.7	2.68	0	SILTY SAND
81.67	273.71	6.57	2.78	0	SILTY SAND
81.74	256.27	6.44	2.88	-0.01	SILTY SAND
81.8	239.43	6.21	2.91	-0.02	SILTY SAND
81.87	225.83	5.99	2.93	-0.01	SILTY SAND
81.93	214.89	5.76	2.93	0	SILTY SAND
82	207.44	5.68	2.99	0	SILTY SAND
82.07	199.98	5.3	2.88	-0.02	SILTY SAND
82.13	192.52	4.93	2.78	-0.02	SILTY SAND
82.2	185.07	4.64	2.71	-0.01	SILTY SAND
82.26	180.59	4.42	2.67	-0.02	SILTY SAND
82.33	175.11	4.22	2.64	-0.02	SILTY SAND
82.39	168.87	4.19	2.71	-0.02	SILTY SAND
82.46	162.25	4.13	2.76	-0.02	SILTY SAND
82.52	155.97	3.95	2.72	-0.02	SILTY SAND
82.59	150.47	3.74	2.62	-0.02	SILTY SAND
82.66	145.57	3.59	2.54	-0.03	SILTY SAND
82.72	142.06	3.41	2.43	-0.02	SILTY SAND
82.79	139.62	3.21	2.3	-0.02	SILTY SAND
82.85	139.27	3.17	2.25	-0.03	SILTY SAND
82.92	140.29	2.5	1.74	-0.03	SANDS
82.98	142.95	2.5	1.71	-0.03	SANDS
83.05	139.65	2.57	1.72	-0.03	SANDS
83.12	138.22	2.69	1.75	-0.06	SANDS
83.18	147.72	2.88	1.8	-0.07	SANDS
83.25	152.04	3.05	1.84	-0.07	SANDS
83.31	156.68	3.19	1.84	-0.08	SANDS
83.38	160.59	3.32	1.83	-0.07	SANDS
83.44	165.99	3.4	1.76	-0.07	SANDS
83.51	173.8	3.42	1.65	-0.06	SANDS
83.57	183.72	3.44	1.54	-0.05	SANDS
83.64	196.33	3.47	1.44	-0.04	SANDS
83.71	211.21	3.54	1.36	-0.03	SANDS
83.77	228.62	3.58	1.27	-0.02	SANDS
83.84	248.49	3.62	1.19	-0.02	SANDS
83.9	270.22	3.66	1.1	-0.01	SANDS
83.97	293.25	3.7	1.02	0	SANDS
84.03	316.29	3.84	0.97	-0.07	SANDS
84.1	339.32	4.01	0.93	-0.06	SANDS
84.16	362.35	4.25	0.91	-0.06	SANDS
84.23	408.05	4.44	0.89	-0.05	SANDS
84.3	452.53	4.78	0.9	-0.06	SANDS
84.36	489.24	5.29	0.95	-0.06	SANDS
84.43	525.85	5.96	1.03	-0.06	SANDS
84.49	554.17	6.68	1.11	-0.05	SANDS
84.56	572.83	7.4	1.2	-0.06	SANDS
84.62	588.67	8.16	1.29	-0.06	SANDS
84.69	607.97	8.25	1.27	-0.05	SANDS
84.75	629.59	8.34	1.26	-0.05	SANDS
84.82	649.82	8.42	1.26	-0.06	SANDS
84.89	662.53	8.51	1.26	-0.06	SANDS

US EPA ARCHIVE DOCUMENT

84.95	668.24	8.6	1.26	-0.07	SANDS
85.02	673.96	8.68	1.26	-0.08	SANDS
85.08	679.67	8.77	1.26	-0.08	SANDS
85.15	685.38	8.86	1.27	-0.07	SANDS
85.21	691.1	8.83	1.26	-0.07	SANDS
85.28	696.81	8.82	1.25	-0.08	SANDS
85.35	702.53	8.8	1.34	-0.08	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-14-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 04

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0.64	0	CLAYS
0.13	0	0	0.56	0	CLAYS
0.2	0	0	0.11	0	CLAYS
0.26	0.1	0	0.14	-0.01	CLAYS
0.33	0.19	0	0.01	-0.01	CLAYEY SILT&SILTY CLAYS
0.39	0.05	0	0.02	-0.03	CLAYS
0.46	0.05	1.2	10	-0.03	CLAYS
0.52	1.63	2.4	10	-0.02	CLAYS
0.59	10.14	3.6	10	-0.03	CLAYS
0.66	18.66	4.3	10	-0.03	CLAYS
0.72	12.74	5.33	10	-0.03	CLAYS
0.79	15.59	4.87	10	-0.02	CLAYS
0.85	18.27	3.71	10	-0.04	CLAYS
0.92	20.99	2.77	10	-0.07	CLAYS
0.98	21.63	1.01	5.09	-0.06	CLAYS
1.05	19.97	0.93	4.75	-0.04	CLAYS
1.12	19.78	1.04	5.24	-0.03	CLAYS
1.18	19.17	1.15	5.69	-0.05	CLAYS
1.25	19.01	1.2	5.84	-0.05	CLAYS
1.31	19.46	1.23	5.89	-0.05	CLAYS
1.38	19.94	1.28	6.14	-0.04	CLAYS
1.44	21.25	1.29	6.21	-0.06	CLAYS
1.51	21.89	1.28	6.37	-0.07	CLAYS
1.57	21.73	1.35	7.05	-0.06	CLAYS
1.64	21.03	1.51	8.34	-0.08	CLAYS
1.71	19.65	1.57	9.12	-0.11	CLAYS
1.77	18.79	1.64	9.77	-0.11	CLAYS
1.84	17.41	1.7	9.87	-0.1	CLAYS
1.9	16.23	1.73	9.14	-0.09	CLAYS
1.97	15.65	1.64	7.53	-0.1	CLAYS
2.03	15.94	1.58	6.35	-0.08	CLAYS
2.1	16.84	1.49	5.3	-0.07	CLAYS
2.16	21.16	1.4	4.52	-0.07	CLAYEY SILT&SILTY CLAYS
2.23	28	1.49	4.56	-0.08	CLAYEY SILT&SILTY CLAYS
2.3	33.09	1.58	4.8	-0.07	CLAYEY SILT&SILTY CLAYS
2.36	34.53	1.59	5	-0.07	CLAYEY SILT&SILTY CLAYS
2.43	34.98	1.58	5.31	-0.08	CLAYS
2.49	33.63	1.6	5.86	-0.08	CLAYS
2.56	31.94	1.6	6.49	-0.08	CLAYS
2.62	29.04	1.58	7.14	-0.08	CLAYS
2.69	26.15	1.54	7.66	-0.1	CLAYS
2.76	22.75	1.4	7.56	-0.1	CLAYS
2.82	20.19	1.11	6.41	-0.1	CLAYS
2.89	18.15	0.82	4.98	-0.1	CLAYS
2.95	16.84	0.88	5.51	-0.11	CLAYS
3.02	16.84	0.91	5.88	-0.12	CLAYS

US EPA ARCHIVE DOCUMENT

3.08	16.26	0.96	6.32	-0.12	CLAYS
3.15	15.71	1	6.7	-0.12	CLAYS
3.21	15.2	1.03	6.99	-0.12	CLAYS
3.28	14.82	1.07	7.27	-0.12	CLAYS
3.35	14.5	1.04	7	-0.12	CLAYS
3.41	14.59	1.03	6.85	-0.12	CLAYS
3.48	14.66	1.04	6.7	-0.12	CLAYS
3.54	14.69	1.03	6.44	-0.12	CLAYS
3.61	15.01	1.03	6.26	-0.12	CLAYS
3.67	15.46	1.04	6.08	-0.12	CLAYS
3.74	16.16	1.09	6.2	-0.13	CLAYS
3.8	16.84	1.17	6.4	-0.13	CLAYS
3.87	17.48	1.3	6.85	-0.14	CLAYS
3.94	18.18	1.38	6.9	-0.15	CLAYS
4	18.47	1.47	6.91	-0.14	CLAYS
4.07	18.66	1.55	6.79	-0.16	CLAYS
4.13	19.97	1.65	6.68	-0.15	CLAYS
4.2	21.44	1.74	6.53	-0.15	CLAYS
4.26	23.39	1.85	6.46	-0.16	CLAYS
4.33	25.31	1.92	6.29	-0.14	CLAYS
4.4	27.81	2.02	6.24	-0.15	CLAYS
4.46	29.92	2.16	6.4	-0.15	CLAYS
4.53	31.78	2.33	6.68	-0.15	CLAYS
4.59	33.54	2.51	7.04	-0.16	CLAYS
4.66	34.82	2.68	7.38	-0.15	CLAYS
4.72	35.91	2.75	7.59	-0.16	CLAYS
4.79	36.29	2.74	7.6	-0.16	CLAYS
4.85	36.77	2.48	7.02	-0.17	CLAYS
4.92	36.9	2.28	6.62	-0.17	CLAYS
4.99	36.96	2.02	6.1	-0.18	CLAYS
5.05	34.95	1.76	5.56	-0.12	CLAYS
5.12	34.31	1.4	4.61	-0.09	CLAYEY SILT&SILTY CLAYS
5.18	32.58	1.14	3.92	-0.08	CLAYEY SILT&SILTY CLAYS
5.25	30.92	0.9	3.18	-0.09	CLAYEY SANDY SILT&SILT
5.31	29.06	0.65	2.35	-0.08	CLAYEY SANDY SILT&SILT
5.38	27.75	0.49	1.78	-0.09	CLAYEY SANDY SILT&SILT
5.44	27.08	0.39	1.45	-0.08	SILTY SAND
5.51	26.98	0.33	1.23	-0.08	SILTY SAND
5.58	27.17	0.32	1.18	-0.08	SILTY SAND
5.64	27.49	0.3	1.15	-0.09	SILTY SAND
5.71	27.36	0.3	1.18	-0.09	SILTY SAND
5.77	26.85	0.33	1.33	-0.09	SILTY SAND
5.84	26.4	0.36	1.55	-0.08	CLAYEY SANDY SILT&SILT
5.9	25.73	0.35	1.58	-0.09	CLAYEY SANDY SILT&SILT
5.97	24.23	0.37	1.71	-0.08	CLAYEY SANDY SILT&SILT
6.04	22.43	0.37	1.83	-0.09	CLAYEY SANDY SILT&SILT
6.1	21.57	0.37	1.86	-0.08	CLAYEY SANDY SILT&SILT
6.17	20.48	0.36	1.83	-0.08	CLAYEY SANDY SILT&SILT
6.23	19.87	0.34	1.75	-0.1	CLAYEY SANDY SILT&SILT
6.3	19.46	0.32	1.64	-0.1	CLAYEY SANDY SILT&SILT
6.36	18.98	0.31	1.56	-0.09	CLAYEY SANDY SILT&SILT
6.43	19.17	0.3	1.52	-0.1	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

6.49	19.49	0.31	1.51	-0.09	CLAYEY SANDY SILT&SILT
6.56	19.55	0.33	1.6	-0.09	CLAYEY SANDY SILT&SILT
6.63	20.04	0.37	1.73	-0.11	CLAYEY SANDY SILT&SILT
6.69	20.71	0.4	1.83	-0.11	CLAYEY SANDY SILT&SILT
6.76	21.25	0.42	1.88	-0.11	CLAYEY SANDY SILT&SILT
6.82	21.6	0.42	1.83	-0.1	CLAYEY SANDY SILT&SILT
6.89	22.27	0.43	1.81	-0.11	CLAYEY SANDY SILT&SILT
6.95	22.88	0.45	1.84	-0.11	CLAYEY SANDY SILT&SILT
7.02	23.14	0.48	1.92	-0.1	CLAYEY SANDY SILT&SILT
7.08	24.23	0.49	1.96	-0.11	CLAYEY SANDY SILT&SILT
7.15	25.16	0.53	2.06	-0.13	CLAYEY SANDY SILT&SILT
7.22	25.19	0.57	2.19	-0.12	CLAYEY SANDY SILT&SILT
7.28	25.47	0.59	2.23	-0.13	CLAYEY SANDY SILT&SILT
7.35	25.41	0.63	2.34	-0.12	CLAYEY SANDY SILT&SILT
7.41	25.7	0.67	2.46	-0.12	CLAYEY SANDY SILT&SILT
7.48	26.66	0.71	2.59	-0.13	CLAYEY SANDY SILT&SILT
7.54	27.97	0.73	2.72	-0.14	CLAYEY SANDY SILT&SILT
7.61	28.51	0.74	2.8	-0.14	CLAYEY SANDY SILT&SILT
7.68	28	0.75	2.95	-0.16	CLAYEY SANDY SILT&SILT
7.74	26.82	0.82	3.28	-0.15	CLAYEY SANDY SILT&SILT
7.81	25.77	0.94	3.77	-0.16	CLAYEY SILT&SILTY CLAYS
7.87	24.77	0.99	3.98	-0.15	CLAYEY SILT&SILTY CLAYS
7.94	24.1	1.01	4.04	-0.15	CLAYEY SILT&SILTY CLAYS
8	23.84	1.06	4.2	-0.14	CLAYEY SILT&SILTY CLAYS
8.07	24.96	1.1	4.34	-0.13	CLAYEY SILT&SILTY CLAYS
8.13	25.86	1.11	4.4	-0.14	CLAYEY SILT&SILTY CLAYS
8.2	25.86	1.14	4.56	-0.14	CLAYEY SILT&SILTY CLAYS
8.27	25.73	1.16	4.69	-0.14	CLAYEY SILT&SILTY CLAYS
8.33	25.38	1.18	4.8	-0.14	CLAYEY SILT&SILTY CLAYS
8.4	24.55	1.23	4.99	-0.15	CLAYS
8.46	23.97	1.25	5.02	-0.14	CLAYS
8.53	24.13	1.24	4.92	-0.15	CLAYS
8.59	24.19	1.24	4.89	-0.14	CLAYS
8.66	24.77	1.3	5.08	-0.14	CLAYS
8.72	25.73	1.36	5.32	-0.14	CLAYS
8.79	26.4	1.38	5.46	-0.14	CLAYS
8.86	26.15	1.35	5.4	-0.13	CLAYS
8.92	25.38	1.31	5.32	-0.13	CLAYS
8.99	24.52	1.33	5.44	-0.13	CLAYS
9.05	25	1.36	5.49	-0.15	CLAYS
9.12	24.61	1.38	5.49	-0.16	CLAYS
9.18	24.13	1.4	5.47	-0.15	CLAYS
9.25	24.16	1.42	5.43	-0.14	CLAYS
9.32	24.77	1.41	5.25	-0.13	CLAYS
9.38	26.21	1.39	5.07	-0.13	CLAYS
9.45	27.05	1.36	4.92	-0.13	CLAYEY SILT&SILTY CLAYS
9.51	27.36	1.35	4.85	-0.13	CLAYEY SILT&SILTY CLAYS
9.58	27.49	1.36	4.89	-0.13	CLAYEY SILT&SILTY CLAYS
9.64	27.78	1.39	4.97	-0.14	CLAYEY SILT&SILTY CLAYS
9.71	28.16	1.4	5	-0.13	CLAYS
9.77	28.16	1.24	4.46	-0.12	CLAYEY SILT&SILTY CLAYS
9.84	27.84	1.09	3.92	-0.13	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

9.91	27.79	0.94	3.38	-0.12	CLAYEY SILT&SILTY CLAYS
9.97	27.74	1.07	3.86	-0.13	CLAYEY SILT&SILTY CLAYS
10.04	27.69	1.19	4.31	-0.09	CLAYEY SILT&SILTY CLAYS
10.1	28.07	1.29	4.68	-0.09	CLAYEY SILT&SILTY CLAYS
10.17	27.81	1.41	5.13	-0.1	CLAYS
10.23	27.46	1.5	5.45	-0.09	CLAYS
10.3	27.39	1.53	5.51	-0.09	CLAYS
10.36	27.2	1.53	5.46	-0.09	CLAYS
10.43	27.36	1.54	5.39	-0.09	CLAYS
10.5	27.69	1.59	5.52	-0.08	CLAYS
10.56	28.36	1.6	5.57	-0.08	CLAYS
10.63	28.97	1.59	5.62	-0.08	CLAYS
10.69	29.09	1.59	5.72	-0.08	CLAYS
10.76	29.47	1.57	5.79	-0.08	CLAYS
10.82	28.87	1.49	5.71	-0.08	CLAYS
10.89	27.49	1.5	6.06	-0.08	CLAYS
10.96	26.15	1.52	6.48	-0.08	CLAYS
11.02	26.02	1.56	6.96	-0.09	CLAYS
11.09	24.77	1.53	7.25	-0.08	CLAYS
11.15	23.08	1.51	7.6	-0.09	CLAYS
11.22	21.41	1.48	7.83	-0.08	CLAYS
11.28	19.78	1.42	7.74	-0.09	CLAYS
11.35	19.01	1.35	7.6	-0.09	CLAYS
11.41	18.4	1.26	6.93	-0.09	CLAYS
11.48	17.54	1.14	6.09	-0.09	CLAYS
11.55	17.18	1.06	5.45	-0.08	CLAYS
11.61	17.92	1.05	5.18	-0.09	CLAYS
11.68	16.68	1.06	5.11	-0.08	CLAYS
11.74	21.25	1.07	4.9	-0.08	CLAYS
11.81	21.96	1.09	4.96	-0.08	CLAYS
11.87	21.99	1.07	4.86	-0.08	CLAYS
11.94	21.63	1.04	4.8	-0.08	CLAYS
12	21.22	1.06	5.04	-0.08	CLAYS
12.07	22.88	1.09	5.37	-0.09	CLAYS
12.14	22.4	1.12	5.84	-0.09	CLAYS
12.2	21.28	1.14	6.36	-0.1	CLAYS
12.27	20.13	1.14	6.83	-0.09	CLAYS
12.33	18.6	1.11	7.13	-0.09	CLAYS
12.4	16.96	1.06	7.15	-0.09	CLAYS
12.46	15.43	1.01	6.99	-0.08	CLAYS
12.53	14.72	0.96	6.69	-0.09	CLAYS
12.6	14.15	0.92	6.33	-0.1	CLAYS
12.66	13.79	0.86	5.84	-0.09	CLAYS
12.73	14.12	0.82	5.34	-0.09	CLAYS
12.79	14.53	0.8	5.02	-0.09	CLAYS
12.86	14.88	0.74	4.55	-0.09	CLAYS
12.92	15.4	0.7	4.21	-0.08	CLAYEY SILT&SILTY CLAYS
12.99	15.84	0.7	4.16	-0.09	CLAYEY SILT&SILTY CLAYS
13.05	17.41	0.7	4.19	-0.11	CLAYEY SILT&SILTY CLAYS
13.12	17.32	0.73	4.45	-0.18	CLAYEY SILT&SILTY CLAYS
13.19	16.99	0.78	4.81	-0.2	CLAYS
13.25	16.61	0.81	5.15	-0.2	CLAYS

US EPA ARCHIVE DOCUMENT

13.32	16.2	0.84	5.39	-0.2	CLAYS
13.38	15.94	0.86	5.6	-0.19	CLAYS
13.45	15.59	0.89	5.88	-0.19	CLAYS
13.51	15.43	0.91	6.1	-0.19	CLAYS
13.58	15.1	0.91	6.15	-0.19	CLAYS
13.64	15.14	0.91	6.13	-0.2	CLAYS
13.71	14.79	0.88	5.89	-0.19	CLAYS
13.78	14.5	0.87	5.67	-0.2	CLAYS
13.84	14.46	0.8	5.11	-0.18	CLAYS
13.91	14.88	0.75	4.73	-0.19	CLAYS
13.97	14.98	0.72	4.53	-0.19	CLAYS
14.04	16.48	0.69	4.38	-0.2	CLAYEY SILT&SILTY CLAYS
14.1	16.51	0.7	4.51	-0.23	CLAYS
14.17	16.16	0.73	4.78	-0.23	CLAYS
14.24	15.68	0.76	5.07	-0.24	CLAYS
14.3	15.36	0.79	5.33	-0.24	CLAYS
14.37	14.95	0.8	5.47	-0.23	CLAYS
14.43	14.69	0.81	5.56	-0.23	CLAYS
14.5	14.79	0.83	5.65	-0.24	CLAYS
14.56	14.66	0.83	5.65	-0.24	CLAYS
14.63	14.53	0.83	5.64	-0.24	CLAYS
14.69	14.53	0.73	4.78	-0.24	CLAYS
14.76	14.75	0.62	3.97	-0.23	CLAYEY SILT&SILTY CLAYS
14.83	14.88	0.64	4	-0.24	CLAYEY SILT&SILTY CLAYS
14.89	14.95	0.66	4.05	-0.23	CLAYEY SILT&SILTY CLAYS
14.96	14.98	0.68	4.11	-0.23	CLAYEY SILT&SILTY CLAYS
15.02	17.48	0.8	4.74	-0.25	CLAYS
15.09	17.25	0.9	5.39	-0.24	CLAYS
15.15	16.99	0.98	5.94	-0.24	CLAYS
15.22	16.71	1.04	6.3	-0.24	CLAYS
15.28	16.45	1.05	6.39	-0.24	CLAYS
15.35	16.29	1.02	6.25	-0.23	CLAYS
15.42	16.32	1	6.12	-0.24	CLAYS
15.48	16.45	0.99	6.06	-0.24	CLAYS
15.55	16.45	0.97	5.94	-0.24	CLAYS
15.61	16.35	0.96	5.87	-0.24	CLAYS
15.68	16.1	0.96	5.84	-0.23	CLAYS
15.74	16.42	0.95	5.67	-0.24	CLAYS
15.81	16.51	0.94	5.48	-0.25	CLAYS
15.88	16.32	0.96	5.56	-0.24	CLAYS
15.94	16.51	0.94	5.47	-0.24	CLAYS
16.01	16.58	0.95	5.56	-0.24	CLAYS
16.07	18.56	0.96	5.7	-0.25	CLAYS
16.14	18.18	0.98	5.98	-0.26	CLAYS
16.2	17.15	0.99	6.16	-0.25	CLAYS
16.27	16.23	0.99	6.19	-0.25	CLAYS
16.33	15.36	0.99	6.09	-0.25	CLAYS
16.4	15.36	0.98	5.8	-0.25	CLAYS
16.47	15.68	0.96	5.51	-0.24	CLAYS
16.53	16.51	0.95	5.23	-0.25	CLAYS
16.6	17.25	0.97	5.2	-0.25	CLAYS
16.66	17.89	0.98	5.19	-0.24	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	18.63	1.02	5.18	-0.24	CLAYS
16.79	19.01	1.04	5.17	-0.25	CLAYS
16.86	19.43	1.06	5.23	-0.25	CLAYS
16.92	19.24	1.08	5.36	-0.24	CLAYS
16.99	19.27	1.1	5.51	-0.25	CLAYS
17.06	22.18	1.16	5.94	-0.25	CLAYS
17.12	21.22	1.21	6.43	-0.26	CLAYS
17.19	19.94	1.23	6.83	-0.26	CLAYS
17.25	18.85	1.24	7.12	-0.25	CLAYS
17.32	18.05	1.22	7.2	-0.25	CLAYS
17.38	17.35	1.16	7.05	-0.25	CLAYS
17.45	17.09	1.11	6.84	-0.25	CLAYS
17.52	16.71	1.05	6.62	-0.25	CLAYS
17.58	16.23	1	6.41	-0.25	CLAYS
17.65	16	0.97	6.27	-0.26	CLAYS
17.71	15.56	0.94	5.92	-0.25	CLAYS
17.78	15.36	0.91	5.61	-0.25	CLAYS
17.84	15.43	0.87	5.26	-0.26	CLAYS
17.91	15.33	0.83	4.98	-0.25	CLAYS
17.97	15.49	0.79	4.73	-0.25	CLAYS
18.04	18.27	0.85	5.14	-0.26	CLAYS
18.11	17.92	0.89	5.61	-0.27	CLAYS
18.17	16.84	0.91	5.98	-0.26	CLAYS
18.24	16	0.93	6.29	-0.27	CLAYS
18.3	15.14	0.93	6.36	-0.26	CLAYS
18.37	14.59	0.91	6.26	-0.26	CLAYS
18.43	14.21	0.87	6.01	-0.26	CLAYS
18.5	14.53	0.85	5.77	-0.27	CLAYS
18.56	14.4	0.83	5.6	-0.26	CLAYS
18.63	14.56	0.81	5.36	-0.26	CLAYS
18.7	14.69	0.8	4.93	-0.26	CLAYS
18.76	14.79	0.8	4.66	-0.26	CLAYS
18.83	15.07	0.81	4.6	-0.26	CLAYS
18.89	15.46	0.85	4.71	-0.26	CLAYS
18.96	16.45	0.93	5.13	-0.26	CLAYS
19.02	20.83	1	5.53	-0.26	CLAYS
19.09	19.91	1.04	6.06	-0.27	CLAYS
19.16	18.27	1.07	6.46	-0.27	CLAYS
19.22	17.02	1.08	6.72	-0.27	CLAYS
19.29	16.48	1.06	6.76	-0.26	CLAYS
19.35	15.87	1.03	6.58	-0.26	CLAYS
19.42	15.71	0.97	6.19	-0.26	CLAYS
19.48	15.49	0.93	5.9	-0.26	CLAYS
19.55	15.49	0.91	5.7	-0.27	CLAYS
19.61	15.49	0.87	5.41	-0.26	CLAYS
19.68	16.07	0.83	5.16	-0.27	CLAYS
19.75	16.16	0.82	4.73	-0.27	CLAYS
19.81	16.29	0.79	4.41	-0.27	CLAYEY SILT&SILTY CLAYS
19.88	16.2	0.8	4.37	-0.27	CLAYEY SILT&SILTY CLAYS
19.94	16.13	0.93	5.08	-0.27	CLAYS
20.01	16.13	1.05	5.79	-0.27	CLAYS
20.07	22.69	1.13	6.37	-0.27	CLAYS

US EPA ARCHIVE DOCUMENT

20.14	20.19	1.19	7.27	-0.28	CLAYS
20.2	17.92	1.18	7.79	-0.28	CLAYS
20.27	16.51	1.14	7.85	-0.28	CLAYS
20.34	15.26	1.07	7.6	-0.28	CLAYS
20.4	14.15	0.96	6.94	-0.28	CLAYS
20.47	13.7	0.86	6.28	-0.28	CLAYS
20.53	13.64	0.8	5.82	-0.28	CLAYS
20.6	13.73	0.75	5.41	-0.28	CLAYS
20.66	13.76	0.72	5.05	-0.27	CLAYS
20.73	13.67	0.68	4.47	-0.27	CLAYS
20.8	13.99	0.64	4.04	-0.28	CLAYEY SILT&SILTY CLAYS
20.86	14.15	0.81	4.96	-0.27	CLAYS
20.93	14.4	0.88	5.28	-0.27	CLAYS
20.99	14.95	0.96	5.72	-0.28	CLAYS
21.06	19.91	1	5.93	-0.28	CLAYS
21.12	18.27	1.01	6.33	-0.28	CLAYS
21.19	16.71	1.03	6.59	-0.28	CLAYS
21.25	15.9	0.98	6.33	-0.29	CLAYS
21.32	15.33	0.9	5.72	-0.28	CLAYS
21.39	14.82	0.82	5.07	-0.27	CLAYS
21.45	15.01	0.73	4.43	-0.28	CLAYS
21.52	15.59	0.72	4.27	-0.27	CLAYEY SILT&SILTY CLAYS
21.58	16.29	0.76	4.44	-0.27	CLAYEY SILT&SILTY CLAYS
21.65	17.28	0.83	4.85	-0.29	CLAYS
21.71	17.54	0.88	5.06	-0.29	CLAYS
21.78	17.35	0.94	5.3	-0.28	CLAYS
21.84	16.8	0.91	5.05	-0.28	CLAYS
21.91	16.84	0.95	5.27	-0.28	CLAYS
21.98	16.8	1.01	5.54	-0.28	CLAYS
22.04	19.14	1.07	5.84	-0.28	CLAYS
22.11	19.33	1.15	6.46	-0.28	CLAYS
22.17	18.76	1.19	6.79	-0.28	CLAYS
22.24	17.73	1.24	7.2	-0.29	CLAYS
22.3	17.25	1.23	7.17	-0.28	CLAYS
22.37	17.32	1.15	6.77	-0.29	CLAYS
22.44	16.96	1.07	6.43	-0.29	CLAYS
22.5	16.9	1.06	6.5	-0.28	CLAYS
22.57	17.28	1.02	6.39	-0.28	CLAYS
22.63	17.09	0.95	6.01	-0.28	CLAYS
22.7	16.07	0.96	6.02	-0.29	CLAYS
22.76	15.59	0.79	4.96	-0.28	CLAYS
22.83	15.3	0.63	3.97	-0.28	CLAYEY SILT&SILTY CLAYS
22.89	14.56	0.66	4.29	-0.28	CLAYEY SILT&SILTY CLAYS
22.96	16.14	0.75	5	-0.28	CLAYS
23.03	17.73	0.8	5.62	-0.28	CLAYS
23.09	16.38	0.85	6.5	-0.29	CLAYS
23.16	14.31	0.92	7.52	-0.28	CLAYS
23.22	13.28	0.94	8.17	-0.28	CLAYS
23.29	12.54	0.9	8.14	-0.29	CLAYS
23.35	11.55	0.82	7.65	-0.28	CLAYS
23.42	10.75	0.72	6.8	-0.28	CLAYS
23.48	10.62	0.63	5.92	-0.29	CLAYS

US EPA ARCHIVE DOCUMENT

23.55	10.44	0.54	5.05	-0.28	CLAYS
23.62	10.34	0.47	4.35	-0.28	CLAYS
23.68	10.4	0.44	3.99	-0.28	CLAYEY SILT&SILTY CLAYS
23.75	10.85	0.42	3.62	-0.29	CLAYEY SILT&SILTY CLAYS
23.81	11.11	0.4	3.36	-0.29	CLAYEY SILT&SILTY CLAYS
23.88	11.11	0.45	3.69	-0.28	CLAYEY SILT&SILTY CLAYS
23.94	11.23	0.48	3.93	-0.28	CLAYEY SILT&SILTY CLAYS
24.01	11.26	0.54	4.41	-0.29	CLAYS
24.08	13.79	0.57	4.68	-0.29	CLAYS
24.14	12.87	0.6	5.15	-0.29	CLAYS
24.21	12.13	0.65	5.72	-0.3	CLAYS
24.27	11.62	0.66	5.91	-0.29	CLAYS
24.34	11.39	0.65	5.81	-0.29	CLAYS
24.4	11.08	0.61	5.45	-0.29	CLAYS
24.47	11.08	0.52	4.65	-0.28	CLAYS
24.53	11.11	0.44	3.85	-0.3	CLAYEY SILT&SILTY CLAYS
24.6	10.98	0.37	3.15	-0.28	CLAYEY SILT&SILTY CLAYS
24.67	11.11	0.33	2.78	-0.28	CLAYEY SILT&SILTY CLAYS
24.73	11.36	0.32	2.55	-0.28	CLAYEY SILT&SILTY CLAYS
24.8	11.75	0.32	2.42	-0.29	CLAYEY SANDY SILT&SILT
24.86	12.06	0.35	2.54	-0.29	CLAYEY SILT&SILTY CLAYS
24.93	12.39	0.38	2.7	-0.29	CLAYEY SILT&SILTY CLAYS
24.99	12.77	0.46	3.16	-0.29	CLAYEY SILT&SILTY CLAYS
25.06	15.52	0.51	3.48	-0.29	CLAYEY SILT&SILTY CLAYS
25.12	15.26	0.58	4.02	-0.3	CLAYEY SILT&SILTY CLAYS
25.19	14.69	0.69	4.87	-0.29	CLAYS
25.26	14.53	0.67	4.7	-0.3	CLAYS
25.32	14.43	0.63	4.46	-0.3	CLAYS
25.39	13.7	0.61	4.35	-0.29	CLAYS
25.45	13.73	0.62	4.38	-0.29	CLAYS
25.52	14.12	0.59	4.14	-0.29	CLAYEY SILT&SILTY CLAYS
25.58	14.5	0.55	3.86	-0.29	CLAYEY SILT&SILTY CLAYS
25.65	14.21	0.55	3.89	-0.29	CLAYEY SILT&SILTY CLAYS
25.72	14.28	0.56	3.89	-0.29	CLAYEY SILT&SILTY CLAYS
25.78	14.31	0.56	3.84	-0.29	CLAYEY SILT&SILTY CLAYS
25.85	14.28	0.43	2.9	-0.29	CLAYEY SILT&SILTY CLAYS
25.91	14.4	0.48	3.25	-0.29	CLAYEY SILT&SILTY CLAYS
25.98	14.05	0.56	3.81	-0.29	CLAYEY SILT&SILTY CLAYS
26.04	15.68	0.61	4.19	-0.29	CLAYEY SILT&SILTY CLAYS
26.11	15.49	0.69	4.88	-0.29	CLAYS
26.17	14.85	0.79	5.77	-0.3	CLAYS
26.24	14.37	0.83	6.2	-0.3	CLAYS
26.31	14.05	0.78	5.86	-0.3	CLAYS
26.37	12.9	0.74	5.62	-0.29	CLAYS
26.44	12.74	0.72	5.44	-0.3	CLAYS
26.5	13.18	0.69	5.25	-0.29	CLAYS
26.57	13.31	0.65	4.96	-0.29	CLAYS
26.63	13.38	0.64	4.96	-0.3	CLAYS
26.7	13.15	0.67	5.09	-0.3	CLAYS
26.76	13.18	0.66	4.88	-0.3	CLAYS
26.83	13.15	0.6	4.38	-0.3	CLAYS
26.9	12.58	0.63	4.47	-0.3	CLAYS

US EPA ARCHIVE DOCUMENT

26.96	12.51	0.68	4.69	-0.29	CLAYS
27.03	14.5	0.72	4.87	-0.3	CLAYS
27.09	14.79	0.77	5.28	-0.3	CLAYS
27.16	14.75	0.85	5.9	-0.3	CLAYS
27.22	14.95	0.92	6.45	-0.3	CLAYS
27.29	14.92	0.94	6.63	-0.3	CLAYS
27.36	14.4	0.93	6.5	-0.29	CLAYS
27.42	13.6	0.92	6.3	-0.29	CLAYS
27.49	13.41	0.95	6.22	-0.29	CLAYS
27.55	13.92	0.94	5.8	-0.3	CLAYS
27.62	15.07	0.89	5.22	-0.3	CLAYS
27.68	15.56	0.88	4.92	-0.3	CLAYS
27.75	16.23	0.92	4.98	-0.29	CLAYS
27.81	17.57	1.01	5.23	-0.29	CLAYS
27.88	18.66	1	4.99	-0.3	CLAYS
27.95	19.1	1.16	5.57	-0.29	CLAYS
28.01	19.68	1.31	5.99	-0.3	CLAYS
28.08	19.84	1.43	6.13	-0.3	CLAYS
28.14	21.12	1.52	6.04	-0.3	CLAYS
28.21	21.76	1.57	5.73	-0.3	CLAYS
28.27	23.43	1.59	5.39	-0.3	CLAYS
28.34	25.41	1.63	5.15	-0.29	CLAYS
28.4	28	1.54	4.62	-0.3	CLAYEY SILT&SILTY CLAYS
28.47	31.04	1.43	4.1	-0.3	CLAYEY SILT&SILTY CLAYS
28.54	34.91	1.29	3.59	-0.29	CLAYEY SILT&SILTY CLAYS
28.6	34.73	1.15	3.14	-0.29	CLAYEY SANDY SILT&SILT
28.67	35.14	0.98	2.67	-0.3	CLAYEY SANDY SILT&SILT
28.73	36.29	0.81	2.2	-0.3	CLAYEY SANDY SILT&SILT
28.8	37.09	0.57	1.57	-0.3	SILTY SAND
28.86	37.67	0.48	1.34	-0.3	SILTY SAND
28.93	38.24	0.46	1.33	-0.29	SILTY SAND
29	36.8	0.54	1.63	-0.31	SILTY SAND
29.06	35.88	0.72	2.24	-0.3	CLAYEY SANDY SILT&SILT
29.13	33.63	0.96	3.08	-0.3	CLAYEY SANDY SILT&SILT
29.19	31.84	1.26	4.06	-0.29	CLAYEY SILT&SILTY CLAYS
29.26	30.72	1.54	4.83	-0.29	CLAYEY SILT&SILTY CLAYS
29.32	30.02	1.8	5.28	-0.29	CLAYS
29.39	29.54	1.98	5.31	-0.28	CLAYS
29.45	30.63	2.07	4.96	-0.28	CLAYEY SILT&SILTY CLAYS
29.52	33.03	2.03	4.36	-0.28	CLAYEY SILT&SILTY CLAYS
29.59	37.51	1.87	3.66	-0.28	CLAYEY SILT&SILTY CLAYS
29.65	43.39	1.73	3.13	-0.29	CLAYEY SANDY SILT&SILT
29.72	49.92	1.56	2.65	-0.28	CLAYEY SANDY SILT&SILT
29.78	56.1	1.38	2.25	-0.28	SILTY SAND
29.85	59.08	1.18	1.86	-0.28	SILTY SAND
29.91	61.16	0.97	1.49	-0.27	SILTY SAND
29.98	61.19	0.8	1.21	-0.28	SILTY SAND
30.04	64.42	0.7	1.04	-0.27	SILTY SAND
30.11	66.5	0.66	0.96	-0.28	SANDS
30.18	68.23	0.64	0.94	-0.27	SANDS
30.24	69.42	0.66	0.97	-0.28	SANDS
30.31	69.38	0.69	1.03	-0.27	SANDS

US EPA ARCHIVE DOCUMENT

30.37	69.57	0.7	1.08	-0.28	SILTY SAND
30.44	69	0.7	1.13	-0.28	SILTY SAND
30.5	66.72	0.72	1.21	-0.27	SILTY SAND
30.57	63.87	0.75	1.35	-0.27	SILTY SAND
30.64	61.54	0.79	1.53	-0.27	SILTY SAND
30.7	58.63	0.83	1.74	-0.27	SILTY SAND
30.77	54.91	0.7	1.6	-0.27	SILTY SAND
30.83	50.63	0.76	1.9	-0.27	SILTY SAND
30.9	45.83	0.82	2.26	-0.27	CLAYEY SANDY SILT&SILT
30.96	40.52	0.93	2.79	-0.27	CLAYEY SANDY SILT&SILT
31.03	37.44	1.1	3.57	-0.27	CLAYEY SANDY SILT&SILT
31.09	33.54	1.33	4.62	-0.27	CLAYEY SILT&SILTY CLAYS
31.16	31.84	1.55	5.67	-0.27	CLAYS
31.23	29.57	1.64	6.27	-0.28	CLAYS
31.29	27.2	1.68	6.63	-0.27	CLAYS
31.36	25.57	1.7	6.87	-0.26	CLAYS
31.42	25.06	1.66	6.88	-0.26	CLAYS
31.49	25.06	1.58	6.67	-0.26	CLAYS
31.55	24.87	1.46	6.28	-0.26	CLAYS
31.62	24.42	1.34	5.84	-0.26	CLAYS
31.68	23.11	1.26	5.52	-0.26	CLAYS
31.75	22.47	1.24	5.37	-0.27	CLAYS
31.82	22.27	1.34	5.77	-0.26	CLAYS
31.88	22.6	1.44	6.18	-0.26	CLAYS
31.95	22.79	1.4	5.97	-0.26	CLAYS
32.01	23.91	1.43	6.11	-0.26	CLAYS
32.08	24.03	1.42	6.07	-0.26	CLAYS
32.14	23.36	1.52	6.5	-0.26	CLAYS
32.21	22.75	1.59	6.72	-0.25	CLAYS
32.28	23.36	1.58	6.59	-0.26	CLAYS
32.34	23.43	1.55	6.46	-0.25	CLAYS
32.41	23.68	1.63	6.74	-0.26	CLAYS
32.47	24.13	1.66	6.89	-0.25	CLAYS
32.54	24.87	1.58	6.58	-0.26	CLAYS
32.6	24.32	1.5	6.36	-0.25	CLAYS
32.67	23.68	1.47	6.38	-0.25	CLAYS
32.73	24.13	1.51	6.68	-0.25	CLAYS
32.8	23.68	1.74	7.88	-0.26	CLAYS
32.87	23.11	1.72	7.91	-0.26	CLAYS
32.93	22.21	1.72	8.1	-0.25	CLAYS
33	21.54	1.69	8.14	-0.26	CLAYS
33.06	21.25	1.65	8.11	-0.26	CLAYS
33.13	20.93	1.6	7.99	-0.25	CLAYS
33.19	21.22	1.53	7.7	-0.26	CLAYS
33.26	20.55	1.44	7.3	-0.26	CLAYS
33.32	19.24	1.47	7.38	-0.25	CLAYS
33.39	18.82	1.49	7.34	-0.25	CLAYS
33.46	19.52	1.38	6.66	-0.26	CLAYS
33.52	20.07	1.29	6.17	-0.25	CLAYS
33.59	20.45	1.3	6.28	-0.25	CLAYS
33.65	21.06	1.36	6.62	-0.25	CLAYS
33.72	21.57	1.41	6.95	-0.26	CLAYS

US EPA ARCHIVE DOCUMENT

33.78	21.5	1.36	6.9	-0.26	CLAYS
33.85	20.68	1.38	7.17	-0.26	CLAYS
33.92	19.3	1.39	7.41	-0.25	CLAYS
33.98	19.2	1.39	7.44	-0.25	CLAYS
34.05	19.33	1.39	7.49	-0.26	CLAYS
34.11	18.69	1.33	7.09	-0.27	CLAYS
34.18	18.21	1.28	6.63	-0.28	CLAYS
34.24	18.05	1.22	6.04	-0.28	CLAYS
34.31	18.37	1.16	5.36	-0.28	CLAYS
34.37	18.88	1.16	4.92	-0.29	CLAYS
34.44	20	1.23	4.79	-0.29	CLAYS
34.51	21.86	1.33	4.78	-0.29	CLAYS
34.57	24.13	1.44	4.82	-0.29	CLAYEY SILT&SILTY CLAYS
34.64	27.14	1.52	4.74	-0.29	CLAYEY SILT&SILTY CLAYS
34.7	29.28	1.63	4.79	-0.28	CLAYEY SILT&SILTY CLAYS
34.77	31.3	1.52	4.3	-0.28	CLAYEY SILT&SILTY CLAYS
34.83	32.96	1.66	4.54	-0.29	CLAYEY SILT&SILTY CLAYS
34.9	34.18	1.85	4.91	-0.29	CLAYEY SILT&SILTY CLAYS
34.96	37.54	2.01	5.2	-0.28	CLAYEY SILT&SILTY CLAYS
35.03	38.57	2.16	5.45	-0.29	CLAYS
35.1	38.24	2.28	5.64	-0.28	CLAYS
35.16	38.31	2.41	5.81	-0.28	CLAYS
35.23	38.88	2.53	5.96	-0.28	CLAYS
35.29	40.68	2.56	6.02	-0.28	CLAYS
35.36	42.66	2.5	5.96	-0.28	CLAYS
35.42	44.23	2.42	5.99	-0.28	CLAYS
35.49	44.74	2.38	6.25	-0.28	CLAYS
35.56	43.05	2.37	6.67	-0.28	CLAYS
35.62	40.16	2.38	7.19	-0.28	CLAYS
35.69	36.48	2.36	7.62	-0.28	CLAYS
35.75	33.19	2.12	7.19	-0.28	CLAYS
35.82	30.92	1.88	6.65	-0.28	CLAYS
35.88	29.51	1.95	7.17	-0.28	CLAYS
35.95	28.1	2.01	7.67	-0.28	CLAYS
36.01	27.75	2.01	7.92	-0.27	CLAYS
36.08	27.65	1.97	8.06	-0.27	CLAYS
36.15	25.73	1.92	8.23	-0.27	CLAYS
36.21	24.55	1.9	8.43	-0.27	CLAYS
36.28	23.33	1.9	8.64	-0.27	CLAYS
36.34	23.08	1.86	8.54	-0.27	CLAYS
36.41	22.15	1.77	8.08	-0.27	CLAYS
36.47	21.38	1.69	7.58	-0.27	CLAYS
36.54	20.74	1.64	7.05	-0.27	CLAYS
36.6	21.28	1.59	6.45	-0.26	CLAYS
36.67	22.24	1.54	5.8	-0.26	CLAYS
36.74	23.3	1.51	5.3	-0.27	CLAYS
36.8	24.96	1.4	4.68	-0.27	CLAYEY SILT&SILTY CLAYS
36.87	27.11	1.28	4.12	-0.27	CLAYEY SILT&SILTY CLAYS
36.93	28.97	1.19	3.73	-0.27	CLAYEY SILT&SILTY CLAYS
37	32.51	1.21	3.61	-0.28	CLAYEY SILT&SILTY CLAYS
37.06	33.76	1.31	3.65	-0.27	CLAYEY SILT&SILTY CLAYS
37.13	32.48	1.36	3.57	-0.27	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

37.2	31.01	1.41	3.49	-0.27	CLAYEY SILT&SILTY CLAYS
37.26	32.84	1.42	3.32	-0.27	CLAYEY SANDY SILT&SILT
37.33	38.85	1.36	3.06	-0.27	CLAYEY SANDY SILT&SILT
37.39	45.73	1.28	2.87	-0.26	CLAYEY SANDY SILT&SILT
37.46	48.29	1.19	2.71	-0.27	CLAYEY SANDY SILT&SILT
37.52	46.15	1.06	2.46	-0.27	CLAYEY SANDY SILT&SILT
37.59	44.36	0.99	2.28	-0.27	CLAYEY SANDY SILT&SILT
37.65	42.6	1	2.21	-0.27	CLAYEY SANDY SILT&SILT
37.72	41	1.02	2.11	-0.27	CLAYEY SANDY SILT&SILT
37.79	41.28	0.99	1.92	-0.27	SILTY SAND
37.85	43.27	1.01	1.86	-0.26	SILTY SAND
37.92	47.33	1.04	1.84	-0.27	SILTY SAND
37.98	56.9	1.04	1.79	-0.25	SILTY SAND
38.05	59.78	1.02	1.74	-0.26	SILTY SAND
38.11	59.36	1	1.71	-0.26	SILTY SAND
38.18	58.44	0.95	1.63	-0.26	SILTY SAND
38.24	57.41	0.84	1.43	-0.26	SILTY SAND
38.31	57.47	0.72	1.22	-0.27	SILTY SAND
38.38	58.11	0.68	1.14	-0.27	SILTY SAND
38.44	58.69	0.7	1.15	-0.26	SILTY SAND
38.51	59.21	0.74	1.19	-0.26	SILTY SAND
38.57	59.88	0.77	1.21	-0.26	SILTY SAND
38.64	61.41	0.7	1.09	-0.26	SILTY SAND
38.7	63.69	0.62	0.97	-0.26	SILTY SAND
38.77	65.51	0.66	1.02	-0.26	SILTY SAND
38.84	65.03	0.71	1.11	-0.25	SILTY SAND
38.9	64.55	0.74	1.15	-0.26	SILTY SAND
38.97	64.07	0.75	1.16	-0.27	SILTY SAND
39.03	63.97	0.76	1.16	-0.26	SILTY SAND
39.1	63.97	0.75	1.13	-0.26	SILTY SAND
39.16	64.04	0.75	1.1	-0.27	SILTY SAND
39.23	64.58	0.76	1.06	-0.27	SILTY SAND
39.29	65.8	0.76	1.02	-0.27	SILTY SAND
39.36	67.87	0.77	0.97	-0.27	SANDS
39.43	71.49	0.78	0.92	-0.26	SANDS
39.49	76	0.8	0.89	-0.25	SANDS
39.56	81.32	0.84	0.88	-0.26	SANDS
39.62	86.85	0.87	0.87	-0.26	SANDS
39.69	92.52	0.9	0.86	-0.25	SANDS
39.75	98.76	0.94	0.87	-0.25	SANDS
39.82	104.39	1	0.89	-0.25	SANDS
39.88	108.8	1.05	0.93	-0.24	SANDS
39.95	109.1	1.1	0.96	-0.25	SANDS
40.02	114.15	1.16	0.99	-0.25	SANDS
40.08	115.75	1.22	1.03	-0.24	SANDS
40.15	116.94	1.26	1.05	-0.24	SANDS
40.21	117.77	1.28	1.06	-0.25	SANDS
40.28	119.17	1.28	1.04	-0.24	SANDS
40.34	120.39	1.28	1.02	-0.24	SANDS
40.41	121.16	1.3	1.03	-0.23	SANDS
40.48	122.15	1.35	1.05	-0.22	SANDS
40.54	124.62	1.39	1.08	-0.23	SANDS

US EPA ARCHIVE DOCUMENT

40.61	127.85	1.42	1.11	-0.22	SANDS
40.67	130.99	1.44	1.14	-0.22	SANDS
40.74	132.2	1.36	1.11	-0.21	SANDS
40.8	130.63	1.29	1.08	-0.21	SANDS
40.87	126.89	1.21	1.05	-0.22	SANDS
40.93	121.42	1.33	1.2	-0.21	SANDS
41	115.94	1.38	1.28	-0.19	SANDS
41.07	110.47	1.4	1.33	-0.19	SANDS
41.13	108.04	1.42	1.37	-0.19	SANDS
41.2	106.09	1.42	1.4	-0.19	SANDS
41.26	104.26	1.4	1.41	-0.19	SANDS
41.33	102.4	1.41	1.44	-0.19	SANDS
41.39	100.33	1.42	1.48	-0.19	SILTY SAND
41.46	98.38	1.43	1.52	-0.19	SILTY SAND
41.52	96.49	1.45	1.57	-0.19	SILTY SAND
41.59	94.92	1.46	1.61	-0.19	SILTY SAND
41.66	93.61	1.45	1.63	-0.19	SILTY SAND
41.72	91.49	1.46	1.66	-0.2	SILTY SAND
41.79	89.38	1.47	1.66	-0.2	SILTY SAND
41.85	87.62	1.47	1.67	-0.19	SILTY SAND
41.92	87.56	1.46	1.65	-0.19	SILTY SAND
41.98	85.35	1.43	1.6	-0.19	SILTY SAND
42.05	88.9	1.41	1.54	-0.19	SILTY SAND
42.12	89.29	1.38	1.46	-0.2	SILTY SAND
42.18	89.06	1.35	1.36	-0.19	SILTY SAND
42.25	90.18	1.31	1.26	-0.19	SANDS
42.31	93.51	1.28	1.19	-0.19	SANDS
42.38	99.84	1.27	1.14	-0.19	SANDS
42.44	107.56	1.26	1.1	-0.19	SANDS
42.51	114.12	1.3	1.13	-0.2	SANDS
42.57	116.74	1.35	1.18	-0.18	SANDS
42.64	116.74	1.39	1.25	-0.2	SANDS
42.71	115.66	1.33	1.23	-0.19	SANDS
42.77	114.72	1.26	1.21	-0.2	SANDS
42.84	111.82	1.19	1.18	-0.18	SANDS
42.9	106.65	1.27	1.28	-0.18	SANDS
42.97	101.49	1.29	1.3	-0.19	SANDS
43.03	96.33	1.27	1.26	-0.19	SANDS
43.1	94.89	1.21	1.19	-0.18	SANDS
43.16	96.26	1.18	1.14	-0.19	SANDS
43.23	100.3	1.18	1.11	-0.18	SANDS
43.3	105.29	1.22	1.13	-0.19	SANDS
43.36	107.88	1.26	1.16	-0.19	SANDS
43.43	108.13	1.29	1.17	-0.19	SANDS
43.49	107.62	1.29	1.16	-0.19	SANDS
43.56	108.36	1.31	1.16	-0.18	SANDS
43.62	110.41	1.34	1.18	-0.18	SANDS
43.69	112.33	1.35	1.17	-0.19	SANDS
43.76	113.16	1.35	1.15	-0.18	SANDS
43.82	114.38	1.33	1.12	-0.18	SANDS
43.89	117.13	1.34	1.13	-0.18	SANDS
43.95	114.12	1.39	1.17	-0.19	SANDS

US EPA ARCHIVE DOCUMENT

44.02	121.35	1.42	1.2	-0.19	SANDS
44.08	121.09	1.46	1.23	-0.18	SANDS
44.15	119.21	1.48	1.25	-0.18	SANDS
44.21	117.32	1.51	1.25	-0.18	SANDS
44.28	116.58	1.52	1.23	-0.18	SANDS
44.35	117.16	1.5	1.17	-0.18	SANDS
44.41	119.46	1.44	1.08	-0.18	SANDS
44.48	123.4	1.41	1.02	-0.19	SANDS
44.54	129.45	1.43	1.01	-0.18	SANDS
44.61	136.9	1.5	1.06	-0.18	SANDS
44.67	143.49	1.62	1.17	-0.19	SANDS
44.74	147.37	1.77	1.33	-0.19	SANDS
44.8	147.53	1.89	1.54	-0.19	SANDS
44.87	143.34	1.93	1.77	-0.19	SANDS
44.94	134.86	1.97	2.12	-0.19	SILTY SAND
45	116.45	1.97	2.59	-0.18	SILTY SAND
45.07	107.21	2.01	3.27	-0.18	CLAYEY SANDY SILT&SILT
45.13	87.08	2.09	4.46	-0.18	CLAYEY SANDY SILT&SILT
45.2	64.04	2.23	6.28	-0.18	CLAYS
45.26	46.44	2.25	8.07	-0.18	CLAYS
45.33	35.88	2.05	8.98	-0.17	CLAYS
45.4	27.36	1.78	9.13	-0.19	CLAYS
45.46	20.93	1.5	8.62	-0.19	CLAYS
45.53	18.94	1.18	7.25	-0.17	CLAYS
45.59	17.73	0.87	5.47	-0.18	CLAYS
45.66	16.38	0.63	3.88	-0.17	CLAYEY SILT&SILTY CLAYS
45.72	15.68	0.39	2.3	-0.18	CLAYEY SANDY SILT&SILT
45.79	14.82	0.35	1.97	-0.17	CLAYEY SANDY SILT&SILT
45.85	14.4	0.31	1.69	-0.17	CLAYEY SANDY SILT&SILT
45.92	16.76	0.34	1.79	-0.17	CLAYEY SANDY SILT&SILT
45.99	19.12	0.38	2.03	-0.14	CLAYEY SANDY SILT&SILT
46.05	21.47	0.44	2.43	-0.13	CLAYEY SANDY SILT&SILT
46.12	20.45	0.56	3.18	-0.14	CLAYEY SILT&SILTY CLAYS
46.18	18.47	0.65	3.78	-0.15	CLAYEY SILT&SILTY CLAYS
46.25	16.99	0.69	3.94	-0.15	CLAYEY SILT&SILTY CLAYS
46.31	16.42	0.7	3.78	-0.15	CLAYEY SILT&SILTY CLAYS
46.38	15.9	0.71	3.63	-0.15	CLAYEY SILT&SILTY CLAYS
46.45	16.8	0.71	3.48	-0.15	CLAYEY SILT&SILTY CLAYS
46.51	18.72	0.71	3.28	-0.15	CLAYEY SILT&SILTY CLAYS
46.58	20.8	0.79	3.46	-0.14	CLAYEY SILT&SILTY CLAYS
46.64	22.24	0.93	3.64	-0.14	CLAYEY SILT&SILTY CLAYS
46.71	22.72	0.98	3.39	-0.14	CLAYEY SILT&SILTY CLAYS
46.77	21.92	0.89	2.71	-0.15	CLAYEY SANDY SILT&SILT
46.84	22.72	0.83	2.2	-0.15	CLAYEY SANDY SILT&SILT
46.9	26.37	0.89	2.05	-0.15	CLAYEY SANDY SILT&SILT
46.97	37.51	0.93	1.89	-0.16	CLAYEY SANDY SILT&SILT
47.04	42.53	0.97	1.78	-0.17	SILTY SAND
47.1	46.34	0.91	1.54	-0.19	SILTY SAND
47.17	50.95	0.84	1.29	-0.19	SILTY SAND
47.23	56.45	0.82	1.15	-0.2	SILTY SAND
47.3	61.99	0.79	1.03	-0.22	SILTY SAND
47.36	67.72	0.78	0.94	-0.23	SANDS

US EPA ARCHIVE DOCUMENT

47.43	73.48	0.8	0.88	-0.22	SANDS
47.49	79.69	0.82	0.84	-0.22	SANDS
47.56	86.18	0.87	0.82	-0.21	SANDS
47.63	93.19	0.94	0.84	-0.22	SANDS
47.69	100.65	1.02	0.85	-0.22	SANDS
47.76	108.58	1.11	0.88	-0.22	SANDS
47.82	116.71	1.17	0.87	-0.21	SANDS
47.89	124.93	1.27	0.91	-0.21	SANDS
47.95	126.6	1.37	0.94	-0.21	SANDS
48.02	138.54	1.48	0.98	-0.21	SANDS
48.09	144.29	1.6	1.03	-0.21	SANDS
48.15	149.64	1.7	1.08	-0.21	SANDS
48.22	154.5	1.81	1.14	-0.21	SANDS
48.28	158.73	1.93	1.24	-0.21	SANDS
48.35	161.74	2.05	1.35	-0.21	SANDS
48.41	162.38	2.16	1.5	-0.21	SANDS
48.48	159.5	2.24	1.68	-0.2	SANDS
48.54	152.81	2.28	1.92	-0.2	SANDS
48.61	143.08	2.26	2.19	-0.2	SILTY SAND
48.68	130.82	2.22	2.53	-0.21	SILTY SAND
48.74	115.36	2.18	2.95	-0.21	SILTY SAND
48.81	95.53	2.14	3.48	-0.22	CLAYEY SANDY SILT&SILT
48.87	75.36	2.1	4.08	-0.23	CLAYEY SANDY SILT&SILT
48.94	59.88	2.06	4.65	-0.22	CLAYEY SILT&SILTY CLAYS
49	50.4	2.23	5.66	-0.2	CLAYS
49.07	46.82	2.27	6.28	-0.21	CLAYS
49.13	41.19	2.18	6.49	-0.21	CLAYS
49.2	35.78	2.05	6.4	-0.2	CLAYS
49.27	32	1.96	6.21	-0.21	CLAYS
49.33	30.56	1.89	5.92	-0.2	CLAYS
49.4	30.47	1.76	5.39	-0.2	CLAYS
49.46	31.23	1.61	4.79	-0.19	CLAYEY SILT&SILTY CLAYS
49.53	32.07	1.35	3.93	-0.19	CLAYEY SILT&SILTY CLAYS
49.59	33.15	1.06	3.01	-0.19	CLAYEY SANDY SILT&SILT
49.66	34.09	0.92	2.52	-0.19	CLAYEY SANDY SILT&SILT
49.73	35.01	0.83	2.21	-0.19	CLAYEY SANDY SILT&SILT
49.79	35.94	1.02	2.69	-0.18	CLAYEY SANDY SILT&SILT
49.86	36.45	1.04	2.7	-0.18	CLAYEY SANDY SILT&SILT
49.92	37.22	1.08	2.78	-0.18	CLAYEY SANDY SILT&SILT
49.99	39.65	1.06	2.72	-0.16	CLAYEY SANDY SILT&SILT
50.05	39.78	1.05	2.68	-0.16	CLAYEY SANDY SILT&SILT
50.12	39.17	1.04	2.69	-0.16	CLAYEY SANDY SILT&SILT
50.18	38.95	1.06	2.73	-0.17	CLAYEY SANDY SILT&SILT
50.25	38.4	1.06	2.73	-0.16	CLAYEY SANDY SILT&SILT
50.32	38.88	1.04	2.68	-0.16	CLAYEY SANDY SILT&SILT
50.38	38.72	1.04	2.69	-0.16	CLAYEY SANDY SILT&SILT
50.45	39.01	1.07	2.77	-0.16	CLAYEY SANDY SILT&SILT
50.51	38.95	1.1	2.87	-0.16	CLAYEY SANDY SILT&SILT
50.58	38.57	1.14	3.01	-0.15	CLAYEY SANDY SILT&SILT
50.64	38.53	1.17	3.15	-0.16	CLAYEY SANDY SILT&SILT
50.71	38.18	1.2	3.29	-0.16	CLAYEY SANDY SILT&SILT
50.77	38.02	1.26	3.54	-0.16	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

50.84	37.12	1.32	3.85	-0.16	CLAYEY SILT&SILTY CLAYS
50.91	36.19	1.38	4.2	-0.16	CLAYEY SILT&SILTY CLAYS
50.97	35.46	1.39	4.45	-0.15	CLAYEY SILT&SILTY CLAYS
51.04	34.47	1.35	4.58	-0.15	CLAYEY SILT&SILTY CLAYS
51.1	32.32	1.27	4.62	-0.14	CLAYEY SILT&SILTY CLAYS
51.17	30.28	1.21	4.7	-0.16	CLAYEY SILT&SILTY CLAYS
51.23	28.23	1.15	4.81	-0.14	CLAYEY SILT&SILTY CLAYS
51.3	26.63	1.04	4.64	-0.15	CLAYEY SILT&SILTY CLAYS
51.37	24.93	0.92	4.36	-0.14	CLAYEY SILT&SILTY CLAYS
51.43	23.08	0.83	4.16	-0.14	CLAYEY SILT&SILTY CLAYS
51.5	21.22	0.74	3.83	-0.14	CLAYEY SILT&SILTY CLAYS
51.56	19.87	0.66	3.36	-0.14	CLAYEY SILT&SILTY CLAYS
51.63	18.88	0.58	2.67	-0.14	CLAYEY SANDY SILT&SILT
51.69	18.05	0.52	2.09	-0.14	CLAYEY SANDY SILT&SILT
51.76	18.12	0.52	1.85	-0.15	CLAYEY SANDY SILT&SILT
51.82	19.2	0.44	1.39	-0.15	CLAYEY SANDY SILT&SILT
51.89	23.2	0.39	1.12	-0.14	SILTY SAND
51.96	33.54	0.35	0.91	-0.14	SILTY SAND
52.02	36.74	0.39	0.98	-0.14	SILTY SAND
52.09	38.02	0.48	1.15	-0.14	SILTY SAND
52.15	38.47	0.48	1.1	-0.13	SILTY SAND
52.22	40	0.55	1.21	-0.13	SILTY SAND
52.28	41.19	0.77	1.62	-0.13	SILTY SAND
52.35	43.78	0.91	1.86	-0.13	SILTY SAND
52.41	47.43	1.08	2.18	-0.12	CLAYEY SANDY SILT&SILT
52.48	50.37	1.29	2.59	-0.13	CLAYEY SANDY SILT&SILT
52.55	51.11	1.4	2.84	-0.13	CLAYEY SANDY SILT&SILT
52.61	50.15	1.55	3.19	-0.13	CLAYEY SANDY SILT&SILT
52.68	49.41	1.67	3.43	-0.12	CLAYEY SANDY SILT&SILT
52.74	48.8	1.73	3.54	-0.11	CLAYEY SANDY SILT&SILT
52.81	48.54	2.11	4.29	-0.12	CLAYEY SILT&SILTY CLAYS
52.87	47.94	2.06	4.17	-0.11	CLAYEY SILT&SILTY CLAYS
52.94	47.87	2.09	4.17	-0.11	CLAYEY SILT&SILTY CLAYS
53.01	49.57	2.18	4.31	-0.09	CLAYEY SILT&SILTY CLAYS
53.07	50.37	2.28	4.49	-0.09	CLAYEY SILT&SILTY CLAYS
53.14	50.59	2.3	4.48	-0.1	CLAYEY SILT&SILTY CLAYS
53.2	50.79	2.27	4.39	-0.08	CLAYEY SILT&SILTY CLAYS
53.27	50.73	2.24	4.27	-0.09	CLAYEY SILT&SILTY CLAYS
53.33	50.88	2.24	4.21	-0.08	CLAYEY SILT&SILTY CLAYS
53.4	51.49	2.26	4.18	-0.08	CLAYEY SILT&SILTY CLAYS
53.46	53.12	2.24	4.09	-0.08	CLAYEY SILT&SILTY CLAYS
53.53	53.83	2.21	4.01	-0.08	CLAYEY SILT&SILTY CLAYS
53.6	54.09	2.3	4.14	-0.08	CLAYEY SILT&SILTY CLAYS
53.66	55.49	2.42	4.31	-0.08	CLAYEY SILT&SILTY CLAYS
53.73	56.52	2.56	4.55	-0.08	CLAYEY SILT&SILTY CLAYS
53.79	55.94	3.28	5.85	-0.08	CLAYS
53.86	55.37	3.32	5.99	-0.07	CLAYS
53.92	56.32	3.43	6.27	-0.07	CLAYS
53.99	57.22	3.58	6.71	-0.07	CLAYS
54.05	56.9	3.6	7.02	-0.08	CLAYS
54.12	54.76	3.7	7.53	-0.07	CLAYS
54.19	52.35	3.75	7.95	-0.08	CLAYS

US EPA ARCHIVE DOCUMENT

54.25	50.85	3.69	8.19	-0.08	CLAYS
54.32	47.81	3.54	8.26	-0.08	CLAYS
54.38	45.28	3.51	8.6	-0.08	CLAYS
54.45	43.75	3.41	8.73	-0.07	CLAYS
54.51	42.69	3.22	8.64	-0.08	CLAYS
54.58	39.85	3.04	8.55	-0.07	CLAYS
54.65	37.32	2.96	8.67	-0.07	CLAYS
54.71	35.68	2.81	8.42	-0.07	CLAYS
54.78	34.88	2.77	8.42	-0.08	CLAYS
54.84	33.28	2.44	7.62	-0.08	CLAYS
54.91	32.32	2.24	7.19	-0.08	CLAYS
54.97	31.17	2.14	7.1	-0.08	CLAYS
55.04	33.25	2.05	7.04	-0.07	CLAYS
55.1	32.23	1.95	7.09	-0.07	CLAYS
55.17	29.89	1.92	7.47	-0.07	CLAYS
55.24	27.84	1.96	8.07	-0.07	CLAYS
55.3	26.27	1.93	8.33	-0.08	CLAYS
55.37	24.87	1.78	7.92	-0.07	CLAYS
55.43	23.46	1.65	7.43	-0.08	CLAYS
55.5	21.99	1.48	6.74	-0.08	CLAYS
55.56	21.19	1.39	6.3	-0.08	CLAYS
55.63	21.09	1.46	6.61	-0.07	CLAYS
55.69	22.15	1.34	5.85	-0.07	CLAYS
55.76	23.11	1.06	4.6	-0.08	CLAYEY SILT&SILTY CLAYS
55.83	22.18	1.18	5.13	-0.07	CLAYS
55.89	22.66	1.32	5.7	-0.07	CLAYS
55.96	21.25	1.32	5.7	-0.07	CLAYS
56.02	25.92	1.27	5.44	-0.07	CLAYS
56.09	23.58	1.29	5.69	-0.06	CLAYS
56.15	22.91	1.34	5.93	-0.07	CLAYS
56.22	22.69	1.36	6.08	-0.07	CLAYS
56.29	22.6	1.35	5.99	-0.07	CLAYS
56.35	22.37	1.34	5.86	-0.07	CLAYS
56.42	22.11	1.33	5.72	-0.07	CLAYS
56.48	22.43	1.31	5.58	-0.07	CLAYS
56.55	22.56	1.18	4.97	-0.07	CLAYS
56.61	23.3	1.14	4.77	-0.07	CLAYEY SILT&SILTY CLAYS
56.68	24.07	1.11	4.5	-0.07	CLAYEY SILT&SILTY CLAYS
56.74	24.71	1.17	4.63	-0.06	CLAYEY SILT&SILTY CLAYS
56.81	24.32	1.28	5.04	-0.06	CLAYS
56.88	23.78	1.36	5.36	-0.06	CLAYS
56.94	23.36	1.53	6.1	-0.08	CLAYS
57.01	28.13	1.6	6.44	-0.06	CLAYS
57.07	27.72	1.62	6.87	-0.07	CLAYS
57.14	25.31	1.7	7.64	-0.06	CLAYS
57.2	23.39	1.81	8.43	-0.06	CLAYS
57.27	22.63	1.83	8.72	-0.06	CLAYS
57.33	21.92	1.68	8.06	-0.07	CLAYS
57.4	20.74	1.49	7.16	-0.06	CLAYS
57.47	19.81	1.45	6.8	-0.06	CLAYS
57.53	20.13	1.4	6.38	-0.06	CLAYS
57.6	20.96	1.3	5.81	-0.06	CLAYS

US EPA ARCHIVE DOCUMENT

57.66	21.41	1.23	5.14	-0.06	CLAYS
57.73	22.27	1.23	4.86	-0.07	CLAYS
57.79	23.01	1.14	4.35	-0.06	CLAYEY SILT&SILTY CLAYS
57.86	23.62	1.31	4.88	-0.07	CLAYS
57.93	23.11	1.56	5.7	-0.06	CLAYS
57.99	30.18	1.73	6.12	-0.05	CLAYS
58.06	29.7	1.91	6.49	-0.07	CLAYS
58.12	27.46	2.09	6.28	-0.06	CLAYS
58.19	26.34	2.19	5.37	-0.05	CLAYS
58.25	26.79	2.08	3.97	-0.05	CLAYEY SILT&SILTY CLAYS
58.32	29.47	1.96	2.91	-0.05	CLAYEY SANDY SILT&SILT
58.38	36.8	1.98	2.36	-0.05	CLAYEY SANDY SILT&SILT
58.45	52.35	2.06	2.06	-0.05	SILTY SAND
58.52	73.25	2.08	1.82	-0.04	SILTY SAND
58.58	96.13	2.07	1.66	-0.05	SILTY SAND
58.65	116.04	1.98	1.51	-0.05	SANDS
58.71	128.84	1.89	1.42	-0.05	SANDS
58.78	134.15	1.8	1.35	-0.05	SANDS
58.84	137.03	1.82	1.37	-0.08	SANDS
58.91	135.42	1.88	1.44	-0.08	SANDS
58.97	133.81	1.88	1.46	-0.11	SANDS
59.04	132.2	1.85	1.47	-0.12	SANDS
59.11	130.76	1.81	1.46	-0.13	SANDS
59.17	128.07	1.77	1.46	-0.15	SANDS
59.24	125.32	1.74	1.47	-0.16	SANDS
59.3	122.67	1.72	1.49	-0.18	SANDS
59.37	119.94	1.74	1.53	-0.18	SANDS
59.43	116.52	1.77	1.58	-0.2	SANDS
59.5	113.29	1.75	1.57	-0.2	SANDS
59.57	111.69	1.69	1.52	-0.21	SANDS
59.63	111.18	1.62	1.46	-0.21	SANDS
59.7	111.21	1.55	1.38	-0.21	SANDS
59.76	110.76	1.53	1.35	-0.22	SANDS
59.83	110.25	1.45	1.25	-0.22	SANDS
59.89	111.11	1.39	1.17	-0.23	SANDS
59.96	111.27	1.38	1.14	-0.24	SANDS
60.02	116.27	1.43	1.18	-0.23	SANDS
60.09	121.32	1.5	1.26	-0.23	SANDS
60.16	125.54	1.61	1.44	-0.24	SANDS
60.22	126.5	1.73	1.72	-0.24	SILTY SAND
60.29	123.34	1.82	2.1	-0.24	SILTY SAND
60.35	115.59	1.96	2.72	-0.24	SILTY SAND
60.42	100.71	2.09	3.63	-0.23	CLAYEY SANDY SILT&SILT
60.48	78.15	2.28	5.09	-0.24	CLAYEY SILT&SILTY CLAYS
60.55	57.35	2.48	6.91	-0.25	CLAYS
60.61	43.81	2.37	7.81	-0.25	CLAYS
60.68	36.42	2.09	7.48	-0.24	CLAYS
60.75	28.26	1.8	6.72	-0.24	CLAYS
60.81	24.74	1.26	4.71	-0.24	CLAYEY SILT&SILTY CLAYS
60.88	24.35	0.99	3.65	-0.24	CLAYEY SILT&SILTY CLAYS
60.94	24.35	0.84	3.05	-0.24	CLAYEY SANDY SILT&SILT
61.01	29.86	0.76	2.73	-0.06	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

61.07	29.31	0.73	2.67	-0.07	CLAYEY SANDY SILT&SILT
61.14	28.07	0.77	2.79	-0.07	CLAYEY SANDY SILT&SILT
61.21	26.34	0.8	2.8	-0.06	CLAYEY SANDY SILT&SILT
61.27	26.24	0.82	2.75	-0.07	CLAYEY SANDY SILT&SILT
61.34	26.75	0.83	2.65	-0.07	CLAYEY SANDY SILT&SILT
61.4	27.84	0.85	2.57	-0.06	CLAYEY SANDY SILT&SILT
61.47	30.31	0.83	2.45	-0.05	CLAYEY SANDY SILT&SILT
61.53	33.15	0.83	2.39	-0.06	CLAYEY SANDY SILT&SILT
61.6	35.01	0.83	2.33	-0.06	CLAYEY SANDY SILT&SILT
61.66	35.49	0.84	2.31	-0.05	CLAYEY SANDY SILT&SILT
61.73	35.37	0.88	2.34	-0.06	CLAYEY SANDY SILT&SILT
61.8	35.07	0.92	2.35	-0.05	CLAYEY SANDY SILT&SILT
61.86	34.88	0.95	2.33	-0.03	CLAYEY SANDY SILT&SILT
61.93	37.36	0.99	2.25	-0.04	CLAYEY SANDY SILT&SILT
61.99	39.85	1.15	2.28	0	CLAYEY SANDY SILT&SILT
62.06	42.32	1.26	2.19	0.01	CLAYEY SANDY SILT&SILT
62.12	44.8	1.56	2.27	0.02	CLAYEY SANDY SILT&SILT
62.19	46.18	1.8	2.1	0.02	SILTY SAND
62.25	54.85	2.28	2.12	0.02	SILTY SAND
62.32	73.06	2.51	1.91	0.04	SILTY SAND
62.39	85.29	2.51	1.62	0.06	SILTY SAND
62.45	109.26	2.41	1.36	0.06	SANDS
62.52	145.99	2.39	1.21	0.06	SANDS
62.58	176.75	2.5	1.17	0.04	SANDS
62.65	197.58	2.5	1.11	-0.02	SANDS
62.71	212.68	2.25	0.96	-0.08	SANDS
62.78	224.17	2.35	0.97	-0.12	SANDS
62.85	233.58	2.56	1.03	-0.14	SANDS
62.91	241.04	2.58	1.01	-0.16	SANDS
62.98	246.28	2.69	1.02	-0.17	SANDS
63.04	248.01	2.79	1.01	-0.22	SANDS
63.11	258.22	2.9	1.01	-0.22	SANDS
63.17	266.8	3.05	1.02	-0.21	SANDS
63.24	277.87	3.23	1.03	-0.21	SANDS
63.3	292.37	3.43	1.05	-0.22	SANDS
63.37	308.14	3.68	1.09	-0.22	SANDS
63.44	321.11	3.98	1.15	-0.2	SANDS
63.5	332.69	4.3	1.21	-0.21	SANDS
63.57	344.43	4.63	1.29	-0.21	SANDS
63.63	352.5	4.99	1.37	-0.21	SANDS
63.7	359.41	5.13	1.4	-0.22	SANDS
63.76	364.72	5.26	1.43	-0.21	SANDS
63.83	369.88	5.39	1.46	-0.22	SANDS
63.89	369.23	5.52	1.5	-0.21	SANDS
63.96	368.58	5.56	1.52	-0.18	SANDS
64.03	367.93	5.51	1.53	-0.17	SANDS
64.09	367.28	5.49	1.56	-0.17	SANDS
64.16	367.09	5.57	1.63	-0.17	SANDS
64.22	364.85	5.63	1.72	-0.18	SANDS
64.29	356.62	5.61	1.81	-0.16	SANDS
64.35	342	5.87	2.01	-0.17	SANDS
64.42	320.95	6.03	2.22	-0.16	SANDS

US EPA ARCHIVE DOCUMENT

64.49	302.16	6.07	2.39	-0.17	SANDS
64.55	280.66	5.92	2.51	-0.17	SANDS
64.62	261.52	5.53	2.51	-0.16	SANDS
64.68	242.86	5.11	2.47	-0.17	SILTY SAND
64.75	224.94	4.68	2.39	-0.17	SILTY SAND
64.81	208.91	4.05	2.14	-0.17	SANDS
64.88	196.97	3.65	1.95	-0.17	SANDS
64.94	188.3	3.18	1.7	-0.17	SANDS
65.01	177.35	2.8	1.47	-0.14	SANDS
65.08	180.77	2.57	1.3	-0.13	SANDS
65.14	185.38	2.45	1.2	-0.13	SANDS
65.21	191.5	2.41	1.15	-0.13	SANDS
65.27	200.1	2.51	1.16	-0.13	SANDS
65.34	208.59	2.59	1.18	-0.13	SANDS
65.4	215.95	2.72	1.22	-0.13	SANDS
65.47	220.85	2.78	1.23	-0.14	SANDS
65.53	223.44	2.82	1.23	-0.13	SANDS
65.6	224.81	2.8	1.21	-0.13	SANDS
65.67	226.16	2.78	1.19	-0.14	SANDS
65.73	228.69	2.71	1.14	-0.13	SANDS
65.8	232.65	2.64	1.1	-0.14	SANDS
65.86	238.22	2.58	1.06	-0.12	SANDS
65.93	240.36	2.51	1.02	-0.12	SANDS
65.99	242.51	2.58	1.05	-0.14	SANDS
66.06	244.66	2.71	1.11	-0.12	SANDS
66.13	246.8	2.81	1.15	-0.13	SANDS
66.19	249.36	2.9	1.21	-0.12	SANDS
66.26	247.08	2.96	1.25	-0.12	SANDS
66.32	243.85	3.02	1.3	-0.12	SANDS
66.39	239.5	3.11	1.36	-0.12	SANDS
66.45	234.51	3.1	1.36	-0.12	SANDS
66.52	229.36	2.97	1.3	-0.12	SANDS
66.58	225.42	2.82	1.22	-0.12	SANDS
66.65	224.3	2.7	1.15	-0.13	SANDS
66.72	225.74	2.65	1.1	-0.12	SANDS
66.78	230.12	2.49	1	-0.13	SANDS
66.85	236.4	2.51	0.98	-0.12	SANDS
66.91	244.08	2.54	0.96	-0.12	SANDS
66.98	251.76	2.7	0.99	-0.13	SANDS
67.04	259.44	2.91	1.04	-0.12	SANDS
67.11	267.12	3.14	1.1	-0.12	SANDS
67.17	277.39	3.39	1.17	-0.11	SANDS
67.24	286.25	3.67	1.25	-0.11	SANDS
67.31	294.29	3.98	1.37	-0.11	SANDS
67.37	298.35	4.29	1.5	-0.12	SANDS
67.44	298.03	4.53	1.63	-0.11	SANDS
67.5	292.85	4.76	1.77	-0.11	SANDS
67.57	284.5	4.93	1.9	-0.11	SANDS
67.63	274.93	5.09	2.04	-0.12	SANDS
67.7	264.94	5.2	2.18	-0.11	SANDS
67.77	255.15	5.3	2.32	-0.11	SANDS
67.83	244.43	4.77	2.17	-0.11	SANDS

US EPA ARCHIVE DOCUMENT

67.9	233.99	4.63	2.19	-0.12	SANDS
67.96	220.85	4.45	2.18	-0.11	SANDS
68.03	210.89	4.34	2.19	-0.1	SANDS
68.09	206.16	4.19	2.16	-0.1	SANDS
68.16	200.97	4.06	2.13	-0.11	SANDS
68.22	195.08	3.97	2.12	-0.1	SANDS
68.29	190.22	3.92	2.12	-0.1	SANDS
68.36	186.28	3.88	2.1	-0.1	SANDS
68.42	184.3	3.79	2.05	-0.11	SANDS
68.49	183.24	3.66	1.96	-0.1	SANDS
68.55	183.27	3.58	1.9	-0.1	SANDS
68.62	184.49	3.51	1.82	-0.1	SANDS
68.68	186.44	3.43	1.73	-0.11	SANDS
68.75	188.46	3.19	1.54	-0.1	SANDS
68.81	191.62	2.94	1.36	-0.11	SANDS
68.88	197.9	2.69	1.18	-0.11	SANDS
68.95	209.23	2.44	0.99	-0.11	SANDS
69.01	220.55	2.38	0.9	-0.13	SANDS
69.08	231.89	2.34	0.81	-0.11	SANDS
69.14	243.21	2.31	0.74	-0.11	SANDS
69.21	270	2.4	0.71	-0.11	SANDS
69.27	299.06	2.6	0.71	-0.11	SANDS
69.34	328.63	2.81	0.72	-0.11	SANDS
69.41	356.37	3.05	0.74	-0.11	SANDS
69.47	379.92	3.32	0.76	-0.12	SANDS
69.54	405.11	3.64	0.8	-0.11	SANDS
69.6	430.04	4	0.86	-0.12	SANDS
69.67	447.99	4.41	0.93	-0.12	SANDS
69.73	463.19	4.65	0.96	-0.11	SANDS
69.8	476.63	4.88	0.99	-0.12	SANDS
69.86	486.74	5.12	1.03	-0.12	SANDS
69.93	490.52	5.36	1.07	-0.11	SANDS
70	494.3	5.71	1.13	-0.1	SANDS
70.06	498.07	5.97	1.17	-0.09	SANDS
70.13	501.85	6.25	1.22	-0.09	SANDS
70.19	509.37	6.53	1.28	-0.1	SANDS
70.26	512.15	6.7	1.31	-0.1	SANDS
70.32	513.21	7	1.37	-0.1	SANDS
70.39	513.85	7.29	1.44	-0.09	SANDS
70.45	513.33	7.59	1.51	-0.09	SANDS
70.52	509.49	7.89	1.58	-0.1	SANDS
70.59	505.64	7.98	1.62	-0.1	SANDS
70.65	501.79	7.96	1.64	-0.09	SANDS
70.72	497.94	8.06	1.69	-0.09	SANDS
70.78	490.52	8.16	1.74	-0.08	SANDS
70.85	484.34	8.26	1.8	-0.09	SANDS
70.91	474.22	8.35	1.86	-0.07	SANDS
70.98	464.1	8.54	1.94	-0.07	SANDS
71.05	453.98	8.59	1.99	-0.07	SANDS
71.11	443.86	8.48	2.01	-0.07	SANDS
71.18	434.9	8.31	2.01	-0.07	SANDS
71.24	426.93	7.95	1.96	-0.07	SANDS

US EPA ARCHIVE DOCUMENT

71.31	417.97	7.51	1.89	-0.08	SANDS
71.37	407.67	7.35	1.88	-0.08	SANDS
71.44	399.35	7.04	1.83	-0.07	SANDS
71.5	393.87	6.77	1.78	-0.08	SANDS
71.57	387.09	6.56	1.74	-0.08	SANDS
71.64	380.59	6.49	1.74	-0.07	SANDS
71.7	378.23	6.33	1.72	-0.06	SANDS
71.77	374.77	6.18	1.7	-0.06	SANDS
71.83	371.54	6.02	1.67	-0.06	SANDS
71.9	366.83	5.86	1.65	-0.06	SANDS
71.96	362.13	5.82	1.65	-0.07	SANDS
72.03	357.43	5.61	1.6	-0.05	SANDS
72.09	352.72	5.44	1.56	-0.06	SANDS
72.16	349.94	5.26	1.52	-0.05	SANDS
72.23	348.66	5.07	1.47	-0.05	SANDS
72.29	347.86	4.97	1.44	-0.06	SANDS
72.36	345.87	4.97	1.44	-0.05	SANDS
72.42	344.05	4.92	1.43	-0.06	SANDS
72.49	343.28	4.96	1.44	-0.06	SANDS
72.55	343.51	4.94	1.44	-0.06	SANDS
72.62	344.02	4.75	1.38	-0.06	SANDS
72.69	344.08	4.64	1.35	-0.05	SANDS
72.75	343.82	4.55	1.33	-0.05	SANDS
72.82	345.33	4.45	1.31	-0.05	SANDS
72.88	344.37	4.36	1.29	-0.05	SANDS
72.95	340.89	4.27	1.27	-0.05	SANDS
73.01	337.42	4.21	1.27	-0.06	SANDS
73.08	333.95	4.09	1.23	-0.05	SANDS
73.14	330.48	3.96	1.19	-0.06	SANDS
73.21	332.59	3.87	1.17	-0.05	SANDS
73.28	331.89	3.83	1.15	-0.05	SANDS
73.34	332.5	3.76	1.13	-0.05	SANDS
73.41	331.28	3.9	1.17	-0.06	SANDS
73.47	329.62	4.01	1.2	-0.06	SANDS
73.54	330.77	4.11	1.23	-0.06	SANDS
73.6	332.91	4.16	1.25	-0.06	SANDS
73.67	335.83	4.11	1.23	-0.06	SANDS
73.73	336.02	4.07	1.22	-0.05	SANDS
73.8	334.25	4.02	1.21	-0.05	SANDS
73.87	332.78	3.97	1.19	-0.07	SANDS
73.93	332.53	3.92	1.18	-0.06	SANDS
74	332.28	3.87	1.16	-0.07	SANDS
74.06	332.04	3.82	1.14	-0.07	SANDS
74.13	331.79	3.72	1.09	-0.07	SANDS
74.19	331.54	3.62	1.05	-0.06	SANDS
74.26	334.99	3.54	1.01	-0.06	SANDS
74.32	340.14	3.53	0.98	-0.06	SANDS
74.39	346.51	3.69	1	-0.06	SANDS
74.46	354.29	3.81	1.02	-0.07	SANDS
74.52	363.15	3.92	1.03	-0.06	SANDS
74.59	372.95	3.92	1.03	-0.06	SANDS
74.65	381.24	3.92	1.03	-0.06	SANDS

US EPA ARCHIVE DOCUMENT

74.72	386.52	3.91	1.04	-0.07	SANDS
74.78	387.99	3.91	1.05	-0.07	SANDS
74.85	384.88	3.91	1.07	-0.06	SANDS
74.92	376.97	3.91	1.08	-0.06	SANDS
74.98	369.06	3.84	1.07	-0.07	SANDS
75.05	361.15	3.72	1.04	-0.07	SANDS
75.11	353.23	3.64	1	-0.07	SANDS
75.18	354.8	3.53	0.95	-0.06	SANDS
75.24	356.69	3.38	0.89	-0.06	SANDS
75.31	360.5	3.24	0.82	-0.06	SANDS
75.37	370.23	3.38	0.82	-0.06	SANDS
75.44	383.76	3.5	0.82	-0.06	SANDS
75.51	401.17	3.53	0.8	-0.06	SANDS
75.57	418.1	3.61	0.8	-0.06	SANDS
75.64	437.4	3.57	0.77	-0.06	SANDS
75.7	456.72	3.53	0.76	-0.06	SANDS
75.77	472.82	3.5	0.74	-0.07	SANDS
75.83	467.56	4.02	0.85	-0.06	SANDS
75.9	462.3	4.23	0.88	-0.06	SANDS
75.96	469.21	4.39	0.89	-0.06	SANDS
76.03	476.12	4.47	0.89	-0.05	SANDS
76.1	483.03	4.55	0.89	-0.07	SANDS
76.16	494.2	4.52	0.87	-0.05	SANDS
76.23	504.57	4.59	0.87	-0.07	SANDS
76.29	516.41	4.72	0.89	-0.06	SANDS
76.36	530.36	4.82	0.91	-0.06	SANDS
76.42	535.42	4.87	0.92	-0.06	SANDS
76.49	534.36	4.97	0.94	-0.06	SANDS
76.56	531.67	5.3	1.02	-0.06	SANDS
76.62	530.75	5.75	1.12	-0.06	SANDS
76.69	529.56	6.13	1.22	-0.06	SANDS
76.75	521.05	5.71	1.16	-0.05	SANDS
76.82	509.3	5.3	1.1	-0.05	SANDS
76.88	499.73	5.3	1.12	-0.05	SANDS
76.95	488.67	5.31	1.14	-0.06	SANDS
77.01	477.61	5.32	1.17	-0.07	SANDS
77.08	466.54	5.3	1.19	-0.06	SANDS
77.15	455.48	5.33	1.21	-0.06	SANDS
77.21	451.03	5.27	1.21	-0.06	SANDS
77.28	443.09	5.07	1.17	-0.06	SANDS
77.34	435.29	4.81	1.12	-0.05	SANDS
77.41	431.09	4.88	1.15	-0.05	SANDS
77.47	427.99	4.97	1.19	-0.05	SANDS
77.54	430.84	5.06	1.22	-0.05	SANDS
77.6	425.13	5.15	1.26	-0.05	SANDS
77.67	419.43	5.24	1.29	-0.08	SANDS
77.74	413.73	5.07	1.26	-0.07	SANDS
77.8	393.01	4.9	1.21	-0.05	SANDS
77.87	397.31	4.74	1.16	-0.05	SANDS
77.93	401.62	4.57	1.12	-0.06	SANDS
78	405.92	4.55	1.12	-0.08	SANDS
78.06	410.22	4.46	1.09	-0.07	SANDS

US EPA ARCHIVE DOCUMENT

78.13	414.52	4.31	1.06	-0.08	SANDS
78.2	410.36	4.33	1.06	-0.07	SANDS
78.26	405.08	4.49	1.1	-0.06	SANDS
78.33	404.63	4.55	1.11	-0.07	SANDS
78.39	405.59	4.75	1.16	-0.07	SANDS
78.46	407.89	4.83	1.17	-0.06	SANDS
78.52	409.17	4.82	1.17	-0.07	SANDS
78.59	412.89	4.79	1.16	-0.08	SANDS
78.65	415.19	4.66	1.13	-0.08	SANDS
78.72	416.79	4.45	1.08	-0.07	SANDS
78.79	415.89	4.14	1.01	-0.07	SANDS
78.85	413.02	3.84	0.94	-0.07	SANDS
78.92	410.16	3.53	0.87	-0.07	SANDS
78.98	407.29	3.71	0.92	-0.07	SANDS
79.05	404.42	3.85	0.95	-0.06	SANDS
79.11	401.55	4.07	1.01	-0.06	SANDS
79.18	401.27	4.18	1.03	-0.07	SANDS
79.24	402.52	4.27	1.04	-0.07	SANDS
79.31	402.55	4.31	1.04	-0.06	SANDS
79.38	405.33	4.38	1.04	-0.07	SANDS
79.44	410.45	4.33	1.02	-0.08	SANDS
79.51	416.15	4.34	1.01	-0.08	SANDS
79.57	423.8	4.48	1.04	-0.07	SANDS
79.64	429.87	4.62	1.07	-0.06	SANDS
79.7	434.71	4.14	0.96	-0.07	SANDS
79.77	433.14	3.67	0.85	-0.07	SANDS
79.84	432.5	3.19	0.74	-0.07	SANDS
79.9	432.07	3.2	0.74	-0.07	SANDS
79.97	431.64	3.33	0.77	-0.08	SANDS
80.03	431.2	3.42	0.78	-0.07	SANDS
80.1	430.77	3.56	0.81	-0.07	SANDS
80.16	433.46	3.67	0.83	-0.07	SANDS
80.23	434.87	3.73	0.83	-0.07	SANDS
80.29	439.86	3.8	0.84	-0.06	SANDS
80.36	447.89	4	0.88	-0.07	SANDS
80.43	454.49	4.17	0.91	-0.07	SANDS
80.49	459.22	4.23	0.92	-0.07	SANDS
80.56	458.58	4.2	0.91	-0.07	SANDS
80.62	455.77	4.18	0.9	-0.07	SANDS
80.69	455.96	4.15	0.89	-0.07	SANDS
80.75	464.79	4.12	0.88	-0.07	SANDS
80.82	477.63	4.1	0.88	-0.08	SANDS
80.88	472.27	4.07	0.88	-0.07	SANDS
80.95	466.91	4.07	0.89	-0.07	SANDS
81.02	461.55	4.14	0.91	-0.07	SANDS
81.08	456.19	4.17	0.92	-0.07	SANDS
81.15	450.84	4.19	0.92	-0.07	SANDS
81.21	452.92	4.18	0.91	-0.07	SANDS
81.28	453.01	4.23	0.92	-0.06	SANDS
81.34	454.36	4.36	0.95	-0.06	SANDS
81.41	458.39	4.56	0.99	-0.07	SANDS
81.48	462.1	4.56	1	-0.06	SANDS

US EPA ARCHIVE DOCUMENT

81.54	467.19	4.63	1.02	-0.07	SANDS
81.61	466.29	5.09	1.13	-0.06	SANDS
81.67	461.88	4.97	1.12	-0.07	SANDS
81.74	452.28	4.86	1.1	-0.07	SANDS
81.8	441.85	5.22	1.19	-0.06	SANDS
81.87	435.96	5.59	1.26	-0.06	SANDS
81.93	437.84	5.66	1.27	-0.06	SANDS
82	439.72	5.66	1.26	-0.06	SANDS
82.07	441.6	5.53	1.22	-0.06	SANDS
82.13	443.48	5.32	1.17	-0.06	SANDS
82.2	453.78	5.05	1.1	-0.06	SANDS
82.26	457.21	4.89	1.05	-0.06	SANDS
82.33	458.64	4.73	1.01	-0.06	SANDS
82.39	458.16	4.57	0.96	-0.06	SANDS
82.46	464.26	4.4	0.92	-0.06	SANDS
82.52	470.37	4.53	0.93	-0.08	SANDS
82.59	476.46	4.55	0.92	-0.05	SANDS
82.66	482.57	4.56	0.91	-0.05	SANDS
82.72	488.66	4.58	0.9	-0.06	SANDS
82.79	495.05	4.35	0.85	-0.06	SANDS
82.85	501.45	4.13	0.79	-0.06	SANDS
82.92	507.83	3.91	0.73	-0.05	SANDS
82.98	517.52	3.68	0.68	-0.08	SANDS
83.05	527.2	3.51	0.63	-0.08	SANDS
83.12	536.89	3.5	0.62	-0.08	SANDS
83.18	549.36	3.48	0.6	-0.08	SANDS
83.25	561.83	3.42	0.58	-0.08	SANDS
83.31	574.3	3.36	0.56	-0.08	SANDS
83.38	583.04	3.3	0.55	-0.08	SANDS
83.44	591.77	3.51	0.58	-0.08	SANDS
83.51	600.51	3.57	0.58	-0.08	SANDS
83.57	607.45	3.64	0.59	-0.09	SANDS
83.64	614.4	3.7	0.59	-0.09	SANDS
83.71	617.22	3.81	0.61	-0.09	SANDS
83.77	620.05	3.83	0.61	-0.1	SANDS
83.84	622.88	3.85	0.66	-0.09	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-13-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 05

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0.02	0.22	0	CLAYS
0.13	0	0.03	0.16	0	CLAYS
0.2	0	0.05	0.23	0	CLAYS
0.26	0.1	0.85	3.41	0	CLAYS
0.33	6.78	2.65	9.15	-0.03	CLAYS
0.39	56.35	4.44	10	-0.02	CLAYS
0.46	40.43	6.24	10	-0.01	CLAYS
0.52	24.52	3.53	10	-0.01	CLAYS
0.59	22.18	3.19	10	-0.02	CLAYS
0.66	23.36	1.29	5.68	-0.02	CLAYS
0.72	22.63	0.82	3.7	-0.03	CLAYEY SILT&SILTY CLAYS
0.79	23.62	0.81	3.74	-0.02	CLAYEY SILT&SILTY CLAYS
0.85	22.82	0.71	3.39	-0.03	CLAYEY SILT&SILTY CLAYS
0.92	21.86	0.72	3.58	-0.06	CLAYEY SILT&SILTY CLAYS
0.98	21.63	0.73	3.81	-0.09	CLAYEY SILT&SILTY CLAYS
1.05	20.9	0.66	3.62	-0.1	CLAYEY SILT&SILTY CLAYS
1.12	19.58	0.55	3.25	-0.09	CLAYEY SILT&SILTY CLAYS
1.18	18.69	0.45	2.83	-0.11	CLAYEY SANDY SILT&SILT
1.25	17.63	0.39	2.64	-0.1	CLAYEY SANDY SILT&SILT
1.31	16.54	0.39	2.78	-0.12	CLAYEY SANDY SILT&SILT
1.38	15.3	0.43	3.18	-0.11	CLAYEY SILT&SILTY CLAYS
1.44	14.05	0.48	3.6	-0.1	CLAYEY SILT&SILTY CLAYS
1.51	13.31	0.52	3.85	-0.11	CLAYEY SILT&SILTY CLAYS
1.57	12.61	0.6	4.22	-0.1	CLAYS
1.64	12.58	0.69	4.5	-0.11	CLAYS
1.71	13	0.78	4.6	-0.1	CLAYS
1.77	13.95	0.84	4.45	-0.12	CLAYS
1.84	15.3	0.92	4.37	-0.13	CLAYEY SILT&SILTY CLAYS
1.9	17.38	0.93	3.98	-0.13	CLAYEY SILT&SILTY CLAYS
1.97	19.81	0.94	3.67	-0.13	CLAYEY SILT&SILTY CLAYS
2.03	22.43	0.94	3.41	-0.1	CLAYEY SILT&SILTY CLAYS
2.1	24.71	0.92	3.17	-0.05	CLAYEY SANDY SILT&SILT
2.16	27.04	0.86	2.83	-0.04	CLAYEY SANDY SILT&SILT
2.23	28.61	0.79	2.59	-0.05	CLAYEY SANDY SILT&SILT
2.3	30.56	0.7	2.28	-0.05	CLAYEY SANDY SILT&SILT
2.36	31.59	0.63	2.08	-0.05	CLAYEY SANDY SILT&SILT
2.43	31.91	0.58	1.94	-0.05	CLAYEY SANDY SILT&SILT
2.49	31.43	0.53	1.8	-0.05	CLAYEY SANDY SILT&SILT
2.56	29.92	0.48	1.67	-0.05	CLAYEY SANDY SILT&SILT
2.62	29.09	0.44	1.59	-0.05	CLAYEY SANDY SILT&SILT
2.69	28.45	0.4	1.48	-0.04	SILTY SAND
2.76	28.03	0.38	1.4	-0.05	SILTY SAND
2.82	27.78	0.26	1	-0.05	SILTY SAND
2.89	27.49	0.27	1.05	-0.06	SILTY SAND
2.95	26.69	0.26	1.07	-0.05	SILTY SAND
3.02	25.95	0.24	1.05	-0.09	SILTY SAND

US EPA ARCHIVE DOCUMENT

3.08	25.57	0.23	1.08	-0.09	SILTY SAND
3.15	23.94	0.22	1.1	-0.09	SILTY SAND
3.21	22.27	0.22	1.19	-0.1	SILTY SAND
3.28	20.48	0.21	1.21	-0.1	CLAYEY SANDY SILT&SILT
3.35	19.2	0.23	1.35	-0.1	CLAYEY SANDY SILT&SILT
3.41	17.79	0.24	1.46	-0.1	CLAYEY SANDY SILT&SILT
3.48	16.74	0.24	1.55	-0.1	CLAYEY SANDY SILT&SILT
3.54	15.78	0.26	1.66	-0.09	CLAYEY SANDY SILT&SILT
3.61	15.46	0.26	1.68	-0.1	CLAYEY SANDY SILT&SILT
3.67	15.26	0.23	1.5	-0.09	CLAYEY SANDY SILT&SILT
3.74	15.46	0.22	1.43	-0.1	CLAYEY SANDY SILT&SILT
3.8	15.49	0.22	1.36	-0.11	CLAYEY SANDY SILT&SILT
3.87	15.71	0.13	0.83	-0.1	SILTY SAND
3.94	15.71	0.14	0.87	-0.1	CLAYEY SANDY SILT&SILT
4	16	0.14	0.82	-0.1	SILTY SAND
4.07	15.62	0.13	0.8	-0.12	SILTY SAND
4.13	16.64	0.13	0.78	-0.13	SILTY SAND
4.2	16.77	0.13	0.78	-0.12	SILTY SAND
4.26	16.77	0.13	0.79	-0.12	SILTY SAND
4.33	16.77	0.13	0.8	-0.12	SILTY SAND
4.4	16.54	0.13	0.81	-0.12	SILTY SAND
4.46	16.45	0.14	0.87	-0.12	SILTY SAND
4.53	16.26	0.15	0.91	-0.13	CLAYEY SANDY SILT&SILT
4.59	16.1	0.15	0.92	-0.12	CLAYEY SANDY SILT&SILT
4.66	15.84	0.15	0.9	-0.13	CLAYEY SANDY SILT&SILT
4.72	16	0.15	0.89	-0.13	CLAYEY SANDY SILT&SILT
4.79	15.78	0.15	0.86	-0.12	CLAYEY SANDY SILT&SILT
4.85	15.97	0.14	0.84	-0.13	SILTY SAND
4.92	16.45	0.13	0.74	-0.14	SILTY SAND
4.99	16.99	0.13	0.71	-0.13	SILTY SAND
5.05	17.38	0.13	0.72	-0.16	SILTY SAND
5.12	18.12	0.13	0.73	-0.16	SILTY SAND
5.18	18.34	0.15	0.81	-0.16	SILTY SAND
5.25	18.53	0.16	0.89	-0.17	SILTY SAND
5.31	18.63	0.19	1.05	-0.19	CLAYEY SANDY SILT&SILT
5.38	18.46	0.23	1.24	-0.18	CLAYEY SANDY SILT&SILT
5.44	18.3	0.29	1.55	-0.18	CLAYEY SANDY SILT&SILT
5.51	18.15	0.32	1.7	-0.17	CLAYEY SANDY SILT&SILT
5.58	18.15	0.35	1.82	-0.16	CLAYEY SANDY SILT&SILT
5.64	18.27	0.38	1.99	-0.16	CLAYEY SANDY SILT&SILT
5.71	18.72	0.4	2.05	-0.16	CLAYEY SANDY SILT&SILT
5.77	19.14	0.43	2.15	-0.16	CLAYEY SANDY SILT&SILT
5.84	19.75	0.37	1.8	-0.17	CLAYEY SANDY SILT&SILT
5.9	20	0.4	1.98	-0.18	CLAYEY SANDY SILT&SILT
5.97	19.88	0.45	2.19	-0.18	CLAYEY SANDY SILT&SILT
6.04	20.9	0.48	2.34	-0.2	CLAYEY SANDY SILT&SILT
6.1	20.99	0.53	2.57	-0.2	CLAYEY SANDY SILT&SILT
6.17	20.38	0.6	2.85	-0.18	CLAYEY SANDY SILT&SILT
6.23	20.42	0.65	3.05	-0.18	CLAYEY SILT&SILTY CLAYS
6.3	20.32	0.69	3.19	-0.17	CLAYEY SILT&SILTY CLAYS
6.36	20.83	0.74	3.37	-0.16	CLAYEY SILT&SILTY CLAYS
6.43	21.63	0.79	3.5	-0.18	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

6.49	21.83	0.83	3.6	-0.2	CLAYEY SILT&SILTY CLAYS
6.56	22.18	0.86	3.67	-0.2	CLAYEY SILT&SILTY CLAYS
6.63	22.79	0.89	3.73	-0.22	CLAYEY SILT&SILTY CLAYS
6.69	23.33	0.93	3.82	-0.2	CLAYEY SILT&SILTY CLAYS
6.76	23.97	0.96	3.87	-0.2	CLAYEY SILT&SILTY CLAYS
6.82	24.35	0.93	3.7	-0.2	CLAYEY SILT&SILTY CLAYS
6.89	24.48	0.84	3.32	-0.21	CLAYEY SILT&SILTY CLAYS
6.95	24.85	0.8	3.15	-0.21	CLAYEY SANDY SILT&SILT
7.02	25.22	0.81	3.14	-0.21	CLAYEY SANDY SILT&SILT
7.08	25.59	0.82	3.21	-0.27	CLAYEY SANDY SILT&SILT
7.15	25.95	0.84	3.33	-0.27	CLAYEY SILT&SILTY CLAYS
7.22	25.99	0.87	3.52	-0.28	CLAYEY SILT&SILTY CLAYS
7.28	25.83	0.88	3.63	-0.26	CLAYEY SILT&SILTY CLAYS
7.35	25.41	0.89	3.79	-0.26	CLAYEY SILT&SILTY CLAYS
7.41	24.58	0.92	4.04	-0.26	CLAYEY SILT&SILTY CLAYS
7.48	23.46	0.94	4.19	-0.25	CLAYEY SILT&SILTY CLAYS
7.54	23.01	0.93	4.19	-0.25	CLAYEY SILT&SILTY CLAYS
7.61	22.21	0.9	4.09	-0.25	CLAYEY SILT&SILTY CLAYS
7.68	21.67	0.88	3.99	-0.25	CLAYEY SILT&SILTY CLAYS
7.74	21.7	0.87	3.88	-0.25	CLAYEY SILT&SILTY CLAYS
7.81	22.11	0.87	3.79	-0.25	CLAYEY SILT&SILTY CLAYS
7.87	22.11	0.85	3.66	-0.25	CLAYEY SILT&SILTY CLAYS
7.94	22.43	0.81	3.47	-0.25	CLAYEY SILT&SILTY CLAYS
8	22.66	0.79	3.38	-0.24	CLAYEY SILT&SILTY CLAYS
8.07	23.39	0.82	3.5	-0.26	CLAYEY SILT&SILTY CLAYS
8.13	24.55	0.87	3.75	-0.27	CLAYEY SILT&SILTY CLAYS
8.2	24.13	0.91	4.03	-0.28	CLAYEY SILT&SILTY CLAYS
8.27	23.52	0.95	4.33	-0.29	CLAYEY SILT&SILTY CLAYS
8.33	22.75	0.98	4.56	-0.28	CLAYEY SILT&SILTY CLAYS
8.4	22.18	1.01	4.77	-0.28	CLAYS
8.46	21.28	1.02	4.88	-0.28	CLAYS
8.53	20.99	1.02	4.91	-0.28	CLAYS
8.59	20.9	1.01	4.88	-0.28	CLAYS
8.66	21.12	0.99	4.84	-0.28	CLAYS
8.72	20.93	0.98	4.69	-0.28	CLAYEY SILT&SILTY CLAYS
8.79	20.42	0.92	4.29	-0.28	CLAYEY SILT&SILTY CLAYS
8.86	20.26	0.85	3.92	-0.28	CLAYEY SILT&SILTY CLAYS
8.92	20.16	0.84	3.81	-0.27	CLAYEY SILT&SILTY CLAYS
8.99	20.35	0.88	3.94	-0.27	CLAYEY SILT&SILTY CLAYS
9.05	23.3	0.93	4.12	-0.28	CLAYEY SILT&SILTY CLAYS
9.12	23.62	0.97	4.41	-0.28	CLAYEY SILT&SILTY CLAYS
9.18	22.88	1.03	4.79	-0.28	CLAYS
9.25	22.34	1.07	5.12	-0.28	CLAYS
9.32	21.83	1.1	5.39	-0.28	CLAYS
9.38	20.9	1.1	5.47	-0.28	CLAYS
9.45	20.45	1.08	5.42	-0.29	CLAYS
9.51	20	1.06	5.4	-0.28	CLAYS
9.58	19.84	1.04	5.39	-0.28	CLAYS
9.64	19.91	1.03	5.4	-0.28	CLAYS
9.71	19.78	1	5.26	-0.28	CLAYS
9.77	19.46	0.96	4.99	-0.29	CLAYS
9.84	18.43	0.92	4.74	-0.28	CLAYS

US EPA ARCHIVE DOCUMENT

9.91	18.4	0.87	4.45	-0.29	CLAYEY SILT&SILTY CLAYS
9.97	17.92	0.94	4.71	-0.28	CLAYS
10.04	20.58	1	4.91	-0.29	CLAYS
10.1	20.74	1.06	5.13	-0.29	CLAYS
10.17	20.1	1.09	5.19	-0.28	CLAYS
10.23	20.07	1.09	5.05	-0.29	CLAYS
10.3	20.19	1.08	4.83	-0.3	CLAYS
10.36	20.74	1.07	4.63	-0.29	CLAYEY SILT&SILTY CLAYS
10.43	21.7	1.11	4.65	-0.29	CLAYEY SILT&SILTY CLAYS
10.5	22.85	1.18	4.83	-0.28	CLAYS
10.56	23.91	1.24	5.05	-0.28	CLAYS
10.63	24.71	1.31	5.29	-0.28	CLAYS
10.69	25.06	1.41	5.74	-0.29	CLAYS
10.76	24.9	1.52	6.08	-0.28	CLAYS
10.82	24.48	1.54	6.02	-0.28	CLAYS
10.89	24.35	1.55	5.86	-0.29	CLAYS
10.96	24.61	1.6	5.76	-0.29	CLAYS
11.02	24.22	1.72	5.88	-0.3	CLAYS
11.09	27.14	1.8	5.85	-0.29	CLAYS
11.15	28.45	1.89	5.92	-0.29	CLAYS
11.22	30.25	1.91	5.83	-0.29	CLAYS
11.28	32	2.03	6.04	-0.3	CLAYS
11.35	32.9	2.14	6.24	-0.29	CLAYS
11.41	33.7	2.22	6.42	-0.29	CLAYS
11.48	34.12	2.4	6.92	-0.3	CLAYS
11.55	34.02	2.52	7.34	-0.29	CLAYS
11.61	35.17	2.47	7.27	-0.29	CLAYS
11.68	36.13	2.43	7.25	-0.28	CLAYS
11.74	34.85	2.37	7.34	-0.28	CLAYS
11.81	33.48	2.32	7.41	-0.28	CLAYS
11.87	32.23	2.16	7.1	-0.29	CLAYS
11.94	32.29	2.16	7.29	-0.3	CLAYS
12	31.75	2.2	7.58	-0.29	CLAYS
12.07	28.93	2.3	8.08	-0.29	CLAYS
12.14	28.8	2.33	8.09	-0.3	CLAYS
12.2	28.13	2.34	8.05	-0.29	CLAYS
12.27	27.94	2.27	7.62	-0.3	CLAYS
12.33	28.29	2.12	6.84	-0.29	CLAYS
12.4	28.96	2.05	6.39	-0.28	CLAYS
12.46	30.37	1.97	5.99	-0.29	CLAYS
12.53	30.66	2.04	6.05	-0.28	CLAYS
12.6	32.51	2.04	5.95	-0.29	CLAYS
12.66	35.36	1.91	5.49	-0.28	CLAYS
12.73	34.24	2.01	5.7	-0.28	CLAYS
12.79	34.09	2.08	5.73	-0.28	CLAYS
12.86	35.24	2.31	6.15	-0.29	CLAYS
12.92	34.5	2.36	6.18	-0.28	CLAYS
12.99	35.52	2.46	6.32	-0.28	CLAYS
13.05	37.6	2.53	6.43	-0.28	CLAYS
13.12	41.06	2.52	6.41	-0.28	CLAYS
13.19	40.96	2.6	6.75	-0.28	CLAYS
13.25	39.88	2.73	7.27	-0.3	CLAYS

US EPA ARCHIVE DOCUMENT

13.32	38.47	2.79	7.58	-0.29	CLAYS
13.38	37.79	2.83	7.76	-0.29	CLAYS
13.45	37.41	2.83	7.87	-0.29	CLAYS
13.51	36.45	2.75	7.81	-0.29	CLAYS
13.58	35.46	2.81	8.11	-0.28	CLAYS
13.64	35.59	2.73	7.99	-0.28	CLAYS
13.71	36.42	2.41	7.24	-0.27	CLAYS
13.78	34.53	2.29	7.06	-0.29	CLAYS
13.84	32.55	2.37	7.5	-0.29	CLAYS
13.91	33.35	2.25	7.22	-0.28	CLAYS
13.97	32.45	2.29	7.36	-0.28	CLAYS
14.04	30.05	2.23	7.07	-0.28	CLAYS
14.1	31.4	2.16	6.75	-0.29	CLAYS
14.17	29.86	2.26	6.98	-0.28	CLAYS
14.24	30.12	2.24	6.7	-0.28	CLAYS
14.3	33.06	2	5.73	-0.29	CLAYS
14.37	34.46	1.84	5.15	-0.28	CLAYEY SILT&SILTY CLAYS
14.43	32.96	1.95	5.4	-0.28	CLAYS
14.5	33.67	1.99	5.36	-0.28	CLAYS
14.56	36.68	2.02	5.38	-0.28	CLAYS
14.63	38.79	2.05	5.5	-0.28	CLAYS
14.69	38.24	2.2	6.02	-0.28	CLAYS
14.76	36.9	2.31	6.49	-0.28	CLAYS
14.83	37.76	2.42	6.96	-0.28	CLAYS
14.89	36.52	2.53	7.49	-0.29	CLAYS
14.96	35.28	2.64	7.99	-0.28	CLAYS
15.02	34.04	2.69	8.21	-0.29	CLAYS
15.09	32.81	2.74	8.26	-0.28	CLAYS
15.15	32.04	2.57	7.55	-0.28	CLAYS
15.22	32.2	2.32	6.63	-0.28	CLAYS
15.28	32.26	2.29	6.38	-0.28	CLAYS
15.35	33.51	2.3	6.25	-0.28	CLAYS
15.42	36.32	2.28	6.13	-0.28	CLAYS
15.48	37.99	2.2	5.98	-0.28	CLAYS
15.55	37.89	2.32	6.47	-0.28	CLAYS
15.61	37.79	2.47	7.12	-0.28	CLAYS
15.68	37.6	2.58	7.76	-0.28	CLAYS
15.74	35.55	2.66	8.39	-0.28	CLAYS
15.81	33.99	2.73	8.89	-0.28	CLAYS
15.88	32.13	2.75	9.18	-0.28	CLAYS
15.94	30.82	2.61	8.85	-0.29	CLAYS
16.01	29.44	2.44	8.32	-0.28	CLAYS
16.07	28.33	2.27	7.74	-0.29	CLAYS
16.14	29.31	2.15	7.29	-0.29	CLAYS
16.2	29.41	2.07	7.04	-0.28	CLAYS
16.27	29.92	1.97	6.74	-0.3	CLAYS
16.33	29.86	1.92	6.62	-0.3	CLAYS
16.4	29.38	1.96	6.76	-0.29	CLAYS
16.47	29.25	2	6.85	-0.29	CLAYS
16.53	28.42	1.97	6.66	-0.29	CLAYS
16.6	28.26	1.97	6.55	-0.29	CLAYS
16.66	29.31	1.91	6.24	-0.29	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	29.76	1.95	6.32	-0.28	CLAYS
16.79	30.53	1.89	6.05	-0.28	CLAYS
16.86	31.33	1.68	5.37	-0.29	CLAYS
16.92	31.07	1.68	5.37	-0.3	CLAYS
16.99	31.3	1.73	5.52	-0.28	CLAYS
17.06	31.52	1.82	5.79	-0.3	CLAYS
17.12	31.71	1.86	5.86	-0.29	CLAYS
17.19	31.3	1.84	5.72	-0.29	CLAYS
17.25	30.79	1.95	5.92	-0.29	CLAYS
17.32	31.07	1.98	5.9	-0.3	CLAYS
17.38	32.1	2.03	5.93	-0.29	CLAYS
17.45	33.09	1.95	5.67	-0.29	CLAYS
17.52	34.88	1.93	5.56	-0.29	CLAYS
17.58	35.1	1.97	5.66	-0.29	CLAYS
17.65	35.2	2	5.7	-0.29	CLAYS
17.71	34.5	2.02	5.68	-0.29	CLAYS
17.78	33.95	2.08	5.69	-0.29	CLAYS
17.84	34.56	2.26	5.94	-0.29	CLAYS
17.91	35.49	2.19	5.51	-0.29	CLAYS
17.97	36.77	2.11	5.08	-0.29	CLAYEY SILT&SILTY CLAYS
18.04	38.18	1.96	4.54	-0.31	CLAYEY SILT&SILTY CLAYS
18.11	40.61	1.75	3.9	-0.3	CLAYEY SILT&SILTY CLAYS
18.17	42.98	1.5	3.23	-0.31	CLAYEY SANDY SILT&SILT
18.24	44.48	1.29	2.67	-0.3	CLAYEY SANDY SILT&SILT
18.3	45.92	1.15	2.3	-0.31	CLAYEY SANDY SILT&SILT
18.37	46.95	1.02	1.98	-0.31	SILTY SAND
18.43	47.94	0.87	1.65	-0.31	SILTY SAND
18.5	50.4	0.77	1.44	-0.31	SILTY SAND
18.56	53.54	0.74	1.38	-0.31	SILTY SAND
18.63	55.91	0.74	1.42	-0.31	SILTY SAND
18.7	55.88	0.8	1.59	-0.3	SILTY SAND
18.76	53.89	0.9	1.87	-0.3	SILTY SAND
18.83	51.36	1.02	2.23	-0.3	SILTY SAND
18.89	49.06	1.05	2.44	-0.3	CLAYEY SANDY SILT&SILT
18.96	47.11	1.13	2.83	-0.3	CLAYEY SANDY SILT&SILT
19.02	44.77	1.23	3.37	-0.31	CLAYEY SANDY SILT&SILT
19.09	43.04	1.38	4.17	-0.31	CLAYEY SILT&SILTY CLAYS
19.16	38.6	1.56	5.3	-0.31	CLAYS
19.22	34.43	1.76	6.75	-0.31	CLAYS
19.29	31.07	1.81	7.83	-0.31	CLAYS
19.35	27.75	1.82	8.96	-0.31	CLAYS
19.42	24.16	1.81	10	-0.31	CLAYS
19.48	20.68	1.78	10	-0.31	CLAYS
19.55	18.3	1.59	10	-0.31	CLAYS
19.61	16.48	1.32	9.26	-0.31	CLAYS
19.68	14.56	1.04	7.45	-0.31	CLAYS
19.75	13.7	0.81	5.71	-0.31	CLAYS
19.81	13.6	0.63	4.28	-0.32	CLAYS
19.88	13.6	0.37	2.41	-0.32	CLAYEY SANDY SILT&SILT
19.94	13.79	0.38	2.39	-0.31	CLAYEY SANDY SILT&SILT
20.01	14.5	0.42	2.44	-0.32	CLAYEY SANDY SILT&SILT
20.07	15.68	0.44	2.35	-0.32	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

20.14	16.67	0.47	2.31	-0.32	CLAYEY SANDY SILT&SILT
20.2	17.12	0.53	2.39	-0.32	CLAYEY SANDY SILT&SILT
20.27	18.94	0.57	2.37	-0.33	CLAYEY SANDY SILT&SILT
20.34	20.9	0.61	2.35	-0.32	CLAYEY SANDY SILT&SILT
20.4	23.17	0.69	2.45	-0.33	CLAYEY SANDY SILT&SILT
20.47	25.31	0.82	2.71	-0.33	CLAYEY SANDY SILT&SILT
20.53	27.36	0.97	3.06	-0.33	CLAYEY SANDY SILT&SILT
20.6	29.12	1.17	3.57	-0.33	CLAYEY SILT&SILTY CLAYS
20.66	30.82	1.41	4.18	-0.32	CLAYEY SILT&SILTY CLAYS
20.73	33.25	1.66	4.84	-0.32	CLAYEY SILT&SILTY CLAYS
20.8	34.46	1.9	5.5	-0.33	CLAYS
20.86	34.76	2.12	6.16	-0.32	CLAYS
20.93	34.85	2.19	6.46	-0.32	CLAYS
20.99	34.72	2.28	6.87	-0.32	CLAYS
21.06	34.18	2.32	7.15	-0.33	CLAYS
21.12	34.02	2.37	7.53	-0.33	CLAYS
21.19	33.38	2.43	8.01	-0.33	CLAYS
21.25	32.13	2.49	8.55	-0.33	CLAYS
21.32	30.82	2.5	8.88	-0.33	CLAYS
21.39	29.89	2.48	9.08	-0.33	CLAYS
21.45	28.8	2.42	9.04	-0.34	CLAYS
21.52	27.39	2.37	8.93	-0.33	CLAYS
21.58	26.08	2.28	8.54	-0.33	CLAYS
21.65	25.83	2.18	7.95	-0.34	CLAYS
21.71	25.83	2.03	7.29	-0.33	CLAYS
21.78	26.44	1.93	6.7	-0.33	CLAYS
21.84	27.33	1.85	6.27	-0.33	CLAYS
21.91	28.83	1.87	6.18	-0.33	CLAYS
21.98	29.83	1.91	6.22	-0.33	CLAYS
22.04	29.19	1.98	6.37	-0.33	CLAYS
22.11	31.14	2.07	6.55	-0.34	CLAYS
22.17	30.98	2.19	6.89	-0.34	CLAYS
22.24	31.52	2.26	7.08	-0.34	CLAYS
22.3	31.84	2.31	7.28	-0.34	CLAYS
22.37	31.97	2.39	7.58	-0.33	CLAYS
22.44	32.39	2.43	7.79	-0.34	CLAYS
22.5	32.13	2.42	7.79	-0.34	CLAYS
22.57	31.56	2.38	7.63	-0.33	CLAYS
22.63	30.66	2.3	7.26	-0.34	CLAYS
22.7	30.25	2.25	6.98	-0.33	CLAYS
22.76	30.37	1.97	5.89	-0.33	CLAYS
22.83	31.43	1.69	4.9	-0.33	CLAYEY SILT&SILTY CLAYS
22.89	32.74	1.88	5.36	-0.33	CLAYS
22.96	34.66	1.98	5.63	-0.34	CLAYS
23.03	33.95	2.11	6.07	-0.33	CLAYS
23.09	37.41	2.2	6.44	-0.33	CLAYS
23.16	36.64	2.27	6.89	-0.34	CLAYS
23.22	35.24	2.33	7.3	-0.33	CLAYS
23.29	33.57	2.37	7.62	-0.34	CLAYS
23.35	31.49	2.38	7.75	-0.34	CLAYS
23.42	30.28	2.33	7.62	-0.34	CLAYS
23.48	30.05	2.3	7.45	-0.33	CLAYS

US EPA ARCHIVE DOCUMENT

23.55	30.43	2.2	7.08	-0.34	CLAYS
23.62	30.82	2.12	6.77	-0.34	CLAYS
23.68	30.95	2.07	6.55	-0.33	CLAYS
23.75	31.01	2.05	6.47	-0.33	CLAYS
23.81	31.78	2.03	6.39	-0.34	CLAYS
23.88	31.78	2.09	6.63	-0.34	CLAYS
23.94	31.94	2.16	6.91	-0.33	CLAYS
24.01	32.32	2.21	7.13	-0.34	CLAYS
24.08	31.56	2.26	7.37	-0.35	CLAYS
24.14	30.88	2.26	7.43	-0.34	CLAYS
24.21	30.47	2.27	7.56	-0.34	CLAYS
24.27	30.31	2.29	7.6	-0.34	CLAYS
24.34	30.4	2.39	7.8	-0.34	CLAYS
24.4	30.79	2.28	7.27	-0.34	CLAYS
24.47	29.54	2.19	6.73	-0.34	CLAYS
24.53	28.51	2.09	6.14	-0.33	CLAYS
24.6	31.04	1.92	5.35	-0.34	CLAYS
24.67	33.25	1.88	5.04	-0.34	CLAYEY SILT&SILTY CLAYS
24.73	35.07	1.91	4.95	-0.34	CLAYEY SILT&SILTY CLAYS
24.8	37.57	2.02	5.13	-0.33	CLAYEY SILT&SILTY CLAYS
24.86	39.04	1.94	4.92	-0.34	CLAYEY SILT&SILTY CLAYS
24.93	39.43	2.11	5.4	-0.34	CLAYS
24.99	39.72	2.28	5.91	-0.33	CLAYS
25.06	40.52	2.38	6.27	-0.33	CLAYS
25.12	39.62	2.46	6.61	-0.33	CLAYS
25.19	37.79	2.59	7.08	-0.34	CLAYS
25.26	37.19	2.68	7.34	-0.34	CLAYS
25.32	36.8	2.62	7.17	-0.34	CLAYS
25.39	36.1	2.52	6.89	-0.34	CLAYS
25.45	35.71	2.49	6.79	-0.33	CLAYS
25.52	36.04	2.5	6.83	-0.33	CLAYS
25.58	37.03	2.45	6.76	-0.33	CLAYS
25.65	37.63	2.31	6.48	-0.34	CLAYS
25.72	37.22	2.27	6.44	-0.34	CLAYS
25.78	36.68	2.29	6.5	-0.34	CLAYS
25.85	35.17	2.11	6.03	-0.34	CLAYS
25.91	33.92	2.08	5.94	-0.33	CLAYS
25.98	33.15	2.1	5.96	-0.33	CLAYS
26.04	34.95	2.13	6.07	-0.34	CLAYS
26.11	37.06	2.12	6.11	-0.34	CLAYS
26.17	36	2.16	6.4	-0.34	CLAYS
26.24	35.33	2.15	6.5	-0.34	CLAYS
26.31	34.43	2.14	6.6	-0.34	CLAYS
26.37	32.71	2.14	6.7	-0.34	CLAYS
26.44	32.29	2.2	6.93	-0.34	CLAYS
26.5	31.94	2.17	6.8	-0.34	CLAYS
26.57	31.49	2.06	6.27	-0.34	CLAYS
26.63	31.17	1.94	5.76	-0.33	CLAYS
26.7	31.59	1.87	5.38	-0.33	CLAYS
26.76	31.91	1.88	5.27	-0.33	CLAYS
26.83	33.79	1.47	4.03	-0.33	CLAYEY SILT&SILTY CLAYS
26.9	37.09	1.48	4.01	-0.34	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

26.96	37.15	1.48	4.09	-0.34	CLAYEY SILT&SILTY CLAYS
27.03	36.87	1.63	4.57	-0.34	CLAYEY SILT&SILTY CLAYS
27.09	37.76	1.8	5.09	-0.35	CLAYEY SILT&SILTY CLAYS
27.16	36.58	1.92	5.39	-0.34	CLAYS
27.22	35.1	2.04	5.55	-0.34	CLAYS
27.29	33.38	2.08	5.41	-0.34	CLAYS
27.36	33.76	2.04	4.99	-0.33	CLAYEY SILT&SILTY CLAYS
27.42	35.36	1.91	4.38	-0.34	CLAYEY SILT&SILTY CLAYS
27.49	39.68	1.85	3.98	-0.33	CLAYEY SILT&SILTY CLAYS
27.55	42.66	1.83	3.77	-0.34	CLAYEY SILT&SILTY CLAYS
27.62	45.41	1.78	3.56	-0.34	CLAYEY SANDY SILT&SILT
27.68	47.97	1.64	3.25	-0.34	CLAYEY SANDY SILT&SILT
27.75	50.85	1.55	3.06	-0.33	CLAYEY SANDY SILT&SILT
27.81	52.58	1.51	3.02	-0.33	CLAYEY SANDY SILT&SILT
27.88	52.07	1.4	2.92	-0.33	CLAYEY SANDY SILT&SILT
27.95	50.31	1.3	2.85	-0.34	CLAYEY SANDY SILT&SILT
28.01	48.96	1.27	2.97	-0.34	CLAYEY SANDY SILT&SILT
28.08	48.71	1.3	3.22	-0.31	CLAYEY SANDY SILT&SILT
28.14	46.05	1.5	3.97	-0.3	CLAYEY SILT&SILTY CLAYS
28.21	42.56	1.66	4.6	-0.31	CLAYEY SILT&SILTY CLAYS
28.27	36.74	1.79	5.09	-0.31	CLAYEY SILT&SILTY CLAYS
28.34	33.22	1.88	5.25	-0.32	CLAYS
28.4	33.83	1.93	5.17	-0.32	CLAYS
28.47	34.31	1.9	4.98	-0.31	CLAYEY SILT&SILTY CLAYS
28.54	35.43	1.86	4.88	-0.31	CLAYEY SILT&SILTY CLAYS
28.6	37.57	1.82	4.89	-0.32	CLAYEY SILT&SILTY CLAYS
28.67	40.32	1.81	5.15	-0.31	CLAYEY SILT&SILTY CLAYS
28.73	41.89	1.89	5.85	-0.31	CLAYS
28.8	39.58	1.82	6.28	-0.31	CLAYS
28.86	34.18	1.76	6.77	-0.31	CLAYS
28.93	29.25	1.65	7.02	-0.31	CLAYS
29	25.28	1.52	6.95	-0.31	CLAYS
29.06	23.33	1.35	6.53	-0.31	CLAYS
29.13	22.47	1.19	5.99	-0.31	CLAYS
29.19	21.06	0.99	5.24	-0.31	CLAYS
29.26	20.04	0.87	4.71	-0.31	CLAYS
29.32	19.14	0.77	4.3	-0.31	CLAYEY SILT&SILTY CLAYS
29.39	18.43	0.69	3.91	-0.31	CLAYEY SILT&SILTY CLAYS
29.45	17.7	0.65	3.73	-0.31	CLAYEY SILT&SILTY CLAYS
29.52	17.35	0.62	3.6	-0.31	CLAYEY SILT&SILTY CLAYS
29.59	17.44	0.58	3.36	-0.31	CLAYEY SILT&SILTY CLAYS
29.65	17.22	0.54	3.16	-0.31	CLAYEY SILT&SILTY CLAYS
29.72	17.06	0.52	3.04	-0.31	CLAYEY SILT&SILTY CLAYS
29.78	17.12	0.52	3	-0.32	CLAYEY SILT&SILTY CLAYS
29.85	17.22	0.42	2.43	-0.32	CLAYEY SANDY SILT&SILT
29.91	17.22	0.46	2.63	-0.31	CLAYEY SANDY SILT&SILT
29.98	17.06	0.5	2.87	-0.31	CLAYEY SILT&SILTY CLAYS
30.04	17.63	0.53	3.04	-0.32	CLAYEY SILT&SILTY CLAYS
30.11	17.63	0.56	3.23	-0.31	CLAYEY SILT&SILTY CLAYS
30.18	17.38	0.61	3.54	-0.32	CLAYEY SILT&SILTY CLAYS
30.24	17.51	0.65	3.77	-0.32	CLAYEY SILT&SILTY CLAYS
30.31	17.44	0.63	3.68	-0.32	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

30.37	17.02	0.61	3.57	-0.32	CLAYEY SILT&SILTY CLAYS
30.44	16.87	0.61	3.56	-0.32	CLAYEY SILT&SILTY CLAYS
30.5	17.09	0.6	3.55	-0.32	CLAYEY SILT&SILTY CLAYS
30.57	17.28	0.6	3.54	-0.32	CLAYEY SILT&SILTY CLAYS
30.64	16.99	0.59	3.51	-0.32	CLAYEY SILT&SILTY CLAYS
30.7	16.93	0.59	3.48	-0.32	CLAYEY SILT&SILTY CLAYS
30.77	16.93	0.58	3.41	-0.32	CLAYEY SILT&SILTY CLAYS
30.83	16.84	0.53	3.09	-0.32	CLAYEY SILT&SILTY CLAYS
30.9	16.8	0.57	3.3	-0.32	CLAYEY SILT&SILTY CLAYS
30.96	16.87	0.62	3.56	-0.32	CLAYEY SILT&SILTY CLAYS
31.03	17.25	0.64	3.59	-0.33	CLAYEY SILT&SILTY CLAYS
31.09	18.21	0.63	3.53	-0.33	CLAYEY SILT&SILTY CLAYS
31.16	17.66	0.66	3.7	-0.32	CLAYEY SILT&SILTY CLAYS
31.23	17.51	0.68	3.73	-0.32	CLAYEY SILT&SILTY CLAYS
31.29	17.73	0.67	3.62	-0.32	CLAYEY SILT&SILTY CLAYS
31.36	17.79	0.68	3.54	-0.32	CLAYEY SILT&SILTY CLAYS
31.42	18.18	0.66	3.35	-0.32	CLAYEY SILT&SILTY CLAYS
31.49	18.79	0.66	3.2	-0.32	CLAYEY SILT&SILTY CLAYS
31.55	19.36	0.68	3.14	-0.32	CLAYEY SILT&SILTY CLAYS
31.62	20.1	0.71	3.13	-0.32	CLAYEY SILT&SILTY CLAYS
31.68	20.74	0.76	3.22	-0.32	CLAYEY SILT&SILTY CLAYS
31.75	21.54	0.82	3.3	-0.32	CLAYEY SILT&SILTY CLAYS
31.82	23.04	0.71	2.78	-0.32	CLAYEY SANDY SILT&SILT
31.88	24.87	0.61	2.34	-0.32	CLAYEY SANDY SILT&SILT
31.95	25.57	0.77	2.94	-0.32	CLAYEY SANDY SILT&SILT
32.01	26.31	0.96	3.67	-0.32	CLAYEY SILT&SILTY CLAYS
32.08	27.46	1.17	4.5	-0.33	CLAYEY SILT&SILTY CLAYS
32.14	27.14	1.33	5.22	-0.32	CLAYS
32.21	25.77	1.45	5.83	-0.32	CLAYS
32.28	25.35	1.56	6.42	-0.32	CLAYS
32.34	25.47	1.59	6.69	-0.32	CLAYS
32.41	24.87	1.6	6.91	-0.32	CLAYS
32.47	24	1.62	7.07	-0.32	CLAYS
32.54	23.55	1.61	7.05	-0.32	CLAYS
32.6	22.75	1.55	6.67	-0.32	CLAYS
32.67	21.83	1.46	6.11	-0.32	CLAYS
32.73	22.02	1.43	5.75	-0.33	CLAYS
32.8	22.98	1.39	5.25	-0.32	CLAYS
32.87	24.07	1.34	4.77	-0.32	CLAYEY SILT&SILTY CLAYS
32.93	25.41	1.3	4.36	-0.32	CLAYEY SILT&SILTY CLAYS
33	27.23	1.46	4.63	-0.32	CLAYEY SILT&SILTY CLAYS
33.06	27.52	1.55	4.71	-0.32	CLAYEY SILT&SILTY CLAYS
33.13	31.49	1.69	4.81	-0.32	CLAYEY SILT&SILTY CLAYS
33.19	33.25	1.89	5.02	-0.33	CLAYEY SILT&SILTY CLAYS
33.26	34.24	2	4.89	-0.32	CLAYEY SILT&SILTY CLAYS
33.32	34.79	2.09	4.65	-0.32	CLAYEY SILT&SILTY CLAYS
33.39	36.64	2.16	4.38	-0.32	CLAYEY SILT&SILTY CLAYS
33.46	40.93	2.02	3.74	-0.33	CLAYEY SILT&SILTY CLAYS
33.52	45.54	1.83	3.14	-0.32	CLAYEY SANDY SILT&SILT
33.59	53.12	1.63	2.62	-0.33	CLAYEY SANDY SILT&SILT
33.65	58.82	1.43	2.2	-0.32	SILTY SAND
33.72	61.41	1.23	1.85	-0.33	SILTY SAND

US EPA ARCHIVE DOCUMENT

33.78	63.84	1.03	1.51	-0.33	SILTY SAND
33.85	66.92	0.88	1.26	-0.32	SILTY SAND
33.92	70.21	0.69	0.99	-0.32	SANDS
33.98	69.01	0.63	0.9	-0.32	SANDS
34.05	67.81	0.64	0.92	-0.33	SANDS
34.11	71.68	0.67	0.96	-0.33	SANDS
34.18	70.79	0.7	0.99	-0.32	SANDS
34.24	70.31	0.69	0.98	-0.32	SANDS
34.31	70.28	0.69	0.96	-0.33	SANDS
34.37	70.09	0.68	0.92	-0.32	SANDS
34.44	70.66	0.68	0.91	-0.32	SANDS
34.51	71.81	0.69	0.91	-0.32	SANDS
34.57	73.73	0.69	0.89	-0.32	SANDS
34.64	75.81	0.68	0.88	-0.32	SANDS
34.7	77.28	0.68	0.86	-0.32	SANDS
34.77	77.7	0.68	0.85	-0.32	SANDS
34.83	77.38	0.5	0.61	-0.31	SANDS
34.9	77.86	0.51	0.61	-0.31	SANDS
34.96	79.69	0.53	0.6	-0.32	SANDS
35.03	81.96	0.55	0.61	-0.32	SANDS
35.1	84.23	0.59	0.63	-0.32	SANDS
35.16	88.55	0.61	0.63	-0.32	SANDS
35.23	92.16	0.64	0.64	-0.32	SANDS
35.29	95.33	0.69	0.67	-0.31	SANDS
35.36	98.98	0.78	0.76	-0.31	SANDS
35.42	102.66	0.89	0.87	-0.31	SANDS
35.49	105.38	1	0.99	-0.31	SANDS
35.56	106.41	1.09	1.12	-0.31	SANDS
35.62	105.32	1.16	1.25	-0.31	SANDS
35.69	101.96	1.22	1.39	-0.31	SANDS
35.75	96.74	1.26	1.56	-0.31	SILTY SAND
35.82	90.82	1.28	1.71	-0.31	SILTY SAND
35.88	84.48	1.31	1.91	-0.32	SILTY SAND
35.95	77.96	1.26	2.01	-0.31	SILTY SAND
36.01	71.43	1.22	2.15	-0.32	SILTY SAND
36.08	64.2	1.17	2.29	-0.31	SILTY SAND
36.15	60.13	1.14	2.5	-0.31	CLAYEY SANDY SILT&SILT
36.21	54.31	1.16	2.85	-0.31	CLAYEY SANDY SILT&SILT
36.28	48.36	1.26	3.51	-0.31	CLAYEY SANDY SILT&SILT
36.34	42.44	1.42	4.5	-0.31	CLAYEY SILT&SILTY CLAYS
36.41	37.03	1.63	5.84	-0.31	CLAYS
36.47	32.55	1.84	7.33	-0.31	CLAYS
36.54	28.77	1.95	8.56	-0.31	CLAYS
36.6	25.22	2.01	9.64	-0.31	CLAYS
36.67	22.75	2.06	10	-0.31	CLAYS
36.74	21.5	2.04	10	-0.32	CLAYS
36.8	19.78	1.89	10	-0.31	CLAYS
36.87	18.27	1.73	9.22	-0.31	CLAYS
36.93	17.73	1.58	8.28	-0.31	CLAYS
37	18.33	1.43	7.27	-0.32	CLAYS
37.06	18.93	1.36	6.7	-0.34	CLAYS
37.13	19.53	1.32	6.31	-0.33	CLAYS

US EPA ARCHIVE DOCUMENT

37.2	20.13	1.38	6.46	-0.32	CLAYS
37.26	20	1.5	6.89	-0.32	CLAYS
37.33	20.99	1.48	6.72	-0.32	CLAYS
37.39	22.27	1.38	6.32	-0.32	CLAYS
37.46	22.21	1.39	6.49	-0.32	CLAYS
37.52	22.5	1.47	7.07	-0.32	CLAYS
37.59	22.72	1.56	7.7	-0.32	CLAYS
37.65	21.44	1.57	7.94	-0.32	CLAYS
37.72	20.26	1.55	7.61	-0.32	CLAYS
37.79	19.36	1.53	7.01	-0.33	CLAYS
37.85	18.63	1.5	6.25	-0.33	CLAYS
37.92	18.79	1.48	5.58	-0.32	CLAYS
37.98	20.55	1.46	4.98	-0.32	CLAYS
38.05	24.64	1.62	5.1	-0.33	CLAYS
38.11	28.74	1.63	4.91	-0.33	CLAYEY SILT&SILTY CLAYS
38.18	32.84	1.72	5.04	-0.33	CLAYEY SILT&SILTY CLAYS
38.24	33.51	1.85	5.4	-0.32	CLAYS
38.31	35.1	1.91	5.57	-0.32	CLAYS
38.38	35.14	2.08	6.14	-0.33	CLAYS
38.44	34.5	2.2	6.58	-0.32	CLAYS
38.51	34.02	2.35	7.04	-0.32	CLAYS
38.57	33.35	2.43	7.3	-0.32	CLAYS
38.64	33.28	2.29	6.95	-0.33	CLAYS
38.7	32.64	2.34	7.15	-0.32	CLAYS
38.77	32.71	2.41	7.37	-0.32	CLAYS
38.84	34.15	2.36	7.28	-0.32	CLAYS
38.9	33.31	2.35	7.44	-0.32	CLAYS
38.97	32.04	2.46	8	-0.32	CLAYS
39.03	31.46	2.48	8.33	-0.33	CLAYS
39.1	32.64	2.52	8.8	-0.32	CLAYS
39.16	30.79	2.47	9.22	-0.33	CLAYS
39.23	29.31	2.44	9.76	-0.32	CLAYS
39.29	27.97	2.36	10	-0.32	CLAYS
39.36	26.31	2.22	10	-0.32	CLAYS
39.43	24.42	2.03	10	-0.33	CLAYS
39.49	21.99	1.74	9.24	-0.32	CLAYS
39.56	19.88	1.5	7.96	-0.33	CLAYS
39.62	18.02	1.31	6.49	-0.33	CLAYS
39.69	17.09	0.97	4.63	-0.32	CLAYS
39.75	17.28	0.72	3.08	-0.33	CLAYEY SILT&SILTY CLAYS
39.82	18.63	0.39	1.48	-0.33	CLAYEY SANDY SILT&SILT
39.88	22.37	0.39	1.31	-0.33	CLAYEY SANDY SILT&SILT
39.95	27.43	0.56	1.72	-0.33	CLAYEY SANDY SILT&SILT
40.02	23.46	0.7	2.02	-0.32	CLAYEY SANDY SILT&SILT
40.08	30.29	0.85	2.27	-0.33	CLAYEY SANDY SILT&SILT
40.15	37.12	1.08	2.76	-0.33	CLAYEY SANDY SILT&SILT
40.21	38.27	1.32	3.33	-0.33	CLAYEY SANDY SILT&SILT
40.28	39.33	1.62	4.05	-0.32	CLAYEY SILT&SILTY CLAYS
40.34	39.84	2.01	4.98	-0.32	CLAYEY SILT&SILTY CLAYS
40.41	40.35	2.06	5	-0.32	CLAYEY SILT&SILTY CLAYS
40.48	40.29	2.03	4.87	-0.32	CLAYEY SILT&SILTY CLAYS
40.54	39.55	2.02	4.77	-0.32	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

40.61	40.68	2.05	4.75	-0.32	CLAYEY SILT&SILTY CLAYS
40.67	42.11	2.12	4.87	-0.32	CLAYEY SILT&SILTY CLAYS
40.74	43.52	2.09	4.76	-0.32	CLAYEY SILT&SILTY CLAYS
40.8	44.39	2.37	5.38	-0.32	CLAYEY SILT&SILTY CLAYS
40.87	43.94	2.46	5.63	-0.32	CLAYS
40.93	44.36	2.46	5.66	-0.32	CLAYS
41	42.98	2.46	5.73	-0.32	CLAYS
41.07	44.67	2.4	5.62	-0.32	CLAYS
41.13	43.68	2.34	5.53	-0.32	CLAYS
41.2	42.72	2.3	5.5	-0.32	CLAYS
41.26	42.28	2.17	5.21	-0.32	CLAYEY SILT&SILTY CLAYS
41.33	41.96	2.11	5.08	-0.32	CLAYEY SILT&SILTY CLAYS
41.39	41.38	2.07	4.99	-0.32	CLAYEY SILT&SILTY CLAYS
41.46	41.51	2.01	4.82	-0.32	CLAYEY SILT&SILTY CLAYS
41.52	41.19	2.02	4.76	-0.32	CLAYEY SILT&SILTY CLAYS
41.59	41.47	1.96	4.56	-0.32	CLAYEY SILT&SILTY CLAYS
41.66	41.54	1.8	4.11	-0.31	CLAYEY SILT&SILTY CLAYS
41.72	41.77	1.85	4.13	-0.32	CLAYEY SILT&SILTY CLAYS
41.79	42.69	2.02	4.42	-0.32	CLAYEY SILT&SILTY CLAYS
41.85	45.19	2.2	4.7	-0.32	CLAYEY SILT&SILTY CLAYS
41.92	45.8	2.23	4.73	-0.32	CLAYEY SILT&SILTY CLAYS
41.98	45.86	2.35	4.93	-0.32	CLAYEY SILT&SILTY CLAYS
42.05	46.88	2.5	5.2	-0.31	CLAYEY SILT&SILTY CLAYS
42.12	47.88	2.63	5.42	-0.32	CLAYEY SILT&SILTY CLAYS
42.18	48.9	2.69	5.51	-0.32	CLAYEY SILT&SILTY CLAYS
42.25	48.1	2.73	5.57	-0.32	CLAYS
42.31	48.1	2.82	5.74	-0.31	CLAYS
42.38	48.81	2.87	5.81	-0.32	CLAYS
42.44	49.48	2.88	5.84	-0.31	CLAYS
42.51	49.45	2.81	5.72	-0.31	CLAYS
42.57	49.67	2.82	5.76	-0.31	CLAYS
42.64	49.54	2.8	5.74	-0.31	CLAYS
42.71	49.51	2.65	5.46	-0.31	CLAYEY SILT&SILTY CLAYS
42.77	48.61	2.65	5.49	-0.31	CLAYEY SILT&SILTY CLAYS
42.84	48.04	2.64	5.54	-0.31	CLAYS
42.9	48.2	2.54	5.39	-0.31	CLAYEY SILT&SILTY CLAYS
42.97	48.36	2.51	5.46	-0.32	CLAYEY SILT&SILTY CLAYS
43.03	48.51	2.47	5.53	-0.31	CLAYS
43.1	47.26	2.51	5.83	-0.31	CLAYS
43.16	45.89	2.49	6	-0.31	CLAYS
43.23	44.07	2.47	6.15	-0.31	CLAYS
43.3	41.83	2.39	6.12	-0.31	CLAYS
43.36	40.48	2.31	6.03	-0.32	CLAYS
43.43	39.08	2.21	5.86	-0.32	CLAYS
43.49	38.21	2.1	5.64	-0.31	CLAYS
43.56	37.83	1.97	5.3	-0.31	CLAYS
43.62	37.06	1.83	4.98	-0.31	CLAYEY SILT&SILTY CLAYS
43.69	36.93	1.77	4.82	-0.31	CLAYEY SILT&SILTY CLAYS
43.76	36.87	1.86	5.06	-0.31	CLAYEY SILT&SILTY CLAYS
43.82	36.99	1.95	5.33	-0.31	CLAYS
43.89	37.12	1.91	5.29	-0.31	CLAYS
43.95	35.49	1.89	5.32	-0.31	CLAYS

US EPA ARCHIVE DOCUMENT

44.02	37.44	1.91	5.46	-0.32	CLAYS
44.08	36.61	1.97	5.77	-0.31	CLAYS
44.15	35.71	1.92	5.73	-0.32	CLAYS
44.21	34.37	1.89	5.77	-0.31	CLAYS
44.28	33.09	1.88	5.83	-0.31	CLAYS
44.35	32.96	1.85	5.78	-0.31	CLAYS
44.41	32.55	1.84	5.83	-0.31	CLAYS
44.48	32.13	1.8	5.81	-0.31	CLAYS
44.54	31.68	1.77	5.77	-0.31	CLAYS
44.61	31.27	1.76	5.78	-0.32	CLAYS
44.67	31.01	1.69	5.57	-0.32	CLAYS
44.74	30.31	1.68	5.54	-0.31	CLAYS
44.8	29.57	1.67	5.47	-0.31	CLAYS
44.87	30.05	1.66	5.38	-0.32	CLAYS
44.94	30.39	1.65	5.3	-0.31	CLAYS
45	30.72	1.6	5.07	-0.32	CLAYEY SILT&SILTY CLAYS
45.07	31.06	1.51	4.75	-0.32	CLAYEY SILT&SILTY CLAYS
45.13	31.4	1.47	4.54	-0.32	CLAYEY SILT&SILTY CLAYS
45.2	31.36	1.44	4.42	-0.32	CLAYEY SILT&SILTY CLAYS
45.26	31.87	1.49	4.5	-0.32	CLAYEY SILT&SILTY CLAYS
45.33	32.42	1.58	4.75	-0.32	CLAYEY SILT&SILTY CLAYS
45.4	33.25	1.6	4.78	-0.32	CLAYEY SILT&SILTY CLAYS
45.46	33.41	1.61	4.78	-0.31	CLAYEY SILT&SILTY CLAYS
45.53	33.28	1.67	4.98	-0.31	CLAYEY SILT&SILTY CLAYS
45.59	33.67	1.82	5.39	-0.31	CLAYS
45.66	34.02	1.91	5.56	-0.32	CLAYS
45.72	33.92	1.82	5.21	-0.31	CLAYS
45.79	33.51	1.78	5.05	-0.32	CLAYEY SILT&SILTY CLAYS
45.85	33.09	1.71	4.78	-0.32	CLAYEY SILT&SILTY CLAYS
45.92	33.95	1.76	4.88	-0.32	CLAYEY SILT&SILTY CLAYS
45.99	37.29	1.75	4.8	-0.31	CLAYEY SILT&SILTY CLAYS
46.05	37.32	1.73	4.79	-0.32	CLAYEY SILT&SILTY CLAYS
46.12	36.58	1.74	4.84	-0.32	CLAYEY SILT&SILTY CLAYS
46.18	36.07	1.78	4.96	-0.32	CLAYEY SILT&SILTY CLAYS
46.25	35.55	1.81	5.03	-0.31	CLAYEY SILT&SILTY CLAYS
46.31	35.74	1.74	4.85	-0.31	CLAYEY SILT&SILTY CLAYS
46.38	35.68	1.73	4.8	-0.32	CLAYEY SILT&SILTY CLAYS
46.45	35.97	1.76	4.89	-0.31	CLAYEY SILT&SILTY CLAYS
46.51	36.58	1.75	4.87	-0.31	CLAYEY SILT&SILTY CLAYS
46.58	36.07	1.75	4.93	-0.31	CLAYEY SILT&SILTY CLAYS
46.64	35.88	1.79	5.02	-0.31	CLAYEY SILT&SILTY CLAYS
46.71	36.16	1.74	4.92	-0.31	CLAYEY SILT&SILTY CLAYS
46.77	35.74	1.83	5.21	-0.32	CLAYEY SILT&SILTY CLAYS
46.84	35.04	1.77	5.13	-0.31	CLAYEY SILT&SILTY CLAYS
46.9	34.72	1.76	5.21	-0.31	CLAYS
46.97	36.16	1.78	5.41	-0.31	CLAYS
47.04	34.9	1.72	5.41	-0.31	CLAYS
47.1	33.63	1.72	5.6	-0.32	CLAYS
47.17	32.04	1.7	5.7	-0.31	CLAYS
47.23	31.07	1.72	5.88	-0.31	CLAYS
47.3	29.92	1.64	5.74	-0.31	CLAYS
47.36	29.48	1.51	5.46	-0.31	CLAYS

US EPA ARCHIVE DOCUMENT

US EPA ARCHIVE DOCUMENT

47.43	28.58	1.5	5.54	-0.31	CLAYS
47.49	28.26	1.56	5.89	-0.31	CLAYS
47.56	27.97	1.48	5.68	-0.32	CLAYS
47.63	26.75	1.44	5.58	-0.31	CLAYS
47.69	25.38	1.39	5.41	-0.31	CLAYS
47.76	25.35	1.34	5.23	-0.31	CLAYS
47.82	25.64	1.25	4.93	-0.31	CLAYS
47.89	25.6	1.26	5.04	-0.31	CLAYS
47.95	25.83	1.26	5.2	-0.32	CLAYS
48.02	26.34	1.24	5.26	-0.31	CLAYS
48.09	25.03	1.28	5.73	-0.32	CLAYS
48.15	23.81	1.32	6.11	-0.31	CLAYS
48.22	22.91	1.41	6.73	-0.31	CLAYS
48.28	21.89	1.31	6.43	-0.31	CLAYS
48.35	20.99	1.13	5.63	-0.31	CLAYS
48.41	19.78	1.05	5.23	-0.31	CLAYS
48.48	20	0.94	4.69	-0.31	CLAYS
48.54	20.1	0.82	4.02	-0.31	CLAYEY SILT&SILTY CLAYS
48.61	19.84	0.77	3.74	-0.32	CLAYEY SILT&SILTY CLAYS
48.68	20	0.72	3.45	-0.32	CLAYEY SILT&SILTY CLAYS
48.74	20.26	0.68	3.17	-0.31	CLAYEY SILT&SILTY CLAYS
48.81	20.48	0.53	2.46	-0.31	CLAYEY SANDY SILT&SILT
48.87	20.96	0.6	2.75	-0.31	CLAYEY SANDY SILT&SILT
48.94	21.35	0.65	3	-0.32	CLAYEY SANDY SILT&SILT
49	21.67	0.72	3.33	-0.31	CLAYEY SILT&SILTY CLAYS
49.07	23.14	0.77	3.6	-0.32	CLAYEY SILT&SILTY CLAYS
49.13	22.4	0.82	3.99	-0.31	CLAYEY SILT&SILTY CLAYS
49.2	21.5	0.85	4.23	-0.32	CLAYEY SILT&SILTY CLAYS
49.27	20.68	0.87	4.41	-0.31	CLAYEY SILT&SILTY CLAYS
49.33	20.19	0.87	4.51	-0.32	CLAYEY SILT&SILTY CLAYS
49.4	19.78	0.8	4.22	-0.31	CLAYEY SILT&SILTY CLAYS
49.46	19.23	0.78	4.18	-0.31	CLAYEY SILT&SILTY CLAYS
49.53	18.91	0.8	4.33	-0.31	CLAYEY SILT&SILTY CLAYS
49.59	18.98	0.74	4.03	-0.32	CLAYEY SILT&SILTY CLAYS
49.66	18.56	0.68	3.73	-0.31	CLAYEY SILT&SILTY CLAYS
49.73	18.08	0.57	3.06	-0.31	CLAYEY SILT&SILTY CLAYS
49.79	18.21	0.45	2.43	-0.31	CLAYEY SANDY SILT&SILT
49.86	18.12	0.53	2.84	-0.31	CLAYEY SANDY SILT&SILT
49.92	17.96	0.61	3.27	-0.32	CLAYEY SILT&SILTY CLAYS
49.99	18.56	0.66	3.58	-0.32	CLAYEY SILT&SILTY CLAYS
50.05	19.94	0.69	3.84	-0.31	CLAYEY SILT&SILTY CLAYS
50.12	18.98	0.74	4.26	-0.32	CLAYEY SILT&SILTY CLAYS
50.18	18.08	0.78	4.64	-0.31	CLAYS
50.25	17.41	0.81	4.9	-0.31	CLAYS
50.32	16.84	0.79	4.85	-0.31	CLAYS
50.38	16.48	0.7	4.37	-0.31	CLAYEY SILT&SILTY CLAYS
50.45	16.29	0.65	4.03	-0.32	CLAYEY SILT&SILTY CLAYS
50.51	16.2	0.58	3.64	-0.32	CLAYEY SILT&SILTY CLAYS
50.58	15.9	0.53	3.33	-0.31	CLAYEY SILT&SILTY CLAYS
50.64	15.9	0.5	3.05	-0.32	CLAYEY SILT&SILTY CLAYS
50.71	15.9	0.46	2.73	-0.32	CLAYEY SANDY SILT&SILT
50.77	15.84	0.34	1.99	-0.32	CLAYEY SANDY SILT&SILT

50.84	15.9	0.39	2.23	-0.32	CLAYEY SANDY SILT&SILT
50.91	15.97	0.5	2.85	-0.32	CLAYEY SILT&SILTY CLAYS
50.97	17.99	0.58	3.29	-0.32	CLAYEY SILT&SILTY CLAYS
51.04	19.11	0.66	3.84	-0.32	CLAYEY SILT&SILTY CLAYS
51.1	18.08	0.78	4.77	-0.31	CLAYS
51.17	17.28	0.9	5.69	-0.31	CLAYS
51.23	16.84	0.97	6.26	-0.32	CLAYS
51.3	16.07	0.96	6.36	-0.32	CLAYS
51.37	15.36	0.88	5.94	-0.31	CLAYS
51.43	14.95	0.8	5.45	-0.32	CLAYS
51.5	14.69	0.73	4.99	-0.31	CLAYS
51.56	14.66	0.66	4.47	-0.32	CLAYS
51.63	14.56	0.59	3.89	-0.31	CLAYEY SILT&SILTY CLAYS
51.69	14.69	0.55	3.41	-0.32	CLAYEY SILT&SILTY CLAYS
51.76	14.75	0.51	3.04	-0.31	CLAYEY SILT&SILTY CLAYS
51.82	14.88	0.47	2.73	-0.32	CLAYEY SILT&SILTY CLAYS
51.89	14.82	0.68	3.86	-0.32	CLAYEY SILT&SILTY CLAYS
51.96	17.57	0.78	4.36	-0.31	CLAYEY SILT&SILTY CLAYS
52.02	20.32	0.88	5.01	-0.31	CLAYS
52.09	18.5	1.03	6.19	-0.31	CLAYS
52.15	17.66	1.15	7.16	-0.32	CLAYS
52.22	17.02	1.23	7.88	-0.32	CLAYS
52.28	16.42	1.14	7.5	-0.32	CLAYS
52.35	15.56	1.01	6.72	-0.32	CLAYS
52.41	14.92	0.87	5.76	-0.31	CLAYS
52.48	14.72	0.72	4.76	-0.31	CLAYS
52.55	14.82	0.63	4.07	-0.31	CLAYEY SILT&SILTY CLAYS
52.61	15.14	0.55	3.53	-0.32	CLAYEY SILT&SILTY CLAYS
52.68	15.23	0.49	3	-0.32	CLAYEY SILT&SILTY CLAYS
52.74	15.36	0.43	2.43	-0.32	CLAYEY SANDY SILT&SILT
52.81	15.56	0.39	2.12	-0.31	CLAYEY SANDY SILT&SILT
52.87	16.23	0.58	3.14	-0.32	CLAYEY SILT&SILTY CLAYS
52.94	16.67	0.88	4.69	-0.31	CLAYS
53.01	19.3	1.01	5.35	-0.32	CLAYS
53.07	21.92	1.1	6.01	-0.32	CLAYS
53.14	19.49	1.22	7.07	-0.32	CLAYS
53.2	18.21	1.3	7.87	-0.31	CLAYS
53.27	17.32	1.32	8.18	-0.31	CLAYS
53.33	16.64	1.22	7.74	-0.32	CLAYS
53.4	15.94	1.11	7.13	-0.31	CLAYS
53.46	15.62	1.05	6.79	-0.31	CLAYS
53.53	15.62	1.02	6.61	-0.32	CLAYS
53.6	15.39	1	6.46	-0.31	CLAYS
53.66	15.56	0.98	6.13	-0.32	CLAYS
53.73	15.3	0.73	4.36	-0.31	CLAYEY SILT&SILTY CLAYS
53.79	15.3	0.47	2.69	-0.32	CLAYEY SANDY SILT&SILT
53.86	15.49	0.55	2.94	-0.31	CLAYEY SILT&SILTY CLAYS
53.92	15.62	0.7	3.55	-0.31	CLAYEY SILT&SILTY CLAYS
53.99	18.6	0.79	3.8	-0.31	CLAYEY SILT&SILTY CLAYS
54.05	19.73	0.91	4.26	-0.31	CLAYEY SILT&SILTY CLAYS
54.12	20.85	1.03	4.76	-0.31	CLAYS
54.19	21.99	1.11	5.09	-0.31	CLAYS

US EPA ARCHIVE DOCUMENT

54.25	21.7	1.18	5.43	-0.31	CLAYS
54.32	21.7	1.21	5.54	-0.3	CLAYS
54.38	21.83	1.25	5.68	-0.31	CLAYS
54.45	21.73	1.17	5.23	-0.31	CLAYS
54.51	21.67	1.11	4.78	-0.31	CLAYS
54.58	21.57	1.07	4.29	-0.3	CLAYEY SILT&SILTY CLAYS
54.65	22.15	0.98	3.59	-0.3	CLAYEY SILT&SILTY CLAYS
54.71	22.82	0.93	3.05	-0.31	CLAYEY SANDY SILT&SILT
54.78	24.26	0.76	2.24	-0.3	CLAYEY SANDY SILT&SILT
54.84	27.23	0.94	2.47	-0.3	CLAYEY SANDY SILT&SILT
54.91	31.84	1.06	2.53	-0.31	CLAYEY SANDY SILT&SILT
54.97	35.97	1.2	2.61	-0.3	CLAYEY SANDY SILT&SILT
55.04	40.64	1.4	2.83	-0.3	CLAYEY SANDY SILT&SILT
55.1	43.72	1.73	3.28	-0.3	CLAYEY SANDY SILT&SILT
55.17	48.16	2.06	3.66	-0.29	CLAYEY SANDY SILT&SILT
55.24	51.56	2.25	3.84	-0.29	CLAYEY SANDY SILT&SILT
55.3	55.14	2.44	4.05	-0.29	CLAYEY SILT&SILTY CLAYS
55.37	58.24	2.66	4.35	-0.29	CLAYEY SILT&SILTY CLAYS
55.43	60.45	2.99	4.88	-0.28	CLAYEY SILT&SILTY CLAYS
55.5	63.75	3.2	5.27	-0.3	CLAYEY SILT&SILTY CLAYS
55.56	62.56	3.38	5.71	-0.3	CLAYEY SILT&SILTY CLAYS
55.63	61.03	3.6	6.26	-0.31	CLAYS
55.69	60.61	3.88	6.93	-0.31	CLAYS
55.76	59.17	3.98	7.32	-0.3	CLAYS
55.83	56.96	4.07	7.68	-0.31	CLAYS
55.89	54.73	4	7.68	-0.3	CLAYS
55.96	52.23	3.8	7.47	-0.3	CLAYS
56.02	52.2	3.7	7.37	-0.3	CLAYS
56.09	50.88	3.73	7.54	-0.29	CLAYS
56.15	51.43	3.48	7.08	-0.3	CLAYS
56.22	50.6	3.29	6.76	-0.29	CLAYS
56.29	47.68	3.21	6.61	-0.29	CLAYS
56.35	48.55	3.14	6.39	-0.29	CLAYS
56.42	48	3.04	6.13	-0.29	CLAYS
56.48	48.36	2.82	5.64	-0.28	CLAYS
56.55	48.67	2.75	5.46	-0.29	CLAYEY SILT&SILTY CLAYS
56.61	49.99	2.81	5.54	-0.29	CLAYEY SILT&SILTY CLAYS
56.68	51.2	2.84	5.6	-0.28	CLAYS
56.74	51.14	2.87	5.63	-0.29	CLAYS
56.81	50.63	2.89	5.67	-0.28	CLAYS
56.88	50.6	2.94	5.72	-0.29	CLAYS
56.94	50.55	2.98	5.76	-0.28	CLAYS
57.01	50.5	3.03	5.79	-0.28	CLAYS
57.07	52.29	2.89	5.46	-0.28	CLAYEY SILT&SILTY CLAYS
57.14	51.43	2.89	5.41	-0.27	CLAYEY SILT&SILTY CLAYS
57.2	52.61	2.91	5.39	-0.28	CLAYEY SILT&SILTY CLAYS
57.27	53.51	2.92	5.36	-0.27	CLAYEY SILT&SILTY CLAYS
57.33	53.67	2.9	5.33	-0.28	CLAYEY SILT&SILTY CLAYS
57.4	53.93	2.91	5.38	-0.28	CLAYEY SILT&SILTY CLAYS
57.47	55.01	2.96	5.49	-0.27	CLAYEY SILT&SILTY CLAYS
57.53	55.27	3.03	5.65	-0.27	CLAYEY SILT&SILTY CLAYS
57.6	54.82	2.95	5.56	-0.28	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

57.66	53.6	2.85	5.41	-0.28	CLAYEY SILT&SILTY CLAYS
57.73	52.16	2.92	5.57	-0.27	CLAYEY SILT&SILTY CLAYS
57.79	52.68	2.95	5.65	-0.27	CLAYS
57.86	52.84	3.03	5.84	-0.28	CLAYS
57.93	52.47	3.11	6.04	-0.27	CLAYS
57.99	52.11	3.18	6.27	-0.27	CLAYS
58.06	51.75	3	6.02	-0.27	CLAYS
58.12	51.11	3.06	6.28	-0.27	CLAYS
58.19	50.47	3.05	6.4	-0.26	CLAYS
58.25	50.82	2.95	6.36	-0.27	CLAYS
58.32	48.26	2.88	6.44	-0.27	CLAYS
58.38	46.4	2.87	6.62	-0.27	CLAYS
58.45	45.35	3	7.12	-0.26	CLAYS
58.52	44.13	3.08	7.52	-0.27	CLAYS
58.58	43.3	2.97	7.45	-0.26	CLAYS
58.65	41.28	2.89	7.42	-0.27	CLAYS
58.71	39.78	2.77	7.23	-0.26	CLAYS
58.78	39.27	2.72	7.2	-0.27	CLAYS
58.84	37.89	2.61	7.05	-0.26	CLAYS
58.91	37.79	2.46	6.75	-0.26	CLAYS
58.97	37.22	2.35	6.56	-0.27	CLAYS
59.04	37.73	2.16	6.18	-0.26	CLAYS
59.11	36.61	2.02	5.94	-0.26	CLAYS
59.17	35.01	1.99	5.99	-0.26	CLAYS
59.24	34.5	1.93	5.94	-0.27	CLAYS
59.3	33.79	1.84	5.75	-0.26	CLAYS
59.37	32.26	1.77	5.62	-0.26	CLAYS
59.43	31.68	1.74	5.61	-0.26	CLAYS
59.5	31.62	1.73	5.66	-0.26	CLAYS
59.57	31.43	1.65	5.51	-0.26	CLAYS
59.63	31.36	1.55	5.3	-0.26	CLAYS
59.7	30.21	1.54	5.37	-0.26	CLAYS
59.76	29.7	1.61	5.75	-0.27	CLAYS
59.83	28.87	1.59	5.79	-0.26	CLAYS
59.89	28	1.49	5.53	-0.26	CLAYS
59.96	27.56	1.45	5.49	-0.27	CLAYS
60.02	27.46	1.44	5.56	-0.27	CLAYS
60.09	26.66	1.47	5.86	-0.27	CLAYS
60.16	25.95	1.54	6.29	-0.27	CLAYS
60.22	25.95	1.48	6.22	-0.27	CLAYS
60.29	25.28	1.49	6.37	-0.27	CLAYS
60.35	23.75	1.66	7.08	-0.27	CLAYS
60.42	23.01	1.68	7.01	-0.27	CLAYS
60.48	22.5	1.61	6.54	-0.26	CLAYS
60.55	22.08	1.55	6.09	-0.26	CLAYS
60.61	23.78	1.37	5.19	-0.26	CLAYS
60.68	25.6	1.34	4.87	-0.26	CLAYEY SILT&SILTY CLAYS
60.75	26.34	1.39	4.81	-0.27	CLAYEY SILT&SILTY CLAYS
60.81	27.49	1.39	4.58	-0.27	CLAYEY SILT&SILTY CLAYS
60.88	27.39	1.52	4.79	-0.27	CLAYEY SILT&SILTY CLAYS
60.94	27.52	1.72	5.23	-0.27	CLAYS
61.01	31.17	1.85	5.38	-0.26	CLAYS

US EPA ARCHIVE DOCUMENT

61.07	33.73	1.96	5.5	-0.27	CLAYS
61.14	34.56	2.01	5.54	-0.26	CLAYS
61.21	35.43	1.99	5.26	-0.26	CLAYS
61.27	35.04	2.07	5.2	-0.26	CLAYEY SILT&SILTY CLAYS
61.34	36.64	2.02	4.73	-0.26	CLAYEY SILT&SILTY CLAYS
61.4	37.89	1.99	4.37	-0.26	CLAYEY SILT&SILTY CLAYS
61.47	38.72	1.98	4.17	-0.26	CLAYEY SILT&SILTY CLAYS
61.53	43.14	1.95	3.96	-0.26	CLAYEY SILT&SILTY CLAYS
61.6	47.87	1.92	3.82	-0.26	CLAYEY SANDY SILT&SILT
61.66	52.13	2.06	3.8	-0.27	CLAYEY SANDY SILT&SILT
61.73	52.96	2.16	3.62	-0.26	CLAYEY SANDY SILT&SILT
61.8	49.95	2.07	3.05	-0.27	CLAYEY SANDY SILT&SILT
61.86	49	2.13	2.64	-0.27	CLAYEY SANDY SILT&SILT
61.93	50.56	2.34	2.41	-0.27	CLAYEY SANDY SILT&SILT
61.99	69.54	2.47	2.13	-0.25	SILTY SAND
62.06	85.19	2.73	2.07	-0.25	SILTY SAND
62.12	102.82	3.02	2.1	-0.25	SILTY SAND
62.19	126.85	3.22	2.13	-0.25	SILTY SAND
62.25	147.97	3.36	2.24	-0.25	SILTY SAND
62.32	162.15	3.42	2.41	-0.25	SILTY SAND
62.39	164.94	3.33	2.63	-0.26	SILTY SAND
62.45	159.05	3.28	3.01	-0.27	SILTY SAND
62.52	145.13	3.41	3.77	-0.28	CLAYEY SANDY SILT&SILT
62.58	122.85	3.23	4.43	-0.27	CLAYEY SANDY SILT&SILT
62.65	95.46	3.32	5.72	-0.28	CLAYEY SILT&SILTY CLAYS
62.71	72.2	3.14	6.6	-0.28	CLAYS
62.78	57.99	2.95	7.37	-0.29	CLAYS
62.85	49.15	2.77	8.03	-0.29	CLAYS
62.91	40.26	2.9	9.6	-0.29	CLAYS
62.98	33.03	2.76	10	-0.28	CLAYS
63.04	32.35	2.52	9.86	-0.29	CLAYS
63.11	27.59	2.29	9.56	-0.29	CLAYS
63.17	24.64	2.12	9.17	-0.28	CLAYS
63.24	23.33	2	8.68	-0.28	CLAYS
63.3	22.98	1.85	7.98	-0.28	CLAYS
63.37	22.37	1.62	6.84	-0.28	CLAYS
63.44	22.69	1.48	6.1	-0.29	CLAYS
63.5	22.88	1.45	5.83	-0.28	CLAYS
63.57	23.78	1.46	5.69	-0.28	CLAYS
63.63	24.64	1.45	5.21	-0.28	CLAYS
63.7	25.44	1.45	4.86	-0.28	CLAYEY SILT&SILTY CLAYS
63.76	26.08	1.58	5.03	-0.28	CLAYS
63.83	26.72	1.7	5.25	-0.28	CLAYS
63.89	27.23	1.83	5.52	-0.27	CLAYS
63.96	37.06	1.99	5.92	-0.25	CLAYS
64.03	36.8	2.14	6.49	-0.25	CLAYS
64.09	34.24	2.14	6.54	-0.25	CLAYS
64.16	32.23	2.01	5.85	-0.24	CLAYS
64.22	30.82	1.73	4.48	-0.24	CLAYEY SILT&SILTY CLAYS
64.29	30.95	1.39	2.98	-0.25	CLAYEY SANDY SILT&SILT
64.35	32.51	1.36	2.3	-0.24	CLAYEY SANDY SILT&SILT
64.42	36.1	1.47	1.96	-0.24	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

64.49	43.81	1.56	1.69	-0.24	SILTY SAND
64.55	57.67	1.87	1.7	-0.24	SILTY SAND
64.62	79.24	2.15	1.71	-0.24	SILTY SAND
64.68	106.06	2.43	1.75	-0.24	SILTY SAND
64.75	128.04	2.44	1.65	-0.24	SANDS
64.81	141.03	2.46	1.6	-0.24	SANDS
64.88	148.74	2.6	1.64	-0.25	SANDS
64.94	152.79	2.68	1.65	-0.28	SANDS
65.01	156.84	2.66	1.61	-0.31	SANDS
65.08	160.89	2.6	1.55	-0.31	SANDS
65.14	164.94	2.48	1.48	-0.31	SANDS
65.21	168.49	2.35	1.42	-0.31	SANDS
65.27	170.35	2.26	1.39	-0.3	SANDS
65.34	170.16	2.26	1.42	-0.31	SANDS
65.4	167.37	2.33	1.52	-0.32	SANDS
65.47	163.27	2.49	1.68	-0.31	SANDS
65.53	157.54	2.77	1.93	-0.31	SANDS
65.6	149.99	3.1	2.23	-0.32	SILTY SAND
65.67	142.5	3.08	2.29	-0.31	SILTY SAND
65.73	138.09	3.05	2.31	-0.32	SILTY SAND
65.8	136.52	3.03	2.35	-0.32	SILTY SAND
65.86	134.86	3.1	2.49	-0.32	SILTY SAND
65.93	131.11	3.03	2.55	-0.33	SILTY SAND
65.99	124.74	2.92	2.6	-0.34	SILTY SAND
66.06	127.08	2.92	2.75	-0.36	SILTY SAND
66.13	120.84	3.02	3	-0.37	SILTY SAND
66.19	110.28	3.16	3.25	-0.37	CLAYEY SANDY SILT&SILT
66.26	99.11	3.34	3.42	-0.37	CLAYEY SANDY SILT&SILT
66.32	91.62	3.54	3.49	-0.36	CLAYEY SANDY SILT&SILT
66.39	88.81	3.69	3.44	-0.36	CLAYEY SANDY SILT&SILT
66.45	92.01	3.77	3.3	-0.35	CLAYEY SANDY SILT&SILT
66.52	101.73	3.76	3.11	-0.35	CLAYEY SANDY SILT&SILT
66.58	113.1	3.63	2.87	-0.35	SILTY SAND
66.65	121.48	3.35	2.55	-0.36	SILTY SAND
66.72	126.54	2.58	1.89	-0.37	SILTY SAND
66.78	130.05	1.82	1.28	-0.37	SANDS
66.85	133.32	1.73	1.17	-0.37	SANDS
66.91	134.28	1.73	1.13	-0.37	SANDS
66.98	143.24	1.79	1.12	-0.36	SANDS
67.04	152.2	1.88	1.14	-0.36	SANDS
67.11	158.5	1.97	1.15	-0.36	SANDS
67.17	163.72	2.01	1.14	-0.35	SANDS
67.24	168.61	2.01	1.12	-0.36	SANDS
67.31	173.1	2.01	1.09	-0.35	SANDS
67.37	177.87	2.02	1.07	-0.35	SANDS
67.44	182.38	2.03	1.05	-0.35	SANDS
67.5	187.18	2.06	1.05	-0.34	SANDS
67.57	191.95	2.09	1.05	-0.33	SANDS
67.63	196.01	2.16	1.08	-0.33	SANDS
67.7	198.83	2.26	1.13	-0.34	SANDS
67.77	200.97	2.41	1.2	-0.33	SANDS
67.83	202.51	2.45	1.22	-0.33	SANDS

US EPA ARCHIVE DOCUMENT

67.9	200.06	2.48	1.24	-0.32	SANDS
67.96	197.61	2.53	1.26	-0.3	SANDS
68.03	200.88	2.55	1.26	-0.3	SANDS
68.09	200.91	2.57	1.27	-0.3	SANDS
68.16	201.58	2.59	1.28	-0.29	SANDS
68.22	202.22	2.62	1.29	-0.3	SANDS
68.29	202.57	2.65	1.31	-0.28	SANDS
68.36	202.25	2.66	1.32	-0.29	SANDS
68.42	202.09	2.67	1.32	-0.28	SANDS
68.49	202.12	2.67	1.31	-0.28	SANDS
68.55	202.32	2.66	1.31	-0.27	SANDS
68.62	202.66	2.62	1.29	-0.27	SANDS
68.68	203.34	2.59	1.28	-0.27	SANDS
68.75	204.11	2.57	1.27	-0.27	SANDS
68.81	204.17	2.55	1.27	-0.26	SANDS
68.88	201.96	2.45	1.23	-0.27	SANDS
68.95	201.11	2.4	1.2	-0.26	SANDS
69.01	200.26	2.38	1.18	-0.27	SANDS
69.08	199.4	2.38	1.18	-0.27	SANDS
69.14	199.24	2.38	1.17	-0.27	SANDS
69.21	199.91	2.42	1.18	-0.27	SANDS
69.27	201.45	2.46	1.18	-0.26	SANDS
69.34	203.69	2.51	1.2	-0.26	SANDS
69.41	206.38	2.57	1.21	-0.25	SANDS
69.47	209	2.59	1.22	-0.26	SANDS
69.54	211.47	2.64	1.23	-0.25	SANDS
69.6	213.74	2.7	1.26	-0.25	SANDS
69.67	214.92	2.78	1.31	-0.25	SANDS
69.73	215.02	2.76	1.32	-0.25	SANDS
69.8	214.83	2.75	1.32	-0.25	SANDS
69.86	213.8	2.74	1.33	-0.24	SANDS
69.93	209.64	2.72	1.34	-0.25	SANDS
70	205.48	2.76	1.37	-0.25	SANDS
70.06	201.32	2.76	1.39	-0.25	SANDS
70.13	202.63	2.73	1.38	-0.24	SANDS
70.19	200.52	2.68	1.37	-0.23	SANDS
70.26	198.32	2.63	1.35	-0.23	SANDS
70.32	196.39	2.6	1.34	-0.23	SANDS
70.39	194.92	2.67	1.39	-0.23	SANDS
70.45	193.9	2.7	1.41	-0.23	SANDS
70.52	192.81	2.73	1.43	-0.23	SANDS
70.59	191.62	2.7	1.42	-0.24	SANDS
70.65	190.03	2.69	1.42	-0.23	SANDS
70.72	189	2.67	1.4	-0.23	SANDS
70.78	188.84	2.74	1.44	-0.23	SANDS
70.85	189.36	2.64	1.38	-0.23	SANDS
70.91	189.95	2.52	1.31	-0.23	SANDS
70.98	190.55	2.48	1.29	-0.24	SANDS
71.05	191.14	2.51	1.31	-0.23	SANDS
71.11	193.96	2.55	1.34	-0.23	SANDS
71.18	193.77	2.59	1.38	-0.22	SANDS
71.24	192.78	2.61	1.41	-0.23	SANDS

US EPA ARCHIVE DOCUMENT

71.31	190.09	2.59	1.42	-0.23	SANDS
71.37	186.47	2.56	1.43	-0.22	SANDS
71.44	182.86	2.5	1.41	-0.23	SANDS
71.5	179.88	2.46	1.4	-0.22	SANDS
71.57	177.67	2.38	1.37	-0.23	SANDS
71.64	176.11	2.3	1.34	-0.23	SANDS
71.7	174.7	2.26	1.33	-0.23	SANDS
71.77	173.22	2.28	1.35	-0.23	SANDS
71.83	171.98	2.3	1.37	-0.23	SANDS
71.9	167.88	2.33	1.39	-0.22	SANDS
71.96	163.79	2.41	1.43	-0.23	SANDS
72.03	168.55	2.5	1.47	-0.22	SANDS
72.09	168.65	2.56	1.51	-0.22	SANDS
72.16	169.03	2.6	1.52	-0.22	SANDS
72.23	169.52	2.64	1.54	-0.22	SANDS
72.29	170.38	2.67	1.55	-0.23	SANDS
72.36	171.02	2.7	1.55	-0.22	SANDS
72.42	171.91	2.71	1.54	-0.22	SANDS
72.49	172.58	2.72	1.52	-0.22	SANDS
72.55	173.61	2.7	1.46	-0.23	SANDS
72.62	175.14	2.65	1.38	-0.22	SANDS
72.69	178.18	2.58	1.28	-0.22	SANDS
72.75	183.5	2.43	1.13	-0.22	SANDS
72.82	191.37	2.27	1	-0.22	SANDS
72.88	203.08	2.12	0.86	-0.22	SANDS
72.95	219.35	1.97	0.74	-0.22	SANDS
73.01	235.61	2.05	0.72	-0.24	SANDS
73.08	251.87	2.18	0.72	-0.23	SANDS
73.14	268.14	2.41	0.76	-0.24	SANDS
73.21	294.99	2.74	0.82	-0.22	SANDS
73.28	316.21	3.11	0.9	-0.22	SANDS
73.34	333.1	3.5	0.99	-0.22	SANDS
73.41	344.79	3.92	1.08	-0.22	SANDS
73.47	353.04	4.21	1.15	-0.22	SANDS
73.54	359.98	4.47	1.2	-0.21	SANDS
73.6	367.09	4.74	1.27	-0.22	SANDS
73.67	372.5	5	1.34	-0.22	SANDS
73.73	377.07	5.32	1.43	-0.21	SANDS
73.8	377.53	5.65	1.53	-0.21	SANDS
73.87	374.58	6.12	1.67	-0.22	SANDS
73.93	369.27	6.21	1.69	-0.22	SANDS
74	365.52	6.32	1.72	-0.21	SANDS
74.06	365.55	6.37	1.73	-0.2	SANDS
74.13	365.58	6.38	1.73	-0.19	SANDS
74.19	365.62	6.23	1.69	-0.19	SANDS
74.26	372.63	6.19	1.68	-0.19	SANDS
74.32	374.74	6.19	1.69	-0.19	SANDS
74.39	371.09	6.27	1.71	-0.18	SANDS
74.46	364.72	6.4	1.75	-0.19	SANDS
74.52	361.84	6.44	1.77	-0.18	SANDS
74.59	364.98	6.39	1.77	-0.19	SANDS
74.65	366.48	6.37	1.79	-0.18	SANDS

US EPA ARCHIVE DOCUMENT

74.72	367.28	6.26	1.79	-0.18	SANDS
74.78	364.4	6.15	1.79	-0.19	SANDS
74.85	353.08	6.04	1.8	-0.18	SANDS
74.92	345.87	6.15	1.88	-0.18	SANDS
74.98	338.66	6.13	1.91	-0.16	SANDS
75.05	331.45	6.07	1.93	-0.16	SANDS
75.11	324.24	5.98	1.94	-0.16	SANDS
75.18	317.42	5.8	1.91	-0.16	SANDS
75.24	309.46	5.61	1.87	-0.15	SANDS
75.31	304.65	5.34	1.81	-0.16	SANDS
75.37	301.04	5.27	1.82	-0.16	SANDS
75.44	298.13	5.15	1.8	-0.16	SANDS
75.51	294.48	4.99	1.78	-0.16	SANDS
75.57	289.07	4.9	1.78	-0.15	SANDS
75.64	283.28	4.84	1.78	-0.15	SANDS
75.7	277	4.45	1.66	-0.15	SANDS
75.77	272.24	4.05	1.54	-0.16	SANDS
75.83	268.62	3.66	1.4	-0.16	SANDS
75.9	265.2	3.27	1.25	-0.16	SANDS
75.96	261.77	3.22	1.23	-0.16	SANDS
76.03	258.35	3.15	1.19	-0.15	SANDS
76.1	254.93	3.12	1.17	-0.15	SANDS
76.16	262.41	3.12	1.15	-0.15	SANDS
76.23	266.12	3.15	1.15	-0.14	SANDS
76.29	269.93	3.14	1.13	-0.14	SANDS
76.36	273.01	3.33	1.18	-0.14	SANDS
76.42	274.51	3.56	1.24	-0.14	SANDS
76.49	277.64	3.69	1.26	-0.15	SANDS
76.56	282.38	3.73	1.25	-0.14	SANDS
76.62	289.2	3.76	1.24	-0.14	SANDS
76.69	296.24	3.84	1.26	-0.15	SANDS
76.75	302.32	3.88	1.26	-0.15	SANDS
76.82	308.27	3.92	1.28	-0.15	SANDS
76.88	311.79	3.96	1.29	-0.15	SANDS
76.95	309.6	4.01	1.31	-0.15	SANDS
77.01	307.41	4.15	1.35	-0.16	SANDS
77.08	305.22	4.28	1.38	-0.15	SANDS
77.15	303.03	4.39	1.4	-0.14	SANDS
77.21	306.13	4.48	1.4	-0.15	SANDS
77.28	309.33	4.55	1.39	-0.14	SANDS
77.34	314.35	4.65	1.4	-0.14	SANDS
77.41	322.54	4.94	1.46	-0.14	SANDS
77.47	331.09	5.14	1.51	-0.14	SANDS
77.54	339.92	5.28	1.55	-0.14	SANDS
77.6	344.79	5.43	1.59	-0.14	SANDS
77.67	344.49	5.58	1.65	-0.14	SANDS
77.74	342.45	5.69	1.7	-0.14	SANDS
77.8	340.69	5.27	1.6	-0.14	SANDS
77.87	337.75	4.85	1.48	-0.14	SANDS
77.93	334.58	4.43	1.36	-0.14	SANDS
78	328.23	4.55	1.4	-0.14	SANDS
78.06	321.88	4.69	1.42	-0.13	SANDS

US EPA ARCHIVE DOCUMENT

78.13	315.53	4.79	1.43	-0.13	SANDS
78.2	323.6	4.87	1.42	-0.13	SANDS
78.26	330.16	4.97	1.42	-0.13	SANDS
78.33	338.67	5	1.4	-0.13	SANDS
78.39	346.77	5.19	1.44	-0.13	SANDS
78.46	355.41	5.44	1.49	-0.13	SANDS
78.52	362.48	5.51	1.49	-0.13	SANDS
78.59	367.06	5.53	1.49	-0.12	SANDS
78.65	368.94	5.62	1.51	-0.13	SANDS
78.72	369.33	5.77	1.55	-0.13	SANDS
78.79	371.19	5.9	1.58	-0.13	SANDS
78.85	373.17	5.96	1.59	-0.12	SANDS
78.92	373.94	5.97	1.59	-0.13	SANDS
78.98	374.16	5.99	1.58	-0.13	SANDS
79.05	374.23	5.89	1.54	-0.12	SANDS
79.11	375.57	5.81	1.51	-0.12	SANDS
79.18	377.43	5.78	1.49	-0.12	SANDS
79.24	382.38	5.72	1.47	-0.12	SANDS
79.31	387.6	5.75	1.47	-0.13	SANDS
79.38	392.05	5.87	1.51	-0.13	SANDS
79.44	394.42	5.95	1.53	-0.13	SANDS
79.51	393.59	5.92	1.53	-0.13	SANDS
79.57	389.75	5.94	1.54	-0.13	SANDS
79.64	385.62	5.98	1.56	-0.13	SANDS
79.7	382.1	5.87	1.54	-0.12	SANDS
79.77	382.48	5.77	1.52	-0.12	SANDS
79.84	386.52	5.66	1.5	-0.12	SANDS
79.9	382.41	5.55	1.48	-0.13	SANDS
79.97	378.3	5.69	1.51	-0.11	SANDS
80.03	374.2	5.6	1.49	-0.09	SANDS
80.1	370.1	5.44	1.44	-0.09	SANDS
80.16	374.93	5.26	1.39	-0.09	SANDS
80.23	376.85	5.05	1.33	-0.08	SANDS
80.29	380.21	4.87	1.29	-0.1	SANDS
80.36	381.94	4.83	1.3	-0.1	SANDS
80.43	383.06	5.01	1.37	-0.1	SANDS
80.49	379.44	5.25	1.46	-0.09	SANDS
80.56	370.77	5.51	1.56	-0.09	SANDS
80.62	363.63	5.73	1.65	-0.09	SANDS
80.69	356.98	5.64	1.65	-0.09	SANDS
80.75	348.02	5.54	1.65	-0.09	SANDS
80.82	340.37	5.44	1.63	-0.09	SANDS
80.88	337.3	5.35	1.59	-0.1	SANDS
80.95	334.22	5.25	1.55	-0.12	SANDS
81.02	331.15	5.15	1.49	-0.12	SANDS
81.08	328.08	5.03	1.42	-0.11	SANDS
81.15	335.76	4.95	1.36	-0.11	SANDS
81.21	345.33	4.86	1.29	-0.11	SANDS
81.28	358	4.8	1.24	-0.11	SANDS
81.34	371.67	4.98	1.26	-0.11	SANDS
81.41	384.5	5.19	1.28	-0.12	SANDS
81.48	393.97	5.35	1.29	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

81.54	400.15	5.4	1.27	-0.11	SANDS
81.61	407.41	5.46	1.25	-0.12	SANDS
81.67	416.63	5.58	1.25	-0.12	SANDS
81.74	426.84	5.76	1.27	-0.11	SANDS
81.8	440.69	5.45	1.19	-0.11	SANDS
81.87	456.54	5.14	1.12	-0.11	SANDS
81.93	468.66	4.83	1.05	-0.11	SANDS
82	462.58	5.04	1.1	-0.12	SANDS
82.07	456.5	5.27	1.15	-0.11	SANDS
82.13	450.42	5.48	1.19	-0.1	SANDS
82.2	462.1	5.69	1.24	-0.11	SANDS
82.26	464.53	6	1.32	-0.11	SANDS
82.33	464.02	6.19	1.38	-0.11	SANDS
82.39	460.44	6.38	1.45	-0.11	SANDS
82.46	454.55	6.77	1.57	-0.11	SANDS
82.52	447.48	7.17	1.7	-0.11	SANDS
82.59	439.57	7.32	1.78	-0.11	SANDS
82.66	427.54	7.3	1.82	-0.11	SANDS
82.72	414.32	7.15	1.83	-0.1	SANDS
82.79	404.18	7	1.84	-0.1	SANDS
82.85	395.48	6.84	1.84	-0.1	SANDS
82.92	385.21	6.69	1.83	-0.11	SANDS
82.98	374.93	6.45	1.8	-0.11	SANDS
83.05	364.66	6.2	1.75	-0.1	SANDS
83.12	354.39	5.83	1.66	-0.11	SANDS
83.18	355.47	5.58	1.59	-0.1	SANDS
83.25	351.6	5.37	1.53	-0.11	SANDS
83.31	350.74	5.29	1.51	-0.11	SANDS
83.38	348.94	5.29	1.51	-0.1	SANDS
83.44	348.91	5.62	1.6	-0.11	SANDS
83.51	350.77	5.98	1.7	-0.11	SANDS
83.57	351.41	6.13	1.74	-0.11	SANDS
83.64	351.7	6.05	1.71	-0.11	SANDS
83.71	352.91	5.67	1.61	-0.11	SANDS
83.77	353.39	5.3	1.51	-0.11	SANDS
83.84	356.02	4.93	1.41	-0.11	SANDS
83.9	352.97	4.56	1.31	-0.1	SANDS
83.97	349.92	4.46	1.28	-0.12	SANDS
84.03	346.88	4.38	1.26	-0.11	SANDS
84.1	343.82	4.3	1.22	-0.11	SANDS
84.16	347.66	4.29	1.21	-0.11	SANDS
84.23	349.62	4.34	1.21	-0.11	SANDS
84.3	352.08	4.47	1.24	-0.11	SANDS
84.36	354.48	4.8	1.32	-0.12	SANDS
84.43	358.58	5.16	1.41	-0.11	SANDS
84.49	363.09	5.29	1.43	-0.12	SANDS
84.56	366.19	5.4	1.45	-0.12	SANDS
84.62	367.99	5.47	1.45	-0.11	SANDS
84.69	371.44	5.34	1.41	-0.12	SANDS
84.75	374.07	5.21	1.37	-0.12	SANDS
84.82	379.63	5.09	1.32	-0.12	SANDS
84.89	380.83	4.96	1.27	-0.11	SANDS

US EPA ARCHIVE DOCUMENT

84.95	382.02	5.13	1.28	-0.12	SANDS
85.02	383.21	5.16	1.25	-0.12	SANDS
85.08	384.4	5.16	1.21	-0.11	SANDS
85.15	401.2	5.07	1.15	-0.11	SANDS
85.21	418.36	4.98	1.1	-0.12	SANDS
85.28	436.18	5	1.08	-0.11	SANDS
85.35	452.98	5	1.06	-0.11	SANDS
85.41	463.96	5.3	1.11	-0.12	SANDS
85.48	472.76	5.59	1.17	-0.12	SANDS
85.54	478.36	6.04	1.26	-0.12	SANDS
85.61	477.14	6.34	1.33	-0.11	SANDS
85.67	479.96	6.57	1.38	-0.12	SANDS
85.74	479.54	6.54	1.38	-0.12	SANDS
85.8	477.11	6.51	1.39	-0.1	SANDS
85.87	478.74	6.47	1.38	-0.11	SANDS
85.94	473.37	6.44	1.38	-0.1	SANDS
86	467.99	6.71	1.43	-0.13	SANDS
86.07	462.61	6.86	1.45	-0.12	SANDS
86.13	457.24	6.97	1.45	-0.12	SANDS
86.2	470.1	7	1.44	-0.13	SANDS
86.26	477.4	7.09	1.44	-0.12	SANDS
86.33	482.42	7.2	1.45	-0.12	SANDS
86.39	491.16	7.3	1.46	-0.13	SANDS
86.46	499.89	7.4	1.48	-0.12	SANDS
86.53	500.32	7.51	1.5	-0.12	SANDS
86.59	500.74	7.51	1.5	-0.12	SANDS
86.66	501.17	7.6	1.52	-0.12	SANDS
86.72	501.59	7.6	1.52	-0.12	SANDS
86.79	499.48	7.57	1.52	-0.12	SANDS
86.85	499	7.62	1.59	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-15-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 06

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0	0	CLAYS
0.13	0	0.01	0.08	0	CLAYS
0.2	0	0.21	0.92	0	CLAYS
0.26	0.03	0.66	2.3	0	CLAYS
0.33	24.55	0.68	1.94	0	CLAYEY SANDY SILT&SILT
0.39	33.95	0.81	2.09	-0.01	CLAYEY SANDY SILT&SILT
0.46	36.61	1.02	2.48	0	CLAYEY SANDY SILT&SILT
0.52	41.03	1.27	2.84	0	CLAYEY SANDY SILT&SILT
0.59	36.74	1.52	3.15	0	CLAYEY SANDY SILT&SILT
0.66	38.98	1.89	3.52	0	CLAYEY SANDY SILT&SILT
0.72	43.84	1.9	3.18	0	CLAYEY SANDY SILT&SILT
0.79	50.72	2.35	3.6	0	CLAYEY SANDY SILT&SILT
0.85	56.77	2.84	4.07	0	CLAYEY SILT&SILTY CLAYS
0.92	62.98	3.3	4.48	-0.01	CLAYEY SILT&SILTY CLAYS
0.98	69.32	3.73	4.87	-0.01	CLAYEY SILT&SILTY CLAYS
1.05	74.08	3.72	4.73	-0.02	CLAYEY SILT&SILTY CLAYS
1.12	78.56	3.5	4.38	-0.03	CLAYEY SILT&SILTY CLAYS
1.18	77.99	3.24	4.04	-0.04	CLAYEY SANDY SILT&SILT
1.25	78.88	2.99	3.73	-0.02	CLAYEY SANDY SILT&SILT
1.31	80.84	2.77	3.5	-0.01	CLAYEY SANDY SILT&SILT
1.38	81.86	2.56	3.31	-0.02	CLAYEY SANDY SILT&SILT
1.44	81.06	2.26	3.04	-0.01	CLAYEY SANDY SILT&SILT
1.51	80.29	2.14	3	-0.01	CLAYEY SANDY SILT&SILT
1.57	77.67	2.05	3.03	-0.01	CLAYEY SANDY SILT&SILT
1.64	73.7	1.97	3.08	-0.02	CLAYEY SANDY SILT&SILT
1.71	69.48	1.84	3.03	-0.01	CLAYEY SANDY SILT&SILT
1.77	64.84	1.71	2.94	-0.01	CLAYEY SANDY SILT&SILT
1.84	61.38	1.57	2.82	-0.02	CLAYEY SANDY SILT&SILT
1.9	59.01	1.44	2.7	-0.01	CLAYEY SANDY SILT&SILT
1.97	56.42	1.31	2.54	-0.01	CLAYEY SANDY SILT&SILT
2.03	53.79	1.18	2.36	-0.02	CLAYEY SANDY SILT&SILT
2.1	52.26	1.09	2.24	-0.02	SILTY SAND
2.16	50.28	0.95	2	-0.01	SILTY SAND
2.23	48.93	0.81	1.74	-0.02	SILTY SAND
2.3	47.56	0.68	1.49	-0.01	SILTY SAND
2.36	46.44	0.58	1.28	-0.01	SILTY SAND
2.43	45.76	0.5	1.11	-0.01	SILTY SAND
2.49	45.12	0.45	0.99	-0.01	SILTY SAND
2.56	44.67	0.4	0.88	-0.01	SILTY SAND
2.62	45.12	0.37	0.8	-0.01	SILTY SAND
2.69	45.54	0.35	0.77	-0.01	SILTY SAND
2.76	45.51	0.31	0.68	-0.02	SILTY SAND
2.82	45.34	0.28	0.6	-0.01	SILTY SAND
2.89	45.38	0.12	0.26	-0.01	SANDS
2.95	46.4	0.15	0.31	-0.02	SANDS
3.02	46.88	0.18	0.37	-0.01	SANDS

US EPA ARCHIVE DOCUMENT

3.08	46.53	0.22	0.47	-0.03	SANDS
3.15	47.81	0.35	0.74	-0.03	SILTY SAND
3.21	47.9	0.49	1.03	-0.04	SILTY SAND
3.28	48.32	0.61	1.3	-0.05	SILTY SAND
3.35	47.81	0.76	1.65	-0.08	SILTY SAND
3.41	46.98	0.87	1.91	-0.08	SILTY SAND
3.48	46.37	0.92	2.07	-0.07	SILTY SAND
3.54	45.38	0.98	2.23	-0.08	CLAYEY SANDY SILT&SILT
3.61	44.96	1.05	2.43	-0.08	CLAYEY SANDY SILT&SILT
3.67	44.45	1.1	2.62	-0.08	CLAYEY SANDY SILT&SILT
3.74	43.58	1.15	2.82	-0.1	CLAYEY SANDY SILT&SILT
3.8	42.72	1.13	2.88	-0.08	CLAYEY SANDY SILT&SILT
3.87	41.83	1.08	2.82	-0.05	CLAYEY SANDY SILT&SILT
3.94	40.22	0.79	2.12	-0.04	CLAYEY SANDY SILT&SILT
4	38.79	0.75	2.05	-0.04	CLAYEY SANDY SILT&SILT
4.07	37.28	0.67	1.87	-0.04	CLAYEY SANDY SILT&SILT
4.13	35.87	0.59	1.69	-0.05	SILTY SAND
4.2	35.59	0.52	1.49	-0.04	SILTY SAND
4.26	35.43	0.49	1.42	-0.04	SILTY SAND
4.33	34.95	0.46	1.36	-0.05	SILTY SAND
4.4	35.33	0.43	1.32	-0.05	SILTY SAND
4.46	34.66	0.43	1.34	-0.04	SILTY SAND
4.53	33.89	0.45	1.46	-0.05	SILTY SAND
4.59	32.54	0.45	1.51	-0.04	SILTY SAND
4.66	31.3	0.44	1.54	-0.05	SILTY SAND
4.72	29.67	0.44	1.57	-0.05	SILTY SAND
4.79	28.77	0.44	1.61	-0.05	CLAYEY SANDY SILT&SILT
4.85	27.97	0.44	1.62	-0.05	CLAYEY SANDY SILT&SILT
4.92	27.49	0.46	1.68	-0.05	CLAYEY SANDY SILT&SILT
4.99	27.27	0.43	1.56	-0.05	CLAYEY SANDY SILT&SILT
5.05	26.88	0.42	1.48	-0.05	CLAYEY SANDY SILT&SILT
5.12	27.11	0.42	1.45	-0.06	SILTY SAND
5.18	27.94	0.43	1.49	-0.07	SILTY SAND
5.25	28.39	0.44	1.51	-0.07	SILTY SAND
5.31	29.06	0.46	1.55	-0.06	SILTY SAND
5.38	29.54	0.47	1.59	-0.06	CLAYEY SANDY SILT&SILT
5.44	29.95	0.49	1.66	-0.07	CLAYEY SANDY SILT&SILT
5.51	29.83	0.51	1.72	-0.07	CLAYEY SANDY SILT&SILT
5.58	29.6	0.53	1.82	-0.06	CLAYEY SANDY SILT&SILT
5.64	29.7	0.53	1.82	-0.06	CLAYEY SANDY SILT&SILT
5.71	29.57	0.54	1.86	-0.07	CLAYEY SANDY SILT&SILT
5.77	29.31	0.54	1.88	-0.07	CLAYEY SANDY SILT&SILT
5.84	29.09	0.54	1.89	-0.07	CLAYEY SANDY SILT&SILT
5.9	28.77	0.55	1.95	-0.06	CLAYEY SANDY SILT&SILT
5.97	28.67	0.52	1.84	-0.07	CLAYEY SANDY SILT&SILT
6.04	28.64	0.51	1.8	-0.07	CLAYEY SANDY SILT&SILT
6.1	28.06	0.49	1.74	-0.07	CLAYEY SANDY SILT&SILT
6.17	28.32	0.49	1.74	-0.08	CLAYEY SANDY SILT&SILT
6.23	28.06	0.49	1.72	-0.07	CLAYEY SANDY SILT&SILT
6.3	28.64	0.48	1.67	-0.08	CLAYEY SANDY SILT&SILT
6.36	28.83	0.48	1.65	-0.08	CLAYEY SANDY SILT&SILT
6.43	28.51	0.49	1.69	-0.08	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

6.49	28.26	0.49	1.68	-0.08	CLAYEY SANDY SILT&SILT
6.56	28.8	0.5	1.72	-0.08	CLAYEY SANDY SILT&SILT
6.63	29.28	0.51	1.78	-0.08	CLAYEY SANDY SILT&SILT
6.69	29.67	0.52	1.82	-0.08	CLAYEY SANDY SILT&SILT
6.76	29.41	0.51	1.85	-0.08	CLAYEY SANDY SILT&SILT
6.82	29.12	0.51	1.9	-0.09	CLAYEY SANDY SILT&SILT
6.89	28.39	0.5	1.93	-0.08	CLAYEY SANDY SILT&SILT
6.95	27.55	0.48	1.94	-0.08	CLAYEY SANDY SILT&SILT
7.02	26.69	0.45	1.91	-0.08	CLAYEY SANDY SILT&SILT
7.08	25.22	0.43	1.86	-0.08	CLAYEY SANDY SILT&SILT
7.15	23.94	0.42	1.82	-0.08	CLAYEY SANDY SILT&SILT
7.22	22.63	0.41	1.79	-0.08	CLAYEY SANDY SILT&SILT
7.28	21.92	0.41	1.74	-0.09	CLAYEY SANDY SILT&SILT
7.35	21.83	0.41	1.67	-0.08	CLAYEY SANDY SILT&SILT
7.41	22.82	0.42	1.66	-0.09	CLAYEY SANDY SILT&SILT
7.48	24.19	0.43	1.65	-0.09	CLAYEY SANDY SILT&SILT
7.54	24.89	0.44	1.65	-0.08	CLAYEY SANDY SILT&SILT
7.61	25.47	0.44	1.65	-0.08	CLAYEY SANDY SILT&SILT
7.68	26.34	0.47	1.74	-0.08	CLAYEY SANDY SILT&SILT
7.74	27.2	0.5	1.88	-0.09	CLAYEY SANDY SILT&SILT
7.81	27.36	0.55	2.06	-0.08	CLAYEY SANDY SILT&SILT
7.87	27.07	0.59	2.25	-0.09	CLAYEY SANDY SILT&SILT
7.94	26.94	0.63	2.45	-0.09	CLAYEY SANDY SILT&SILT
8	26.37	0.63	2.51	-0.09	CLAYEY SANDY SILT&SILT
8.07	25.76	0.63	2.54	-0.09	CLAYEY SANDY SILT&SILT
8.13	25.28	0.61	2.49	-0.11	CLAYEY SANDY SILT&SILT
8.2	24.77	0.58	2.39	-0.11	CLAYEY SANDY SILT&SILT
8.27	24.29	0.57	2.33	-0.1	CLAYEY SANDY SILT&SILT
8.33	23.91	0.56	2.3	-0.1	CLAYEY SANDY SILT&SILT
8.4	24.13	0.57	2.35	-0.09	CLAYEY SANDY SILT&SILT
8.46	24.58	0.59	2.46	-0.09	CLAYEY SANDY SILT&SILT
8.53	24.83	0.61	2.57	-0.1	CLAYEY SANDY SILT&SILT
8.59	24.58	0.62	2.69	-0.1	CLAYEY SANDY SILT&SILT
8.66	23.87	0.63	2.81	-0.1	CLAYEY SANDY SILT&SILT
8.72	23.1	0.62	2.87	-0.09	CLAYEY SANDY SILT&SILT
8.79	22.66	0.6	2.95	-0.1	CLAYEY SANDY SILT&SILT
8.86	22.37	0.57	2.92	-0.1	CLAYEY SANDY SILT&SILT
8.92	21.5	0.53	2.9	-0.1	CLAYEY SANDY SILT&SILT
8.99	20.16	0.47	2.69	-0.09	CLAYEY SANDY SILT&SILT
9.05	18.76	0.42	2.47	-0.09	CLAYEY SANDY SILT&SILT
9.12	17.18	0.38	2.25	-0.1	CLAYEY SANDY SILT&SILT
9.18	16.26	0.34	1.96	-0.1	CLAYEY SANDY SILT&SILT
9.25	15.94	0.3	1.67	-0.1	CLAYEY SANDY SILT&SILT
9.32	16.16	0.27	1.42	-0.09	CLAYEY SANDY SILT&SILT
9.38	17.25	0.27	1.34	-0.1	CLAYEY SANDY SILT&SILT
9.45	18.49	0.29	1.41	-0.1	CLAYEY SANDY SILT&SILT
9.51	20.07	0.33	1.55	-0.1	CLAYEY SANDY SILT&SILT
9.58	21.28	0.37	1.67	-0.11	CLAYEY SANDY SILT&SILT
9.64	21.7	0.41	1.8	-0.1	CLAYEY SANDY SILT&SILT
9.71	21.73	0.45	1.93	-0.1	CLAYEY SANDY SILT&SILT
9.77	21.92	0.48	2	-0.1	CLAYEY SANDY SILT&SILT
9.84	22.66	0.49	1.99	-0.11	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

9.91	23.84	0.5	1.98	-0.11	CLAYEY SANDY SILT&SILT
9.97	24.86	0.53	2.06	-0.12	CLAYEY SANDY SILT&SILT
10.04	24.67	0.56	2.15	-0.12	CLAYEY SANDY SILT&SILT
10.1	25.67	0.6	2.29	-0.13	CLAYEY SANDY SILT&SILT
10.17	25.99	0.67	2.56	-0.14	CLAYEY SANDY SILT&SILT
10.23	26.37	0.77	2.96	-0.16	CLAYEY SANDY SILT&SILT
10.3	26.5	0.87	3.36	-0.15	CLAYEY SILT&SILTY CLAYS
10.36	26.05	0.9	3.47	-0.12	CLAYEY SILT&SILTY CLAYS
10.43	25.63	0.91	3.48	-0.12	CLAYEY SILT&SILTY CLAYS
10.5	25.35	0.92	3.45	-0.15	CLAYEY SILT&SILTY CLAYS
10.56	25.79	0.95	3.5	-0.21	CLAYEY SILT&SILTY CLAYS
10.63	26.31	0.98	3.58	-0.18	CLAYEY SILT&SILTY CLAYS
10.69	26.94	1	3.61	-0.15	CLAYEY SILT&SILTY CLAYS
10.76	27.49	0.98	3.48	-0.14	CLAYEY SILT&SILTY CLAYS
10.82	27.62	0.97	3.4	-0.14	CLAYEY SILT&SILTY CLAYS
10.89	27.94	0.96	3.37	-0.14	CLAYEY SILT&SILTY CLAYS
10.96	28.36	0.96	3.34	-0.15	CLAYEY SILT&SILTY CLAYS
11.02	28.23	0.95	3.32	-0.17	CLAYEY SANDY SILT&SILT
11.09	29.22	0.95	3.34	-0.18	CLAYEY SANDY SILT&SILT
11.15	29.15	0.95	3.41	-0.18	CLAYEY SILT&SILTY CLAYS
11.22	28.7	0.99	3.64	-0.17	CLAYEY SILT&SILTY CLAYS
11.28	28.32	1	3.79	-0.16	CLAYEY SILT&SILTY CLAYS
11.35	27.94	1.01	3.95	-0.15	CLAYEY SILT&SILTY CLAYS
11.41	27.23	1.05	4.24	-0.16	CLAYEY SILT&SILTY CLAYS
11.48	26.08	1.12	4.66	-0.19	CLAYEY SILT&SILTY CLAYS
11.55	24.86	1.2	5.05	-0.19	CLAYS
11.61	24.03	1.27	5.33	-0.18	CLAYS
11.68	23.46	1.25	5.2	-0.17	CLAYS
11.74	23.01	1.21	5.03	-0.16	CLAYS
11.81	23.3	1.2	4.84	-0.17	CLAYS
11.87	24.1	1.1	4.31	-0.17	CLAYEY SILT&SILTY CLAYS
11.94	24.77	1.16	4.39	-0.16	CLAYEY SILT&SILTY CLAYS
12	25.67	1.09	4.03	-0.17	CLAYEY SILT&SILTY CLAYS
12.07	23.68	1.03	3.72	-0.18	CLAYEY SILT&SILTY CLAYS
12.14	27.39	0.99	3.45	-0.17	CLAYEY SILT&SILTY CLAYS
12.2	28.13	0.96	3.26	-0.17	CLAYEY SANDY SILT&SILT
12.27	28.58	0.92	3.08	-0.17	CLAYEY SANDY SILT&SILT
12.33	29.03	0.89	2.93	-0.16	CLAYEY SANDY SILT&SILT
12.4	29.7	0.86	2.82	-0.17	CLAYEY SANDY SILT&SILT
12.46	30.34	0.87	2.86	-0.18	CLAYEY SANDY SILT&SILT
12.53	30.88	0.92	3.04	-0.18	CLAYEY SANDY SILT&SILT
12.6	30.98	0.98	3.31	-0.17	CLAYEY SANDY SILT&SILT
12.66	30.82	1.08	3.7	-0.16	CLAYEY SILT&SILTY CLAYS
12.73	30.24	1.18	4.17	-0.15	CLAYEY SILT&SILTY CLAYS
12.79	29.63	1.3	4.56	-0.15	CLAYEY SILT&SILTY CLAYS
12.86	28.61	1.38	4.81	-0.15	CLAYEY SILT&SILTY CLAYS
12.92	27.87	1.36	4.69	-0.15	CLAYEY SILT&SILTY CLAYS
12.99	27.36	1.38	4.68	-0.14	CLAYEY SILT&SILTY CLAYS
13.05	26.78	1.41	4.72	-0.14	CLAYEY SILT&SILTY CLAYS
13.12	30.78	1.45	4.77	-0.15	CLAYEY SILT&SILTY CLAYS
13.19	30.82	1.49	4.93	-0.15	CLAYEY SILT&SILTY CLAYS
13.25	30.4	1.54	5.1	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

13.32	30.21	1.59	5.28	-0.15	CLAYS
13.38	30.15	1.58	5.29	-0.14	CLAYS
13.45	30.18	1.59	5.37	-0.15	CLAYS
13.51	29.95	1.59	5.47	-0.14	CLAYS
13.58	29.92	1.6	5.54	-0.14	CLAYS
13.64	29.7	1.59	5.58	-0.14	CLAYS
13.71	29.06	1.43	5.08	-0.14	CLAYS
13.78	28.26	1.33	4.82	-0.14	CLAYEY SILT&SILTY CLAYS
13.84	27.55	1.27	4.7	-0.13	CLAYEY SILT&SILTY CLAYS
13.91	28.45	1.23	4.66	-0.18	CLAYEY SILT&SILTY CLAYS
13.97	28.32	1.23	4.81	-0.2	CLAYEY SILT&SILTY CLAYS
14.04	27.23	1.24	5.01	-0.21	CLAYS
14.1	26.05	1.24	5.16	-0.2	CLAYS
14.17	24.96	1.22	5.16	-0.2	CLAYS
14.24	23.97	1.21	5.16	-0.2	CLAYS
14.3	23.3	1.22	5.18	-0.2	CLAYS
14.37	23.14	1.23	5.18	-0.2	CLAYS
14.43	23.1	1.24	5.15	-0.2	CLAYS
14.5	23.39	1.23	5.06	-0.19	CLAYS
14.56	24.03	1.22	4.95	-0.2	CLAYS
14.63	24.42	1.21	4.86	-0.2	CLAYS
14.69	24.64	1.21	4.81	-0.19	CLAYEY SILT&SILTY CLAYS
14.76	24.86	1.21	4.74	-0.19	CLAYEY SILT&SILTY CLAYS
14.83	25.06	1.23	4.75	-0.19	CLAYEY SILT&SILTY CLAYS
14.89	25.31	1.19	4.53	-0.19	CLAYEY SILT&SILTY CLAYS
14.96	25.41	1.15	4.38	-0.18	CLAYEY SILT&SILTY CLAYS
15.02	25.41	1.16	4.45	-0.19	CLAYEY SILT&SILTY CLAYS
15.09	27.49	1.18	4.58	-0.2	CLAYEY SILT&SILTY CLAYS
15.15	27.36	1.23	4.82	-0.2	CLAYEY SILT&SILTY CLAYS
15.22	26.5	1.27	5.09	-0.2	CLAYS
15.28	25.25	1.33	5.35	-0.18	CLAYS
15.35	24.58	1.36	5.45	-0.19	CLAYS
15.42	24.13	1.4	5.61	-0.19	CLAYS
15.48	24.61	1.43	5.68	-0.19	CLAYS
15.55	25.09	1.45	5.73	-0.19	CLAYS
15.61	25.35	1.45	5.73	-0.18	CLAYS
15.68	25.57	1.45	5.75	-0.18	CLAYS
15.74	25.47	1.44	5.76	-0.19	CLAYS
15.81	25.35	1.43	5.58	-0.19	CLAYS
15.88	24.86	1.42	5.47	-0.18	CLAYS
15.94	24.89	1.51	5.79	-0.19	CLAYS
16.01	24.74	1.52	5.85	-0.19	CLAYS
16.07	24.39	1.58	6.15	-0.19	CLAYS
16.14	29.31	1.64	6.46	-0.19	CLAYS
16.2	27.97	1.66	6.87	-0.2	CLAYS
16.27	25.67	1.66	7.14	-0.19	CLAYS
16.33	24.13	1.65	7.21	-0.19	CLAYS
16.4	22.85	1.58	6.93	-0.19	CLAYS
16.47	22.05	1.51	6.51	-0.18	CLAYS
16.53	21.99	1.42	6.02	-0.19	CLAYS
16.6	22.5	1.36	5.6	-0.18	CLAYS
16.66	23.43	1.34	5.41	-0.18	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	24.13	1.35	5.38	-0.18	CLAYS
16.79	24.8	1.37	5.33	-0.19	CLAYS
16.86	25.15	1.4	5.38	-0.18	CLAYS
16.92	25.7	1.37	5.24	-0.19	CLAYS
16.99	25.67	1.4	5.43	-0.18	CLAYS
17.06	25.79	1.46	5.69	-0.19	CLAYS
17.12	27.17	1.51	5.98	-0.2	CLAYS
17.19	26.53	1.53	6.25	-0.2	CLAYS
17.25	25.41	1.57	6.56	-0.2	CLAYS
17.32	24.58	1.58	6.75	-0.19	CLAYS
17.38	24.35	1.57	6.8	-0.2	CLAYS
17.45	23.52	1.55	6.79	-0.19	CLAYS
17.52	23.01	1.52	6.69	-0.19	CLAYS
17.58	22.75	1.48	6.53	-0.19	CLAYS
17.65	22.53	1.44	6.35	-0.19	CLAYS
17.71	22.5	1.4	6.21	-0.19	CLAYS
17.78	22.79	1.38	6.1	-0.19	CLAYS
17.84	22.69	1.37	6.1	-0.19	CLAYS
17.91	22.53	1.39	6.16	-0.2	CLAYS
17.97	22.63	1.36	6.02	-0.2	CLAYS
18.04	22.4	1.36	6.03	-0.2	CLAYS
18.11	22.33	1.38	6.15	-0.21	CLAYS
18.17	22.6	1.42	6.25	-0.22	CLAYS
18.24	22.5	1.49	6.48	-0.21	CLAYS
18.3	22.56	1.54	6.58	-0.2	CLAYS
18.37	22.53	1.55	6.4	-0.19	CLAYS
18.43	22.6	1.59	6.37	-0.18	CLAYS
18.5	23.23	1.61	6.28	-0.18	CLAYS
18.56	24.19	1.69	6.43	-0.17	CLAYS
18.63	25.5	1.81	6.78	-0.17	CLAYS
18.7	26.81	1.87	6.97	-0.18	CLAYS
18.76	27.27	1.94	7.23	-0.17	CLAYS
18.83	27.3	1.99	7.44	-0.18	CLAYS
18.89	26.81	2.04	7.71	-0.17	CLAYS
18.96	26.66	2.12	8.05	-0.18	CLAYS
19.02	26.31	2.17	8.24	-0.17	CLAYS
19.09	26.91	2.09	7.91	-0.17	CLAYS
19.16	26.27	2.09	7.88	-0.16	CLAYS
19.22	25.89	2.1	7.89	-0.16	CLAYS
19.29	26.21	2.02	7.53	-0.16	CLAYS
19.35	26.5	1.96	7.27	-0.15	CLAYS
19.42	26.75	1.96	7.23	-0.15	CLAYS
19.48	27.17	1.89	6.98	-0.15	CLAYS
19.55	26.88	1.91	7.13	-0.14	CLAYS
19.61	27.2	1.86	7.09	-0.15	CLAYS
19.68	27.52	1.78	7.01	-0.14	CLAYS
19.75	27.27	1.76	7.27	-0.14	CLAYS
19.81	26.31	1.73	7.48	-0.14	CLAYS
19.88	25.19	1.7	7.72	-0.14	CLAYS
19.94	24	1.52	7.24	-0.14	CLAYS
20.01	22.33	1.5	7.45	-0.13	CLAYS
20.07	19.94	1.47	7.55	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

20.14	21.05	1.41	7.33	-0.14	CLAYS
20.2	19.74	1.38	7.19	-0.14	CLAYS
20.27	18.94	1.32	6.76	-0.14	CLAYS
20.34	18.59	1.22	6.01	-0.14	CLAYS
20.4	18.46	1.13	5.25	-0.14	CLAYS
20.47	18.85	1.04	4.58	-0.14	CLAYEY SILT&SILTY CLAYS
20.53	20.19	1.02	4.24	-0.14	CLAYEY SILT&SILTY CLAYS
20.6	22.21	1	4	-0.13	CLAYEY SILT&SILTY CLAYS
20.66	24	1.09	4.27	-0.13	CLAYEY SILT&SILTY CLAYS
20.73	25.15	1.24	4.88	-0.13	CLAYS
20.8	26.37	1.43	5.63	-0.13	CLAYS
20.86	26.44	1.56	6.24	-0.13	CLAYS
20.93	26.11	1.65	6.76	-0.12	CLAYS
20.99	25.19	1.74	7.28	-0.12	CLAYS
21.06	23.43	1.8	7.75	-0.13	CLAYS
21.12	24.71	1.8	7.93	-0.13	CLAYS
21.19	23.97	1.79	8.22	-0.13	CLAYS
21.25	23.3	1.79	8.51	-0.14	CLAYS
21.32	22.47	1.78	8.79	-0.13	CLAYS
21.39	21.31	1.7	8.72	-0.13	CLAYS
21.45	20.29	1.6	8.52	-0.13	CLAYS
21.52	19.68	1.53	8.41	-0.14	CLAYS
21.58	19.07	1.46	8.34	-0.13	CLAYS
21.65	18.43	1.4	8.23	-0.13	CLAYS
21.71	18.05	1.32	8.09	-0.13	CLAYS
21.78	17.34	1.25	7.78	-0.13	CLAYS
21.84	16.54	1.15	7.3	-0.13	CLAYS
21.91	15.9	1.02	6.58	-0.13	CLAYS
21.98	15.52	0.97	6.23	-0.12	CLAYS
22.04	14.78	0.93	6.02	-0.13	CLAYS
22.11	16.16	0.9	5.8	-0.14	CLAYS
22.17	15.62	0.88	5.69	-0.13	CLAYS
22.24	15.49	0.82	5.24	-0.13	CLAYS
22.3	15.39	0.74	4.7	-0.14	CLAYS
22.37	15.17	0.7	4.38	-0.13	CLAYS
22.44	15.46	0.68	4.17	-0.13	CLAYEY SILT&SILTY CLAYS
22.5	15.84	0.64	3.89	-0.13	CLAYEY SILT&SILTY CLAYS
22.57	16.1	0.61	3.62	-0.13	CLAYEY SILT&SILTY CLAYS
22.63	16.32	0.62	3.61	-0.14	CLAYEY SILT&SILTY CLAYS
22.7	16.54	0.66	3.73	-0.13	CLAYEY SILT&SILTY CLAYS
22.76	17.12	0.67	3.67	-0.14	CLAYEY SILT&SILTY CLAYS
22.83	17.34	0.7	3.71	-0.13	CLAYEY SILT&SILTY CLAYS
22.89	17.63	0.72	3.7	-0.13	CLAYEY SILT&SILTY CLAYS
22.96	18.59	0.81	4.07	-0.13	CLAYEY SILT&SILTY CLAYS
23.03	19.01	0.91	4.54	-0.13	CLAYEY SILT&SILTY CLAYS
23.09	20.19	1	4.94	-0.15	CLAYS
23.16	20.48	1.1	5.47	-0.13	CLAYS
23.22	20.64	1.2	6.01	-0.14	CLAYS
23.29	20.55	1.25	6.29	-0.13	CLAYS
23.35	19.94	1.26	6.39	-0.13	CLAYS
23.42	19.58	1.25	6.36	-0.14	CLAYS
23.48	19.62	1.19	6.03	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

23.55	19.91	1.14	5.77	-0.14	CLAYS
23.62	19.71	1.08	5.5	-0.13	CLAYS
23.68	19.81	1.04	5.25	-0.14	CLAYS
23.75	19.65	1.02	5.16	-0.14	CLAYS
23.81	19.58	1.01	5.02	-0.13	CLAYS
23.88	19.58	1	4.95	-0.13	CLAYS
23.94	19.74	0.99	4.8	-0.13	CLAYS
24.01	20.19	1.04	5	-0.14	CLAYS
24.08	20.19	1.08	5.14	-0.13	CLAYS
24.14	20.96	1.12	5.26	-0.13	CLAYS
24.21	21.15	1.18	5.46	-0.13	CLAYS
24.27	21.35	1.23	5.6	-0.13	CLAYS
24.34	21.47	1.25	5.52	-0.13	CLAYS
24.4	21.47	1.28	5.45	-0.14	CLAYS
24.47	21.6	1.32	5.35	-0.14	CLAYS
24.53	22.5	1.35	5.2	-0.14	CLAYS
24.6	23.58	1.33	4.98	-0.13	CLAYS
24.67	25.19	1.31	4.77	-0.14	CLAYEY SILT&SILTY CLAYS
24.73	26.94	1.34	4.84	-0.13	CLAYEY SILT&SILTY CLAYS
24.8	28.39	1.42	5.12	-0.14	CLAYS
24.86	28.61	1.51	5.47	-0.16	CLAYS
24.93	28.03	1.53	5.56	-0.18	CLAYS
24.99	27.68	1.6	5.82	-0.19	CLAYS
25.06	27.07	1.66	5.99	-0.19	CLAYS
25.12	27.2	1.71	6.1	-0.18	CLAYS
25.19	27.36	1.73	6.09	-0.18	CLAYS
25.26	27.81	1.72	5.95	-0.19	CLAYS
25.32	28.26	1.74	5.94	-0.17	CLAYS
25.39	28.9	1.78	5.98	-0.18	CLAYS
25.45	29.12	1.82	6.04	-0.18	CLAYS
25.52	29.38	1.79	5.9	-0.18	CLAYS
25.58	29.95	1.77	5.74	-0.18	CLAYS
25.65	30.43	1.76	5.61	-0.18	CLAYS
25.72	30.72	1.75	5.49	-0.19	CLAYS
25.78	30.78	1.71	5.28	-0.19	CLAYS
25.85	30.98	1.65	5	-0.18	CLAYEY SILT&SILTY CLAYS
25.91	32.13	1.51	4.45	-0.19	CLAYEY SILT&SILTY CLAYS
25.98	32.8	1.45	4.19	-0.19	CLAYEY SILT&SILTY CLAYS
26.04	33.18	1.37	3.88	-0.21	CLAYEY SILT&SILTY CLAYS
26.11	34.05	1.25	3.47	-0.19	CLAYEY SANDY SILT&SILT
26.17	35.01	1.13	3.08	-0.18	CLAYEY SANDY SILT&SILT
26.24	36.07	1	2.67	-0.19	CLAYEY SANDY SILT&SILT
26.31	36.61	0.86	2.27	-0.17	CLAYEY SANDY SILT&SILT
26.37	37.06	0.72	1.88	-0.17	CLAYEY SANDY SILT&SILT
26.44	37.57	0.63	1.63	-0.17	SILTY SAND
26.5	38.56	0.56	1.45	-0.18	SILTY SAND
26.57	39.1	0.53	1.38	-0.17	SILTY SAND
26.63	38.94	0.52	1.35	-0.17	SILTY SAND
26.7	38.47	0.51	1.32	-0.17	SILTY SAND
26.76	38.15	0.48	1.26	-0.17	SILTY SAND
26.83	38.02	0.46	1.21	-0.17	SILTY SAND
26.9	38.24	0.44	1.16	-0.17	SILTY SAND

US EPA ARCHIVE DOCUMENT

26.96	38.91	0.41	1.11	-0.17	SILTY SAND
27.03	39.1	0.41	1.14	-0.17	SILTY SAND
27.09	38.24	0.42	1.21	-0.16	SILTY SAND
27.16	36.74	0.43	1.29	-0.16	SILTY SAND
27.22	35.23	0.45	1.4	-0.15	SILTY SAND
27.29	34.34	0.46	1.47	-0.16	SILTY SAND
27.36	33.09	0.47	1.57	-0.16	SILTY SAND
27.42	31.59	0.49	1.68	-0.16	CLAYEY SANDY SILT&SILT
27.49	30.15	0.48	1.73	-0.16	CLAYEY SANDY SILT&SILT
27.55	29.31	0.51	1.86	-0.17	CLAYEY SANDY SILT&SILT
27.62	28.42	0.58	2.15	-0.16	CLAYEY SANDY SILT&SILT
27.68	27.39	0.66	2.44	-0.16	CLAYEY SANDY SILT&SILT
27.75	26.44	0.73	2.7	-0.16	CLAYEY SANDY SILT&SILT
27.81	26.17	0.79	2.82	-0.17	CLAYEY SANDY SILT&SILT
27.88	26.4	0.78	2.65	-0.17	CLAYEY SANDY SILT&SILT
27.95	26.91	0.76	2.47	-0.17	CLAYEY SANDY SILT&SILT
28.01	27.94	0.74	2.3	-0.17	CLAYEY SANDY SILT&SILT
28.08	28.7	0.75	2.21	-0.17	CLAYEY SANDY SILT&SILT
28.14	32.29	0.73	2.01	-0.15	CLAYEY SANDY SILT&SILT
28.21	33.6	0.69	1.78	-0.15	CLAYEY SANDY SILT&SILT
28.27	34.95	0.7	1.71	-0.16	SILTY SAND
28.34	36.48	0.78	1.78	-0.15	SILTY SAND
28.4	38.76	0.8	1.72	-0.15	SILTY SAND
28.47	42.02	0.84	1.7	-0.15	SILTY SAND
28.54	46.27	0.87	1.69	-0.14	SILTY SAND
28.6	49.12	0.89	1.69	-0.15	SILTY SAND
28.67	50.62	0.91	1.67	-0.14	SILTY SAND
28.73	52.26	0.87	1.57	-0.14	SILTY SAND
28.8	53.92	0.78	1.4	-0.15	SILTY SAND
28.86	55.46	0.75	1.33	-0.14	SILTY SAND
28.93	56.87	0.72	1.28	-0.15	SILTY SAND
29	57.44	0.71	1.25	-0.15	SILTY SAND
29.06	55.81	0.68	1.21	-0.16	SILTY SAND
29.13	56.61	0.67	1.17	-0.15	SILTY SAND
29.19	56.38	0.67	1.16	-0.14	SILTY SAND
29.26	56.71	0.67	1.16	-0.14	SILTY SAND
29.32	57.44	0.68	1.16	-0.15	SILTY SAND
29.39	57.73	0.68	1.15	-0.15	SILTY SAND
29.45	58.5	0.69	1.15	-0.15	SILTY SAND
29.52	59.11	0.7	1.15	-0.15	SILTY SAND
29.59	59.58	0.7	1.14	-0.15	SILTY SAND
29.65	60.32	0.7	1.13	-0.15	SILTY SAND
29.72	60.64	0.7	1.11	-0.15	SILTY SAND
29.78	61.03	0.7	1.08	-0.15	SILTY SAND
29.85	61.63	0.69	1.03	-0.15	SILTY SAND
29.91	62.85	0.58	0.83	-0.15	SANDS
29.98	65.12	0.6	0.82	-0.15	SANDS
30.04	68	0.61	0.79	-0.15	SANDS
30.11	70.85	0.62	0.76	-0.14	SANDS
30.18	74.91	0.64	0.75	-0.14	SANDS
30.24	79.27	0.66	0.74	-0.15	SANDS
30.31	83.36	0.7	0.74	-0.14	SANDS

US EPA ARCHIVE DOCUMENT

30.37	87.68	0.74	0.76	-0.14	SANDS
30.44	92.13	0.79	0.78	-0.14	SANDS
30.5	96.61	0.83	0.79	-0.14	SANDS
30.57	100.74	0.88	0.81	-0.13	SANDS
30.64	104.17	0.91	0.83	-0.14	SANDS
30.7	107.01	0.96	0.86	-0.14	SANDS
30.77	109.41	1.01	0.89	-0.13	SANDS
30.83	111.33	1.06	0.94	-0.14	SANDS
30.9	113.03	1.08	0.95	-0.13	SANDS
30.96	114.57	1.09	0.95	-0.14	SANDS
31.03	114.41	1.11	0.98	-0.14	SANDS
31.09	114.38	1.14	1.01	-0.12	SANDS
31.16	115.17	1.17	1.05	-0.13	SANDS
31.23	114.53	1.19	1.09	-0.13	SANDS
31.29	113.06	1.22	1.14	-0.12	SANDS
31.36	111.3	1.25	1.2	-0.13	SANDS
31.42	109.06	1.28	1.28	-0.12	SANDS
31.49	105.92	1.3	1.37	-0.12	SANDS
31.55	102.53	1.31	1.45	-0.12	SANDS
31.62	98.44	1.32	1.55	-0.12	SILTY SAND
31.68	93.67	1.33	1.68	-0.12	SILTY SAND
31.75	88.55	1.31	1.8	-0.13	SILTY SAND
31.82	82.37	1.28	1.91	-0.13	SILTY SAND
31.88	76.1	1.24	2	-0.13	SILTY SAND
31.95	69.28	1.24	2.15	-0.13	SILTY SAND
32.01	63.23	1.15	2.15	-0.13	SILTY SAND
32.08	58.15	1.08	2.15	-0.13	SILTY SAND
32.14	53.86	1.01	2.17	-0.12	SILTY SAND
32.21	51.14	0.95	2.17	-0.12	SILTY SAND
32.28	48.36	0.88	2.19	-0.11	CLAYEY SANDY SILT&SILT
32.34	45.63	0.85	2.32	-0.12	CLAYEY SANDY SILT&SILT
32.41	42.78	0.86	2.6	-0.12	CLAYEY SANDY SILT&SILT
32.47	39.07	0.9	2.99	-0.12	CLAYEY SANDY SILT&SILT
32.54	34.46	0.95	3.44	-0.12	CLAYEY SANDY SILT&SILT
32.6	30.47	1.01	3.92	-0.13	CLAYEY SILT&SILTY CLAYS
32.67	27.65	1.06	4.32	-0.13	CLAYEY SILT&SILTY CLAYS
32.73	25.22	1.12	4.69	-0.12	CLAYEY SILT&SILTY CLAYS
32.8	23.94	1.17	4.88	-0.12	CLAYS
32.87	23.71	1.16	4.78	-0.12	CLAYEY SILT&SILTY CLAYS
32.93	23.55	1.16	4.66	-0.13	CLAYEY SILT&SILTY CLAYS
33	23.46	1.15	4.48	-0.12	CLAYEY SILT&SILTY CLAYS
33.06	23.23	1.29	4.75	-0.12	CLAYEY SILT&SILTY CLAYS
33.13	26.08	1.43	4.9	-0.13	CLAYEY SILT&SILTY CLAYS
33.19	26.08	1.59	5.18	-0.13	CLAYS
33.26	26.59	1.71	5.37	-0.13	CLAYS
33.32	28.8	1.74	5.38	-0.14	CLAYS
33.39	32.16	1.62	4.97	-0.13	CLAYEY SILT&SILTY CLAYS
33.46	35.01	1.54	4.8	-0.13	CLAYEY SILT&SILTY CLAYS
33.52	35.07	1.49	4.89	-0.13	CLAYEY SILT&SILTY CLAYS
33.59	32.96	1.43	4.98	-0.14	CLAYEY SILT&SILTY CLAYS
33.65	30.24	1.42	5.22	-0.13	CLAYS
33.72	29.73	1.44	5.5	-0.13	CLAYS

US EPA ARCHIVE DOCUMENT

33.78	29.06	1.45	5.64	-0.14	CLAYS
33.85	26.21	1.47	5.93	-0.13	CLAYS
33.92	24.13	1.28	5.36	-0.13	CLAYS
33.98	23.94	1.32	5.75	-0.13	CLAYS
34.05	23.87	1.39	6.4	-0.13	CLAYS
34.11	26.78	1.49	7.26	-0.13	CLAYS
34.18	24.07	1.49	7.9	-0.13	CLAYS
34.24	20.51	1.51	8.26	-0.14	CLAYS
34.31	18.15	1.47	7.82	-0.14	CLAYS
34.37	17.41	1.34	6.6	-0.14	CLAYS
34.44	16.35	1.22	5.49	-0.14	CLAYS
34.51	16.99	1.15	4.66	-0.14	CLAYS
34.57	20	1.08	3.98	-0.13	CLAYEY SILT&SILTY CLAYS
34.64	24.25	1.08	3.68	-0.14	CLAYEY SILT&SILTY CLAYS
34.7	27.04	1.05	3.37	-0.13	CLAYEY SILT&SILTY CLAYS
34.77	28.9	1.06	3.27	-0.13	CLAYEY SANDY SILT&SILT
34.83	30.31	1.14	3.4	-0.13	CLAYEY SANDY SILT&SILT
34.9	31.9	1.4	4.12	-0.12	CLAYEY SILT&SILTY CLAYS
34.96	33.73	1.51	4.37	-0.13	CLAYEY SILT&SILTY CLAYS
35.03	34.11	1.62	4.61	-0.13	CLAYEY SILT&SILTY CLAYS
35.1	35.23	1.73	4.8	-0.13	CLAYEY SILT&SILTY CLAYS
35.16	34.82	1.77	4.74	-0.13	CLAYEY SILT&SILTY CLAYS
35.23	34.43	1.83	4.68	-0.13	CLAYEY SILT&SILTY CLAYS
35.29	34.88	1.92	4.67	-0.13	CLAYEY SILT&SILTY CLAYS
35.36	37.28	1.98	4.57	-0.13	CLAYEY SILT&SILTY CLAYS
35.42	40.07	2.08	4.61	-0.12	CLAYEY SILT&SILTY CLAYS
35.49	42.56	2.26	4.83	-0.13	CLAYEY SILT&SILTY CLAYS
35.56	45.28	2.43	5.05	-0.13	CLAYEY SILT&SILTY CLAYS
35.62	46.78	2.46	5.04	-0.13	CLAYEY SILT&SILTY CLAYS
35.69	47.49	2.4	4.91	-0.13	CLAYEY SILT&SILTY CLAYS
35.75	48.58	2.25	4.65	-0.13	CLAYEY SILT&SILTY CLAYS
35.82	50.02	2.11	4.52	-0.13	CLAYEY SILT&SILTY CLAYS
35.88	50.66	1.68	3.86	-0.14	CLAYEY SANDY SILT&SILT
35.95	49.54	1.5	3.86	-0.14	CLAYEY SANDY SILT&SILT
36.01	47.11	1.33	3.92	-0.14	CLAYEY SILT&SILTY CLAYS
36.08	44.9	1.26	4.3	-0.14	CLAYEY SILT&SILTY CLAYS
36.15	38.59	1.29	5.31	-0.16	CLAYS
36.21	29.86	1.37	6.72	-0.16	CLAYS
36.28	23.65	1.46	8.1	-0.17	CLAYS
36.34	20.29	1.4	8.37	-0.16	CLAYS
36.41	18.02	1.28	7.85	-0.16	CLAYS
36.47	15.65	1.12	6.66	-0.16	CLAYS
36.54	15.14	0.91	5.02	-0.16	CLAYS
36.6	15.33	0.78	3.88	-0.16	CLAYEY SILT&SILTY CLAYS
36.67	16.16	0.76	3.4	-0.17	CLAYEY SILT&SILTY CLAYS
36.74	17.6	0.84	3.4	-0.16	CLAYEY SILT&SILTY CLAYS
36.8	20.86	0.93	3.36	-0.15	CLAYEY SILT&SILTY CLAYS
36.87	24.07	0.89	2.91	-0.16	CLAYEY SANDY SILT&SILT
36.93	26.53	0.82	2.48	-0.15	CLAYEY SANDY SILT&SILT
37	29.22	1.05	3	-0.16	CLAYEY SANDY SILT&SILT
37.06	29.03	1.24	3.41	-0.16	CLAYEY SILT&SILTY CLAYS
37.13	36.96	1.5	3.97	-0.15	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

37.2	37.76	1.81	4.79	-0.15	CLAYEY SILT&SILTY CLAYS
37.26	38.66	1.98	5.26	-0.16	CLAYEY SILT&SILTY CLAYS
37.33	38.18	2.1	5.63	-0.15	CLAYS
37.39	37.54	2.14	5.74	-0.15	CLAYS
37.46	37.63	2.2	5.86	-0.14	CLAYS
37.52	37.06	2.17	5.63	-0.14	CLAYS
37.59	36.93	2.09	5.22	-0.14	CLAYEY SILT&SILTY CLAYS
37.65	36.71	1.93	4.57	-0.15	CLAYEY SILT&SILTY CLAYS
37.72	37.73	1.78	3.96	-0.14	CLAYEY SILT&SILTY CLAYS
37.79	39.84	1.66	3.41	-0.15	CLAYEY SANDY SILT&SILT
37.85	42.69	1.62	3.09	-0.14	CLAYEY SANDY SILT&SILT
37.92	46.11	1.91	3.44	-0.15	CLAYEY SANDY SILT&SILT
37.98	49.95	2.19	3.76	-0.14	CLAYEY SANDY SILT&SILT
38.05	53.03	2.45	4.08	-0.15	CLAYEY SILT&SILTY CLAYS
38.11	60.83	2.6	4.25	-0.15	CLAYEY SILT&SILTY CLAYS
38.18	61.99	2.92	4.78	-0.14	CLAYEY SILT&SILTY CLAYS
38.24	61.67	3.22	5.3	-0.13	CLAYEY SILT&SILTY CLAYS
38.31	61.89	3.42	5.66	-0.13	CLAYEY SILT&SILTY CLAYS
38.38	60.77	3.51	5.86	-0.13	CLAYS
38.44	60.29	3.52	5.88	-0.13	CLAYS
38.51	59.58	3.66	6.11	-0.14	CLAYS
38.57	59.72	3.63	6.02	-0.14	CLAYS
38.64	60	3.61	5.94	-0.14	CLAYS
38.7	59.49	3.54	5.82	-0.14	CLAYS
38.77	60.12	3.43	5.6	-0.14	CLAYEY SILT&SILTY CLAYS
38.84	60.75	3.24	5.25	-0.13	CLAYEY SILT&SILTY CLAYS
38.9	61.38	3.5	5.63	-0.13	CLAYEY SILT&SILTY CLAYS
38.97	62.66	3.76	6.01	-0.13	CLAYS
39.03	60.74	3.67	5.86	-0.13	CLAYS
39.1	61.8	3.67	5.83	-0.13	CLAYS
39.16	62.85	3.72	5.9	-0.13	CLAYS
39.23	63.81	3.7	5.87	-0.13	CLAYS
39.29	63.43	3.64	5.81	-0.13	CLAYS
39.36	62.95	3.53	5.67	-0.13	CLAYEY SILT&SILTY CLAYS
39.43	62.88	3.55	5.75	-0.13	CLAYEY SILT&SILTY CLAYS
39.49	62.82	3.55	5.81	-0.12	CLAYS
39.56	62.44	3.57	5.91	-0.12	CLAYS
39.62	61.31	3.68	6.15	-0.13	CLAYS
39.69	60.87	3.7	6.27	-0.12	CLAYS
39.75	60.42	3.69	6.34	-0.13	CLAYS
39.82	58.91	3.65	6.36	-0.13	CLAYS
39.88	58.79	3.81	6.71	-0.12	CLAYS
39.95	58.63	3.97	7.08	-0.13	CLAYS
40.02	56.16	3.95	7.15	-0.13	CLAYS
40.08	56	3.83	6.99	-0.12	CLAYS
40.15	56.1	3.69	6.82	-0.13	CLAYS
40.21	55.04	3.5	6.56	-0.12	CLAYS
40.28	54.5	3.39	6.43	-0.13	CLAYS
40.34	53.51	3.34	6.43	-0.11	CLAYS
40.41	53.54	3.22	6.29	-0.12	CLAYS
40.48	52.61	3.14	6.27	-0.12	CLAYS
40.54	51.36	3.1	6.3	-0.11	CLAYS

US EPA ARCHIVE DOCUMENT

40.61	50.85	3.08	6.38	-0.12	CLAYS
40.67	49.86	3.03	6.4	-0.12	CLAYS
40.74	48.67	2.97	6.43	-0.12	CLAYS
40.8	47.46	2.96	6.55	-0.12	CLAYS
40.87	46.85	2.78	6.26	-0.12	CLAYS
40.93	46.18	2.9	6.7	-0.12	CLAYS
41	44.83	3.03	7.17	-0.12	CLAYS
41.07	42.72	2.96	7.2	-0.12	CLAYS
41.13	43.24	2.85	7.06	-0.12	CLAYS
41.2	42.34	2.74	6.98	-0.12	CLAYS
41.26	40.64	2.62	6.86	-0.12	CLAYS
41.33	39.46	2.52	6.73	-0.12	CLAYS
41.39	38.53	2.51	6.83	-0.12	CLAYS
41.46	37.86	2.39	6.62	-0.12	CLAYS
41.52	36.93	2.27	6.37	-0.12	CLAYS
41.59	35.74	2.17	6.16	-0.12	CLAYS
41.66	35.74	2.09	5.98	-0.13	CLAYS
41.72	35.33	2.02	5.87	-0.12	CLAYS
41.79	34.72	2.06	6.02	-0.12	CLAYS
41.85	34.82	2	5.85	-0.12	CLAYS
41.92	34.69	2.2	6.47	-0.12	CLAYS
41.98	34.11	2.13	6.3	-0.12	CLAYS
42.05	32.45	2.04	6.07	-0.12	CLAYS
42.12	34.79	2.01	5.92	-0.13	CLAYS
42.18	33.89	1.98	5.82	-0.12	CLAYS
42.25	33.76	1.92	5.58	-0.13	CLAYS
42.31	33.35	1.88	5.36	-0.13	CLAYS
42.38	33.44	1.86	5.21	-0.12	CLAYS
42.44	34.34	1.82	4.98	-0.12	CLAYEY SILT&SILTY CLAYS
42.51	35.1	1.93	5.23	-0.12	CLAYS
42.57	36.61	2.02	5.4	-0.13	CLAYS
42.64	37.6	2.06	5.51	-0.12	CLAYS
42.71	37.38	2.14	5.75	-0.12	CLAYS
42.77	37.44	2.23	5.93	-0.12	CLAYS
42.84	37.7	2.3	6.03	-0.12	CLAYS
42.9	37.41	2.13	5.54	-0.12	CLAYS
42.97	36.99	2.19	5.61	-0.11	CLAYS
43.03	36.13	2.12	5.38	-0.12	CLAYS
43.1	39.88	2.05	5.13	-0.12	CLAYEY SILT&SILTY CLAYS
43.16	40.38	2.08	5.25	-0.12	CLAYEY SILT&SILTY CLAYS
43.23	40.22	2.23	5.67	-0.12	CLAYS
43.3	40.32	2.33	5.96	-0.11	CLAYS
43.36	39.97	2.26	5.86	-0.12	CLAYS
43.43	38.85	2.21	5.81	-0.11	CLAYS
43.49	38.24	2.25	5.97	-0.11	CLAYS
43.56	38.88	2.23	6	-0.12	CLAYS
43.62	38.47	2.14	5.87	-0.12	CLAYS
43.69	37.31	2.11	5.82	-0.12	CLAYS
43.76	36.68	2.03	5.65	-0.12	CLAYS
43.82	36.29	2.18	6.12	-0.12	CLAYS
43.89	35.23	2.12	6.02	-0.12	CLAYS
43.95	35.01	2.07	5.98	-0.11	CLAYS

US EPA ARCHIVE DOCUMENT

44.02	36.35	2.02	5.99	-0.12	CLAYS
44.08	36.04	2.06	6.29	-0.12	CLAYS
44.15	34.79	2.16	6.85	-0.12	CLAYS
44.21	33.35	2.15	7.02	-0.12	CLAYS
44.28	31.87	2.09	6.98	-0.12	CLAYS
44.35	30.31	1.92	6.52	-0.11	CLAYS
44.41	29.7	1.81	6.27	-0.12	CLAYS
44.48	29.38	1.81	6.35	-0.12	CLAYS
44.54	29.44	1.76	6.23	-0.12	CLAYS
44.61	29.19	1.67	6.01	-0.12	CLAYS
44.67	28.29	1.56	5.69	-0.12	CLAYS
44.74	27.68	1.51	5.55	-0.12	CLAYS
44.8	27.36	1.55	5.65	-0.11	CLAYS
44.87	27.42	1.65	6.05	-0.12	CLAYS
44.94	26.81	1.6	5.93	-0.12	CLAYS
45	26.72	1.63	6.09	-0.12	CLAYS
45.07	27.75	1.64	6.17	-0.12	CLAYS
45.13	28.06	1.62	6.29	-0.12	CLAYS
45.2	26.69	1.69	6.75	-0.12	CLAYS
45.26	26.08	1.76	7.23	-0.12	CLAYS
45.33	25.63	1.73	7.27	-0.12	CLAYS
45.4	24.83	1.62	6.99	-0.12	CLAYS
45.46	23.58	1.55	6.89	-0.12	CLAYS
45.53	23.17	1.54	7.02	-0.12	CLAYS
45.59	22.85	1.55	7.17	-0.12	CLAYS
45.66	22.4	1.49	6.99	-0.12	CLAYS
45.72	21.73	1.4	6.56	-0.12	CLAYS
45.79	20.9	1.38	6.39	-0.12	CLAYS
45.85	20.68	0.97	4.41	-0.12	CLAYEY SILT&SILTY CLAYS
45.92	21.05	1.01	4.54	-0.13	CLAYEY SILT&SILTY CLAYS
45.99	20.93	1.04	4.59	-0.12	CLAYEY SILT&SILTY CLAYS
46.05	22.6	1.04	4.56	-0.12	CLAYEY SILT&SILTY CLAYS
46.12	23.46	1.07	4.71	-0.12	CLAYEY SILT&SILTY CLAYS
46.18	22.94	1.17	5.18	-0.13	CLAYS
46.25	22.94	1.23	5.44	-0.13	CLAYS
46.31	23.04	1.3	5.67	-0.12	CLAYS
46.38	22.63	1.18	5.05	-0.12	CLAYS
46.45	21.92	1.17	4.83	-0.12	CLAYS
46.51	22.37	1.17	4.6	-0.12	CLAYEY SILT&SILTY CLAYS
46.58	23.17	1.17	4.33	-0.12	CLAYEY SILT&SILTY CLAYS
46.64	24.1	1.17	4.07	-0.13	CLAYEY SILT&SILTY CLAYS
46.71	25.76	1.19	3.84	-0.13	CLAYEY SILT&SILTY CLAYS
46.77	27.87	1.25	3.74	-0.12	CLAYEY SILT&SILTY CLAYS
46.84	29.54	1.23	3.5	-0.13	CLAYEY SILT&SILTY CLAYS
46.9	31.59	1.43	3.89	-0.12	CLAYEY SILT&SILTY CLAYS
46.97	33.09	1.64	4.32	-0.11	CLAYEY SILT&SILTY CLAYS
47.04	37.57	1.87	4.8	-0.12	CLAYEY SILT&SILTY CLAYS
47.1	40.19	2.05	5.23	-0.11	CLAYEY SILT&SILTY CLAYS
47.17	39.55	2.23	5.75	-0.11	CLAYS
47.23	38.88	2.36	6.15	-0.11	CLAYS
47.3	39.2	2.46	6.51	-0.12	CLAYS
47.36	38.5	2.53	6.83	-0.12	CLAYS

US EPA ARCHIVE DOCUMENT

47.43	38.5	2.53	6.95	-0.11	CLAYS
47.49	38.12	2.5	7.01	-0.12	CLAYS
47.56	37.15	2.53	7.23	-0.12	CLAYS
47.63	35.78	2.53	7.4	-0.11	CLAYS
47.69	34.62	2.56	7.45	-0.11	CLAYS
47.76	34.11	2.2	6.21	-0.11	CLAYS
47.82	34.53	1.84	5.12	-0.11	CLAYEY SILT&SILTY CLAYS
47.89	33.41	1.98	5.5	-0.11	CLAYS
47.95	32.87	2.16	6.01	-0.11	CLAYS
48.02	36.77	2.24	6.27	-0.1	CLAYS
48.09	40.68	2.34	6.71	-0.1	CLAYS
48.15	37.22	2.44	7.37	-0.1	CLAYS
48.22	34.75	2.54	7.89	-0.09	CLAYS
48.28	33.12	2.56	7.99	-0.1	CLAYS
48.35	31.97	2.48	7.55	-0.1	CLAYS
48.41	31.23	2.31	6.64	-0.1	CLAYS
48.48	30.78	2.16	5.69	-0.1	CLAYS
48.54	31.42	2.11	5.01	-0.09	CLAYEY SILT&SILTY CLAYS
48.61	33.95	2.05	4.35	-0.09	CLAYEY SILT&SILTY CLAYS
48.68	38.05	2.01	3.86	-0.09	CLAYEY SILT&SILTY CLAYS
48.74	43.42	2.06	3.62	-0.1	CLAYEY SANDY SILT&SILT
48.81	50.21	1.99	3.29	-0.09	CLAYEY SANDY SILT&SILT
48.87	56.19	1.58	2.48	-0.09	CLAYEY SANDY SILT&SILT
48.94	60.83	1.67	2.55	-0.09	CLAYEY SANDY SILT&SILT
49	63.36	1.85	2.76	-0.09	CLAYEY SANDY SILT&SILT
49.07	66.44	2.09	3.06	-0.09	CLAYEY SANDY SILT&SILT
49.13	66.98	2.45	3.53	-0.1	CLAYEY SANDY SILT&SILT
49.2	67.33	2.74	3.82	-0.09	CLAYEY SANDY SILT&SILT
49.27	68.32	2.99	3.97	-0.1	CLAYEY SANDY SILT&SILT
49.33	69.6	3.21	4.03	-0.1	CLAYEY SANDY SILT&SILT
49.4	70.82	3.18	3.77	-0.09	CLAYEY SANDY SILT&SILT
49.46	74.12	2.97	3.34	-0.09	CLAYEY SANDY SILT&SILT
49.53	80.77	2.74	2.94	-0.09	CLAYEY SANDY SILT&SILT
49.59	88.93	2.49	2.59	-0.09	SILTY SAND
49.66	93.8	2.21	2.27	-0.09	SILTY SAND
49.73	97.09	1.93	1.96	-0.09	SILTY SAND
49.79	98.88	1.62	1.65	-0.1	SILTY SAND
49.86	99.24	1.37	1.39	-0.11	SANDS
49.92	98.79	1.19	1.2	-0.11	SANDS
49.99	98.82	1.1	1.1	-0.12	SANDS
50.05	95.97	1.05	1.04	-0.13	SANDS
50.12	99.36	1.03	0.99	-0.14	SANDS
50.18	99.97	1.03	0.96	-0.13	SANDS
50.25	101	1.04	0.93	-0.13	SANDS
50.32	103.49	1.08	0.93	-0.13	SANDS
50.38	108.39	1.16	0.97	-0.13	SANDS
50.45	114.31	1.24	1.02	-0.12	SANDS
50.51	120.07	1.32	1.09	-0.13	SANDS
50.58	124.04	1.42	1.19	-0.13	SANDS
50.64	124.9	1.53	1.31	-0.12	SANDS
50.71	123.53	1.64	1.47	-0.12	SANDS
50.77	119.49	1.63	1.55	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

50.84	114.53	1.59	1.62	-0.12	SILTY SAND
50.91	111.08	1.65	1.84	-0.12	SILTY SAND
50.97	107.04	1.65	2.08	-0.13	SILTY SAND
51.04	92.19	1.64	2.36	-0.12	SILTY SAND
51.1	89.86	1.63	2.68	-0.13	SILTY SAND
51.17	75.55	1.68	3.22	-0.13	CLAYEY SANDY SILT&SILT
51.23	61.03	1.77	3.9	-0.12	CLAYEY SANDY SILT&SILT
51.3	51.49	1.87	4.56	-0.13	CLAYEY SILT&SILTY CLAYS
51.37	45.6	1.92	5.08	-0.12	CLAYEY SILT&SILTY CLAYS
51.43	41.47	1.95	5.46	-0.12	CLAYS
51.5	38.02	1.94	5.67	-0.13	CLAYS
51.56	35.26	1.92	5.79	-0.12	CLAYS
51.63	33.63	1.89	5.81	-0.12	CLAYS
51.69	33.25	1.82	5.63	-0.12	CLAYS
51.76	32.84	1.7	5.32	-0.12	CLAYS
51.82	32.48	1.52	4.83	-0.12	CLAYEY SILT&SILTY CLAYS
51.89	31.94	1.46	4.76	-0.12	CLAYEY SILT&SILTY CLAYS
51.96	31.42	1.52	5.11	-0.12	CLAYS
52.02	32.16	1.62	5.58	-0.1	CLAYS
52.09	31.11	1.67	5.89	-0.1	CLAYS
52.15	29.06	1.68	6.08	-0.1	CLAYS
52.22	27.78	1.69	6.22	-0.1	CLAYS
52.28	27.2	1.74	6.51	-0.09	CLAYS
52.35	27.27	1.69	6.44	-0.1	CLAYS
52.41	27.59	1.51	5.9	-0.1	CLAYS
52.48	27.14	1.36	5.48	-0.1	CLAYS
52.55	26.21	1.23	5.1	-0.1	CLAYS
52.61	25.15	1.15	4.95	-0.1	CLAYS
52.68	24.22	1.11	4.92	-0.1	CLAYS
52.74	23.52	1.07	4.93	-0.09	CLAYS
52.81	22.94	1.04	4.83	-0.1	CLAYS
52.87	22.24	0.87	4.11	-0.1	CLAYEY SILT&SILTY CLAYS
52.94	21.35	0.81	3.91	-0.09	CLAYEY SILT&SILTY CLAYS
53.01	21.09	0.83	4.07	-0.1	CLAYEY SILT&SILTY CLAYS
53.07	19.58	0.83	4.11	-0.11	CLAYEY SILT&SILTY CLAYS
53.14	21.38	0.83	4.04	-0.11	CLAYEY SILT&SILTY CLAYS
53.2	20.64	0.8	3.94	-0.1	CLAYEY SILT&SILTY CLAYS
53.27	20.22	0.77	3.75	-0.1	CLAYEY SILT&SILTY CLAYS
53.33	19.91	0.76	3.6	-0.1	CLAYEY SILT&SILTY CLAYS
53.4	20.07	0.76	3.5	-0.1	CLAYEY SILT&SILTY CLAYS
53.46	20.45	0.72	3.13	-0.11	CLAYEY SILT&SILTY CLAYS
53.53	21.02	0.68	2.68	-0.1	CLAYEY SANDY SILT&SILT
53.6	21.66	0.65	2.37	-0.11	CLAYEY SANDY SILT&SILT
53.66	22.85	0.63	2.1	-0.1	CLAYEY SANDY SILT&SILT
53.73	24.67	0.58	1.77	-0.09	CLAYEY SANDY SILT&SILT
53.79	28.1	0.54	1.52	-0.1	SILTY SAND
53.86	32.64	0.72	1.96	-0.1	CLAYEY SANDY SILT&SILT
53.92	35.07	0.85	2.31	-0.09	CLAYEY SANDY SILT&SILT
53.99	35.65	1.11	3.04	-0.1	CLAYEY SANDY SILT&SILT
54.05	41.03	1.44	4.09	-0.11	CLAYEY SILT&SILTY CLAYS
54.12	38.79	1.69	5.2	-0.11	CLAYEY SILT&SILTY CLAYS
54.19	36.45	1.94	6.5	-0.11	CLAYS

US EPA ARCHIVE DOCUMENT

54.25	34.15	2.18	8	-0.12	CLAYS
54.32	32.2	2.28	9.19	-0.1	CLAYS
54.38	28.86	2.19	9.7	-0.11	CLAYS
54.45	24.99	1.97	9.42	-0.11	CLAYS
54.51	22.47	1.74	8.73	-0.12	CLAYS
54.58	20.74	1.63	8.37	-0.12	CLAYS
54.65	19.71	1.53	7.86	-0.12	CLAYS
54.71	18.82	1.35	6.84	-0.11	CLAYS
54.78	18.76	1.21	5.88	-0.12	CLAYS
54.84	19.2	0.98	4.56	-0.11	CLAYEY SILT&SILTY CLAYS
54.91	19.87	1.02	4.46	-0.12	CLAYEY SILT&SILTY CLAYS
54.97	20.16	1.02	4.22	-0.11	CLAYEY SILT&SILTY CLAYS
55.04	21.6	1.08	4.14	-0.11	CLAYEY SILT&SILTY CLAYS
55.1	23.65	1.14	4.07	-0.11	CLAYEY SILT&SILTY CLAYS
55.17	25.12	1.15	3.86	-0.11	CLAYEY SILT&SILTY CLAYS
55.24	26.56	1.19	3.74	-0.11	CLAYEY SILT&SILTY CLAYS
55.3	28.32	1.28	3.81	-0.11	CLAYEY SILT&SILTY CLAYS
55.37	30.78	1.36	3.87	-0.11	CLAYEY SILT&SILTY CLAYS
55.43	32.96	1.43	3.94	-0.1	CLAYEY SILT&SILTY CLAYS
55.5	35.2	1.56	4.18	-0.11	CLAYEY SILT&SILTY CLAYS
55.56	36.61	1.73	4.56	-0.1	CLAYEY SILT&SILTY CLAYS
55.63	37.51	1.95	5.02	-0.11	CLAYEY SILT&SILTY CLAYS
55.69	37.89	2.16	5.45	-0.1	CLAYS
55.76	37.92	2.32	5.56	-0.11	CLAYS
55.83	38.21	2.29	5.18	-0.1	CLAYEY SILT&SILTY CLAYS
55.89	39.58	2.11	4.48	-0.11	CLAYEY SILT&SILTY CLAYS
55.96	41.5	2.33	4.63	-0.11	CLAYEY SILT&SILTY CLAYS
56.02	42.18	2.51	4.66	-0.1	CLAYEY SILT&SILTY CLAYS
56.09	50.88	2.65	4.54	-0.09	CLAYEY SILT&SILTY CLAYS
56.15	53.03	2.79	4.48	-0.1	CLAYEY SILT&SILTY CLAYS
56.22	55.4	2.93	4.38	-0.09	CLAYEY SILT&SILTY CLAYS
56.29	58.88	3.1	4.31	-0.09	CLAYEY SILT&SILTY CLAYS
56.35	63.52	3.21	4.19	-0.09	CLAYEY SILT&SILTY CLAYS
56.42	68.36	3.13	3.88	-0.08	CLAYEY SANDY SILT&SILT
56.48	74.34	2.95	3.51	-0.09	CLAYEY SANDY SILT&SILT
56.55	80.74	2.82	3.25	-0.08	CLAYEY SANDY SILT&SILT
56.61	85.64	2.76	3.11	-0.08	CLAYEY SANDY SILT&SILT
56.68	87.43	2.72	3.01	-0.08	CLAYEY SANDY SILT&SILT
56.74	87.81	2.67	2.92	-0.08	CLAYEY SANDY SILT&SILT
56.81	88.55	2.61	2.82	-0.1	SILTY SAND
56.88	90.21	2.55	2.72	-0.09	SILTY SAND
56.94	93.09	2.36	2.52	-0.1	SILTY SAND
57.01	95.3	2.2	2.35	-0.11	SILTY SAND
57.07	94.63	2.04	2.19	-0.12	SILTY SAND
57.14	94.05	1.86	2	-0.12	SILTY SAND
57.2	94.21	1.64	1.76	-0.13	SILTY SAND
57.27	92.8	1.41	1.49	-0.13	SILTY SAND
57.33	91.71	1.24	1.29	-0.13	SANDS
57.4	91.88	1.17	1.17	-0.13	SANDS
57.47	93.6	1.15	1.11	-0.14	SANDS
57.53	96.49	1.16	1.08	-0.13	SANDS
57.6	100.33	1.19	1.07	-0.14	SANDS

US EPA ARCHIVE DOCUMENT

57.66	105.28	1.23	1.1	-0.15	SANDS
57.73	110.28	1.29	1.15	-0.15	SANDS
57.79	114.24	1.36	1.22	-0.15	SANDS
57.86	116.07	1.4	1.29	-0.14	SANDS
57.93	115.78	1.38	1.33	-0.15	SANDS
57.99	113.13	1.32	1.34	-0.14	SANDS
58.06	106.15	1.26	1.35	-0.15	SANDS
58.12	101.73	1.19	1.35	-0.13	SANDS
58.19	95.75	1.14	1.38	-0.13	SANDS
58.25	90.05	1.15	1.48	-0.13	SILTY SAND
58.32	85.06	1.27	1.73	-0.13	SILTY SAND
58.38	79.56	1.25	1.78	-0.13	SILTY SAND
58.45	74.4	1.28	1.87	-0.13	SILTY SAND
58.52	70.66	1.45	2.13	-0.13	SILTY SAND
58.58	67.01	1.73	2.51	-0.13	SILTY SAND
58.65	65.06	1.81	2.55	-0.13	CLAYEY SANDY SILT&SILT
58.71	65.38	1.81	2.47	-0.12	SILTY SAND
58.78	68.39	1.64	2.14	-0.13	SILTY SAND
58.84	72.35	1.47	1.83	-0.14	SILTY SAND
58.91	75.55	1.47	1.75	-0.13	SILTY SAND
58.97	78.45	1.44	1.63	-0.13	SILTY SAND
59.04	81.33	1.29	1.37	-0.15	SILTY SAND
59.11	84.23	1.14	1.13	-0.15	SANDS
59.17	89.6	1.08	1.01	-0.15	SANDS
59.24	95.49	1.08	0.94	-0.15	SANDS
59.3	102.09	1.08	0.88	-0.14	SANDS
59.37	110.6	1.07	0.82	-0.14	SANDS
59.43	119.46	1.12	0.81	-0.14	SANDS
59.5	127.85	1.2	0.82	-0.13	SANDS
59.57	135.94	1.3	0.85	-0.12	SANDS
59.63	143.75	1.41	0.89	-0.13	SANDS
59.7	150.79	1.54	0.95	-0.12	SANDS
59.76	157	1.66	1	-0.12	SANDS
59.83	162.66	1.85	1.09	-0.12	SANDS
59.89	168.3	1.9	1.1	-0.12	SANDS
59.96	173.39	1.98	1.14	-0.12	SANDS
60.02	164.39	2.08	1.2	-0.1	SANDS
60.09	172.68	2.2	1.27	-0.1	SANDS
60.16	180.97	2.32	1.37	-0.11	SANDS
60.22	179.27	2.4	1.47	-0.1	SANDS
60.29	175.05	2.46	1.57	-0.11	SANDS
60.35	168.58	2.49	1.66	-0.1	SANDS
60.42	160.74	2.5	1.73	-0.1	SANDS
60.48	152.55	2.47	1.78	-0.11	SANDS
60.55	145.51	2.38	1.77	-0.11	SANDS
60.61	139.2	2.27	1.73	-0.1	SANDS
60.68	134.63	2.17	1.69	-0.1	SANDS
60.75	131.36	2.08	1.65	-0.1	SANDS
60.81	128.84	2	1.62	-0.1	SANDS
60.88	126.76	1.92	1.58	-0.11	SANDS
60.94	124.71	1.85	1.54	-0.11	SANDS
61.01	122.44	1.85	1.56	-0.1	SANDS

US EPA ARCHIVE DOCUMENT

61.07	120.17	1.8	1.55	-0.09	SANDS
61.14	117.89	1.77	1.55	-0.09	SANDS
61.21	118.09	1.75	1.56	-0.08	SANDS
61.27	117.03	1.73	1.6	-0.08	SANDS
61.34	114.82	1.72	1.65	-0.08	SILTY SAND
61.4	111.62	1.71	1.71	-0.08	SILTY SAND
61.47	107.3	1.73	1.82	-0.08	SILTY SAND
61.53	102.5	1.73	1.89	-0.09	SILTY SAND
61.6	97.16	1.7	1.91	-0.09	SILTY SAND
61.66	92.19	1.64	1.84	-0.09	SILTY SAND
61.73	87.53	1.58	1.73	-0.09	SILTY SAND
61.8	84.64	1.5	1.57	-0.09	SILTY SAND
61.86	84.77	1.43	1.41	-0.08	SILTY SAND
61.93	89.06	1.34	1.24	-0.09	SANDS
61.99	96.87	1.3	1.12	-0.09	SANDS
62.06	103.97	1.3	1.05	-0.08	SANDS
62.12	112.84	1.34	1.02	-0.09	SANDS
62.19	120.13	1.41	1.02	-0.08	SANDS
62.25	126.88	1.49	1.03	-0.08	SANDS
62.32	133.74	1.56	1.02	-0.08	SANDS
62.39	141.45	1.6	1.01	-0.08	SANDS
62.45	148.84	1.64	1	-0.08	SANDS
62.52	156.52	1.72	1.02	-0.08	SANDS
62.58	163.91	1.8	1.05	-0.08	SANDS
62.65	169.83	1.89	1.09	-0.07	SANDS
62.71	173.73	1.96	1.13	-0.08	SANDS
62.78	174.53	1.94	1.13	-0.07	SANDS
62.85	174.6	1.93	1.12	-0.07	SANDS
62.91	174.63	1.91	1.12	-0.08	SANDS
62.98	172.38	1.99	1.17	-0.09	SANDS
63.04	170.13	2.02	1.19	-0.07	SANDS
63.11	167.88	2	1.17	-0.08	SANDS
63.17	168.9	1.98	1.15	-0.07	SANDS
63.24	169.45	2	1.14	-0.07	SANDS
63.3	171.21	2.04	1.15	-0.07	SANDS
63.37	173.55	2.14	1.19	-0.07	SANDS
63.44	176.2	2.26	1.24	-0.08	SANDS
63.5	178.44	2.37	1.27	-0.07	SANDS
63.57	181.16	2.45	1.29	-0.07	SANDS
63.63	183.66	2.55	1.32	-0.07	SANDS
63.7	186.89	2.64	1.33	-0.07	SANDS
63.76	190.67	2.69	1.33	-0.07	SANDS
63.83	194.67	2.62	1.26	-0.07	SANDS
63.89	199.85	2.69	1.27	-0.07	SANDS
63.96	205.86	2.67	1.25	-0.08	SANDS
64.03	210.38	2.68	1.26	-0.05	SANDS
64.09	214.89	2.69	1.27	-0.06	SANDS
64.16	219.4	2.72	1.3	-0.05	SANDS
64.22	217.07	2.76	1.34	-0.05	SANDS
64.29	211.92	2.8	1.38	-0.06	SANDS
64.35	206.35	2.82	1.4	-0.05	SANDS
64.42	201.83	2.83	1.41	-0.05	SANDS

US EPA ARCHIVE DOCUMENT

64.49	198.95	2.82	1.39	-0.05	SANDS
64.55	198.18	2.77	1.35	-0.05	SANDS
64.62	199.79	2.75	1.32	-0.06	SANDS
64.68	202.76	2.73	1.3	-0.05	SANDS
64.75	206.79	2.74	1.29	-0.06	SANDS
64.81	211.4	2.8	1.32	-0.06	SANDS
64.88	213.58	2.83	1.33	-0.06	SANDS
64.94	212.78	2.84	1.33	-0.06	SANDS
65.01	212.82	2.81	1.32	-0.05	SANDS
65.08	212.86	2.83	1.33	-0.04	SANDS
65.14	212.89	2.9	1.36	-0.05	SANDS
65.21	212.94	2.99	1.4	-0.05	SANDS
65.27	215.18	3.1	1.45	-0.04	SANDS
65.34	215.15	3.23	1.51	-0.04	SANDS
65.4	213.77	3.38	1.59	-0.04	SANDS
65.47	212.26	3.54	1.66	-0.04	SANDS
65.53	211.88	3.67	1.71	-0.04	SANDS
65.6	211.82	3.79	1.75	-0.04	SANDS
65.67	212.65	3.87	1.75	-0.05	SANDS
65.73	213.77	3.87	1.72	-0.04	SANDS
65.8	216.23	3.76	1.63	-0.04	SANDS
65.86	219.98	3.65	1.54	-0.05	SANDS
65.93	226.25	3.54	1.45	-0.04	SANDS
65.99	233.28	3.43	1.37	-0.04	SANDS
66.06	240.31	3.46	1.35	-0.03	SANDS
66.13	247.35	3.49	1.33	-0.02	SANDS
66.19	254.38	3.56	1.33	-0.02	SANDS
66.26	261.83	3.67	1.35	-0.02	SANDS
66.32	265.58	3.82	1.39	-0.02	SANDS
66.39	269.65	4.05	1.46	-0.02	SANDS
66.45	273.8	4.38	1.6	-0.02	SANDS
66.52	279.08	4.65	1.74	-0.02	SANDS
66.58	282.51	4.88	1.91	-0.02	SANDS
66.65	281.2	5	2.07	-0.02	SANDS
66.72	271.63	4.97	2.23	-0.02	SANDS
66.78	254.44	4.9	2.39	-0.02	SANDS
66.85	234.32	4.83	2.58	-0.02	SILTY SAND
66.91	213.84	4.41	2.57	-0.03	SILTY SAND
66.98	194.28	4.05	2.56	-0.02	SILTY SAND
67.04	170.06	3.64	2.48	-0.03	SILTY SAND
67.11	161	3.29	2.39	-0.03	SILTY SAND
67.17	149.83	3.08	2.38	-0.02	SILTY SAND
67.24	140.81	2.86	2.33	-0.02	SILTY SAND
67.31	132.97	2.7	2.32	-0.02	SILTY SAND
67.37	125.64	2.7	2.42	-0.03	SILTY SAND
67.44	117.16	2.84	2.64	-0.03	SILTY SAND
67.5	111.24	3.01	2.85	-0.03	SILTY SAND
67.57	106.85	3.18	3.04	-0.03	SILTY SAND
67.63	104.42	3.37	3.22	-0.03	CLAYEY SANDY SILT&SILT
67.7	103.49	3.55	3.4	-0.03	CLAYEY SANDY SILT&SILT
67.77	103.24	3.6	3.43	-0.03	CLAYEY SANDY SILT&SILT
67.83	104.45	3.34	3.16	-0.04	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

67.9	105.48	3.1	2.93	-0.04	SILTY SAND
67.96	106.5	2.81	2.65	-0.04	SILTY SAND
68.03	103.11	2.56	2.42	-0.05	SILTY SAND
68.09	106.66	2.36	2.22	-0.05	SILTY SAND
68.16	107.24	2.19	2.07	-0.07	SILTY SAND
68.22	106.79	2.06	1.96	-0.08	SILTY SAND
68.29	106.18	2.01	1.93	-0.08	SILTY SAND
68.36	105.57	2.01	1.95	-0.07	SILTY SAND
68.42	105	2.05	2.01	-0.08	SILTY SAND
68.49	104.13	2.09	2.08	-0.06	SILTY SAND
68.55	102.73	2.11	2.15	-0.06	SILTY SAND
68.62	101.35	2.11	2.21	-0.06	SILTY SAND
68.68	99.62	2.08	2.24	-0.06	SILTY SAND
68.75	97.8	2.09	2.32	-0.08	SILTY SAND
68.81	95.36	2.2	2.5	-0.09	SILTY SAND
68.88	91.52	2.17	2.53	-0.09	SILTY SAND
68.95	87.88	2.24	2.68	-0.08	SILTY SAND
69.01	85.03	2.31	2.83	-0.08	SILTY SAND
69.08	84.39	2.41	3.02	-0.1	CLAYEY SANDY SILT&SILT
69.14	83.75	2.57	3.32	-0.1	CLAYEY SANDY SILT&SILT
69.21	82.24	2.8	3.77	-0.1	CLAYEY SANDY SILT&SILT
69.27	79.49	3.01	4.27	-0.1	CLAYEY SANDY SILT&SILT
69.34	75.88	3.11	4.71	-0.09	CLAYEY SILT&SILTY CLAYS
69.41	72.87	3.09	5.06	-0.09	CLAYEY SILT&SILTY CLAYS
69.47	70.21	3.12	5.62	-0.09	CLAYEY SILT&SILTY CLAYS
69.54	65.47	3.22	6.47	-0.09	CLAYS
69.6	59.17	3.29	7.49	-0.09	CLAYS
69.67	52.39	3.32	8.5	-0.09	CLAYS
69.73	45.89	3.2	9.03	-0.09	CLAYS
69.8	40.07	2.99	9.01	-0.09	CLAYS
69.86	35.04	2.79	8.73	-0.09	CLAYS
69.93	31.42	2.11	6.7	-0.09	CLAYS
70	29.67	2.18	6.93	-0.09	CLAYS
70.06	30.8	2.15	6.75	-0.09	CLAYS
70.13	31.92	2.2	6.82	-0.1	CLAYS
70.19	33.06	2.3	7.03	-0.1	CLAYS
70.26	31.78	2.35	6.95	-0.1	CLAYS
70.32	31.59	2.23	6.12	-0.1	CLAYS
70.39	32.23	2.11	5.14	-0.1	CLAYS
70.45	33.03	2.1	4.35	-0.11	CLAYEY SILT&SILTY CLAYS
70.52	34.66	2.11	3.62	-0.1	CLAYEY SILT&SILTY CLAYS
70.59	39.65	2.12	3.03	-0.1	CLAYEY SANDY SILT&SILT
70.65	47.65	2.08	2.54	-0.11	CLAYEY SANDY SILT&SILT
70.72	59.39	1.89	2.02	-0.1	SILTY SAND
70.78	75.27	1.68	1.61	-0.09	SILTY SAND
70.85	92.39	1.47	1.3	-0.09	SANDS
70.91	105.06	1.26	1.05	-0.1	SANDS
70.98	111.41	1.32	1.05	-0.1	SANDS
71.05	117.76	1.37	1.05	-0.09	SANDS
71.11	124.1	1.49	1.11	-0.09	SANDS
71.18	130.54	1.42	1.02	-0.09	SANDS
71.24	134.15	1.4	0.98	-0.1	SANDS

US EPA ARCHIVE DOCUMENT

71.31	132.07	1.41	0.95	-0.1	SANDS
71.37	142.37	1.45	0.95	-0.09	SANDS
71.44	146.92	1.49	0.95	-0.09	SANDS
71.5	151.3	1.52	0.94	-0.09	SANDS
71.57	155.72	1.54	0.93	-0.09	SANDS
71.64	160.23	1.55	0.92	-0.09	SANDS
71.7	164.62	1.59	0.94	-0.09	SANDS
71.77	168.17	1.67	0.97	-0.09	SANDS
71.83	170.82	1.75	1.01	-0.1	SANDS
71.9	172.58	1.79	1.03	-0.08	SANDS
71.96	172.72	1.84	1.06	-0.09	SANDS
72.03	172.86	1.91	1.1	-0.09	SANDS
72.09	173	1.98	1.14	-0.08	SANDS
72.16	173.42	2.03	1.17	-0.08	SANDS
72.23	173.42	2.08	1.21	-0.08	SANDS
72.29	173.51	2.11	1.23	-0.08	SANDS
72.36	173.35	2.19	1.28	-0.08	SANDS
72.42	172.84	2.25	1.33	-0.08	SANDS
72.49	171.85	2.3	1.37	-0.08	SANDS
72.55	170.57	2.36	1.42	-0.08	SANDS
72.62	168.74	2.41	1.47	-0.09	SANDS
72.69	166.57	2.45	1.51	-0.09	SANDS
72.75	164.55	2.47	1.53	-0.09	SANDS
72.82	162.79	2.4	1.51	-0.08	SANDS
72.88	161.61	2.34	1.48	-0.08	SANDS
72.95	160.71	2.28	1.45	-0.09	SANDS
73.01	159.1	2.27	1.47	-0.08	SANDS
73.08	157.49	2.22	1.46	-0.07	SANDS
73.14	155.89	2.19	1.47	-0.07	SANDS
73.21	154.28	2.18	1.5	-0.07	SANDS
73.28	152.17	2.17	1.54	-0.07	SANDS
73.34	148.84	2.16	1.6	-0.07	SANDS
73.41	144.59	2.2	1.69	-0.08	SANDS
73.47	138.98	2.21	1.78	-0.08	SANDS
73.54	132.81	2.16	1.82	-0.08	SILTY SAND
73.6	126.53	2.09	1.83	-0.08	SILTY SAND
73.67	120.64	2.01	1.81	-0.08	SILTY SAND
73.73	115.33	1.93	1.79	-0.07	SILTY SAND
73.8	110.98	1.86	1.76	-0.08	SILTY SAND
73.87	107.52	1.75	1.65	-0.08	SILTY SAND
73.93	105.6	1.62	1.52	-0.08	SILTY SAND
74	104.87	1.55	1.44	-0.08	SANDS
74.06	101.58	1.51	1.41	-0.08	SANDS
74.13	106.76	1.5	1.42	-0.08	SANDS
74.19	109.38	1.52	1.48	-0.08	SANDS
74.26	111.05	1.76	1.8	-0.07	SILTY SAND
74.32	110.37	2.22	2.39	-0.08	SILTY SAND
74.39	104.23	2.65	3	-0.08	SILTY SAND
74.46	93.38	3.04	3.53	-0.09	CLAYEY SANDY SILT&SILT
74.52	85.32	3.4	3.89	-0.08	CLAYEY SANDY SILT&SILT
74.59	81.41	3.65	3.95	-0.09	CLAYEY SANDY SILT&SILT
74.65	81.92	3.93	3.94	-0.08	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

74.72	84.74	4.1	3.81	-0.08	CLAYEY SANDY SILT&SILT
74.78	90.31	4.12	3.54	-0.07	CLAYEY SANDY SILT&SILT
74.85	101.22	4.04	3.23	-0.07	CLAYEY SANDY SILT&SILT
74.92	115.17	3.78	2.85	-0.07	SILTY SAND
74.98	125.13	3.53	2.56	-0.06	SILTY SAND
75.05	128.26	3.36	2.35	-0.1	SILTY SAND
75.11	138.22	3.15	2.14	-0.09	SILTY SAND
75.18	142.37	2.86	1.9	-0.09	SILTY SAND
75.24	145.57	2.53	1.64	-0.08	SANDS
75.31	148.74	2.2	1.39	-0.08	SANDS
75.37	152.23	2.04	1.27	-0.08	SANDS
75.44	155.56	2	1.21	-0.08	SANDS
75.51	159.34	2	1.19	-0.08	SANDS
75.57	163.08	2.08	1.22	-0.08	SANDS
75.64	167.05	2.2	1.28	-0.09	SANDS
75.7	170.09	2.32	1.35	-0.08	SANDS
75.77	172.78	2.3	1.35	-0.08	SANDS
75.83	174.12	2.28	1.34	-0.08	SANDS
75.9	173.7	2.26	1.35	-0.08	SANDS
75.96	171.22	2.28	1.38	-0.08	SANDS
76.03	168.73	2.21	1.35	-0.07	SANDS
76.1	166.25	2.11	1.31	-0.07	SANDS
76.16	165.06	2	1.26	-0.06	SANDS
76.23	162.15	1.98	1.26	-0.07	SANDS
76.29	159.88	1.99	1.3	-0.07	SANDS
76.36	157.35	2.1	1.39	-0.07	SANDS
76.42	155.4	2.2	1.48	-0.07	SANDS
76.49	153.13	2.23	1.54	-0.07	SANDS
76.56	150.22	2.24	1.58	-0.08	SANDS
76.62	147.15	2.24	1.62	-0.08	SANDS
76.69	143.31	2.2	1.64	-0.07	SANDS
76.75	139.08	2.14	1.63	-0.08	SANDS
76.82	135.72	2.05	1.59	-0.08	SANDS
76.88	132.71	2.06	1.64	-0.08	SANDS
76.95	129.8	2.01	1.63	-0.08	SANDS
77.01	127.42	1.93	1.59	-0.09	SANDS
77.08	125.04	1.94	1.64	-0.08	SANDS
77.15	122.66	2.05	1.77	-0.08	SILTY SAND
77.21	119.37	2.14	1.88	-0.08	SILTY SAND
77.28	117.09	2.27	2.04	-0.08	SILTY SAND
77.34	115.49	2.36	2.16	-0.09	SILTY SAND
77.41	112.58	2.34	2.21	-0.08	SILTY SAND
77.47	109.48	2.31	2.23	-0.09	SILTY SAND
77.54	107.01	2.25	2.24	-0.09	SILTY SAND
77.6	105.28	2.25	2.31	-0.08	SILTY SAND
77.67	103.11	2.36	2.5	-0.09	SILTY SAND
77.74	98.79	2.48	2.75	-0.09	SILTY SAND
77.8	96.07	2.6	3.03	-0.08	CLAYEY SANDY SILT&SILT
77.87	92.32	2.79	3.52	-0.09	CLAYEY SANDY SILT&SILT
77.93	89.73	2.87	4.02	-0.1	CLAYEY SANDY SILT&SILT
78	85.51	3.17	5.03	-0.1	CLAYEY SILT&SILTY CLAYS
78.06	78.31	3.57	6.54	-0.12	CLAYS

US EPA ARCHIVE DOCUMENT

78.13	72.35	3.92	8.35	-0.12	CLAYS
78.2	56.55	4.15	10	-0.12	CLAYS
78.26	46.21	4.07	10	-0.12	CLAYS
78.33	39.27	3.65	10	-0.12	CLAYS
78.39	35.1	3.1	9.36	-0.12	CLAYS
78.46	32.45	2.73	8.19	-0.12	CLAYS
78.52	31.23	2.55	7.49	-0.12	CLAYS
78.59	32.03	2.39	6.89	-0.12	CLAYS
78.65	33.21	2.39	6.77	-0.12	CLAYS
78.72	34.62	2.65	7.41	-0.12	CLAYS
78.79	36.35	2.53	7.02	-0.13	CLAYS
78.85	36.77	2.42	6.64	-0.12	CLAYS
78.92	34.98	2.3	6.14	-0.13	CLAYS
78.98	35.59	2.6	6.37	-0.12	CLAYS
79.05	36.19	2.54	5.11	-0.15	CLAYEY SILT&SILTY CLAYS
79.11	36.8	2.45	3.7	-0.13	CLAYEY SILT&SILTY CLAYS
79.18	38.24	2.36	2.54	-0.14	CLAYEY SANDY SILT&SILT
79.24	43.36	2.27	1.77	-0.13	SILTY SAND
79.31	55.3	2.18	1.29	-0.13	SILTY SAND
79.38	88.23	2.51	1.18	-0.13	SANDS
79.44	135.43	2.63	1.03	-0.12	SANDS
79.51	195.98	2.63	0.9	-0.11	SANDS
79.57	250.76	2.77	0.86	-0.12	SANDS
79.64	289.58	3.15	0.92	-0.1	SANDS
79.7	319.66	3.5	0.99	-0.1	SANDS
79.77	342.96	3.77	1.04	-0.1	SANDS
79.84	357.71	4.04	1.1	-0.09	SANDS
79.9	365.91	4.31	1.15	-0.08	SANDS
79.97	367.27	4.66	1.21	-0.09	SANDS
80.03	368.64	5.05	1.27	-0.08	SANDS
80.1	370	5.37	1.29	-0.07	SANDS
80.16	383.57	5.57	1.27	-0.07	SANDS
80.23	399.22	5.8	1.24	-0.06	SANDS
80.29	420.63	5.77	1.16	-0.06	SANDS
80.36	449.97	5.73	1.09	-0.06	SANDS
80.43	474.68	5.76	1.04	-0.08	SANDS
80.49	511.38	5.9	1.01	-0.07	SANDS
80.56	547.41	6.22	1.03	-0.08	SANDS
80.62	577.47	6.69	1.08	-0.08	SANDS
80.69	601.79	7.2	1.14	-0.07	SANDS
80.75	623.49	6.38	1.01	-0.07	SANDS
80.82	637.18	6.53	1.03	-0.06	SANDS
80.88	647.33	6.69	1.06	-0.06	SANDS
80.95	637.34	7.82	1.25	-0.06	SANDS
81.02	627.36	8.09	1.29	-0.01	SANDS
81.08	617.37	8.07	1.3	-0.02	SANDS
81.15	630.37	7.98	1.29	-0.01	SANDS
81.21	628.28	7.82	1.28	-0.01	SANDS
81.28	623.83	7.59	1.27	-0.01	SANDS
81.34	620.54	7.58	1.29	-0.01	SANDS
81.41	611.23	7.94	1.38	-0.01	SANDS
81.48	599.13	8.18	1.46	-0.01	SANDS

US EPA ARCHIVE DOCUMENT

81.54	579.29	8.43	1.55	-0.01	SANDS
81.61	565.4	8.68	1.63	-0.01	SANDS
81.67	551.4	8.88	1.71	0.02	SANDS
81.74	537.39	9.09	1.78	0.02	SANDS
81.8	523.39	9.29	1.84	0.04	SANDS
81.87	506.26	9.26	1.86	0.04	SANDS
81.93	503.16	9.24	1.87	0.04	SANDS
82	500.06	9.21	1.88	0.04	SANDS
82.07	497.37	8.25	1.7	0.04	SANDS
82.13	494.68	8.21	1.71	0.05	SANDS
82.2	491.99	8.24	1.74	0.05	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-12-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 07

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0.01	0	CLAYS
0.13	0	0.02	0.06	0	CLAYS
0.2	0	1.71	5.47	0	CLAYS
0.26	6.78	7.11	10	-0.02	CLAYS
0.33	61.35	6.43	10	-0.02	CLAYS
0.39	86.02	6.46	10	0	CLAYS
0.46	13.76	6.45	10	-0.01	CLAYS
0.52	19.81	6.59	10	-0.02	CLAYS
0.59	28	6.51	10	-0.01	CLAYS
0.66	40.04	5.61	9.07	-0.01	CLAYS
0.72	52.16	2.28	3.36	-0.01	CLAYEY SANDY SILT&SILT
0.79	62.56	1.07	1.49	-0.01	SILTY SAND
0.85	69.57	1.05	1.4	-0.03	SILTY SAND
0.92	71.71	1.09	1.44	-0.03	SILTY SAND
0.98	75.33	1.14	1.54	-0.03	SILTY SAND
1.05	77.09	1.22	1.69	-0.02	SILTY SAND
1.12	77.25	1.26	1.83	-0.02	SILTY SAND
1.18	77.25	1.33	2.04	-0.02	SILTY SAND
1.25	73.41	1.15	1.88	-0.02	SILTY SAND
1.31	65.67	1.17	2.02	-0.02	SILTY SAND
1.38	60.71	1.28	2.29	-0.03	SILTY SAND
1.44	59.33	1.35	2.51	-0.02	CLAYEY SANDY SILT&SILT
1.51	55.4	1.35	2.59	-0.02	CLAYEY SANDY SILT&SILT
1.57	53.25	1.38	2.73	-0.04	CLAYEY SANDY SILT&SILT
1.64	53.41	1.23	2.48	-0.02	CLAYEY SANDY SILT&SILT
1.71	52.2	1.23	2.52	-0.03	CLAYEY SANDY SILT&SILT
1.77	48.96	1.2	2.5	-0.03	CLAYEY SANDY SILT&SILT
1.84	48.58	1.09	2.28	-0.03	CLAYEY SANDY SILT&SILT
1.9	48.06	1.04	2.17	-0.04	CLAYEY SANDY SILT&SILT
1.97	47.52	0.98	2.04	-0.06	SILTY SAND
2.03	47.59	0.94	1.99	-0.06	SILTY SAND
2.1	47.72	0.9	1.92	-0.06	SILTY SAND
2.16	48.64	1.02	2.22	-0.08	CLAYEY SANDY SILT&SILT
2.23	48.23	1.07	2.37	-0.08	CLAYEY SANDY SILT&SILT
2.3	47.08	1.08	2.45	-0.07	CLAYEY SANDY SILT&SILT
2.36	45	1.01	2.31	-0.06	CLAYEY SANDY SILT&SILT
2.43	44.29	0.92	2.05	-0.03	SILTY SAND
2.49	42.98	0.8	1.68	-0.03	SILTY SAND
2.56	42.82	0.61	1.16	-0.04	SILTY SAND
2.62	43.04	0.57	0.98	-0.04	SILTY SAND
2.69	44.74	0.63	0.96	-0.03	SILTY SAND
2.76	51.17	0.85	1.18	-0.03	SILTY SAND
2.82	60.42	0.8	1.03	-0.02	SILTY SAND
2.89	71.97	1.12	1.36	-0.04	SILTY SAND
2.95	81.12	1.51	1.8	-0.02	SILTY SAND
3.02	81.73	1.89	2.29	-0.01	SILTY SAND

US EPA ARCHIVE DOCUMENT

3.08	84.97	2.12	2.65	-0.01	SILTY SAND
3.15	86.28	2.23	2.92	-0.01	CLAYEY SANDY SILT&SILT
3.21	87.11	2.26	3.12	0	CLAYEY SANDY SILT&SILT
3.28	80.71	2.24	3.28	-0.02	CLAYEY SANDY SILT&SILT
3.35	73.63	2.12	3.29	-0.01	CLAYEY SANDY SILT&SILT
3.41	66.72	1.96	3.19	-0.01	CLAYEY SANDY SILT&SILT
3.48	64.2	1.75	2.98	-0.01	CLAYEY SANDY SILT&SILT
3.54	63.23	1.52	2.69	-0.01	CLAYEY SANDY SILT&SILT
3.61	60.39	1.31	2.42	-0.01	SILTY SAND
3.67	57.92	1.04	2	0	SILTY SAND
3.74	56.55	0.86	1.72	-0.01	SILTY SAND
3.8	51.17	0.67	1.4	-0.01	SILTY SAND
3.87	50.05	0.49	1.05	-0.01	SILTY SAND
3.94	48.93	0.35	0.77	0	SILTY SAND
4	47.72	0.3	0.67	-0.01	SILTY SAND
4.07	43.97	0.29	0.67	0.01	SILTY SAND
4.13	44.26	0.29	0.68	0.02	SILTY SAND
4.2	44.8	0.29	0.67	0.01	SILTY SAND
4.26	44.06	0.3	0.71	0.02	SILTY SAND
4.33	42.56	0.31	0.73	0.02	SILTY SAND
4.4	41.6	0.32	0.75	0.01	SILTY SAND
4.46	41.67	0.31	0.71	0.01	SILTY SAND
4.53	42.66	0.31	0.7	0.01	SILTY SAND
4.59	43.39	0.33	0.75	0.01	SILTY SAND
4.66	43.97	0.4	0.9	0.01	SILTY SAND
4.72	43.68	0.49	1.12	0.01	SILTY SAND
4.79	44.19	0.71	1.59	0	SILTY SAND
4.85	44.64	0.94	2.12	-0.01	CLAYEY SANDY SILT&SILT
4.92	45.12	1.28	2.9	-0.01	CLAYEY SANDY SILT&SILT
4.99	44.7	1.73	3.95	-0.02	CLAYEY SILT&SILTY CLAYS
5.05	43.62	2.11	4.83	0	CLAYEY SILT&SILTY CLAYS
5.12	43.88	2.44	5.55	0	CLAYS
5.18	43.24	2.7	6.12	0	CLAYS
5.25	43.49	2.88	6.51	0.01	CLAYS
5.31	43.97	2.96	6.65	0	CLAYS
5.38	44.29	2.89	6.49	0	CLAYS
5.44	44.52	2.72	6.1	0.01	CLAYS
5.51	44.61	2.55	5.72	-0.01	CLAYS
5.58	44.67	2.34	5.25	-0.01	CLAYEY SILT&SILTY CLAYS
5.64	44.74	2.07	4.67	-0.01	CLAYEY SILT&SILTY CLAYS
5.71	44.55	1.83	4.15	0.01	CLAYEY SILT&SILTY CLAYS
5.77	44.83	1.54	3.51	0.01	CLAYEY SANDY SILT&SILT
5.84	44.45	1.06	2.41	0.01	CLAYEY SANDY SILT&SILT
5.9	43.65	0.85	1.93	0.02	SILTY SAND
5.97	44	0.72	1.63	0.01	SILTY SAND
6.04	42.63	0.64	1.44	0.02	SILTY SAND
6.1	44.13	0.6	1.33	0.02	SILTY SAND
6.17	44.58	0.59	1.29	0.03	SILTY SAND
6.23	45.41	0.59	1.28	0.02	SILTY SAND
6.3	45.19	0.58	1.24	0.03	SILTY SAND
6.36	45.47	0.58	1.23	0.02	SILTY SAND
6.43	45.92	0.6	1.26	0.03	SILTY SAND

US EPA ARCHIVE DOCUMENT

6.49	46.98	0.62	1.31	0.02	SILTY SAND
6.56	47.42	0.66	1.39	0.03	SILTY SAND
6.63	48.39	0.7	1.49	0.02	SILTY SAND
6.69	48.1	0.75	1.62	0.03	SILTY SAND
6.76	48.16	0.78	1.72	0.01	SILTY SAND
6.82	47.65	0.67	1.49	0.03	SILTY SAND
6.89	46.21	0.64	1.45	0.03	SILTY SAND
6.95	45.34	0.64	1.48	0.02	SILTY SAND
7.02	43.49	0.63	1.5	0.03	SILTY SAND
7.08	43.46	0.64	1.57	0.02	SILTY SAND
7.15	42.85	0.67	1.67	0.03	SILTY SAND
7.22	41.89	0.69	1.78	0.03	SILTY SAND
7.28	40.96	0.69	1.81	0.03	SILTY SAND
7.35	39.36	0.67	1.81	0.02	SILTY SAND
7.41	37.89	0.66	1.79	0.03	SILTY SAND
7.48	36.99	0.65	1.78	0.03	SILTY SAND
7.54	36.48	0.64	1.76	0.02	SILTY SAND
7.61	36.38	0.63	1.72	0.03	SILTY SAND
7.68	36.48	0.62	1.68	0.03	SILTY SAND
7.74	36.68	0.61	1.66	0.03	SILTY SAND
7.81	36.83	0.62	1.69	0.03	SILTY SAND
7.87	36.61	0.65	1.77	0.02	SILTY SAND
7.94	36.64	0.64	1.72	0.02	SILTY SAND
8	36.77	0.64	1.71	0.02	SILTY SAND
8.07	36.54	0.66	1.72	0.02	SILTY SAND
8.13	37.32	0.67	1.73	0.02	SILTY SAND
8.2	37.83	0.68	1.77	0.03	SILTY SAND
8.27	38.59	0.7	1.8	0.03	SILTY SAND
8.33	39.01	0.73	1.88	0.02	SILTY SAND
8.4	39.04	0.75	1.93	0.03	CLAYEY SANDY SILT&SILT
8.46	38.63	0.76	1.96	0.03	CLAYEY SANDY SILT&SILT
8.53	38.69	0.78	2	0.02	CLAYEY SANDY SILT&SILT
8.59	38.88	0.8	2.06	0.01	CLAYEY SANDY SILT&SILT
8.66	39.04	0.82	2.09	0.02	CLAYEY SANDY SILT&SILT
8.72	39.11	0.83	2.12	0.02	CLAYEY SANDY SILT&SILT
8.79	38.98	0.84	2.16	0.03	CLAYEY SANDY SILT&SILT
8.86	39.07	0.8	2.05	0.02	CLAYEY SANDY SILT&SILT
8.92	39.2	0.8	2.03	0.02	CLAYEY SANDY SILT&SILT
8.99	39.3	0.79	2.02	0.02	CLAYEY SANDY SILT&SILT
9.05	39.04	0.79	2.01	0.02	CLAYEY SANDY SILT&SILT
9.12	39.33	0.78	1.97	0.02	CLAYEY SANDY SILT&SILT
9.18	39.27	0.77	1.95	0.02	CLAYEY SANDY SILT&SILT
9.25	39.27	0.77	1.95	0.02	CLAYEY SANDY SILT&SILT
9.32	39.43	0.79	2	0.02	CLAYEY SANDY SILT&SILT
9.38	39.46	0.8	2.05	0.01	CLAYEY SANDY SILT&SILT
9.45	39.81	0.82	2.13	0.01	CLAYEY SANDY SILT&SILT
9.51	39.68	0.84	2.23	0.01	CLAYEY SANDY SILT&SILT
9.58	39.55	0.86	2.33	0.02	CLAYEY SANDY SILT&SILT
9.64	38.82	0.87	2.41	0.02	CLAYEY SANDY SILT&SILT
9.71	37.7	0.86	2.42	0.01	CLAYEY SANDY SILT&SILT
9.77	36.1	0.83	2.35	0.02	CLAYEY SANDY SILT&SILT
9.84	35.23	0.78	2.2	0.01	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

9.91	34.82	0.74	2.05	0.01	CLAYEY SANDY SILT&SILT
9.97	34.85	0.71	1.95	0.02	CLAYEY SANDY SILT&SILT
10.04	35.07	0.7	1.9	0.02	CLAYEY SANDY SILT&SILT
10.1	36.19	0.71	1.91	0.02	CLAYEY SANDY SILT&SILT
10.17	37.22	0.73	1.97	0.01	CLAYEY SANDY SILT&SILT
10.23	37.86	0.74	2.02	0.01	CLAYEY SANDY SILT&SILT
10.3	37.73	0.74	2.03	0.01	CLAYEY SANDY SILT&SILT
10.36	36.87	0.74	2.06	0.01	CLAYEY SANDY SILT&SILT
10.43	36.32	0.74	2.08	0	CLAYEY SANDY SILT&SILT
10.5	36	0.77	2.18	0.01	CLAYEY SANDY SILT&SILT
10.56	35.81	0.81	2.3	0.01	CLAYEY SANDY SILT&SILT
10.63	35.52	0.81	2.31	0	CLAYEY SANDY SILT&SILT
10.69	35.26	0.81	2.35	0.01	CLAYEY SANDY SILT&SILT
10.76	35.26	0.83	2.42	0	CLAYEY SANDY SILT&SILT
10.82	34.88	0.83	2.42	0	CLAYEY SANDY SILT&SILT
10.89	34.15	0.8	2.33	0	CLAYEY SANDY SILT&SILT
10.96	34.18	0.77	2.24	0	CLAYEY SANDY SILT&SILT
11.02	33.76	0.74	2.17	0	CLAYEY SANDY SILT&SILT
11.09	34.66	0.73	2.15	-0.01	CLAYEY SANDY SILT&SILT
11.15	34.79	0.74	2.19	0	CLAYEY SANDY SILT&SILT
11.22	34.63	0.74	2.23	0	CLAYEY SANDY SILT&SILT
11.28	33.95	0.74	2.26	0	CLAYEY SANDY SILT&SILT
11.35	33.28	0.77	2.38	-0.01	CLAYEY SANDY SILT&SILT
11.41	32.7	0.8	2.5	-0.01	CLAYEY SANDY SILT&SILT
11.48	32.1	0.84	2.63	-0.01	CLAYEY SANDY SILT&SILT
11.55	31.75	0.89	2.81	-0.01	CLAYEY SANDY SILT&SILT
11.61	32.06	0.92	2.89	-0.01	CLAYEY SANDY SILT&SILT
11.68	32.1	0.93	2.91	-0.01	CLAYEY SANDY SILT&SILT
11.74	32	0.93	2.87	-0.02	CLAYEY SANDY SILT&SILT
11.81	31.68	0.91	2.76	-0.01	CLAYEY SANDY SILT&SILT
11.87	31.49	0.9	2.7	0	CLAYEY SANDY SILT&SILT
11.94	31.97	0.85	2.49	0	CLAYEY SANDY SILT&SILT
12	32.96	0.84	2.44	0	CLAYEY SANDY SILT&SILT
12.07	33.99	0.87	2.51	-0.01	CLAYEY SANDY SILT&SILT
12.14	35.3	0.92	2.62	-0.01	CLAYEY SANDY SILT&SILT
12.2	35.26	0.96	2.75	-0.02	CLAYEY SANDY SILT&SILT
12.27	34.91	0.98	2.84	-0.02	CLAYEY SANDY SILT&SILT
12.33	34.56	1.01	2.91	-0.02	CLAYEY SANDY SILT&SILT
12.4	34.59	1.02	2.97	-0.03	CLAYEY SANDY SILT&SILT
12.46	34.72	1.03	3.01	-0.02	CLAYEY SANDY SILT&SILT
12.53	34.88	1.02	3.02	-0.02	CLAYEY SANDY SILT&SILT
12.6	34.4	1.02	3.08	-0.02	CLAYEY SANDY SILT&SILT
12.66	34.15	1.01	3.09	-0.03	CLAYEY SANDY SILT&SILT
12.73	33.7	1	3.13	-0.04	CLAYEY SANDY SILT&SILT
12.79	32.87	1.01	3.2	-0.04	CLAYEY SANDY SILT&SILT
12.86	32.2	1.03	3.26	-0.05	CLAYEY SANDY SILT&SILT
12.92	31.49	1.01	3.17	-0.06	CLAYEY SANDY SILT&SILT
12.99	31.17	0.98	3.05	-0.07	CLAYEY SANDY SILT&SILT
13.05	31.01	0.95	2.91	-0.05	CLAYEY SANDY SILT&SILT
13.12	31.78	0.92	2.79	-0.05	CLAYEY SANDY SILT&SILT
13.19	32.35	0.92	2.76	-0.06	CLAYEY SANDY SILT&SILT
13.25	32.8	0.92	2.74	-0.05	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

13.32	33.51	0.93	2.74	-0.06	CLAYEY SANDY SILT&SILT
13.38	33.82	0.93	2.76	-0.07	CLAYEY SANDY SILT&SILT
13.45	33.99	0.95	2.81	-0.08	CLAYEY SANDY SILT&SILT
13.51	34.02	0.96	2.86	-0.1	CLAYEY SANDY SILT&SILT
13.58	33.99	0.97	2.91	-0.13	CLAYEY SANDY SILT&SILT
13.64	34.02	0.97	2.94	-0.15	CLAYEY SANDY SILT&SILT
13.71	33.67	0.96	2.95	-0.15	CLAYEY SANDY SILT&SILT
13.78	33.31	0.94	2.93	-0.13	CLAYEY SANDY SILT&SILT
13.84	32.87	0.86	2.74	-0.13	CLAYEY SANDY SILT&SILT
13.91	32.61	0.83	2.67	-0.13	CLAYEY SANDY SILT&SILT
13.97	31.97	0.81	2.65	-0.13	CLAYEY SANDY SILT&SILT
14.04	30.95	0.81	2.7	-0.07	CLAYEY SANDY SILT&SILT
14.1	30.85	0.81	2.76	-0.14	CLAYEY SANDY SILT&SILT
14.17	30.08	0.84	2.92	-0.16	CLAYEY SANDY SILT&SILT
14.24	29.7	0.91	3.17	-0.19	CLAYEY SANDY SILT&SILT
14.3	29.03	0.95	3.35	-0.18	CLAYEY SANDY SILT&SILT
14.37	28.55	0.98	3.48	-0.18	CLAYEY SILT&SILTY CLAYS
14.43	28.13	1.01	3.6	-0.18	CLAYEY SILT&SILTY CLAYS
14.5	28.03	1.04	3.7	-0.18	CLAYEY SILT&SILTY CLAYS
14.56	28.08	1.07	3.82	-0.18	CLAYEY SILT&SILTY CLAYS
14.63	28.13	1.08	3.84	-0.17	CLAYEY SILT&SILTY CLAYS
14.69	28.18	1.09	3.86	-0.17	CLAYEY SILT&SILTY CLAYS
14.76	28.23	1.11	3.94	-0.17	CLAYEY SILT&SILTY CLAYS
14.83	28.26	1.16	4.09	-0.17	CLAYEY SILT&SILTY CLAYS
14.89	28.03	1.14	4.02	-0.17	CLAYEY SILT&SILTY CLAYS
14.96	27.55	1.17	4.16	-0.17	CLAYEY SILT&SILTY CLAYS
15.02	28.77	1.23	4.37	-0.05	CLAYEY SILT&SILTY CLAYS
15.09	28.8	1.29	4.62	-0.06	CLAYEY SILT&SILTY CLAYS
15.15	28.39	1.35	4.9	-0.08	CLAYEY SILT&SILTY CLAYS
15.22	28.03	1.4	5.09	-0.09	CLAYS
15.28	27.62	1.43	5.23	-0.08	CLAYS
15.35	27.04	1.45	5.36	-0.07	CLAYS
15.42	27.27	1.45	5.36	-0.08	CLAYS
15.48	27.3	1.44	5.36	-0.08	CLAYS
15.55	27.14	1.42	5.33	-0.07	CLAYS
15.61	27.27	1.41	5.3	-0.07	CLAYS
15.68	26.98	1.4	5.32	-0.08	CLAYS
15.74	26.56	1.4	5.25	-0.07	CLAYS
15.81	26.31	1.39	5.19	-0.07	CLAYS
15.88	26.24	1.35	5	-0.07	CLAYS
15.94	26.08	1.29	4.72	-0.07	CLAYEY SILT&SILTY CLAYS
16.01	25.99	1.31	4.76	-0.07	CLAYEY SILT&SILTY CLAYS
16.07	28.23	1.34	4.84	-0.08	CLAYEY SILT&SILTY CLAYS
16.14	28.16	1.37	5	-0.08	CLAYS
16.2	27.62	1.42	5.19	-0.09	CLAYS
16.27	27.33	1.47	5.41	-0.1	CLAYS
16.33	27.39	1.51	5.6	-0.09	CLAYS
16.4	27.45	1.54	5.72	-0.09	CLAYS
16.47	27.04	1.53	5.73	-0.1	CLAYS
16.53	26.85	1.54	5.77	-0.08	CLAYS
16.6	26.81	1.52	5.73	-0.1	CLAYS
16.66	26.72	1.52	5.73	-0.1	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	26.53	1.5	5.57	-0.09	CLAYS
16.79	26.34	1.39	5.1	-0.09	CLAYS
16.86	26.37	1.29	4.67	-0.09	CLAYEY SILT&SILTY CLAYS
16.92	26.47	1.19	4.25	-0.08	CLAYEY SILT&SILTY CLAYS
16.99	26.37	1.25	4.48	-0.09	CLAYEY SILT&SILTY CLAYS
17.06	29.5	1.32	4.69	-0.1	CLAYEY SILT&SILTY CLAYS
17.12	28.93	1.38	4.99	-0.1	CLAYEY SILT&SILTY CLAYS
17.19	28.03	1.44	5.3	-0.1	CLAYS
17.25	27.91	1.5	5.58	-0.1	CLAYS
17.32	27.33	1.52	5.73	-0.1	CLAYS
17.38	26.88	1.52	5.79	-0.09	CLAYS
17.45	26.72	1.49	5.75	-0.09	CLAYS
17.52	26.66	1.47	5.74	-0.11	CLAYS
17.58	26.21	1.46	5.72	-0.1	CLAYS
17.65	25.76	1.46	5.71	-0.1	CLAYS
17.71	25.22	1.43	5.46	-0.1	CLAYS
17.78	25.06	1.4	5.17	-0.09	CLAYS
17.84	25.06	1.37	4.98	-0.09	CLAYS
17.91	25.57	1.34	4.76	-0.1	CLAYEY SILT&SILTY CLAYS
17.97	26.34	1.38	4.87	-0.1	CLAYEY SILT&SILTY CLAYS
18.04	30.08	1.44	5.06	-0.1	CLAYS
18.11	29.86	1.51	5.42	-0.1	CLAYS
18.17	28.74	1.58	5.77	-0.11	CLAYS
18.24	28	1.63	6.06	-0.1	CLAYS
18.3	27.52	1.65	6.16	-0.11	CLAYS
18.37	26.91	1.63	6.11	-0.11	CLAYS
18.43	26.34	1.59	5.98	-0.11	CLAYS
18.5	26.4	1.56	5.86	-0.11	CLAYS
18.56	26.5	1.54	5.76	-0.1	CLAYS
18.63	26.66	1.54	5.72	-0.11	CLAYS
18.7	26.72	1.55	5.74	-0.11	CLAYS
18.76	26.81	1.56	5.7	-0.11	CLAYS
18.83	26.63	1.56	5.65	-0.1	CLAYS
18.89	27.3	1.5	5.44	-0.11	CLAYS
18.96	27.97	1.46	5.34	-0.11	CLAYS
19.02	27.01	1.46	5.47	-0.1	CLAYS
19.09	28.61	1.46	5.59	-0.13	CLAYS
19.16	27.84	1.47	5.85	-0.16	CLAYS
19.22	26.53	1.51	6.21	-0.16	CLAYS
19.29	25.47	1.55	6.53	-0.16	CLAYS
19.35	24.22	1.57	6.81	-0.16	CLAYS
19.42	23.55	1.63	7.19	-0.16	CLAYS
19.48	23.11	1.68	7.55	-0.16	CLAYS
19.55	22.85	1.69	7.76	-0.15	CLAYS
19.61	22.66	1.65	7.71	-0.15	CLAYS
19.68	22.08	1.6	7.63	-0.15	CLAYS
19.75	21.6	1.56	7.46	-0.15	CLAYS
19.81	21.32	1.52	7.29	-0.16	CLAYS
19.88	20.58	1.43	6.86	-0.15	CLAYS
19.94	20.19	1.34	6.38	-0.15	CLAYS
20.01	20.35	1.32	6.21	-0.15	CLAYS
20.07	21.5	1.3	6.09	-0.16	CLAYS

US EPA ARCHIVE DOCUMENT

US EPA ARCHIVE DOCUMENT

20.14	21.35	1.28	6.09	-0.15	CLAYS
20.2	21.38	1.31	6.35	-0.16	CLAYS
20.27	21.44	1.37	6.81	-0.16	CLAYS
20.34	21.35	1.4	7.13	-0.15	CLAYS
20.4	20.68	1.41	7.39	-0.15	CLAYS
20.47	19.94	1.38	7.44	-0.16	CLAYS
20.53	19.13	1.34	7.32	-0.15	CLAYS
20.6	18.5	1.27	7.04	-0.15	CLAYS
20.66	18.24	1.22	6.75	-0.15	CLAYS
20.73	17.98	1.15	6.29	-0.15	CLAYS
20.8	17.89	1.09	5.9	-0.16	CLAYS
20.86	17.95	1.11	5.96	-0.16	CLAYS
20.93	18.05	1.06	5.64	-0.15	CLAYS
20.99	18.05	1.04	5.58	-0.15	CLAYS
21.06	19.68	1.05	5.64	-0.15	CLAYS
21.12	19.58	1.05	5.81	-0.16	CLAYS
21.19	18.85	1.06	6.02	-0.15	CLAYS
21.25	18.15	1.07	6.2	-0.15	CLAYS
21.32	17.7	1.06	6.19	-0.16	CLAYS
21.39	17.34	1	5.86	-0.16	CLAYS
21.45	16.93	0.94	5.54	-0.15	CLAYS
21.52	16.93	0.87	5.15	-0.16	CLAYS
21.58	17.06	0.81	4.83	-0.15	CLAYS
21.65	16.9	0.76	4.61	-0.15	CLAYS
21.71	16.96	0.74	4.45	-0.15	CLAYEY SILT&SILTY CLAYS
21.78	16.84	0.71	4.35	-0.16	CLAYEY SILT&SILTY CLAYS
21.84	16.61	0.62	3.84	-0.16	CLAYEY SILT&SILTY CLAYS
21.91	16.23	0.64	3.99	-0.16	CLAYEY SILT&SILTY CLAYS
21.98	15.71	0.63	4.01	-0.16	CLAYEY SILT&SILTY CLAYS
22.04	16.8	0.63	4.02	-0.16	CLAYEY SILT&SILTY CLAYS
22.11	16.16	0.63	4.11	-0.15	CLAYEY SILT&SILTY CLAYS
22.17	15.59	0.66	4.29	-0.15	CLAYEY SILT&SILTY CLAYS
22.24	15.39	0.67	4.35	-0.16	CLAYEY SILT&SILTY CLAYS
22.3	15.2	0.64	4.16	-0.15	CLAYEY SILT&SILTY CLAYS
22.37	15.2	0.61	3.91	-0.16	CLAYEY SILT&SILTY CLAYS
22.44	15.07	0.58	3.66	-0.15	CLAYEY SILT&SILTY CLAYS
22.5	15.52	0.55	3.47	-0.16	CLAYEY SILT&SILTY CLAYS
22.57	15.59	0.53	3.34	-0.15	CLAYEY SILT&SILTY CLAYS
22.63	15.87	0.53	3.31	-0.16	CLAYEY SILT&SILTY CLAYS
22.7	16	0.54	3.33	-0.15	CLAYEY SILT&SILTY CLAYS
22.76	16.19	0.57	3.46	-0.15	CLAYEY SILT&SILTY CLAYS
22.83	16.23	0.5	3.06	-0.15	CLAYEY SILT&SILTY CLAYS
22.89	16.26	0.58	3.52	-0.15	CLAYEY SILT&SILTY CLAYS
22.96	16.1	0.58	3.54	-0.16	CLAYEY SILT&SILTY CLAYS
23.03	16.99	0.59	3.57	-0.16	CLAYEY SILT&SILTY CLAYS
23.09	16.64	0.61	3.69	-0.16	CLAYEY SILT&SILTY CLAYS
23.16	16.35	0.64	3.86	-0.16	CLAYEY SILT&SILTY CLAYS
23.22	16.42	0.64	3.81	-0.15	CLAYEY SILT&SILTY CLAYS
23.29	16.45	0.64	3.78	-0.15	CLAYEY SILT&SILTY CLAYS
23.35	16.48	0.65	3.72	-0.16	CLAYEY SILT&SILTY CLAYS
23.42	16.48	0.66	3.66	-0.15	CLAYEY SILT&SILTY CLAYS
23.48	16.9	0.68	3.59	-0.16	CLAYEY SILT&SILTY CLAYS

23.55	17.63	0.69	3.51	-0.15	CLAYEY SILT&SILTY CLAYS
23.62	18.34	0.72	3.51	-0.15	CLAYEY SILT&SILTY CLAYS
23.68	19.33	0.77	3.67	-0.16	CLAYEY SILT&SILTY CLAYS
23.75	20	0.83	3.83	-0.16	CLAYEY SILT&SILTY CLAYS
23.81	20.68	0.89	4.01	-0.16	CLAYEY SILT&SILTY CLAYS
23.88	21.69	0.93	4.2	-0.16	CLAYEY SILT&SILTY CLAYS
23.94	22.4	0.96	4.31	-0.16	CLAYEY SILT&SILTY CLAYS
24.01	22.47	1.01	4.55	-0.16	CLAYEY SILT&SILTY CLAYS
24.08	23.01	1.06	4.75	-0.16	CLAYEY SILT&SILTY CLAYS
24.14	22.24	1.1	4.88	-0.18	CLAYS
24.21	21.54	1.11	4.8	-0.17	CLAYS
24.27	21.44	1.15	4.78	-0.18	CLAYS
24.34	22.08	1.2	4.8	-0.18	CLAYS
24.4	23.46	1.23	4.73	-0.17	CLAYEY SILT&SILTY CLAYS
24.47	24.86	1.27	4.71	-0.18	CLAYEY SILT&SILTY CLAYS
24.53	26.08	1.31	4.72	-0.18	CLAYEY SILT&SILTY CLAYS
24.6	26.53	1.36	4.77	-0.18	CLAYEY SILT&SILTY CLAYS
24.67	27.17	1.43	4.88	-0.19	CLAYEY SILT&SILTY CLAYS
24.73	28.16	1.51	5.01	-0.19	CLAYS
24.8	28.83	1.59	5.13	-0.18	CLAYS
24.86	29.76	1.62	5.09	-0.18	CLAYS
24.93	30.82	1.62	4.96	-0.19	CLAYEY SILT&SILTY CLAYS
24.99	31.49	1.68	5.02	-0.18	CLAYEY SILT&SILTY CLAYS
25.06	31.49	1.75	5.14	-0.18	CLAYS
25.12	33.31	1.82	5.26	-0.18	CLAYS
25.19	34.46	1.87	5.41	-0.19	CLAYS
25.26	35.04	1.92	5.57	-0.18	CLAYS
25.32	35.07	1.95	5.71	-0.17	CLAYS
25.39	34.98	2.02	5.92	-0.18	CLAYS
25.45	34.15	2.01	5.9	-0.17	CLAYS
25.52	33.63	1.93	5.66	-0.17	CLAYS
25.58	33.7	1.82	5.33	-0.16	CLAYS
25.65	33.82	1.71	4.99	-0.17	CLAYEY SILT&SILTY CLAYS
25.72	34.08	1.58	4.67	-0.17	CLAYEY SILT&SILTY CLAYS
25.78	34.69	1.46	4.34	-0.17	CLAYEY SILT&SILTY CLAYS
25.85	34.66	1.19	3.56	-0.17	CLAYEY SILT&SILTY CLAYS
25.91	34.18	1.07	3.21	-0.17	CLAYEY SANDY SILT&SILT
25.98	33.85	0.89	2.67	-0.16	CLAYEY SANDY SILT&SILT
26.04	32.1	0.73	2.15	-0.12	CLAYEY SANDY SILT&SILT
26.11	32.58	0.61	1.76	-0.12	CLAYEY SANDY SILT&SILT
26.17	33.06	0.52	1.46	-0.14	SILTY SAND
26.24	33.6	0.46	1.25	-0.13	SILTY SAND
26.31	35.36	0.44	1.17	-0.14	SILTY SAND
26.37	36.83	0.46	1.2	-0.13	SILTY SAND
26.44	37.73	0.5	1.28	-0.13	SILTY SAND
26.5	38.43	0.57	1.45	-0.13	SILTY SAND
26.57	39.01	0.67	1.68	-0.13	SILTY SAND
26.63	39.74	0.79	1.98	-0.14	CLAYEY SANDY SILT&SILT
26.7	39.97	0.91	2.24	-0.15	CLAYEY SANDY SILT&SILT
26.76	39.84	1.01	2.41	-0.15	CLAYEY SANDY SILT&SILT
26.83	39.58	1.08	2.46	-0.14	CLAYEY SANDY SILT&SILT
26.9	39.65	1.07	2.29	-0.15	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

26.96	40.83	1.07	2.11	-0.14	CLAYEY SANDY SILT&SILT
27.03	43.39	1.06	1.91	-0.13	SILTY SAND
27.09	47.52	1.01	1.66	-0.14	SILTY SAND
27.16	51.9	0.93	1.41	-0.14	SILTY SAND
27.22	57.57	0.86	1.2	-0.14	SILTY SAND
27.29	63.62	0.76	0.99	-0.13	SILTY SAND
27.36	69.35	0.66	0.82	-0.12	SANDS
27.42	74.56	0.57	0.67	-0.12	SANDS
27.49	79.36	0.51	0.57	-0.13	SANDS
27.55	83.46	0.49	0.52	-0.12	SANDS
27.62	87.78	0.49	0.5	-0.13	SANDS
27.68	91.68	0.51	0.5	-0.12	SANDS
27.75	95.46	0.56	0.53	-0.12	SANDS
27.81	99.46	0.49	0.45	-0.12	SANDS
27.88	103.75	0.43	0.38	-0.12	SANDS
27.95	108.23	0.53	0.45	-0.12	SANDS
28.01	111.67	0.61	0.5	-0.12	SANDS
28.08	115.12	0.68	0.53	-0.1	SANDS
28.14	118.56	0.76	0.58	-0.12	SANDS
28.21	123.94	0.85	0.62	-0.12	SANDS
28.27	128.65	0.92	0.65	-0.1	SANDS
28.34	133.7	0.97	0.67	-0.1	SANDS
28.4	138.86	1.04	0.7	-0.11	SANDS
28.47	143.88	1.11	0.73	-0.1	SANDS
28.54	148.9	1.17	0.76	-0.11	SANDS
28.6	152.64	1.22	0.79	-0.1	SANDS
28.67	154.79	1.28	0.83	-0.1	SANDS
28.73	155.11	1.34	0.88	-0.1	SANDS
28.8	154.31	1.39	0.93	-0.1	SANDS
28.86	153	1.46	0.99	-0.1	SANDS
28.93	152.04	1.47	1.01	-0.09	SANDS
29	150.86	1.49	1.04	-0.1	SANDS
29.06	145.48	1.52	1.08	-0.09	SANDS
29.13	145.26	1.55	1.14	-0.09	SANDS
29.19	142.57	1.6	1.2	-0.09	SANDS
29.26	139.11	1.64	1.26	-0.09	SANDS
29.32	135.27	1.66	1.32	-0.09	SANDS
29.39	131.36	1.67	1.38	-0.08	SANDS
29.45	127.59	1.66	1.41	-0.08	SANDS
29.52	123.81	1.63	1.44	-0.08	SANDS
29.59	119.53	1.6	1.47	-0.09	SANDS
29.65	115.11	1.57	1.51	-0.09	SANDS
29.72	110.95	1.53	1.56	-0.09	SANDS
29.78	107.14	1.21	1.3	-0.09	SANDS
29.85	102.92	0.89	1.01	-0.09	SANDS
29.91	98.56	0.92	1.09	-0.09	SANDS
29.98	88.64	0.97	1.2	-0.08	SANDS
30.04	78.72	0.96	1.24	-0.08	SILTY SAND
30.11	82.82	0.94	1.24	-0.07	SANDS
30.18	80	0.93	1.28	-0.08	SILTY SAND
30.24	77.64	0.93	1.35	-0.08	SILTY SAND
30.31	74.79	0.92	1.43	-0.08	SILTY SAND

US EPA ARCHIVE DOCUMENT

30.37	72.01	0.91	1.56	-0.08	SILTY SAND
30.44	68.42	0.93	1.77	-0.08	SILTY SAND
30.5	63.39	0.97	2.13	-0.08	SILTY SAND
30.57	56.45	1.08	2.76	-0.08	CLAYEY SANDY SILT&SILT
30.64	48.7	1.27	3.77	-0.08	CLAYEY SANDY SILT&SILT
30.7	41.41	1.5	5.02	-0.08	CLAYEY SILT&SILTY CLAYS
30.77	35.04	1.66	6.21	-0.08	CLAYS
30.83	28.83	1.57	6.38	-0.08	CLAYS
30.9	24.83	1.62	6.98	-0.09	CLAYS
30.96	23.17	1.59	7.11	-0.09	CLAYS
31.03	25.57	1.6	7.39	-0.1	CLAYS
31.09	23.27	1.58	7.66	-0.1	CLAYS
31.16	21.99	1.48	7.36	-0.11	CLAYS
31.23	20.64	1.38	6.79	-0.11	CLAYS
31.29	19.52	1.3	6.11	-0.11	CLAYS
31.36	18.82	1.23	5.33	-0.11	CLAYS
31.42	19.17	1.15	4.49	-0.11	CLAYEY SILT&SILTY CLAYS
31.49	20.64	1.08	3.7	-0.1	CLAYEY SILT&SILTY CLAYS
31.55	22.85	1.02	3.08	-0.1	CLAYEY SANDY SILT&SILT
31.62	26.14	0.99	2.63	-0.11	CLAYEY SANDY SILT&SILT
31.68	30.24	0.99	2.37	-0.1	CLAYEY SANDY SILT&SILT
31.75	35.07	0.96	2.12	-0.11	CLAYEY SANDY SILT&SILT
31.82	40.13	0.92	1.89	-0.11	SILTY SAND
31.88	44.77	0.88	1.73	-0.1	SILTY SAND
31.95	48.61	0.83	1.58	-0.12	SILTY SAND
32.01	51.14	0.79	1.48	-0.15	SILTY SAND
32.08	52.61	0.76	1.41	-0.14	SILTY SAND
32.14	54.05	0.73	1.35	-0.15	SILTY SAND
32.21	54.79	0.71	1.3	-0.16	SILTY SAND
32.28	54.5	0.69	1.27	-0.15	SILTY SAND
32.34	54.31	0.67	1.24	-0.15	SILTY SAND
32.41	53.83	0.66	1.24	-0.14	SILTY SAND
32.47	53.99	0.65	1.26	-0.15	SILTY SAND
32.54	54.15	0.66	1.34	-0.14	SILTY SAND
32.6	54.02	0.68	1.48	-0.14	SILTY SAND
32.67	52.51	0.75	1.79	-0.15	SILTY SAND
32.73	49.51	0.87	2.28	-0.14	CLAYEY SANDY SILT&SILT
32.8	45.03	0.64	1.88	-0.15	SILTY SAND
32.87	39.49	0.41	1.34	-0.14	SILTY SAND
32.93	34.4	0.55	1.97	-0.14	CLAYEY SANDY SILT&SILT
33	31.4	0.78	2.96	-0.14	CLAYEY SANDY SILT&SILT
33.06	28.41	0.95	3.84	-0.43	CLAYEY SILT&SILTY CLAYS
33.13	25.41	1.07	4.4	-0.43	CLAYEY SILT&SILTY CLAYS
33.19	24.89	1.23	5.1	-0.42	CLAYS
33.26	23.78	1.41	5.82	-0.41	CLAYS
33.32	23.39	1.51	6.16	-0.41	CLAYS
33.39	23.49	1.57	6.3	-0.4	CLAYS
33.46	24.35	1.55	6.14	-0.41	CLAYS
33.52	24.77	1.55	6.1	-0.4	CLAYS
33.59	25.25	1.62	6.34	-0.4	CLAYS
33.65	25.63	1.66	6.47	-0.4	CLAYS
33.72	25.76	1.64	6.26	-0.4	CLAYS

US EPA ARCHIVE DOCUMENT

33.78	25.63	1.63	6.14	-0.4	CLAYS
33.85	25.5	1.58	5.9	-0.39	CLAYS
33.92	25.7	1.63	6.03	-0.4	CLAYS
33.98	25.5	1.72	6.28	-0.4	CLAYS
34.05	29.06	1.75	6.32	-0.37	CLAYS
34.11	28.13	1.77	6.35	-0.37	CLAYS
34.18	26.98	1.82	6.36	-0.37	CLAYS
34.24	27.08	1.78	5.86	-0.37	CLAYS
34.31	27.3	1.61	4.98	-0.37	CLAYS
34.37	27.52	1.54	4.45	-0.36	CLAYEY SILT&SILTY CLAYS
34.44	29.79	1.5	4.06	-0.36	CLAYEY SILT&SILTY CLAYS
34.51	33.38	1.51	3.9	-0.36	CLAYEY SILT&SILTY CLAYS
34.57	36.83	1.52	3.77	-0.36	CLAYEY SILT&SILTY CLAYS
34.64	39.49	1.61	3.93	-0.37	CLAYEY SILT&SILTY CLAYS
34.7	40.32	1.68	4.06	-0.36	CLAYEY SILT&SILTY CLAYS
34.77	41.28	1.82	4.4	-0.37	CLAYEY SILT&SILTY CLAYS
34.83	41.44	2.09	5.1	-0.37	CLAYEY SILT&SILTY CLAYS
34.9	42.34	2.33	5.74	-0.37	CLAYS
34.96	41.5	2.55	6.39	-0.36	CLAYS
35.03	41.09	2.65	6.8	-0.37	CLAYS
35.1	40.16	2.63	6.97	-0.37	CLAYS
35.16	39.46	2.58	7.07	-0.37	CLAYS
35.23	38.63	2.62	7.39	-0.37	CLAYS
35.29	38.02	2.53	7.37	-0.36	CLAYS
35.36	36.61	2.4	7.28	-0.37	CLAYS
35.42	33.82	2.42	7.59	-0.37	CLAYS
35.49	32.8	2.48	7.93	-0.37	CLAYS
35.56	32.54	2.43	7.95	-0.36	CLAYS
35.62	31.78	2.3	7.89	-0.36	CLAYS
35.69	30.66	2.15	7.77	-0.36	CLAYS
35.75	29.95	2.11	7.79	-0.37	CLAYS
35.82	29.76	1.94	7.43	-0.36	CLAYS
35.88	28.48	1.8	7.19	-0.36	CLAYS
35.95	24.26	1.73	7.06	-0.37	CLAYS
36.01	23.11	1.75	6.86	-0.37	CLAYS
36.08	26.66	1.62	5.98	-0.36	CLAYS
36.15	24.26	1.5	5.23	-0.37	CLAYS
36.21	23.14	1.55	4.98	-0.36	CLAYS
36.28	25.79	1.29	3.81	-0.37	CLAYEY SILT&SILTY CLAYS
36.34	29.95	1.07	2.94	-0.36	CLAYEY SANDY SILT&SILT
36.41	32.48	1.12	2.95	-0.37	CLAYEY SANDY SILT&SILT
36.47	36.04	1.28	3.26	-0.36	CLAYEY SANDY SILT&SILT
36.54	39.14	1.45	3.64	-0.36	CLAYEY SANDY SILT&SILT
36.6	40.19	1.64	4.12	-0.36	CLAYEY SILT&SILTY CLAYS
36.67	40.04	1.79	4.53	-0.36	CLAYEY SILT&SILTY CLAYS
36.74	39.68	2.09	5.24	-0.35	CLAYEY SILT&SILTY CLAYS
36.8	39.58	2.34	5.81	-0.36	CLAYS
36.87	40.1	2.56	6.24	-0.36	CLAYS
36.93	38.94	2.46	5.91	-0.35	CLAYS
37	39.27	2.33	5.45	-0.36	CLAYS
37.06	41.35	2.23	5.1	-0.36	CLAYEY SILT&SILTY CLAYS
37.13	42.18	2.23	5.03	-0.36	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

37.2	43.78	2.28	5.07	-0.36	CLAYEY SILT&SILTY CLAYS
37.26	44.58	2.32	5.11	-0.35	CLAYEY SILT&SILTY CLAYS
37.33	45.12	2.35	5.14	-0.36	CLAYEY SILT&SILTY CLAYS
37.39	45.31	2.43	5.29	-0.36	CLAYEY SILT&SILTY CLAYS
37.46	45.63	2.41	5.19	-0.36	CLAYEY SILT&SILTY CLAYS
37.52	45.76	2.41	5.13	-0.35	CLAYEY SILT&SILTY CLAYS
37.59	45.73	2.32	4.86	-0.35	CLAYEY SILT&SILTY CLAYS
37.65	46.91	2.24	4.61	-0.36	CLAYEY SILT&SILTY CLAYS
37.72	46.53	2.25	4.58	-0.35	CLAYEY SILT&SILTY CLAYS
37.79	48.1	2.22	4.45	-0.36	CLAYEY SILT&SILTY CLAYS
37.85	49.28	2.44	4.84	-0.36	CLAYEY SILT&SILTY CLAYS
37.92	49.6	2.65	5.25	-0.35	CLAYEY SILT&SILTY CLAYS
37.98	50.43	2.62	5.19	-0.35	CLAYEY SILT&SILTY CLAYS
38.05	50.92	2.68	5.34	-0.35	CLAYEY SILT&SILTY CLAYS
38.11	50.98	2.7	5.42	-0.36	CLAYEY SILT&SILTY CLAYS
38.18	51.04	2.66	5.39	-0.35	CLAYEY SILT&SILTY CLAYS
38.24	50.05	2.54	5.15	-0.35	CLAYEY SILT&SILTY CLAYS
38.31	48.74	2.46	4.98	-0.35	CLAYEY SILT&SILTY CLAYS
38.38	48.67	2.36	4.72	-0.35	CLAYEY SILT&SILTY CLAYS
38.44	48.87	2.28	4.49	-0.34	CLAYEY SILT&SILTY CLAYS
38.51	49.12	2.24	4.33	-0.34	CLAYEY SILT&SILTY CLAYS
38.57	50.34	2.1	4.01	-0.35	CLAYEY SILT&SILTY CLAYS
38.64	51.2	2.06	3.89	-0.34	CLAYEY SANDY SILT&SILT
38.7	51.62	2.1	3.91	-0.34	CLAYEY SANDY SILT&SILT
38.77	53.73	2.09	3.88	-0.35	CLAYEY SANDY SILT&SILT
38.84	53.99	2.49	4.66	-0.34	CLAYEY SILT&SILTY CLAYS
38.9	53.57	2.45	4.65	-0.35	CLAYEY SILT&SILTY CLAYS
38.97	53.18	2.46	4.78	-0.35	CLAYEY SILT&SILTY CLAYS
39.03	55.59	2.44	4.9	-0.35	CLAYEY SILT&SILTY CLAYS
39.1	53.35	2.4	5.07	-0.34	CLAYEY SILT&SILTY CLAYS
39.16	51.36	2.38	5.25	-0.34	CLAYEY SILT&SILTY CLAYS
39.23	49.15	2.23	5.17	-0.34	CLAYEY SILT&SILTY CLAYS
39.29	45.86	2.11	5.12	-0.34	CLAYEY SILT&SILTY CLAYS
39.36	42.95	2.03	5.12	-0.35	CLAYEY SILT&SILTY CLAYS
39.43	41.7	1.95	5.08	-0.34	CLAYEY SILT&SILTY CLAYS
39.49	40.86	1.84	4.97	-0.34	CLAYEY SILT&SILTY CLAYS
39.56	38.82	1.86	5.23	-0.34	CLAYEY SILT&SILTY CLAYS
39.62	37.47	1.79	5.22	-0.34	CLAYEY SILT&SILTY CLAYS
39.69	36.8	1.64	4.88	-0.34	CLAYEY SILT&SILTY CLAYS
39.75	34.75	1.55	4.79	-0.35	CLAYEY SILT&SILTY CLAYS
39.82	33.25	1.62	5.16	-0.34	CLAYS
39.88	32.45	1.66	5.47	-0.34	CLAYS
39.95	31.11	1.73	5.93	-0.34	CLAYS
40.02	32.67	1.74	6.21	-0.34	CLAYS
40.08	30.56	1.73	6.54	-0.35	CLAYS
40.15	28.61	1.73	6.84	-0.34	CLAYS
40.21	26.98	1.68	6.81	-0.35	CLAYS
40.28	25.44	1.55	6.32	-0.33	CLAYS
40.34	24.03	1.39	5.49	-0.34	CLAYS
40.41	23.36	1.19	4.48	-0.34	CLAYEY SILT&SILTY CLAYS
40.48	23.43	1.01	3.6	-0.34	CLAYEY SILT&SILTY CLAYS
40.54	24.51	0.89	3.01	-0.33	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

40.61	26.88	0.86	2.75	-0.34	CLAYEY SANDY SILT&SILT
40.67	29.47	0.85	2.61	-0.34	CLAYEY SANDY SILT&SILT
40.74	31.29	0.9	2.67	-0.34	CLAYEY SANDY SILT&SILT
40.8	32.03	1.04	3.01	-0.33	CLAYEY SANDY SILT&SILT
40.87	33.25	1.39	3.91	-0.34	CLAYEY SILT&SILTY CLAYS
40.93	34.59	1.5	4.18	-0.33	CLAYEY SILT&SILTY CLAYS
41	35.2	1.61	4.46	-0.33	CLAYEY SILT&SILTY CLAYS
41.07	35.71	1.79	4.98	-0.33	CLAYEY SILT&SILTY CLAYS
41.13	37.09	1.91	5.36	-0.33	CLAYS
41.2	37.06	2.06	5.83	-0.34	CLAYS
41.26	36.32	2.12	6.01	-0.34	CLAYS
41.33	35.46	2.1	5.94	-0.34	CLAYS
41.39	34.31	2.04	5.7	-0.33	CLAYS
41.46	34.02	1.98	5.43	-0.33	CLAYS
41.52	35.1	1.92	5.16	-0.33	CLAYEY SILT&SILTY CLAYS
41.59	36.32	1.87	4.9	-0.33	CLAYEY SILT&SILTY CLAYS
41.66	36.83	1.86	4.78	-0.33	CLAYEY SILT&SILTY CLAYS
41.72	37.7	1.85	4.64	-0.34	CLAYEY SILT&SILTY CLAYS
41.79	38.72	1.84	4.49	-0.33	CLAYEY SILT&SILTY CLAYS
41.85	39.04	2.23	5.33	-0.33	CLAYS
41.92	39.91	2.18	5.08	-0.32	CLAYEY SILT&SILTY CLAYS
41.98	41.06	2.16	4.98	-0.33	CLAYEY SILT&SILTY CLAYS
42.05	43.3	2.2	5.03	-0.32	CLAYEY SILT&SILTY CLAYS
42.12	44.03	2.27	5.17	-0.33	CLAYEY SILT&SILTY CLAYS
42.18	44.29	2.37	5.39	-0.32	CLAYEY SILT&SILTY CLAYS
42.25	44.48	2.39	5.42	-0.33	CLAYEY SILT&SILTY CLAYS
42.31	43.84	2.39	5.34	-0.33	CLAYEY SILT&SILTY CLAYS
42.38	42.88	2.42	5.3	-0.32	CLAYEY SILT&SILTY CLAYS
42.44	43.68	2.35	5.02	-0.32	CLAYEY SILT&SILTY CLAYS
42.51	44.64	2.28	4.75	-0.32	CLAYEY SILT&SILTY CLAYS
42.57	45.67	2.23	4.54	-0.32	CLAYEY SILT&SILTY CLAYS
42.64	47.55	2.19	4.36	-0.33	CLAYEY SILT&SILTY CLAYS
42.71	49.03	2.2	4.26	-0.32	CLAYEY SILT&SILTY CLAYS
42.77	49.89	2.22	4.23	-0.32	CLAYEY SILT&SILTY CLAYS
42.84	50.75	2.31	4.32	-0.33	CLAYEY SILT&SILTY CLAYS
42.9	51.62	2.52	4.59	-0.33	CLAYEY SILT&SILTY CLAYS
42.97	52.77	2.47	4.39	-0.32	CLAYEY SILT&SILTY CLAYS
43.03	55.07	2.47	4.25	-0.32	CLAYEY SILT&SILTY CLAYS
43.1	54.59	2.48	4.15	-0.32	CLAYEY SILT&SILTY CLAYS
43.16	56.29	2.55	4.14	-0.32	CLAYEY SILT&SILTY CLAYS
43.23	58.37	2.65	4.2	-0.31	CLAYEY SILT&SILTY CLAYS
43.3	60.86	2.83	4.41	-0.31	CLAYEY SILT&SILTY CLAYS
43.36	63.3	2.98	4.6	-0.31	CLAYEY SILT&SILTY CLAYS
43.43	64.74	3.12	4.79	-0.31	CLAYEY SILT&SILTY CLAYS
43.49	65.25	3.26	4.99	-0.31	CLAYEY SILT&SILTY CLAYS
43.56	65.48	3.44	5.24	-0.3	CLAYEY SILT&SILTY CLAYS
43.62	65.09	3.55	5.38	-0.32	CLAYEY SILT&SILTY CLAYS
43.69	64.84	3.6	5.36	-0.3	CLAYEY SILT&SILTY CLAYS
43.76	65.57	3.58	5.24	-0.31	CLAYEY SILT&SILTY CLAYS
43.82	66.02	4.17	6.03	-0.31	CLAYS
43.89	66.79	4.09	5.88	-0.31	CLAYS
43.95	67.39	4.22	6.04	-0.3	CLAYS

US EPA ARCHIVE DOCUMENT

44.02	72.52	4.33	6.2	-0.3	CLAYS
44.08	71.88	4.5	6.51	-0.3	CLAYS
44.15	70.15	4.7	6.84	-0.29	CLAYS
44.21	69	4.87	7.04	-0.29	CLAYS
44.28	68.17	4.95	7.08	-0.3	CLAYS
44.35	67.72	4.88	6.82	-0.29	CLAYS
44.41	67.84	4.85	6.58	-0.29	CLAYS
44.48	69.99	4.78	6.26	-0.3	CLAYS
44.54	71.81	4.74	5.97	-0.29	CLAYS
44.61	74.02	4.72	5.69	-0.28	CLAYEY SILT&SILTY CLAYS
44.67	78.05	4.71	5.42	-0.29	CLAYEY SILT&SILTY CLAYS
44.74	80.64	4.8	5.22	-0.28	CLAYEY SILT&SILTY CLAYS
44.8	84.17	4.86	4.95	-0.29	CLAYEY SILT&SILTY CLAYS
44.87	87.56	4.75	4.54	-0.28	CLAYEY SILT&SILTY CLAYS
44.94	92.68	4.64	4.18	-0.29	CLAYEY SANDY SILT&SILT
45	98.37	4.33	3.69	-0.29	CLAYEY SANDY SILT&SILT
45.07	108.26	4.01	3.27	-0.27	CLAYEY SANDY SILT&SILT
45.13	117.7	3.73	2.92	-0.28	SILTY SAND
45.2	122.89	3.54	2.7	-0.27	SILTY SAND
45.26	126.63	3.45	2.57	-0.27	SILTY SAND
45.33	129.32	3.39	2.47	-0.27	SILTY SAND
45.4	131.91	3.21	2.3	-0.26	SILTY SAND
45.46	135.84	3.06	2.17	-0.27	SILTY SAND
45.53	139.84	2.9	2.06	-0.26	SILTY SAND
45.59	143.21	2.84	2.04	-0.27	SILTY SAND
45.66	144.2	2.77	2.02	-0.27	SILTY SAND
45.72	143.17	2.65	1.98	-0.27	SILTY SAND
45.79	139.59	2.47	1.9	-0.26	SILTY SAND
45.85	135.05	1.58	1.23	-0.26	SANDS
45.92	131.08	1.53	1.21	-0.26	SANDS
45.99	128.43	1.51	1.19	-0.27	SANDS
46.05	125.79	1.51	1.19	-0.23	SANDS
46.12	123.14	1.52	1.19	-0.21	SANDS
46.18	124.74	1.51	1.17	-0.21	SANDS
46.25	127.78	1.58	1.2	-0.22	SANDS
46.31	130.28	1.83	1.36	-0.21	SANDS
46.38	130.41	2.07	1.49	-0.21	SANDS
46.45	129.22	2.25	1.59	-0.2	SANDS
46.51	134.34	2.4	1.65	-0.2	SANDS
46.58	140.17	2.51	1.7	-0.2	SANDS
46.64	146.02	2.58	1.73	-0.21	SANDS
46.71	150.79	2.61	1.77	-0.2	SANDS
46.77	152.1	2.54	1.74	-0.2	SANDS
46.84	151.02	2.4	1.68	-0.2	SANDS
46.9	148.58	2.18	1.56	-0.21	SANDS
46.97	145.19	2.05	1.49	-0.2	SANDS
47.04	138.53	1.88	1.39	-0.21	SANDS
47.1	138.6	1.73	1.29	-0.2	SANDS
47.17	136.04	1.67	1.26	-0.21	SANDS
47.23	133.99	1.64	1.24	-0.2	SANDS
47.3	132.46	1.63	1.24	-0.2	SANDS
47.36	131.36	1.64	1.25	-0.2	SANDS

US EPA ARCHIVE DOCUMENT

47.43	131.08	1.63	1.24	-0.19	SANDS
47.49	131.11	1.63	1.23	-0.2	SANDS
47.56	130.79	1.65	1.22	-0.2	SANDS
47.63	130.95	1.64	1.19	-0.2	SANDS
47.69	131.85	1.64	1.17	-0.19	SANDS
47.76	134.38	1.3	0.9	-0.19	SANDS
47.82	138.37	0.95	0.64	-0.19	SANDS
47.89	144.13	0.92	0.61	-0.2	SANDS
47.95	147.2	1.05	0.69	-0.2	SANDS
48.02	150.26	1.16	0.77	-0.07	SANDS
48.09	153.33	1.25	0.83	-0.05	SANDS
48.15	156.39	1.33	0.91	-0.05	SANDS
48.22	155.62	1.41	1	-0.05	SANDS
48.28	151.43	1.43	1.07	-0.06	SANDS
48.35	144.9	1.47	1.16	-0.04	SANDS
48.41	138.15	1.51	1.25	-0.04	SANDS
48.48	131.14	1.48	1.31	-0.05	SANDS
48.54	123.94	1.45	1.36	-0.04	SANDS
48.61	116.81	1.41	1.41	-0.04	SANDS
48.68	109.38	1.35	1.44	-0.05	SANDS
48.74	101.8	1.29	1.45	-0.04	SANDS
48.81	94.98	1.25	1.45	-0.05	SILTY SAND
48.87	89.7	1.27	1.48	-0.07	SILTY SAND
48.94	85.67	1.21	1.42	-0.08	SILTY SAND
49	83.72	1.15	1.34	-0.07	SILTY SAND
49.07	81.31	1.08	1.26	-0.1	SILTY SAND
49.13	84.71	1.06	1.24	-0.1	SANDS
49.2	88.01	1.09	1.34	-0.11	SILTY SAND
49.27	90.18	1.18	1.56	-0.11	SILTY SAND
49.33	89.28	1.24	1.82	-0.11	SILTY SAND
49.4	84.51	1.35	2.28	-0.1	SILTY SAND
49.46	75.14	1.48	2.92	-0.11	CLAYEY SANDY SILT&SILT
49.53	61.8	1.64	3.77	-0.11	CLAYEY SANDY SILT&SILT
49.59	51.49	1.79	4.7	-0.11	CLAYEY SILT&SILTY CLAYS
49.66	44.13	1.89	5.42	-0.11	CLAYEY SILT&SILTY CLAYS
49.73	38.08	1.91	5.76	-0.11	CLAYS
49.79	33.79	1.64	5.02	-0.11	CLAYEY SILT&SILTY CLAYS
49.86	31.07	1.37	4.12	-0.11	CLAYEY SILT&SILTY CLAYS
49.92	30.05	1.1	3.17	-0.11	CLAYEY SANDY SILT&SILT
49.99	31.84	1.27	3.38	-0.12	CLAYEY SANDY SILT&SILT
50.05	33.63	1.43	3.48	-0.13	CLAYEY SANDY SILT&SILT
50.12	35.43	1.52	3.27	-0.13	CLAYEY SANDY SILT&SILT
50.18	37.47	1.59	3.03	-0.12	CLAYEY SANDY SILT&SILT
50.25	40.52	1.7	2.85	-0.12	CLAYEY SANDY SILT&SILT
50.32	45.86	1.69	2.52	-0.13	CLAYEY SANDY SILT&SILT
50.38	54.24	1.66	2.23	-0.14	SILTY SAND
50.45	64.39	1.57	1.95	-0.12	SILTY SAND
50.51	72.93	1.5	1.76	-0.14	SILTY SAND
50.58	79.56	1.46	1.64	-0.13	SILTY SAND
50.64	84.84	1.41	1.55	-0.13	SILTY SAND
50.71	89.28	1.39	1.51	-0.13	SILTY SAND
50.77	91.81	1.45	1.56	-0.13	SILTY SAND

US EPA ARCHIVE DOCUMENT

50.84	93.32	1.44	1.54	-0.14	SILTY SAND
50.91	93.73	1.37	1.47	-0.13	SILTY SAND
50.97	93.73	1.34	1.45	-0.14	SILTY SAND
51.04	91.91	1.33	1.43	-0.14	SILTY SAND
51.1	93.22	1.31	1.42	-0.14	SILTY SAND
51.17	93.38	1.3	1.42	-0.14	SILTY SAND
51.23	93.03	1.29	1.42	-0.14	SILTY SAND
51.3	92.07	1.3	1.45	-0.14	SILTY SAND
51.37	91.24	1.32	1.5	-0.14	SILTY SAND
51.43	90.69	1.37	1.6	-0.13	SILTY SAND
51.5	90.27	1.42	1.71	-0.14	SILTY SAND
51.56	88.13	1.43	1.84	-0.13	SILTY SAND
51.63	85.31	1.4	1.96	-0.15	SILTY SAND
51.69	82.15	1.46	2.28	-0.14	SILTY SAND
51.76	78.31	1.6	2.89	-0.15	CLAYEY SANDY SILT&SILT
51.82	71.07	1.71	3.65	-0.13	CLAYEY SANDY SILT&SILT
51.89	62.05	1.88	4.85	-0.13	CLAYEY SILT&SILTY CLAYS
51.96	49.7	2.07	6.55	-0.14	CLAYS
52.02	40.58	2.21	8.38	-0.16	CLAYS
52.09	31.78	2.24	9.88	-0.16	CLAYS
52.15	26.27	2.14	10	-0.16	CLAYS
52.22	22.11	1.97	10	-0.16	CLAYS
52.28	19.58	1.84	9.54	-0.16	CLAYS
52.35	18.18	1.67	8.43	-0.16	CLAYS
52.41	18.05	1.48	7.12	-0.16	CLAYS
52.48	18.5	1.36	6.15	-0.16	CLAYS
52.55	19.65	1.29	5.53	-0.16	CLAYS
52.61	21.5	1.33	5.43	-0.16	CLAYS
52.68	22.85	1.44	5.71	-0.17	CLAYS
52.74	24.45	1.46	5.68	-0.16	CLAYS
52.81	25.6	1.44	5.53	-0.16	CLAYS
52.87	26.05	1.41	5.43	-0.15	CLAYS
52.94	26.34	1.39	5.34	-0.16	CLAYS
53.01	26.34	1.39	5.4	-0.15	CLAYS
53.07	25.47	1.35	5.3	-0.16	CLAYS
53.14	25.89	1.34	5.33	-0.16	CLAYS
53.2	25.92	1.37	5.54	-0.16	CLAYS
53.27	25.89	1.42	5.9	-0.16	CLAYS
53.33	25.16	1.39	5.89	-0.16	CLAYS
53.4	24.45	1.36	5.8	-0.17	CLAYS
53.46	23.61	1.3	5.56	-0.16	CLAYS
53.53	23.04	1.27	5.28	-0.16	CLAYS
53.6	22.59	1.21	4.82	-0.16	CLAYS
53.66	23.14	1.14	4.29	-0.17	CLAYEY SILT&SILTY CLAYS
53.73	23.61	1.1	3.85	-0.16	CLAYEY SILT&SILTY CLAYS
53.79	24.77	1.07	3.52	-0.16	CLAYEY SILT&SILTY CLAYS
53.86	26.81	1.18	3.69	-0.17	CLAYEY SILT&SILTY CLAYS
53.92	29.47	1.16	3.53	-0.17	CLAYEY SILT&SILTY CLAYS
53.99	31.87	1.19	3.55	-0.16	CLAYEY SILT&SILTY CLAYS
54.05	34.24	1.26	3.75	-0.17	CLAYEY SILT&SILTY CLAYS
54.12	34.53	1.36	4.09	-0.16	CLAYEY SILT&SILTY CLAYS
54.19	34.24	1.46	4.5	-0.16	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

54.25	33.79	1.56	4.95	-0.16	CLAYEY SILT&SILTY CLAYS
54.32	33.12	1.66	5.49	-0.16	CLAYS
54.38	32.39	1.71	5.9	-0.17	CLAYS
54.45	31.07	1.75	6.31	-0.16	CLAYS
54.51	29.63	1.79	6.78	-0.16	CLAYS
54.58	28.58	1.78	7.06	-0.16	CLAYS
54.65	26.98	1.74	7.23	-0.17	CLAYS
54.71	25.63	1.68	7.24	-0.16	CLAYS
54.78	24.19	1.65	7.37	-0.16	CLAYS
54.84	23.17	1.69	7.71	-0.16	CLAYS
54.91	22.63	1.72	8.05	-0.16	CLAYS
54.97	21.82	1.54	7.41	-0.16	CLAYS
55.04	21.69	1.43	7.06	-0.17	CLAYS
55.1	21.12	1.31	6.7	-0.17	CLAYS
55.17	20.8	1.23	6.49	-0.17	CLAYS
55.24	19.87	1.17	6.39	-0.17	CLAYS
55.3	19.2	1.15	6.51	-0.17	CLAYS
55.37	18.56	1.1	6.4	-0.17	CLAYS
55.43	17.98	1.04	6.3	-0.16	CLAYS
55.5	17.06	1	6.22	-0.16	CLAYS
55.56	16.8	1	6.39	-0.17	CLAYS
55.63	16.19	0.95	6.25	-0.16	CLAYS
55.69	16.03	0.89	6.09	-0.17	CLAYS
55.76	15.26	0.83	5.76	-0.16	CLAYS
55.83	15.07	0.78	5.45	-0.17	CLAYS
55.89	14.5	0.79	5.46	-0.16	CLAYS
55.96	14.21	0.77	5.18	-0.17	CLAYS
56.02	12.32	0.74	4.69	-0.17	CLAYS
56.09	15.26	0.67	3.9	-0.16	CLAYEY SILT&SILTY CLAYS
56.15	15.14	0.62	3.32	-0.17	CLAYEY SILT&SILTY CLAYS
56.22	15.71	0.57	2.85	-0.17	CLAYEY SILT&SILTY CLAYS
56.29	16.93	0.58	2.65	-0.18	CLAYEY SANDY SILT&SILT
56.35	19.07	0.61	2.62	-0.17	CLAYEY SANDY SILT&SILT
56.42	21.41	0.63	2.57	-0.17	CLAYEY SANDY SILT&SILT
56.48	23.36	0.69	2.67	-0.16	CLAYEY SANDY SILT&SILT
56.55	24.64	0.73	2.72	-0.16	CLAYEY SANDY SILT&SILT
56.61	25.31	0.81	2.92	-0.16	CLAYEY SANDY SILT&SILT
56.68	25.83	0.92	3.21	-0.16	CLAYEY SANDY SILT&SILT
56.74	27.3	1.01	3.38	-0.17	CLAYEY SILT&SILTY CLAYS
56.81	28.39	1.08	3.51	-0.17	CLAYEY SILT&SILTY CLAYS
56.88	28.96	1.27	4	-0.16	CLAYEY SILT&SILTY CLAYS
56.94	30.31	1.46	4.46	-0.16	CLAYEY SILT&SILTY CLAYS
57.01	31.52	1.42	4.21	-0.16	CLAYEY SILT&SILTY CLAYS
57.07	32.51	1.38	3.99	-0.17	CLAYEY SILT&SILTY CLAYS
57.14	32.8	1.43	4.01	-0.16	CLAYEY SILT&SILTY CLAYS
57.2	34.18	1.48	4.03	-0.16	CLAYEY SILT&SILTY CLAYS
57.27	35.04	1.56	4.12	-0.16	CLAYEY SILT&SILTY CLAYS
57.33	35.9	1.7	4.42	-0.16	CLAYEY SILT&SILTY CLAYS
57.4	37.35	1.83	4.75	-0.16	CLAYEY SILT&SILTY CLAYS
57.47	38.98	2.03	5.32	-0.16	CLAYS
57.53	39.62	2.18	5.83	-0.16	CLAYS
57.6	39.78	2.28	6.26	-0.16	CLAYS

US EPA ARCHIVE DOCUMENT

57.66	38.66	2.35	6.62	-0.16	CLAYS
57.73	37.25	2.31	6.61	-0.16	CLAYS
57.79	35.07	2.21	6.39	-0.16	CLAYS
57.86	33.67	2.28	6.61	-0.16	CLAYS
57.93	33.92	2.36	6.79	-0.16	CLAYS
57.99	34.66	2.24	6.43	-0.15	CLAYS
58.06	34.95	2.19	6.3	-0.16	CLAYS
58.12	34.98	2.21	6.42	-0.16	CLAYS
58.19	35.17	2.23	6.57	-0.16	CLAYS
58.25	34.91	2.18	6.5	-0.16	CLAYS
58.32	34.69	2.04	6.09	-0.16	CLAYS
58.38	34.02	1.88	5.56	-0.16	CLAYS
58.45	32.77	1.66	4.83	-0.16	CLAYEY SILT&SILTY CLAYS
58.52	31.97	1.53	4.36	-0.15	CLAYEY SILT&SILTY CLAYS
58.58	32.87	1.51	4.2	-0.16	CLAYEY SILT&SILTY CLAYS
58.65	35.23	1.65	4.46	-0.16	CLAYEY SILT&SILTY CLAYS
58.71	36.29	1.77	4.73	-0.16	CLAYEY SILT&SILTY CLAYS
58.78	36.77	1.88	4.98	-0.16	CLAYEY SILT&SILTY CLAYS
58.84	37.02	2.39	6.33	-0.15	CLAYS
58.91	37.79	2.36	6.28	-0.15	CLAYS
58.97	38.4	2.36	6.33	-0.15	CLAYS
59.04	38.94	2.29	6.28	-0.16	CLAYS
59.11	37.7	2.19	6.15	-0.15	CLAYS
59.17	36.71	2.15	6.21	-0.15	CLAYS
59.24	36.19	2.05	6.12	-0.16	CLAYS
59.3	35.36	1.98	6.16	-0.15	CLAYS
59.37	34.15	1.9	6.19	-0.15	CLAYS
59.43	33.09	1.89	6.38	-0.16	CLAYS
59.5	31.75	1.95	6.78	-0.15	CLAYS
59.57	30.27	1.83	6.5	-0.15	CLAYS
59.63	28.35	1.71	6.15	-0.15	CLAYS
59.7	26.88	1.66	5.95	-0.15	CLAYS
59.76	27.33	1.61	5.69	-0.15	CLAYS
59.83	27.68	1.74	6.16	-0.15	CLAYS
59.89	28.06	1.58	5.58	-0.16	CLAYS
59.96	28.03	1.42	5.02	-0.16	CLAYS
60.02	29.34	1.36	4.8	-0.15	CLAYEY SILT&SILTY CLAYS
60.09	28.9	1.36	4.82	-0.16	CLAYEY SILT&SILTY CLAYS
60.16	27.97	1.34	4.78	-0.14	CLAYEY SILT&SILTY CLAYS
60.22	27.49	1.45	5.14	-0.15	CLAYS
60.29	27.81	1.51	5.37	-0.15	CLAYS
60.35	28.67	1.49	5.3	-0.14	CLAYS
60.42	28.48	1.54	5.49	-0.15	CLAYS
60.48	28.26	1.62	5.76	-0.15	CLAYS
60.55	28.19	1.65	5.87	-0.14	CLAYS
60.61	27.97	1.69	6.02	-0.15	CLAYS
60.68	27.49	1.65	5.88	-0.14	CLAYS
60.75	28.26	1.57	5.47	-0.15	CLAYS
60.81	28.83	1.49	5.17	-0.15	CLAYS
60.88	28.23	1.65	5.77	-0.14	CLAYS
60.94	27.94	1.7	5.97	-0.15	CLAYS
61.01	27.78	1.77	6.3	-0.15	CLAYS

US EPA ARCHIVE DOCUMENT

61.07	30.92	1.77	6.39	-0.14	CLAYS
61.14	29.37	1.8	6.81	-0.14	CLAYS
61.21	27.42	1.92	7.5	-0.14	CLAYS
61.27	27.08	1.99	7.91	-0.14	CLAYS
61.34	26.27	1.99	8.04	-0.14	CLAYS
61.4	24.86	1.86	7.56	-0.14	CLAYS
61.47	23.81	1.8	7.28	-0.14	CLAYS
61.53	23.94	1.72	6.88	-0.14	CLAYS
61.6	24.83	1.6	6.34	-0.14	CLAYS
61.66	24.83	1.55	6.09	-0.14	CLAYS
61.73	25.22	1.52	5.78	-0.13	CLAYS
61.8	25.57	1.54	5.66	-0.14	CLAYS
61.86	25.28	1.6	5.62	-0.14	CLAYS
61.93	25.7	1.66	5.65	-0.13	CLAYS
61.99	26.63	1.72	5.76	-0.14	CLAYS
62.06	28.84	1.89	6.35	-0.13	CLAYS
62.12	31.06	2.02	6.94	-0.13	CLAYS
62.19	33.28	2.09	7.51	-0.14	CLAYS
62.25	30.47	2.12	8.14	-0.13	CLAYS
62.32	28.58	2.13	8.68	-0.14	CLAYS
62.39	26.63	2.09	8.92	-0.13	CLAYS
62.45	24.89	1.94	8.56	-0.12	CLAYS
62.52	23.46	1.81	8.14	-0.12	CLAYS
62.58	22.15	1.72	7.79	-0.13	CLAYS
62.65	21.5	1.67	7.54	-0.12	CLAYS
62.71	21.69	1.67	7.51	-0.13	CLAYS
62.78	21.95	1.64	7.07	-0.12	CLAYS
62.85	22.43	1.36	5.42	-0.12	CLAYS
62.91	22.53	1.09	4.06	-0.12	CLAYEY SILT&SILTY CLAYS
62.98	23.24	1.25	4.44	-0.13	CLAYEY SILT&SILTY CLAYS
63.04	21.28	1.39	4.75	-0.12	CLAYS
63.11	27.44	1.57	5.13	-0.13	CLAYS
63.17	33.6	1.75	5.7	-0.12	CLAYS
63.24	32.2	1.92	6.38	-0.12	CLAYS
63.3	31.14	2.01	6.66	-0.13	CLAYS
63.37	29.95	1.97	6.41	-0.13	CLAYS
63.44	29.06	1.89	5.93	-0.13	CLAYS
63.5	28.77	1.85	5.57	-0.13	CLAYS
63.57	29.86	1.84	5.33	-0.12	CLAYS
63.63	32.2	1.85	5.24	-0.13	CLAYS
63.7	34.59	1.85	5.15	-0.12	CLAYEY SILT&SILTY CLAYS
63.76	36.58	1.88	5.13	-0.12	CLAYEY SILT&SILTY CLAYS
63.83	37.54	1.74	4.85	-0.12	CLAYEY SILT&SILTY CLAYS
63.89	36.9	1.73	5.02	-0.12	CLAYEY SILT&SILTY CLAYS
63.96	33.44	1.85	5.63	-0.12	CLAYS
64.03	36.31	2	6.36	-0.12	CLAYS
64.09	39.17	2.1	7.2	-0.11	CLAYS
64.16	32.26	2.19	8.25	-0.11	CLAYS
64.22	28.67	2.23	8.45	-0.11	CLAYS
64.29	27.01	2.15	7.23	-0.11	CLAYS
64.35	24.89	2	5.27	-0.11	CLAYS
64.42	22.91	1.74	3.35	-0.12	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

64.49	23.94	1.61	2.26	-0.11	CLAYEY SANDY SILT&SILT
64.55	30.98	1.66	1.79	-0.1	CLAYEY SANDY SILT&SILT
64.62	48.64	1.71	1.5	-0.11	SILTY SAND
64.68	76.71	1.7	1.27	-0.1	SILTY SAND
64.75	109.41	1.7	1.15	-0.1	SANDS
64.81	137.06	1.68	1.07	-0.09	SANDS
64.88	153.74	1.87	1.16	-0.1	SANDS
64.94	162.09	1.9	1.18	-0.1	SANDS
65.01	165.35	1.95	1.22	-0.1	SANDS
65.08	160.81	1.93	1.22	-0.11	SANDS
65.14	161.09	1.9	1.2	-0.11	SANDS
65.21	158.7	1.87	1.18	-0.11	SANDS
65.27	156.71	1.89	1.19	-0.1	SANDS
65.34	156.2	1.94	1.22	-0.11	SANDS
65.4	157	1.95	1.24	-0.1	SANDS
65.47	159.11	1.97	1.27	-0.1	SANDS
65.53	160.71	2.01	1.32	-0.1	SANDS
65.6	160.14	2.07	1.4	-0.11	SANDS
65.67	155.84	2.08	1.45	-0.12	SANDS
65.73	150.31	2.07	1.48	-0.12	SANDS
65.8	144.59	1.67	1.21	-0.11	SANDS
65.86	140.29	1.26	0.93	-0.11	SANDS
65.93	136.55	1.28	0.95	-0.11	SANDS
65.99	135.97	1.32	0.99	-0.11	SANDS
66.06	135.4	1.36	1.03	-0.13	SANDS
66.13	134.82	1.4	1.07	-0.13	SANDS
66.19	134.38	1.45	1.12	-0.12	SANDS
66.26	131.75	1.53	1.18	-0.12	SANDS
66.32	128.62	1.58	1.2	-0.12	SANDS
66.39	126.47	1.65	1.22	-0.12	SANDS
66.45	127.24	1.73	1.26	-0.12	SANDS
66.52	131.75	1.78	1.28	-0.11	SANDS
66.58	137.09	1.8	1.28	-0.12	SANDS
66.65	141.12	1.78	1.27	-0.11	SANDS
66.72	143.46	1.78	1.29	-0.11	SANDS
66.78	143.27	1.74	1.28	-0.13	SANDS
66.85	140.52	1.85	1.38	-0.12	SANDS
66.91	137.06	1.81	1.36	-0.11	SANDS
66.98	133.48	1.78	1.36	-0.11	SANDS
67.04	131.46	1.85	1.42	-0.13	SANDS
67.11	132	1.98	1.55	-0.13	SANDS
67.17	132.68	2.08	1.71	-0.13	SANDS
67.24	131.46	2.29	2.06	-0.14	SILTY SAND
67.31	126.95	2.39	2.44	-0.14	SILTY SAND
67.37	125.42	2.47	2.95	-0.13	SILTY SAND
67.44	116.36	2.62	3.84	-0.14	CLAYEY SANDY SILT&SILT
67.5	95.24	2.75	5.16	-0.14	CLAYEY SILT&SILTY CLAYS
67.57	71.3	2.89	6.93	-0.14	CLAYS
67.63	51.9	2.79	8.19	-0.14	CLAYS
67.7	41.16	2.31	7.75	-0.15	CLAYS
67.77	33.12	1.86	6.59	-0.15	CLAYS
67.83	26.75	1.51	5.41	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

67.9	25.53	0.99	3.49	-0.14	CLAYEY SILT&SILTY CLAYS
67.96	26.08	0.85	2.97	-0.16	CLAYEY SANDY SILT&SILT
68.03	26.37	0.77	2.69	-0.14	CLAYEY SANDY SILT&SILT
68.09	31.23	0.74	2.58	-0.11	CLAYEY SANDY SILT&SILT
68.16	31.78	0.77	2.82	-0.12	CLAYEY SANDY SILT&SILT
68.22	29.03	0.82	3.15	-0.12	CLAYEY SANDY SILT&SILT
68.29	27.2	0.86	3.43	-0.11	CLAYEY SILT&SILTY CLAYS
68.36	26.27	0.86	3.5	-0.12	CLAYEY SILT&SILTY CLAYS
68.42	25.44	0.83	3.47	-0.12	CLAYEY SILT&SILTY CLAYS
68.49	24.29	0.76	3.21	-0.12	CLAYEY SILT&SILTY CLAYS
68.55	24.03	0.66	2.79	-0.12	CLAYEY SANDY SILT&SILT
68.62	23.68	0.58	2.49	-0.12	CLAYEY SANDY SILT&SILT
68.68	23.43	0.53	2.25	-0.12	CLAYEY SANDY SILT&SILT
68.75	23.24	0.5	2.09	-0.12	CLAYEY SANDY SILT&SILT
68.81	23.17	0.49	1.99	-0.12	CLAYEY SANDY SILT&SILT
68.88	23.43	0.53	2.09	-0.13	CLAYEY SANDY SILT&SILT
68.95	23.91	0.61	2.33	-0.12	CLAYEY SANDY SILT&SILT
69.01	24.69	0.6	2.22	-0.12	CLAYEY SANDY SILT&SILT
69.08	25.48	0.63	2.12	0.08	CLAYEY SANDY SILT&SILT
69.14	26.27	0.64	1.96	0.08	CLAYEY SANDY SILT&SILT
69.21	27.36	0.63	1.73	0.08	CLAYEY SANDY SILT&SILT
69.27	28.23	0.6	1.54	0.08	CLAYEY SANDY SILT&SILT
69.34	31.42	0.75	1.73	0.1	CLAYEY SANDY SILT&SILT
69.41	38.5	1.1	2.2	0.1	CLAYEY SANDY SILT&SILT
69.47	44.96	1.56	2.75	0.11	CLAYEY SANDY SILT&SILT
69.54	46.79	1.83	2.89	0.12	CLAYEY SANDY SILT&SILT
69.6	45.06	1.96	2.77	0.14	CLAYEY SANDY SILT&SILT
69.67	54.66	2.04	2.55	0.18	CLAYEY SANDY SILT&SILT
69.73	69.31	2.25	2.48	0.2	SILTY SAND
69.8	79.11	2.53	2.51	0.22	SILTY SAND
69.86	84.93	2.36	2.11	0.23	SILTY SAND
69.93	91.04	2.34	1.83	0.23	SILTY SAND
70	100.9	2.36	1.55	0.19	SILTY SAND
70.06	117.77	2.39	1.3	-0.15	SANDS
70.13	130.85	2.4	1.09	-0.14	SANDS
70.19	144.84	2.29	0.89	-0.15	SANDS
70.26	183.43	2.26	0.76	-0.14	SANDS
70.32	237.29	2.41	0.72	-0.15	SANDS
70.39	288.4	2.43	0.67	-0.16	SANDS
70.45	332.33	2.58	0.68	-0.17	SANDS
70.52	361.23	2.75	0.7	-0.17	SANDS
70.59	391.16	2.88	0.72	-0.17	SANDS
70.65	399.83	3	0.75	-0.17	SANDS
70.72	401.59	3.23	0.82	-0.16	SANDS
70.78	400.43	3.45	0.89	-0.16	SANDS
70.85	399.79	3.17	0.82	-0.17	SANDS
70.91	398.77	2.89	0.75	-0.16	SANDS
70.98	388.64	2.91	0.75	-0.16	SANDS
71.05	378.5	2.92	0.74	-0.08	SANDS
71.11	368.37	3.19	0.79	-0.09	SANDS
71.18	388.53	3.43	0.83	-0.11	SANDS
71.24	401.11	3.54	0.84	-0.1	SANDS

US EPA ARCHIVE DOCUMENT

71.31	412.43	3.66	0.86	-0.1	SANDS
71.37	421.24	3.73	0.86	-0.11	SANDS
71.44	425.65	4	0.92	-0.11	SANDS
71.5	430.87	4.26	0.98	-0.12	SANDS
71.57	435.8	4.45	1.02	-0.11	SANDS
71.64	437.94	4.61	1.06	-0.11	SANDS
71.7	437.04	4.73	1.09	-0.11	SANDS
71.77	436.69	4.82	1.12	-0.12	SANDS
71.83	433.68	4.94	1.15	-0.11	SANDS
71.9	434.74	5.06	1.17	-0.11	SANDS
71.96	431.05	5.18	1.2	-0.11	SANDS
72.03	427.36	5.18	1.19	-0.08	SANDS
72.09	423.67	5.09	1.16	-0.07	SANDS
72.16	434.64	5	1.13	-0.07	SANDS
72.23	438.19	5	1.12	-0.07	SANDS
72.29	443.7	5.02	1.12	-0.06	SANDS
72.36	448.73	5.13	1.15	-0.06	SANDS
72.42	450.2	5.26	1.18	-0.05	SANDS
72.49	449.2	5.37	1.21	-0.06	SANDS
72.55	447.76	5.4	1.21	-0.06	SANDS
72.62	443.19	5.31	1.19	-0.07	SANDS
72.69	441.17	5.23	1.17	-0.05	SANDS
72.75	441.62	5	1.11	-0.06	SANDS
72.82	446.03	4.71	1.04	-0.07	SANDS
72.88	453.04	4.43	0.97	-0.07	SANDS
72.95	459.8	4.36	0.95	-0.07	SANDS
73.01	448.63	4.29	0.93	-0.07	SANDS
73.08	454.62	4.23	0.9	-0.02	SANDS
73.14	460.61	4.16	0.88	-0.02	SANDS
73.21	466.61	4.09	0.86	-0.01	SANDS
73.28	472.6	4.11	0.86	-0.02	SANDS
73.34	476.28	4.21	0.87	-0.02	SANDS
73.41	478.52	4.35	0.9	-0.01	SANDS
73.47	482.07	4.67	0.96	-0.02	SANDS
73.54	486.1	5.06	1.04	-0.01	SANDS
73.6	489.3	5.29	1.08	-0.02	SANDS
73.67	488.7	5.53	1.13	-0.01	SANDS
73.73	488.1	5.77	1.18	-0.02	SANDS
73.8	487.5	5.83	1.19	-0.02	SANDS
73.87	488.88	5.73	1.16	0.01	SANDS
73.93	490.26	5.77	1.17	0.01	SANDS
74	491.64	5.71	1.17	0.01	SANDS
74.06	493.11	5.52	1.14	0.02	SANDS
74.13	494.58	5.33	1.11	0	SANDS
74.19	496.05	5.3	1.12	0.02	SANDS
74.26	482.78	5.27	1.13	0.01	SANDS
74.32	469.49	5.24	1.14	0.02	SANDS
74.39	466.06	5.55	1.22	0.01	SANDS
74.46	462.62	5.64	1.27	0	SANDS
74.52	459.19	5.66	1.3	0	SANDS
74.59	456.34	5.56	1.31	0.01	SANDS
74.65	446.97	5.47	1.33	0	SANDS

US EPA ARCHIVE DOCUMENT

74.72	430.23	5.39	1.35	0.02	SANDS
74.78	415.41	5.06	1.31	0.01	SANDS
74.85	402.04	4.9	1.31	0.02	SANDS
74.92	391.98	4.74	1.3	0.01	SANDS
74.98	379.63	4.58	1.29	0.02	SANDS
75.05	367.28	4.42	1.26	-0.02	SANDS
75.11	354.93	4.26	1.23	0.01	SANDS
75.18	342.57	4.2	1.23	0	SANDS
75.24	347.28	4.07	1.2	0	SANDS
75.31	346.03	3.97	1.18	0	SANDS
75.37	341.39	3.87	1.16	0	SANDS
75.44	336.69	3.96	1.2	0.01	SANDS
75.51	333.39	3.9	1.18	0.01	SANDS
75.57	330.22	3.85	1.17	0.02	SANDS
75.64	328.98	3.8	1.15	0.01	SANDS
75.7	328.66	3.74	1.13	0.01	SANDS
75.77	329.29	3.17	0.95	0.01	SANDS
75.83	330.3	2.59	0.77	0.01	SANDS
75.9	331.32	2.39	0.71	0	SANDS
75.96	332.32	2.53	0.74	0.02	SANDS
76.03	333.33	2.67	0.77	0	SANDS
76.1	338.06	2.8	0.8	0	SANDS
76.16	342.78	2.91	0.82	0.01	SANDS
76.23	347.51	3.04	0.84	0.01	SANDS
76.29	354.9	3.22	0.88	0.01	SANDS
76.36	359.46	3.44	0.93	0.01	SANDS
76.42	364.03	3.8	1.02	0.01	SANDS
76.49	368.59	3.98	1.06	0.01	SANDS
76.56	371.73	4.04	1.07	0	SANDS
76.62	375.47	4.11	1.08	0.01	SANDS
76.69	379.7	4.18	1.1	0	SANDS
76.75	383.28	4.13	1.09	0	SANDS
76.82	383.6	3.87	1.02	0.01	SANDS
76.88	381.2	3.6	0.96	0.01	SANDS
76.95	380.75	3.34	0.89	0.01	SANDS
77.01	377.97	3.08	0.83	0	SANDS
77.08	375.19	2.81	0.76	0	SANDS
77.15	372.4	3.12	0.85	0	SANDS
77.21	369.62	3.5	0.95	0.01	SANDS
77.28	368.74	3.93	1.07	0.01	SANDS
77.34	367.86	4.18	1.14	0.01	SANDS
77.41	366.98	4.31	1.18	0.01	SANDS
77.47	366.1	4.67	1.28	0.01	SANDS
77.54	365.55	4.96	1.36	0	SANDS
77.6	363.79	4.99	1.37	0.01	SANDS
77.67	364.18	5	1.37	0.01	SANDS
77.74	365.3	4.95	1.36	0	SANDS
77.8	365.3	4.89	1.35	0.02	SANDS
77.87	365.3	4.83	1.35	0.02	SANDS
77.93	365.3	4.77	1.34	0.02	SANDS
78	360.85	4.72	1.33	0.01	SANDS
78.06	357.39	4.87	1.38	0	SANDS

US EPA ARCHIVE DOCUMENT

78.13	353.94	5.1	1.44	0	SANDS
78.2	350.48	5.29	1.48	0	SANDS
78.26	350.38	5.39	1.49	0.01	SANDS
78.33	351.76	5.38	1.47	0.02	SANDS
78.39	355.09	5.28	1.43	0.02	SANDS
78.46	361.94	5.17	1.38	0.02	SANDS
78.52	370	4.98	1.31	0.02	SANDS
78.59	374.64	4.99	1.31	0.03	SANDS
78.65	376.69	5.12	1.33	0.03	SANDS
78.72	380.98	5	1.29	0.02	SANDS
78.79	385.49	4.87	1.26	0.02	SANDS
78.85	386.67	4.75	1.23	0.04	SANDS
78.92	387.86	4.63	1.21	0.02	SANDS
78.98	389.04	4.62	1.21	0.03	SANDS
79.05	385.87	4.61	1.21	0	SANDS
79.11	382.71	4.6	1.21	0.02	SANDS
79.18	379.54	4.59	1.2	0.02	SANDS
79.24	376.37	4.54	1.18	0.02	SANDS
79.31	378.26	4.41	1.13	0.03	SANDS
79.38	379.18	4.18	1.05	0.03	SANDS
79.44	381.74	4.15	1.02	0.03	SANDS
79.51	388.85	4.2	1.01	0.04	SANDS
79.57	400.95	4.13	0.98	0.04	SANDS
79.64	415.83	3.96	0.94	0.04	SANDS
79.7	429.94	3.87	0.93	0.03	SANDS
79.77	434.1	3.51	0.86	0.04	SANDS
79.84	431.67	3.46	0.88	0.04	SANDS
79.9	423.41	3.49	0.91	0.03	SANDS
79.97	394.67	3.53	0.95	0.02	SANDS
80.03	384.26	3.57	0.98	0	SANDS
80.1	373.85	3.6	1.01	0.02	SANDS
80.16	363.45	3.64	1.02	0.02	SANDS
80.23	353.04	3.72	1.04	0.03	SANDS
80.29	352.08	3.73	1.03	0.01	SANDS
80.36	353.14	3.73	1.02	0.03	SANDS
80.43	353.81	3.73	1	0.03	SANDS
80.49	361.25	3.73	0.97	0.02	SANDS
80.56	368.68	3.73	0.94	0.02	SANDS
80.62	376.12	3.73	0.92	0.02	SANDS
80.69	383.56	3.73	0.89	0.03	SANDS
80.75	391	3.8	0.89	0.04	SANDS
80.82	412.75	3.88	0.89	0.04	SANDS
80.88	434.74	3.96	0.9	0.03	SANDS
80.95	437.22	4.04	0.92	0.04	SANDS
81.02	439.7	4.35	1.01	0.01	SANDS
81.08	442.18	4.72	1.11	0.02	SANDS
81.15	444.66	5.16	1.25	0.02	SANDS
81.21	437.46	5.63	1.4	0.02	SANDS
81.28	423.86	6.06	1.54	0.02	SANDS
81.34	407.22	6.42	1.67	0.03	SANDS
81.41	390.16	6.69	1.77	0.03	SANDS
81.48	380.79	6.81	1.82	0.03	SANDS

US EPA ARCHIVE DOCUMENT

81.54	376.88	6.68	1.8	0.04	SANDS
81.61	375.95	6.27	1.7	0.03	SANDS
81.67	373.91	5.67	1.55	0.04	SANDS
81.74	368.56	5.33	1.47	0.03	SANDS
81.8	365.81	5.01	1.38	0.03	SANDS
81.87	363.76	4.69	1.3	0.04	SANDS
81.93	362.66	4.37	1.21	0.03	SANDS
82	361.54	4.4	1.21	0.02	SANDS
82.07	360.44	4.93	1.35	0.02	SANDS
82.13	359.33	5.34	1.45	0.02	SANDS
82.2	358.22	5.6	1.51	0.02	SANDS
82.26	369.46	5.74	1.53	0.03	SANDS
82.33	370.93	5.63	1.5	0.03	SANDS
82.39	374.19	5.45	1.44	0.02	SANDS
82.46	377.81	5.38	1.41	0.03	SANDS
82.52	379.7	5.09	1.31	0.02	SANDS
82.59	377.39	4.6	1.16	0.04	SANDS
82.66	376.53	4.55	1.11	0.03	SANDS
82.72	381.68	4.49	1.08	0.03	SANDS
82.79	396.53	4.44	1.05	0.04	SANDS
82.85	416.95	4.38	1.03	0.03	SANDS
82.92	432.85	4.21	0.99	0.04	SANDS
82.98	446.48	4.03	0.95	0.02	SANDS
83.05	433.26	3.84	0.91	0.03	SANDS
83.12	420.05	3.98	0.95	0.01	SANDS
83.18	406.83	4.12	0.99	0.03	SANDS
83.25	423.16	4.19	1	0.02	SANDS
83.31	425.75	4.15	1	0.03	SANDS
83.38	423.41	3.99	0.97	0.04	SANDS
83.44	417.56	3.89	0.95	0.03	SANDS
83.51	410.26	3.99	0.97	0.04	SANDS
83.57	408.21	4.19	1	0.04	SANDS
83.64	407.6	4.28	1.01	0.05	SANDS
83.71	410.26	4.36	1.01	0.04	SANDS
83.77	415.45	4.57	1.05	0.05	SANDS
83.84	426.03	4.61	1.05	0.04	SANDS
83.9	439.29	4.65	1.05	0.05	SANDS
83.97	449.65	4.69	1.05	0.04	SANDS
84.03	445.4	4.8	1.08	0.04	SANDS
84.1	441.14	4.97	1.11	0.03	SANDS
84.16	436.88	5.26	1.16	0.03	SANDS
84.23	446.17	5.68	1.24	0.03	SANDS
84.3	450.61	5.99	1.3	0.04	SANDS
84.36	454.8	6.15	1.33	0.03	SANDS
84.43	461.49	6.36	1.38	0.04	SANDS
84.49	464.98	6.58	1.43	0.04	SANDS
84.56	468.4	6.7	1.47	0.05	SANDS
84.62	464.53	6.58	1.46	0.04	SANDS
84.69	459.64	6.42	1.44	0.04	SANDS
84.75	453.88	6.14	1.39	0.04	SANDS
84.82	448.28	5.85	1.34	0.03	SANDS
84.89	446.36	5.82	1.33	0.03	SANDS

US EPA ARCHIVE DOCUMENT

84.95	433.98	5.78	1.33	0.02	SANDS
85.02	433.74	5.74	1.33	0.03	SANDS
85.08	433.5	5.64	1.31	0.03	SANDS
85.15	433.25	5.49	1.28	0.03	SANDS
85.21	433.01	5.29	1.24	0.03	SANDS
85.28	433.4	5.03	1.19	0.03	SANDS
85.35	429.08	4.88	1.16	0.03	SANDS
85.41	423.06	4.97	1.19	0.02	SANDS
85.48	421.14	5.16	1.24	0.03	SANDS
85.54	419.06	5.26	1.27	0.03	SANDS
85.61	417.52	5.27	1.28	0.03	SANDS
85.67	415.54	5.36	1.3	0.03	SANDS
85.74	413.97	5.49	1.34	0.04	SANDS
85.8	412.82	5.55	1.36	0.03	SANDS
85.87	411.19	5.61	1.38	0.03	SANDS
85.94	410.13	5.67	1.4	0.04	SANDS
86	406.13	5.73	1.4	0.03	SANDS
86.07	402.13	5.69	1.38	0.02	SANDS
86.13	398.13	5.61	1.34	0.03	SANDS
86.2	408.05	5.51	1.29	0.03	SANDS
86.26	415.79	5.34	1.23	0.03	SANDS
86.33	422.26	5.08	1.16	0.03	SANDS
86.39	429.27	5.04	1.14	0.03	SANDS
86.46	437.78	5.16	1.15	0.03	SANDS
86.53	444.72	5.28	1.17	0.03	SANDS
86.59	450.9	5.4	1.19	0.02	SANDS
86.66	451.45	5.52	1.22	0.02	SANDS
86.72	452	5.64	1.25	0.02	SANDS
86.79	452.56	5.83	1.3	0.03	SANDS
86.85	453.11	6.12	1.38	0.03	SANDS
86.92	452.31	6.27	1.42	0.04	SANDS
86.99	447.22	6.49	1.48	0.04	SANDS
87.05	443.47	6.72	1.53	0.02	SANDS
87.12	445.88	6.95	1.57	0.03	SANDS
87.18	420.44	6.92	1.56	0.04	SANDS
87.25	430.37	7.15	1.59	0.02	SANDS
87.31	440.29	7.11	1.57	0.03	SANDS
87.38	450.22	7.06	1.55	0.04	SANDS
87.44	460.15	7.02	1.52	0.04	SANDS
87.51	457.94	7.06	1.52	0.04	SANDS
87.58	455.73	7.04	1.51	0.04	SANDS
87.64	453.52	7.02	1.5	0.04	SANDS
87.71	465.78	6.83	1.46	0.03	SANDS

US EPA ARCHIVE DOCUMENT

DATE : 10-12-2006
JOB NUMBER: 0305-1988
CPT NUMBER: 07A

DEPTH (FT)	TIP (TSF)	SLEEVE (TSF)	F RATIO (%)	PIEZO (TSF)	SOIL BEHAVIOR TYPE
0.07	0	0	0	0	CLAYS
0.13	0	0	0.01	0	CLAYS
0.2	0	1.71	10	0	CLAYS
0.26	15.55	2.16	10	-0.01	CLAYS
0.33	23.5	2.62	10	-0.01	CLAYS
0.39	19.46	2.61	9.76	-0.02	CLAYS
0.46	15.42	2.65	8.07	-0.02	CLAYS
0.52	18.18	2.51	6.12	-0.01	CLAYS
0.59	23.55	2.38	4.79	-0.01	CLAYEY SILT&SILTY CLAYS
0.66	36.64	1.97	3.38	-0.02	CLAYEY SANDY SILT&SILT
0.72	47.04	1.01	1.54	-0.01	SILTY SAND
0.79	56.23	0.97	1.36	-0.01	SILTY SAND
0.85	64.99	0.91	1.19	-0.01	SILTY SAND
0.92	69.41	0.89	1.1	-0.02	SILTY SAND
0.98	75.2	0.92	1.08	-0.01	SANDS
1.05	79.43	0.9	1	-0.01	SANDS
1.12	82.95	0.82	0.88	-0.02	SANDS
1.18	86.56	0.81	0.82	-0.02	SANDS
1.25	90.63	0.83	0.82	-0.02	SANDS
1.31	97.86	0.86	0.83	-0.02	SANDS
1.38	100.03	0.9	0.86	-0.02	SANDS
1.44	106.28	1	0.94	-0.02	SANDS
1.51	109.09	1.06	1.01	-0.03	SANDS
1.57	106.15	1.07	1.04	-0.02	SANDS
1.64	106.53	1.17	1.18	-0.02	SANDS
1.71	105.7	1.26	1.31	-0.02	SANDS
1.77	102.72	1.35	1.46	-0.03	SANDS
1.84	99.05	1.43	1.62	-0.03	SILTY SAND
1.9	94.82	1.45	1.73	-0.04	SILTY SAND
1.97	89.95	1.4	1.76	-0.03	SILTY SAND
2.03	84.8	1.37	1.81	-0.03	SILTY SAND
2.1	81.22	1.28	1.77	-0.03	SILTY SAND
2.16	78.37	1.15	1.66	-0.03	SILTY SAND
2.23	73.82	0.99	1.5	-0.02	SILTY SAND
2.3	69.73	0.81	1.28	-0.02	SILTY SAND
2.36	66.88	0.76	1.23	-0.03	SILTY SAND
2.43	64.32	0.69	1.14	-0.02	SILTY SAND
2.49	61.95	0.59	1	-0.03	SILTY SAND
2.56	59.58	0.49	0.83	-0.03	SANDS
2.62	58.4	0.43	0.74	-0.03	SANDS
2.69	58.02	0.4	0.67	-0.03	SANDS
2.76	58.27	0.4	0.66	-0.03	SANDS
2.82	58.21	0.37	0.61	-0.03	SANDS
2.89	59.46	0.35	0.55	-0.03	SANDS
2.95	60.69	0.32	0.5	-0.03	SANDS
3.02	61.92	0.32	0.48	-0.02	SANDS

US EPA ARCHIVE DOCUMENT

3.08	63.15	0.34	0.51	-0.03	SANDS
3.15	64.39	0.36	0.52	-0.04	SANDS
3.21	66.62	0.44	0.63	-0.04	SANDS
3.28	68.2	0.52	0.74	-0.04	SANDS
3.35	70.72	0.61	0.87	-0.03	SANDS
3.41	70.95	0.73	1.06	-0.04	SANDS
3.48	70.72	0.9	1.32	-0.04	SILTY SAND
3.54	70.31	1.06	1.58	-0.04	SILTY SAND
3.61	69.25	1.11	1.69	-0.04	SILTY SAND
3.67	67.46	1.11	1.72	-0.05	SILTY SAND
3.74	66.24	1.08	1.71	-0.04	SILTY SAND
3.8	65.41	1	1.6	-0.04	SILTY SAND
3.87	63.08	0.92	1.51	-0.04	SILTY SAND
3.94	62.02	0.71	1.16	-0.04	SILTY SAND
4	61.66	0.61	1.01	-0.04	SILTY SAND
4.07	60.64	0.56	0.93	-0.05	SILTY SAND
4.13	60.83	0.55	0.93	-0.04	SILTY SAND
4.2	60.13	0.54	0.93	-0.04	SILTY SAND
4.26	59.97	0.55	0.96	-0.05	SILTY SAND
4.33	59.71	0.56	1	-0.04	SILTY SAND
4.4	59.61	0.6	1.13	-0.04	SILTY SAND
4.46	57.54	0.65	1.26	-0.05	SILTY SAND
4.53	55.07	0.67	1.38	-0.04	SILTY SAND
4.59	51.97	0.7	1.49	-0.05	SILTY SAND
4.66	49.41	0.73	1.63	-0.05	SILTY SAND
4.72	47.14	0.75	1.75	-0.04	SILTY SAND
4.79	45.83	0.78	1.89	-0.05	SILTY SAND
4.85	43.91	0.61	1.53	-0.04	SILTY SAND
4.92	42.46	0.57	1.48	-0.06	SILTY SAND
4.99	40.48	0.57	1.54	-0.04	SILTY SAND
5.05	38.18	0.58	1.6	-0.06	SILTY SAND
5.12	37.28	0.59	1.67	-0.05	SILTY SAND
5.18	36.48	0.6	1.74	-0.06	SILTY SAND
5.25	35.87	0.61	1.81	-0.05	SILTY SAND
5.31	35.01	0.61	1.83	-0.05	CLAYEY SANDY SILT&SILT
5.38	33.85	0.62	1.9	-0.05	CLAYEY SANDY SILT&SILT
5.44	33.21	0.62	1.9	-0.06	CLAYEY SANDY SILT&SILT
5.51	32.64	0.61	1.86	-0.05	CLAYEY SANDY SILT&SILT
5.58	32.23	0.61	1.83	-0.06	CLAYEY SANDY SILT&SILT
5.64	32.03	0.6	1.78	-0.05	CLAYEY SANDY SILT&SILT
5.71	32.48	0.59	1.71	-0.06	CLAYEY SANDY SILT&SILT
5.77	33.09	0.58	1.65	-0.05	SILTY SAND
5.84	34.11	0.6	1.64	-0.06	SILTY SAND
5.9	34.85	0.58	1.54	-0.05	SILTY SAND
5.97	36.1	0.59	1.55	-0.06	SILTY SAND
6.04	36.67	0.62	1.6	-0.07	SILTY SAND
6.1	37.92	0.66	1.69	-0.06	SILTY SAND
6.17	38.98	0.71	1.81	-0.06	SILTY SAND
6.23	39.46	0.75	1.92	-0.06	SILTY SAND
6.3	39.46	0.79	2.02	-0.06	CLAYEY SANDY SILT&SILT
6.36	39.2	0.83	2.12	-0.06	CLAYEY SANDY SILT&SILT
6.43	39.4	0.85	2.17	-0.06	CLAYEY SANDY SILT&SILT

US EPA ARCHIVE DOCUMENT

6.49	39.3	0.87	2.22	-0.07	CLAYEY SANDY SILT&SILT
6.56	39.01	0.86	2.23	-0.06	CLAYEY SANDY SILT&SILT
6.63	39.04	0.88	2.31	-0.06	CLAYEY SANDY SILT&SILT
6.69	39.01	0.9	2.42	-0.07	CLAYEY SANDY SILT&SILT
6.76	39.13	0.93	2.55	-0.07	CLAYEY SANDY SILT&SILT
6.82	38.5	1.01	2.82	-0.07	CLAYEY SANDY SILT&SILT
6.89	37.44	0.98	2.81	-0.07	CLAYEY SANDY SILT&SILT
6.95	36.1	0.93	2.71	-0.07	CLAYEY SANDY SILT&SILT
7.02	34.05	0.89	2.6	-0.07	CLAYEY SANDY SILT&SILT
7.08	33.98	0.86	2.49	-0.07	CLAYEY SANDY SILT&SILT
7.15	33.92	0.82	2.36	-0.07	CLAYEY SANDY SILT&SILT
7.22	34.08	0.8	2.27	-0.06	CLAYEY SANDY SILT&SILT
7.28	34.59	0.79	2.25	-0.07	CLAYEY SANDY SILT&SILT
7.35	35.14	0.81	2.32	-0.07	CLAYEY SANDY SILT&SILT
7.41	35.59	0.84	2.41	-0.07	CLAYEY SANDY SILT&SILT
7.48	35.59	0.85	2.49	-0.07	CLAYEY SANDY SILT&SILT
7.54	35.26	0.87	2.55	-0.08	CLAYEY SANDY SILT&SILT
7.61	34.65	0.88	2.61	-0.07	CLAYEY SANDY SILT&SILT
7.68	34.02	0.88	2.61	-0.07	CLAYEY SANDY SILT&SILT
7.74	33.63	0.87	2.57	-0.07	CLAYEY SANDY SILT&SILT
7.81	33.18	0.84	2.48	-0.07	CLAYEY SANDY SILT&SILT
7.87	33.34	0.84	2.44	-0.08	CLAYEY SANDY SILT&SILT
7.94	33.57	0.77	2.19	-0.07	CLAYEY SANDY SILT&SILT
8	34.37	0.75	2.09	-0.07	CLAYEY SANDY SILT&SILT
8.07	34.65	0.73	2.02	-0.07	CLAYEY SANDY SILT&SILT
8.13	35.49	0.75	2.05	-0.07	CLAYEY SANDY SILT&SILT
8.2	36.1	0.77	2.11	-0.08	CLAYEY SANDY SILT&SILT
8.27	36.71	0.79	2.15	-0.07	CLAYEY SANDY SILT&SILT
8.33	36.8	0.82	2.22	-0.07	CLAYEY SANDY SILT&SILT
8.4	36.8	0.84	2.29	-0.08	CLAYEY SANDY SILT&SILT
8.46	36.64	0.87	2.35	-0.08	CLAYEY SANDY SILT&SILT
8.53	36.67	0.89	2.43	-0.07	CLAYEY SANDY SILT&SILT
8.59	36.9	0.92	2.51	-0.09	CLAYEY SANDY SILT&SILT
8.66	37.02	0.94	2.59	-0.08	CLAYEY SANDY SILT&SILT
8.72	36.83	0.96	2.67	-0.08	CLAYEY SANDY SILT&SILT
8.79	36.87	0.96	2.71	-0.08	CLAYEY SANDY SILT&SILT
8.86	36.35	0.99	2.81	-0.08	CLAYEY SANDY SILT&SILT
8.92	36.03	0.96	2.75	-0.08	CLAYEY SANDY SILT&SILT
8.99	35.71	0.96	2.78	-0.1	CLAYEY SANDY SILT&SILT
9.05	34.14	0.97	2.81	-0.09	CLAYEY SANDY SILT&SILT
9.12	34.34	0.99	2.86	-0.11	CLAYEY SANDY SILT&SILT
9.18	34.31	1.03	2.97	-0.12	CLAYEY SANDY SILT&SILT
9.25	34.27	1.07	3.07	-0.12	CLAYEY SANDY SILT&SILT
9.32	34.59	1.11	3.15	-0.12	CLAYEY SANDY SILT&SILT
9.38	34.56	1.15	3.22	-0.15	CLAYEY SANDY SILT&SILT
9.45	34.59	1.2	3.35	-0.13	CLAYEY SANDY SILT&SILT
9.51	35.46	1.24	3.42	-0.14	CLAYEY SANDY SILT&SILT
9.58	36.13	1.28	3.5	-0.13	CLAYEY SANDY SILT&SILT
9.64	36.13	1.3	3.55	-0.13	CLAYEY SANDY SILT&SILT
9.71	36.61	1.32	3.63	-0.12	CLAYEY SILT&SILTY CLAYS
9.77	36.9	1.34	3.69	-0.12	CLAYEY SILT&SILTY CLAYS
9.84	36.93	1.3	3.61	-0.11	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

9.91	36.99	1.25	3.49	-0.11	CLAYEY SANDY SILT&SILT
9.97	36.87	1.21	3.41	-0.11	CLAYEY SANDY SILT&SILT
10.04	33.82	1.18	3.38	-0.09	CLAYEY SANDY SILT&SILT
10.1	35.84	1.16	3.32	-0.13	CLAYEY SANDY SILT&SILT
10.17	35.84	1.14	3.34	-0.15	CLAYEY SANDY SILT&SILT
10.23	35.43	1.16	3.44	-0.17	CLAYEY SANDY SILT&SILT
10.3	35.17	1.22	3.66	-0.19	CLAYEY SILT&SILTY CLAYS
10.36	34.21	1.27	3.79	-0.18	CLAYEY SILT&SILTY CLAYS
10.43	32.93	1.29	3.8	-0.16	CLAYEY SILT&SILTY CLAYS
10.5	32.16	1.3	3.71	-0.15	CLAYEY SILT&SILTY CLAYS
10.56	32.51	1.28	3.54	-0.14	CLAYEY SILT&SILTY CLAYS
10.63	33.5	1.27	3.42	-0.14	CLAYEY SANDY SILT&SILT
10.69	35.36	1.28	3.35	-0.14	CLAYEY SANDY SILT&SILT
10.76	37.41	1.26	3.24	-0.15	CLAYEY SANDY SILT&SILT
10.82	38.59	1.23	3.13	-0.15	CLAYEY SANDY SILT&SILT
10.89	39.17	1.2	3.02	-0.13	CLAYEY SANDY SILT&SILT
10.96	39.49	1.19	2.99	-0.12	CLAYEY SANDY SILT&SILT
11.02	39.23	1.2	3.03	-0.11	CLAYEY SANDY SILT&SILT
11.09	39.87	1.23	3.14	-0.12	CLAYEY SANDY SILT&SILT
11.15	40.55	1.25	3.27	-0.15	CLAYEY SANDY SILT&SILT
11.22	40.03	1.28	3.45	-0.16	CLAYEY SANDY SILT&SILT
11.28	39.27	1.32	3.72	-0.18	CLAYEY SILT&SILTY CLAYS
11.35	38.34	1.37	4.06	-0.17	CLAYEY SILT&SILTY CLAYS
11.41	36.74	1.42	4.41	-0.16	CLAYEY SILT&SILTY CLAYS
11.48	35.14	1.44	4.64	-0.15	CLAYEY SILT&SILTY CLAYS
11.55	32.7	1.47	4.84	-0.16	CLAYEY SILT&SILTY CLAYS
11.61	30.4	1.51	4.97	-0.15	CLAYEY SILT&SILTY CLAYS
11.68	29.12	1.5	4.87	-0.14	CLAYEY SILT&SILTY CLAYS
11.74	29.02	1.46	4.63	-0.15	CLAYEY SILT&SILTY CLAYS
11.81	29.95	1.39	4.29	-0.14	CLAYEY SILT&SILTY CLAYS
11.87	30.88	1.34	4.07	-0.13	CLAYEY SILT&SILTY CLAYS
11.94	32.54	1.25	3.8	-0.15	CLAYEY SILT&SILTY CLAYS
12	33.57	1.2	3.65	-0.15	CLAYEY SILT&SILTY CLAYS
12.07	33.67	1.19	3.66	-0.14	CLAYEY SILT&SILTY CLAYS
12.14	33.44	1.22	3.74	-0.18	CLAYEY SILT&SILTY CLAYS
12.2	32.61	1.27	3.87	-0.16	CLAYEY SILT&SILTY CLAYS
12.27	31.84	1.33	4.06	-0.16	CLAYEY SILT&SILTY CLAYS
12.33	31.87	1.3	3.93	-0.16	CLAYEY SILT&SILTY CLAYS
12.4	32.54	1.28	3.84	-0.16	CLAYEY SILT&SILTY CLAYS
12.46	33.25	1.28	3.84	-0.15	CLAYEY SILT&SILTY CLAYS
12.53	33.89	1.26	3.83	-0.16	CLAYEY SILT&SILTY CLAYS
12.6	33.98	1.26	3.9	-0.16	CLAYEY SILT&SILTY CLAYS
12.66	33.79	1.22	3.85	-0.15	CLAYEY SILT&SILTY CLAYS
12.73	32.93	1.2	3.86	-0.15	CLAYEY SILT&SILTY CLAYS
12.79	32	1.26	4.05	-0.14	CLAYEY SILT&SILTY CLAYS
12.86	31.04	1.14	3.66	-0.15	CLAYEY SILT&SILTY CLAYS
12.92	30.05	1.18	3.78	-0.15	CLAYEY SILT&SILTY CLAYS
12.99	29.34	1.23	3.9	-0.14	CLAYEY SILT&SILTY CLAYS
13.05	31.33	1.29	4.02	-0.16	CLAYEY SILT&SILTY CLAYS
13.12	32.77	1.36	4.21	-0.15	CLAYEY SILT&SILTY CLAYS
13.19	32.39	1.43	4.42	-0.15	CLAYEY SILT&SILTY CLAYS
13.25	31.84	1.5	4.61	-0.14	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

13.32	31.97	1.58	4.79	-0.15	CLAYEY SILT&SILTY CLAYS
13.38	32.06	1.62	4.82	-0.14	CLAYEY SILT&SILTY CLAYS
13.45	32.45	1.66	4.84	-0.14	CLAYEY SILT&SILTY CLAYS
13.51	33.06	1.68	4.84	-0.14	CLAYEY SILT&SILTY CLAYS
13.58	34.02	1.7	4.84	-0.15	CLAYEY SILT&SILTY CLAYS
13.64	34.85	1.73	4.86	-0.14	CLAYEY SILT&SILTY CLAYS
13.71	35.26	1.76	4.88	-0.13	CLAYEY SILT&SILTY CLAYS
13.78	35.46	1.79	4.91	-0.14	CLAYEY SILT&SILTY CLAYS
13.84	35.65	1.78	4.89	-0.13	CLAYEY SILT&SILTY CLAYS
13.91	35.81	1.76	4.83	-0.13	CLAYEY SILT&SILTY CLAYS
13.97	36.1	1.8	4.99	-0.13	CLAYEY SILT&SILTY CLAYS
14.04	37.38	1.85	5.2	-0.14	CLAYEY SILT&SILTY CLAYS
14.1	37.7	1.9	5.44	-0.14	CLAYS
14.17	36.16	1.94	5.67	-0.14	CLAYS
14.24	34.85	1.98	5.84	-0.13	CLAYS
14.3	33.95	2	5.89	-0.13	CLAYS
14.37	33.7	1.99	5.83	-0.14	CLAYS
14.43	33.34	1.97	5.74	-0.13	CLAYS
14.5	33.38	1.93	5.56	-0.14	CLAYS
14.56	33.85	1.89	5.41	-0.13	CLAYS
14.63	35.04	1.85	5.27	-0.14	CLAYS
14.69	35.29	1.81	5.24	-0.13	CLAYS
14.76	35.26	1.8	5.24	-0.13	CLAYS
14.83	34.98	1.71	5.01	-0.13	CLAYEY SILT&SILTY CLAYS
14.89	35.49	1.71	5.06	-0.14	CLAYEY SILT&SILTY CLAYS
14.96	35.07	1.68	5.06	-0.13	CLAYEY SILT&SILTY CLAYS
15.02	30.75	1.66	5.09	-0.14	CLAYS
15.09	34.53	1.68	5.14	-0.15	CLAYEY SILT&SILTY CLAYS
15.15	33.82	1.69	5.28	-0.15	CLAYS
15.22	32.74	1.71	5.41	-0.14	CLAYS
15.28	32.13	1.73	5.53	-0.14	CLAYS
15.35	31.62	1.7	5.5	-0.14	CLAYS
15.42	31.01	1.68	5.46	-0.14	CLAYS
15.48	30.88	1.74	5.68	-0.13	CLAYS
15.55	31.23	1.76	5.76	-0.14	CLAYS
15.61	30.91	1.79	5.83	-0.14	CLAYS
15.68	30.08	1.8	5.83	-0.13	CLAYS
15.74	30.21	1.8	5.8	-0.14	CLAYS
15.81	30.24	1.81	5.79	-0.14	CLAYS
15.88	31.14	1.71	5.51	-0.14	CLAYS
15.94	31.52	1.67	5.51	-0.13	CLAYS
16.01	31.78	1.74	5.88	-0.14	CLAYS
16.07	31.59	1.79	6.27	-0.15	CLAYS
16.14	30.95	1.79	6.58	-0.15	CLAYS
16.2	29.06	1.79	6.9	-0.15	CLAYS
16.27	27.52	1.77	7.14	-0.15	CLAYS
16.33	26.43	1.74	7.34	-0.15	CLAYS
16.4	25.28	1.69	7.41	-0.14	CLAYS
16.47	24.16	1.62	7.4	-0.14	CLAYS
16.53	23.1	1.55	7.28	-0.14	CLAYS
16.6	22.37	1.44	6.92	-0.14	CLAYS
16.66	21.25	1.35	6.51	-0.14	CLAYS

US EPA ARCHIVE DOCUMENT

16.73	20.38	1.27	6.05	-0.14	CLAYS
16.79	20.22	1.19	5.52	-0.15	CLAYS
16.86	20.19	1.09	4.95	-0.14	CLAYS
16.92	20.74	1.07	4.75	-0.15	CLAYS
16.99	21.34	1.11	4.82	-0.15	CLAYS
17.06	23.26	1.15	4.96	-0.15	CLAYS
17.12	23.65	1.21	5.21	-0.15	CLAYS
17.19	23.26	1.29	5.6	-0.15	CLAYS
17.25	23.39	1.37	5.98	-0.16	CLAYS
17.32	23.17	1.42	6.31	-0.15	CLAYS
17.38	22.85	1.44	6.59	-0.14	CLAYS
17.45	22.88	1.44	6.78	-0.14	CLAYS
17.52	22.85	1.43	6.99	-0.15	CLAYS
17.58	21.86	1.4	7.16	-0.14	CLAYS
17.65	21.05	1.35	7.13	-0.15	CLAYS
17.71	19.84	1.29	6.97	-0.14	CLAYS
17.78	18.72	1.13	6.16	-0.14	CLAYS
17.84	18.21	0.97	5.27	-0.15	CLAYS
17.91	17.54	0.82	4.39	-0.15	CLAYEY SILT&SILTY CLAYS
17.97	18.03	0.86	4.55	-0.16	CLAYS
18.04	18.53	0.9	4.78	-0.16	CLAYS
18.11	19.02	0.94	5.03	-0.15	CLAYS
18.17	19.52	0.99	5.3	-0.16	CLAYS
18.24	19.1	0.96	5.22	-0.16	CLAYS
18.3	18.62	0.92	4.93	-0.16	CLAYS
18.37	17.95	0.86	4.53	-0.16	CLAYEY SILT&SILTY CLAYS
18.43	17.92	0.8	4.08	-0.16	CLAYEY SILT&SILTY CLAYS
18.5	18.4	0.76	3.75	-0.16	CLAYEY SILT&SILTY CLAYS
18.56	18.98	0.74	3.52	-0.16	CLAYEY SILT&SILTY CLAYS
18.63	19.84	0.74	3.42	-0.16	CLAYEY SILT&SILTY CLAYS
18.7	20.64	0.75	3.39	-0.15	CLAYEY SILT&SILTY CLAYS
18.76	21.69	0.82	3.6	-0.16	CLAYEY SILT&SILTY CLAYS
18.83	22.05	0.95	4.13	-0.15	CLAYEY SILT&SILTY CLAYS
18.89	22.63	0.99	4.26	-0.16	CLAYEY SILT&SILTY CLAYS
18.96	22.63	1.08	4.65	-0.15	CLAYEY SILT&SILTY CLAYS
19.02	23.33	1.17	4.99	-0.16	CLAYS
19.09	23.78	1.25	5.38	-0.16	CLAYS
19.16	23.55	1.33	5.75	-0.17	CLAYS
19.22	23.26	1.36	5.92	-0.16	CLAYS
19.29	22.91	1.38	6.03	-0.16	CLAYS
19.35	23.13	1.4	6.09	-0.16	CLAYS
19.42	23.01	1.39	6.09	-0.17	CLAYS
19.48	22.97	1.35	5.94	-0.17	CLAYS
19.55	22.79	1.33	5.9	-0.16	CLAYS
19.61	22.69	1.31	5.9	-0.16	CLAYS
19.68	22.97	1.32	6.02	-0.17	CLAYS
19.75	22.69	1.34	6.19	-0.17	CLAYS
19.81	22.3	1.33	6.2	-0.17	CLAYS
19.88	21.66	1.22	5.72	-0.17	CLAYS
19.94	21.09	1.22	5.73	-0.17	CLAYS
20.01	20.93	1.23	5.75	-0.16	CLAYS
20.07	21.02	1.24	5.73	-0.17	CLAYS

US EPA ARCHIVE DOCUMENT

20.14	21.73	1.26	5.83	-0.17	CLAYS
20.2	21.6	1.27	5.93	-0.17	CLAYS
20.27	21.79	1.26	6.02	-0.18	CLAYS
20.34	21.66	1.27	6.19	-0.18	CLAYS
20.4	21.66	1.24	6.22	-0.18	CLAYS
20.47	21.05	1.22	6.34	-0.18	CLAYS
20.53	20.35	1.18	6.37	-0.18	CLAYS
20.6	19.62	1.12	6.31	-0.17	CLAYS
20.66	18.85	1.07	6.2	-0.17	CLAYS
20.73	18.05	1.01	6.05	-0.17	CLAYS
20.8	17.25	0.96	5.78	-0.17	CLAYS
20.86	16.83	0.85	5.05	-0.17	CLAYS
20.93	16.29	0.86	5.02	-0.17	CLAYS
20.99	16.26	0.86	4.79	-0.18	CLAYS
21.06	15.62	0.84	4.44	-0.19	CLAYS
21.12	17.15	0.87	4.28	-0.19	CLAYEY SILT&SILTY CLAYS
21.19	18.34	0.97	4.42	-0.18	CLAYEY SILT&SILTY CLAYS
21.25	19.42	1.08	4.63	-0.19	CLAYS
21.32	20.26	1.2	4.78	-0.18	CLAYS
21.39	22.56	1.32	4.87	-0.18	CLAYS
21.45	24.55	1.36	4.75	-0.17	CLAYEY SILT&SILTY CLAYS
21.52	26.05	1.5	4.97	-0.17	CLAYS
21.58	27.65	1.64	5.22	-0.16	CLAYS
21.65	29.92	1.76	5.36	-0.17	CLAYS
21.71	31.71	1.77	5.21	-0.18	CLAYS
21.78	32.45	1.75	4.98	-0.17	CLAYEY SILT&SILTY CLAYS
21.84	33.09	1.73	4.75	-0.16	CLAYEY SILT&SILTY CLAYS
21.91	34.18	1.7	4.49	-0.16	CLAYEY SILT&SILTY CLAYS
21.98	35.71	1.7	4.33	-0.17	CLAYEY SILT&SILTY CLAYS
22.04	36.38	1.65	4.03	-0.17	CLAYEY SILT&SILTY CLAYS
22.11	38.66	1.58	3.73	-0.17	CLAYEY SILT&SILTY CLAYS
22.17	40.03	1.52	3.48	-0.18	CLAYEY SANDY SILT&SILT
22.24	41.66	1.45	3.21	-0.18	CLAYEY SANDY SILT&SILT
22.3	43.27	1.32	2.84	-0.17	CLAYEY SANDY SILT&SILT
22.37	44.77	1.19	2.5	-0.17	CLAYEY SANDY SILT&SILT
22.44	45.73	1.05	2.15	-0.17	CLAYEY SANDY SILT&SILT
22.5	47.11	0.91	1.82	-0.18	SILTY SAND
22.57	48.58	0.8	1.56	-0.17	SILTY SAND
22.63	49.89	0.71	1.36	-0.19	SILTY SAND
22.7	51.04	0.65	1.24	-0.18	SILTY SAND
22.76	51.81	0.61	1.16	-0.17	SILTY SAND
22.83	52.8	0.51	0.97	-0.18	SILTY SAND
22.89	53.48	0.51	0.97	-0.19	SILTY SAND
22.96	53.54	0.51	0.96	-0.18	SILTY SAND
23.03	50.43	0.49	0.93	-0.17	SILTY SAND
23.09	52.99	0.48	0.91	-0.18	SILTY SAND
23.16	53.31	0.48	0.91	-0.18	SILTY SAND
23.22	53.48	0.48	0.92	-0.19	SILTY SAND
23.29	53.63	0.49	0.94	-0.18	SILTY SAND
23.35	53.48	0.51	1	-0.19	SILTY SAND
23.42	52.13	0.53	1.04	-0.19	SILTY SAND
23.48	50.82	0.54	1.06	-0.19	SILTY SAND

US EPA ARCHIVE DOCUMENT

23.55	49.64	0.53	1.04	-0.18	SILTY SAND
23.62	49.5	0.52	1.01	-0.18	SILTY SAND
23.68	49.76	0.53	1	-0.18	SILTY SAND
23.75	50.85	0.53	1.02	-0.18	SILTY SAND
23.81	52.74	0.56	1.09	-0.19	SILTY SAND
23.88	54.43	0.6	1.23	-0.19	SILTY SAND
23.94	55.01	0.61	1.35	-0.18	SILTY SAND
24.01	53.41	0.62	1.52	-0.18	SILTY SAND
24.08	47.9	0.64	1.76	-0.18	SILTY SAND
24.14	43.87	0.69	2.11	-0.19	CLAYEY SANDY SILT&SILT
24.21	37.89	0.78	2.67	-0.18	CLAYEY SANDY SILT&SILT
24.27	32.51	0.92	3.42	-0.18	CLAYEY SANDY SILT&SILT
24.34	29.12	1.06	4.17	-0.18	CLAYEY SILT&SILTY CLAYS
24.4	26.94	1.19	4.85	-0.18	CLAYEY SILT&SILTY CLAYS
24.47	25.05	1.31	5.48	-0.19	CLAYS
24.53	24.61	1.37	5.85	-0.19	CLAYS
24.6	23.71	1.39	6.02	-0.18	CLAYS
24.67	23.2	1.39	6.13	-0.18	CLAYS
24.73	23.46	1.36	6.02	-0.18	CLAYS
24.8	23.23	1.35	6.01	-0.18	CLAYS
24.86	22.69	1.4	6.29	-0.19	CLAYS
24.93	21.82	1.32	5.98	-0.18	CLAYS
24.99	21.44	1.29	5.75	-0.18	CLAYS
25.06	22.63	1.27	5.5	-0.18	CLAYS
25.12	22.53	1.19	4.99	-0.19	CLAYS
25.19	22.08	1.11	4.56	-0.19	CLAYEY SILT&SILTY CLAYS
25.26	22.02	1.07	4.22	-0.18	CLAYEY SILT&SILTY CLAYS
25.32	23.84	1.05	4.03	-0.19	CLAYEY SILT&SILTY CLAYS
25.39	25.6	1.07	3.98	-0.18	CLAYEY SILT&SILTY CLAYS
25.45	26.5	1.05	3.83	-0.19	CLAYEY SILT&SILTY CLAYS
25.52	26.59	1.07	3.81	-0.19	CLAYEY SILT&SILTY CLAYS
25.58	26.91	1.08	3.73	-0.19	CLAYEY SILT&SILTY CLAYS
25.65	27.42	1.09	3.63	-0.18	CLAYEY SILT&SILTY CLAYS
25.72	28.22	1.1	3.53	-0.18	CLAYEY SILT&SILTY CLAYS
25.78	29.37	1.1	3.38	-0.19	CLAYEY SILT&SILTY CLAYS
25.85	30.37	1.02	2.96	-0.18	CLAYEY SANDY SILT&SILT
25.91	31.49	1.08	2.97	-0.18	CLAYEY SANDY SILT&SILT
25.98	32.96	1.18	3.06	-0.19	CLAYEY SANDY SILT&SILT
26.04	34.37	1.27	3.12	-0.18	CLAYEY SANDY SILT&SILT
26.11	37.34	1.33	3.09	-0.17	CLAYEY SANDY SILT&SILT
26.17	39.91	1.38	3.05	-0.18	CLAYEY SANDY SILT&SILT
26.24	42.05	1.39	2.94	-0.17	CLAYEY SANDY SILT&SILT
26.31	44.39	1.37	2.8	-0.19	CLAYEY SANDY SILT&SILT
26.37	46.44	1.35	2.68	-0.17	CLAYEY SANDY SILT&SILT
26.44	48.96	1.33	2.59	-0.18	CLAYEY SANDY SILT&SILT
26.5	50.82	1.3	2.5	-0.18	CLAYEY SANDY SILT&SILT
26.57	51.59	1.24	2.37	-0.19	CLAYEY SANDY SILT&SILT
26.63	51.97	1.16	2.22	-0.19	SILTY SAND
26.7	52.23	1.07	2.06	-0.18	SILTY SAND
26.76	52.39	0.99	1.91	-0.19	SILTY SAND
26.83	52.57	0.91	1.79	-0.18	SILTY SAND
26.9	52.71	0.85	1.71	-0.19	SILTY SAND

US EPA ARCHIVE DOCUMENT

26.96	52.03	0.75	1.55	-0.19	SILTY SAND
27.03	49.89	0.64	1.34	-0.19	SILTY SAND
27.09	50.21	0.58	1.22	-0.19	SILTY SAND
27.16	48.42	0.59	1.23	-0.2	SILTY SAND
27.22	46.56	0.69	1.37	-0.19	SILTY SAND
27.29	45.92	0.8	1.48	-0.19	SILTY SAND
27.36	47.08	0.85	1.47	-0.2	SILTY SAND
27.42	49.28	0.89	1.41	-0.18	SILTY SAND
27.49	52.93	0.92	1.35	-0.18	SILTY SAND
27.55	59.52	0.91	1.27	-0.18	SILTY SAND
27.62	67.11	0.88	1.16	-0.19	SILTY SAND
27.68	72.29	0.85	1.09	-0.19	SANDS
27.75	75.84	0.83	1.04	-0.19	SANDS
27.81	78.15	0.81	1	-0.18	SANDS
27.88	79.75	0.8	0.98	-0.19	SANDS
27.95	80.93	0.75	0.91	-0.18	SANDS
28.01	82.18	0.74	0.9	-0.18	SANDS
28.08	80.99	0.76	0.92	-0.19	SANDS
28.14	83.11	0.78	0.95	-0.19	SANDS
28.21	82.88	0.8	0.98	-0.18	SANDS
28.27	82.37	0.83	1.01	-0.18	SANDS
28.34	81.8	0.84	1.04	-0.18	SANDS
28.4	81.5	0.86	1.05	-0.18	SANDS
28.47	80.93	0.86	1.05	-0.18	SANDS
28.54	81.06	0.85	1.03	-0.18	SANDS
28.6	81.19	0.84	1	-0.18	SANDS
28.67	82.02	0.83	0.98	-0.17	SANDS
28.73	83.14	0.83	0.97	-0.18	SANDS
28.8	84.13	0.76	0.87	-0.17	SANDS
28.86	85.44	0.68	0.78	-0.17	SANDS
28.93	87.11	0.61	0.69	-0.18	SANDS
29	87.53	0.69	0.78	-0.17	SANDS
29.06	87.94	0.76	0.84	-0.17	SANDS
29.13	88.35	0.81	0.9	-0.17	SANDS
29.19	89.76	0.85	0.94	-0.17	SANDS
29.26	90.59	0.89	0.97	-0.16	SANDS
29.32	91.17	0.91	0.98	-0.17	SANDS
29.39	91.23	0.95	1.02	-0.16	SANDS
29.45	91.59	0.97	1.04	-0.17	SANDS
29.52	92.1	0.99	1.04	-0.17	SANDS
29.59	92.77	1	1.03	-0.16	SANDS
29.65	94.12	1.01	1.01	-0.17	SANDS
29.72	95.88	1.01	0.99	-0.16	SANDS
29.78	98.24	1.02	0.97	-0.17	SANDS
29.85	100.8	1.04	0.96	-0.17	SANDS
29.91	103.75	1.02	0.91	-0.16	SANDS
29.98	107.2	1.04	0.9	-0.16	SANDS
30.04	106.92	1.08	0.91	-0.17	SANDS
30.11	114.18	1.13	0.91	-0.17	SANDS
30.18	118.37	1.18	0.92	-0.17	SANDS
30.24	122.21	1.23	0.94	-0.16	SANDS
30.31	126.02	1.29	0.95	-0.16	SANDS

US EPA ARCHIVE DOCUMENT

30.37	129.6	1.34	0.97	-0.16	SANDS
30.44	133	1.4	0.98	-0.16	SANDS
30.5	136.52	1.45	0.99	-0.15	SANDS
30.57	140.33	1.49	1	-0.15	SANDS
30.64	144.17	1.54	1.01	-0.16	SANDS
30.7	147.04	1.6	1.04	-0.15	SANDS
30.77	150.95	1.52	0.99	-0.15	SANDS
30.83	154.69	1.45	0.94	-0.15	SANDS
30.9	157.21	1.37	0.91	-0.14	SANDS
30.96	159.72	1.63	1.12	-0.14	SANDS
31.03	149.22	1.88	1.36	-0.15	SANDS
31.09	152.93	2.08	1.59	-0.14	SANDS
31.16	147.43	2.21	1.83	-0.15	SANDS
31.23	137.73	2.25	2.04	-0.14	SILTY SAND
31.29	126.5	2.22	2.23	-0.14	SILTY SAND
31.36	114.91	2.25	2.49	-0.14	SILTY SAND
31.42	104.16	2.22	2.72	-0.15	SILTY SAND
31.49	93.09	2.12	2.86	-0.14	SILTY SAND
31.55	83.56	2.02	2.99	-0.14	CLAYEY SANDY SILT&SILT
31.62	75.49	2.02	3.24	-0.14	CLAYEY SANDY SILT&SILT
31.68	69.25	2.25	3.84	-0.15	CLAYEY SANDY SILT&SILT
31.75	64.23	2.51	4.47	-0.14	CLAYEY SILT&SILTY CLAYS
31.82	58.66	2.71	4.87	-0.14	CLAYEY SILT&SILTY CLAYS
31.88	54.27	2.77	4.92	-0.15	CLAYEY SILT&SILTY CLAYS
31.95	52.13	2.61	4.5	-0.15	CLAYEY SILT&SILTY CLAYS
32.01	52.83	2.54	4.19	-0.14	CLAYEY SILT&SILTY CLAYS
32.08	55.1	2.53	3.97	-0.17	CLAYEY SANDY SILT&SILT
32.14	60.42	2.45	3.68	-0.18	CLAYEY SANDY SILT&SILT
32.21	62.82	2.36	3.45	-0.17	CLAYEY SANDY SILT&SILT
32.28	64.87	2.27	3.28	-0.16	CLAYEY SANDY SILT&SILT
32.34	67.49	2.2	3.17	-0.16	CLAYEY SANDY SILT&SILT
32.41	70.63	2.08	3.03	-0.16	CLAYEY SANDY SILT&SILT
32.47	72.64	1.98	2.98	-0.17	CLAYEY SANDY SILT&SILT
32.54	71.27	1.91	3.03	-0.17	CLAYEY SANDY SILT&SILT
32.6	68.45	1.81	3.07	-0.17	CLAYEY SANDY SILT&SILT
32.67	65.83	1.74	3.18	-0.16	CLAYEY SANDY SILT&SILT
32.73	62.63	1.74	3.45	-0.17	CLAYEY SANDY SILT&SILT
32.8	57.79	1.68	3.57	-0.17	CLAYEY SANDY SILT&SILT
32.87	52.13	1.62	3.71	-0.16	CLAYEY SANDY SILT&SILT
32.93	46.91	1.55	3.87	-0.16	CLAYEY SILT&SILTY CLAYS
33	43.36	1.87	5.02	-0.18	CLAYEY SILT&SILTY CLAYS
33.06	39.81	2.16	6.3	-0.18	CLAYS
33.13	42.02	2.33	7.36	-0.19	CLAYS
33.19	37.15	2.42	8.52	-0.19	CLAYS
33.26	32	2.46	9.35	-0.19	CLAYS
33.32	28.89	2.37	9.39	-0.2	CLAYS
33.39	25.92	2.21	8.69	-0.19	CLAYS
33.46	23.68	1.96	7.45	-0.18	CLAYS
33.52	23.04	1.72	6.19	-0.18	CLAYS
33.59	23.97	1.61	5.39	-0.19	CLAYS
33.65	26.24	1.6	4.98	-0.19	CLAYS
33.72	29.37	1.45	4.26	-0.19	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

33.78	31.39	1.37	3.85	-0.19	CLAYEY SILT&SILTY CLAYS
33.85	32.57	1.62	4.37	-0.19	CLAYEY SILT&SILTY CLAYS
33.92	35.39	1.78	4.7	-0.18	CLAYEY SILT&SILTY CLAYS
33.98	37.79	1.92	5	-0.18	CLAYEY SILT&SILTY CLAYS
34.05	38.05	2.02	5.21	-0.2	CLAYEY SILT&SILTY CLAYS
34.11	38.59	2.09	5.37	-0.2	CLAYS
34.18	39.2	2.11	5.42	-0.2	CLAYS
34.24	38.98	2.18	5.53	-0.21	CLAYS
34.31	38.18	2.28	5.63	-0.2	CLAYS
34.37	38.98	2.32	5.46	-0.2	CLAYS
34.44	39.1	2.36	5.28	-0.2	CLAYEY SILT&SILTY CLAYS
34.51	39.4	2.43	5.15	-0.2	CLAYEY SILT&SILTY CLAYS
34.57	42.02	2.49	5.05	-0.2	CLAYEY SILT&SILTY CLAYS
34.64	45.63	2.56	5.11	-0.2	CLAYEY SILT&SILTY CLAYS
34.7	49.95	2.45	4.96	-0.2	CLAYEY SILT&SILTY CLAYS
34.77	52.35	2.3	4.93	-0.2	CLAYEY SILT&SILTY CLAYS
34.83	53.34	2.31	5.43	-0.2	CLAYEY SILT&SILTY CLAYS
34.9	52.39	2.26	6.02	-0.2	CLAYS
34.96	46.53	2.25	7.02	-0.21	CLAYS
35.03	42.24	2.26	8.32	-0.21	CLAYS
35.1	33.38	2.19	9.66	-0.22	CLAYS
35.16	27.71	2.11	10	-0.21	CLAYS
35.23	23.26	1.91	10	-0.21	CLAYS
35.29	19.58	1.68	9.54	-0.21	CLAYS
35.36	16.67	1.4	7.91	-0.21	CLAYS
35.42	15.78	1.12	6.01	-0.21	CLAYS
35.49	16.48	0.97	4.78	-0.22	CLAYS
35.56	17.95	0.84	3.87	-0.21	CLAYEY SILT&SILTY CLAYS
35.62	19.2	0.83	3.56	-0.22	CLAYEY SILT&SILTY CLAYS
35.69	20.22	0.91	3.65	-0.21	CLAYEY SILT&SILTY CLAYS
35.75	22.56	0.88	3.27	-0.21	CLAYEY SILT&SILTY CLAYS
35.82	24.77	0.85	2.93	-0.21	CLAYEY SANDY SILT&SILT
35.88	26.02	0.83	2.67	-0.21	CLAYEY SANDY SILT&SILT
35.95	26.91	1.16	3.53	-0.21	CLAYEY SILT&SILTY CLAYS
36.01	29.51	1.42	4.07	-0.21	CLAYEY SILT&SILTY CLAYS
36.08	32.11	1.5	4.07	-0.22	CLAYEY SILT&SILTY CLAYS
36.15	35.97	1.67	4.27	-0.21	CLAYEY SILT&SILTY CLAYS
36.21	35.23	1.89	4.61	-0.21	CLAYEY SILT&SILTY CLAYS
36.28	37.6	1.78	4.09	-0.23	CLAYEY SILT&SILTY CLAYS
36.34	39.23	1.62	3.55	-0.21	CLAYEY SANDY SILT&SILT
36.41	40.93	1.72	3.59	-0.22	CLAYEY SANDY SILT&SILT
36.47	44.83	1.86	3.71	-0.22	CLAYEY SANDY SILT&SILT
36.54	48.35	1.97	3.82	-0.21	CLAYEY SANDY SILT&SILT
36.6	49.76	2.16	4.12	-0.21	CLAYEY SILT&SILTY CLAYS
36.67	50.85	2.36	4.42	-0.21	CLAYEY SILT&SILTY CLAYS
36.74	52.39	2.63	4.86	-0.21	CLAYEY SILT&SILTY CLAYS
36.8	53.6	2.8	5.08	-0.21	CLAYEY SILT&SILTY CLAYS
36.87	54.37	3.23	5.81	-0.21	CLAYS
36.93	54.21	3.19	5.68	-0.21	CLAYS
37	55.4	3.23	5.7	-0.21	CLAYS
37.06	55.01	3.24	5.66	-0.21	CLAYS
37.13	57.82	3.16	5.47	-0.21	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

37.2	57.25	3.11	5.37	-0.21	CLAYEY SILT&SILTY CLAYS
37.26	56.87	3.1	5.31	-0.21	CLAYEY SILT&SILTY CLAYS
37.33	57.44	3.13	5.31	-0.21	CLAYEY SILT&SILTY CLAYS
37.39	58.5	3.05	5.12	-0.22	CLAYEY SILT&SILTY CLAYS
37.46	59.2	2.96	4.97	-0.22	CLAYEY SILT&SILTY CLAYS
37.52	58.72	2.91	4.92	-0.21	CLAYEY SILT&SILTY CLAYS
37.59	59.75	2.94	5.01	-0.21	CLAYEY SILT&SILTY CLAYS
37.65	60.45	3.01	5.22	-0.22	CLAYEY SILT&SILTY CLAYS
37.72	60.35	2.97	5.24	-0.22	CLAYEY SILT&SILTY CLAYS
37.79	58.63	3.01	5.43	-0.21	CLAYEY SILT&SILTY CLAYS
37.85	56.45	3.25	5.96	-0.2	CLAYS
37.92	55.84	3.49	6.49	-0.21	CLAYS
37.98	54.76	3.41	6.42	-0.21	CLAYS
38.05	53.34	3.33	6.32	-0.21	CLAYS
38.11	54.24	3.17	6.05	-0.21	CLAYS
38.18	52.96	2.99	5.75	-0.22	CLAYS
38.24	51.68	2.87	5.57	-0.21	CLAYEY SILT&SILTY CLAYS
38.31	51.93	2.79	5.48	-0.21	CLAYEY SILT&SILTY CLAYS
38.38	52.23	2.71	5.43	-0.21	CLAYEY SILT&SILTY CLAYS
38.44	51.71	2.74	5.66	-0.21	CLAYS
38.51	50.88	2.78	5.96	-0.21	CLAYS
38.57	50.47	2.84	6.33	-0.21	CLAYS
38.64	48.09	2.89	6.67	-0.21	CLAYS
38.7	46.05	2.83	6.83	-0.21	CLAYS
38.77	43.27	2.75	6.76	-0.21	CLAYS
38.84	41.06	2.67	6.65	-0.21	CLAYS
38.9	40.51	2.59	6.52	-0.21	CLAYS
38.97	41.15	2.5	6.41	-0.21	CLAYS
39.03	36.26	2.41	6.37	-0.21	CLAYS
39.1	41.57	2.4	6.42	-0.21	CLAYS
39.16	39.94	2.42	6.72	-0.21	CLAYS
39.23	38.46	2.43	6.96	-0.21	CLAYS
39.29	36.42	2.37	7.03	-0.22	CLAYS
39.36	34.69	2.26	6.91	-0.22	CLAYS
39.43	33.76	2.14	6.69	-0.21	CLAYS
39.49	33.25	2	6.4	-0.21	CLAYS
39.56	32.45	1.84	6.04	-0.21	CLAYS
39.62	31.49	1.72	5.76	-0.22	CLAYS
39.69	30.65	1.67	5.65	-0.21	CLAYS
39.75	30.18	1.63	5.52	-0.22	CLAYS
39.82	29.6	1.63	5.52	-0.22	CLAYS
39.88	28.89	1.57	5.31	-0.22	CLAYS
39.95	28.32	1.56	5.25	-0.22	CLAYS
40.02	29.73	1.52	5.09	-0.22	CLAYS
40.08	30.81	1.5	5.03	-0.22	CLAYEY SILT&SILTY CLAYS
40.15	29.89	1.56	5.26	-0.21	CLAYS
40.21	29.73	1.56	5.28	-0.22	CLAYS
40.28	29.53	1.58	5.34	-0.22	CLAYS
40.34	29.28	1.58	5.36	-0.22	CLAYS
40.41	29.41	1.58	5.36	-0.21	CLAYS
40.48	29.79	1.59	5.41	-0.22	CLAYS
40.54	29.7	1.61	5.48	-0.21	CLAYS

US EPA ARCHIVE DOCUMENT

40.61	29.63	1.6	5.48	-0.21	CLAYS
40.67	29.37	1.59	5.48	-0.22	CLAYS
40.74	29.15	1.6	5.6	-0.22	CLAYS
40.8	29.15	1.61	5.59	-0.21	CLAYS
40.87	29.06	1.59	5.59	-0.21	CLAYS
40.93	28.83	1.66	5.93	-0.22	CLAYS
41	28.35	1.73	6.3	-0.22	CLAYS
41.07	27.42	1.76	6.58	-0.23	CLAYS
41.13	29.34	1.74	6.65	-0.23	CLAYS
41.2	27.45	1.74	6.9	-0.22	CLAYS
41.26	26.14	1.81	7.34	-0.23	CLAYS
41.33	25.57	1.82	7.51	-0.22	CLAYS
41.39	24.86	1.68	7.02	-0.22	CLAYS
41.46	24	1.54	6.44	-0.22	CLAYS
41.52	23.65	1.45	6.05	-0.23	CLAYS
41.59	23.78	1.36	5.66	-0.22	CLAYS
41.66	23.87	1.35	5.55	-0.22	CLAYS
41.72	23.9	1.27	5.15	-0.22	CLAYS
41.79	23.94	1.25	4.98	-0.22	CLAYS
41.85	24.22	1.25	4.92	-0.22	CLAYS
41.92	24.67	1.26	4.97	-0.22	CLAYS
41.98	24.83	1.38	5.48	-0.22	CLAYS
42.05	26.02	1.46	5.89	-0.23	CLAYS
42.12	27.2	1.53	6.33	-0.22	CLAYS
42.18	25.38	1.61	6.94	-0.22	CLAYS
42.25	24.22	1.69	7.53	-0.22	CLAYS
42.31	23.49	1.71	7.82	-0.23	CLAYS
42.38	22.66	1.65	7.67	-0.22	CLAYS
42.44	22.11	1.49	7.03	-0.22	CLAYS
42.51	21.02	1.37	6.53	-0.22	CLAYS
42.57	20.99	1.38	6.59	-0.23	CLAYS
42.64	21.12	1.36	6.5	-0.23	CLAYS
42.71	20.93	1.34	6.37	-0.22	CLAYS
42.77	20.77	1.22	5.7	-0.23	CLAYS
42.84	20.77	1.09	5.05	-0.22	CLAYS
42.9	20.8	0.97	4.42	-0.22	CLAYEY SILT&SILTY CLAYS
42.97	21.38	0.99	4.48	-0.22	CLAYEY SILT&SILTY CLAYS
43.03	21.92	1.02	4.57	-0.23	CLAYEY SILT&SILTY CLAYS
43.1	22.46	1.05	4.68	-0.24	CLAYEY SILT&SILTY CLAYS
43.16	22.3	1.18	5.24	-0.23	CLAYS
43.23	22.27	1.29	5.68	-0.23	CLAYS
43.3	22.59	1.28	5.6	-0.23	CLAYS
43.36	22.5	1.2	5.23	-0.22	CLAYS
43.43	22.4	1.23	5.33	-0.23	CLAYS
43.49	22.88	1.24	5.32	-0.22	CLAYS
43.56	23.49	1.22	5.2	-0.22	CLAYS
43.62	23.46	1.2	5.13	-0.23	CLAYS
43.69	23.36	1.2	5.09	-0.23	CLAYS
43.76	23.23	1.25	5.24	-0.22	CLAYS
43.82	23.46	1.25	5.17	-0.23	CLAYS
43.89	23.68	1.29	5.32	-0.23	CLAYS
43.95	23.58	1.32	5.35	-0.23	CLAYS

US EPA ARCHIVE DOCUMENT

44.02	24.07	1.34	5.35	-0.23	CLAYS
44.08	25.15	1.34	5.23	-0.23	CLAYS
44.15	24.67	1.35	5.24	-0.23	CLAYS
44.21	24.61	1.46	5.63	-0.23	CLAYS
44.28	25.47	1.53	5.83	-0.23	CLAYS
44.35	26.69	1.49	5.66	-0.23	CLAYS
44.41	27.01	1.41	5.42	-0.22	CLAYS
44.48	25.92	1.4	5.46	-0.22	CLAYS
44.54	25.86	1.52	5.99	-0.22	CLAYS
44.61	26.21	1.56	6.16	-0.22	CLAYS
44.67	26.11	1.5	5.94	-0.23	CLAYS
44.74	24.83	1.44	5.58	-0.23	CLAYS
44.8	24.51	1.45	5.42	-0.22	CLAYS
44.87	24.74	1.26	4.6	-0.23	CLAYEY SILT&SILTY CLAYS
44.94	25.44	1.31	4.72	-0.22	CLAYEY SILT&SILTY CLAYS
45	25.92	1.39	5.01	-0.23	CLAYS
45.07	29.63	1.53	5.51	-0.23	CLAYS
45.13	29.86	1.63	6.06	-0.23	CLAYS
45.2	28.29	1.69	6.43	-0.23	CLAYS
45.26	27.07	1.69	6.58	-0.23	CLAYS
45.33	25.92	1.66	6.64	-0.22	CLAYS
45.4	25.41	1.64	6.8	-0.22	CLAYS
45.46	25.05	1.64	7.09	-0.22	CLAYS
45.53	25.7	1.67	7.56	-0.23	CLAYS
45.59	25.12	1.61	7.71	-0.22	CLAYS
45.66	22.79	1.63	8.16	-0.22	CLAYS
45.72	20.35	1.52	7.67	-0.22	CLAYS
45.79	19.87	1.29	6.22	-0.22	CLAYS
45.85	18.65	1.06	4.76	-0.22	CLAYS
45.92	18.79	0.83	3.41	-0.23	CLAYEY SILT&SILTY CLAYS
45.99	19.04	0.99	3.72	-0.23	CLAYEY SILT&SILTY CLAYS
46.05	22.36	1.12	3.82	-0.23	CLAYEY SILT&SILTY CLAYS
46.12	25.67	1.28	4.05	-0.23	CLAYEY SILT&SILTY CLAYS
46.18	28.99	1.46	4.32	-0.22	CLAYEY SILT&SILTY CLAYS
46.25	30.47	1.59	4.51	-0.22	CLAYEY SILT&SILTY CLAYS
46.31	33.06	1.64	4.45	-0.22	CLAYEY SILT&SILTY CLAYS
46.38	34.91	1.71	4.54	-0.22	CLAYEY SILT&SILTY CLAYS
46.45	36.57	1.73	4.58	-0.23	CLAYEY SILT&SILTY CLAYS
46.51	38.72	1.81	4.86	-0.22	CLAYEY SILT&SILTY CLAYS
46.58	38.5	1.9	5.2	-0.22	CLAYEY SILT&SILTY CLAYS
46.64	39.27	2.02	5.68	-0.23	CLAYS
46.71	37.82	2.09	5.92	-0.22	CLAYS
46.77	35.49	2.18	6.12	-0.22	CLAYS
46.84	33.7	2	5.57	-0.22	CLAYS
46.9	33.95	1.95	5.38	-0.22	CLAYS
46.97	32.8	1.96	5.35	-0.22	CLAYS
47.04	38.46	1.96	5.28	-0.22	CLAYEY SILT&SILTY CLAYS
47.1	39.13	1.98	5.35	-0.22	CLAYS
47.17	37.09	2.03	5.49	-0.21	CLAYS
47.23	36.32	2.1	5.6	-0.22	CLAYS
47.3	36.16	2.12	5.53	-0.21	CLAYS
47.36	36.19	2.08	5.27	-0.21	CLAYS

US EPA ARCHIVE DOCUMENT

47.43	36.93	2.05	5.02	-0.22	CLAYEY SILT&SILTY CLAYS
47.49	38.76	2.02	4.8	-0.22	CLAYEY SILT&SILTY CLAYS
47.56	40.19	1.99	4.61	-0.22	CLAYEY SILT&SILTY CLAYS
47.63	41.44	1.93	4.4	-0.21	CLAYEY SILT&SILTY CLAYS
47.69	42.82	1.86	4.17	-0.21	CLAYEY SILT&SILTY CLAYS
47.76	44.39	1.83	4.09	-0.22	CLAYEY SILT&SILTY CLAYS
47.82	44.93	1.76	3.99	-0.21	CLAYEY SILT&SILTY CLAYS
47.89	45.41	1.68	3.93	-0.21	CLAYEY SILT&SILTY CLAYS
47.95	44.74	1.67	4.1	-0.21	CLAYEY SILT&SILTY CLAYS
48.02	45.34	1.71	4.49	-0.22	CLAYEY SILT&SILTY CLAYS
48.09	43.91	1.79	5.12	-0.22	CLAYEY SILT&SILTY CLAYS
48.15	40.55	1.88	5.8	-0.22	CLAYS
48.22	36.57	1.95	6.37	-0.22	CLAYS
48.28	33.06	2.02	6.62	-0.22	CLAYS
48.35	28.96	2.05	6.17	-0.22	CLAYS
48.41	27.01	1.96	5.01	-0.22	CLAYS
48.48	28.13	1.84	3.91	-0.22	CLAYEY SILT&SILTY CLAYS
48.54	30.05	1.88	3.37	-0.22	CLAYEY SANDY SILT&SILT
48.61	36.13	1.75	2.73	-0.21	CLAYEY SANDY SILT&SILT
48.68	48.9	1.49	2.1	-0.21	SILTY SAND
48.74	64.23	1.31	1.75	-0.22	SILTY SAND
48.81	75.81	1.17	1.53	-0.22	SILTY SAND
48.87	79.71	0.65	0.85	-0.21	SANDS
48.94	80	0.71	0.93	-0.21	SANDS
49	76.28	0.76	1.01	-0.21	SANDS
49.07	72.55	0.79	1.06	-0.22	SANDS
49.13	75.84	0.78	1.05	-0.22	SANDS
49.2	75.43	0.8	1.09	-0.22	SANDS
49.27	75.14	0.87	1.2	-0.21	SILTY SAND
49.33	75.14	0.97	1.38	-0.22	SILTY SAND
49.4	74.24	1.16	1.71	-0.21	SILTY SAND
49.46	72.23	1.34	2.08	-0.22	SILTY SAND
49.53	69.73	1.4	2.35	-0.21	SILTY SAND
49.59	67.65	1.45	2.64	-0.22	CLAYEY SANDY SILT&SILT
49.66	63.78	1.52	3.04	-0.22	CLAYEY SANDY SILT&SILT
49.73	58.79	1.66	3.64	-0.22	CLAYEY SANDY SILT&SILT
49.79	52.83	1.77	4.28	-0.22	CLAYEY SILT&SILTY CLAYS
49.86	46.08	1.72	4.56	-0.22	CLAYEY SILT&SILTY CLAYS
49.92	41.41	1.87	5.32	-0.21	CLAYEY SILT&SILTY CLAYS
49.99	36.99	1.94	5.85	-0.21	CLAYS
50.05	37.22	2.01	6.37	-0.22	CLAYS
50.12	33.6	2.1	7.02	-0.23	CLAYS
50.18	31.26	2.18	7.55	-0.22	CLAYS
50.25	30.14	2.23	7.89	-0.22	CLAYS
50.32	29.34	2.2	7.96	-0.23	CLAYS
50.38	27.74	2.09	7.65	-0.22	CLAYS
50.45	27.1	2.01	7.4	-0.22	CLAYS
50.51	27.49	1.82	6.72	-0.22	CLAYS
50.58	27.42	1.75	6.45	-0.22	CLAYS
50.64	26.81	1.66	6.03	-0.23	CLAYS
50.71	27.39	1.6	5.58	-0.22	CLAYS
50.77	26.5	1.45	4.92	-0.22	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

50.84	26.63	1.31	4.3	-0.22	CLAYEY SILT&SILTY CLAYS
50.91	27.84	1.16	3.73	-0.23	CLAYEY SILT&SILTY CLAYS
50.97	30.56	1.32	4.16	-0.22	CLAYEY SILT&SILTY CLAYS
51.04	32.77	1.43	4.61	-0.24	CLAYEY SILT&SILTY CLAYS
51.1	33.06	1.65	5.49	-0.23	CLAYS
51.17	31.9	1.93	6.7	-0.23	CLAYS
51.23	31.45	2.08	7.57	-0.23	CLAYS
51.3	30.14	2.07	7.9	-0.23	CLAYS
51.37	27.45	2.04	8.18	-0.23	CLAYS
51.43	26.21	2.02	8.42	-0.24	CLAYS
51.5	25.5	1.99	8.57	-0.23	CLAYS
51.56	24.38	1.92	8.54	-0.23	CLAYS
51.63	23.33	1.83	8.3	-0.23	CLAYS
51.69	22.75	1.67	7.55	-0.23	CLAYS
51.76	22.08	1.45	6.48	-0.23	CLAYS
51.82	21.34	1.09	4.82	-0.23	CLAYS
51.89	21.31	1.09	4.67	-0.24	CLAYEY SILT&SILTY CLAYS
51.96	21.44	1.16	4.78	-0.23	CLAYS
52.02	23.46	1.17	4.55	-0.24	CLAYEY SILT&SILTY CLAYS
52.09	24.35	1.17	4.29	-0.24	CLAYEY SILT&SILTY CLAYS
52.15	24.16	1.19	4.15	-0.23	CLAYEY SILT&SILTY CLAYS
52.22	25.12	1.24	4.11	-0.23	CLAYEY SILT&SILTY CLAYS
52.28	27.1	1.35	4.33	-0.23	CLAYEY SILT&SILTY CLAYS
52.35	30.14	1.41	4.51	-0.23	CLAYEY SILT&SILTY CLAYS
52.41	32.39	1.52	4.98	-0.23	CLAYEY SILT&SILTY CLAYS
52.48	33.15	1.68	5.74	-0.24	CLAYS
52.55	32.8	1.79	6.48	-0.23	CLAYS
52.61	30.72	1.91	7.37	-0.23	CLAYS
52.68	28.22	2	8.17	-0.23	CLAYS
52.74	26.08	2.04	8.63	-0.23	CLAYS
52.81	24.22	2.08	8.95	-0.23	CLAYS
52.87	23.55	1.35	5.88	-0.23	CLAYS
52.94	23.07	1.36	5.95	-0.24	CLAYS
53.01	21.63	1.37	5.98	-0.23	CLAYS
53.07	23.3	1.34	5.81	-0.24	CLAYS
53.14	23.55	1.31	5.74	-0.23	CLAYS
53.2	23.1	1.36	5.98	-0.23	CLAYS
53.27	22.91	1.42	6.19	-0.23	CLAYS
53.33	22.79	1.42	6.09	-0.24	CLAYS
53.4	22.33	1.36	5.7	-0.23	CLAYS
53.46	22.37	1.31	5.34	-0.23	CLAYS
53.53	23.01	1.21	4.77	-0.23	CLAYEY SILT&SILTY CLAYS
53.6	24	1.19	4.58	-0.23	CLAYEY SILT&SILTY CLAYS
53.66	24.99	1.24	4.68	-0.23	CLAYEY SILT&SILTY CLAYS
53.73	26.24	1.28	4.7	-0.22	CLAYEY SILT&SILTY CLAYS
53.79	26.81	1.33	4.82	-0.23	CLAYEY SILT&SILTY CLAYS
53.86	26.94	1.52	5.44	-0.23	CLAYS
53.92	27.14	1.56	5.51	-0.22	CLAYS
53.99	27.23	1.63	5.75	-0.23	CLAYS
54.05	28.7	1.68	5.86	-0.23	CLAYS
54.12	29.22	1.71	5.97	-0.23	CLAYS
54.19	28.73	1.76	6.17	-0.23	CLAYS

US EPA ARCHIVE DOCUMENT

54.25	28.45	1.84	6.4	-0.23	CLAYS
54.32	28.09	1.94	6.68	-0.22	CLAYS
54.38	28.48	1.95	6.55	-0.23	CLAYS
54.45	28.8	1.98	6.35	-0.22	CLAYS
54.51	28.96	2.01	5.96	-0.23	CLAYS
54.58	29.57	1.98	5.27	-0.23	CLAYS
54.65	30.47	1.93	4.5	-0.22	CLAYEY SILT&SILTY CLAYS
54.71	32.45	1.93	3.91	-0.22	CLAYEY SILT&SILTY CLAYS
54.78	36.45	1.94	3.55	-0.22	CLAYEY SANDY SILT&SILT
54.84	44.06	1.55	2.67	-0.22	CLAYEY SANDY SILT&SILT
54.91	52.9	1.5	2.56	-0.22	CLAYEY SANDY SILT&SILT
54.97	61.35	1.54	2.71	-0.22	CLAYEY SANDY SILT&SILT
55.04	68.77	1.66	3.14	-0.23	CLAYEY SANDY SILT&SILT
55.1	65.22	1.93	4.07	-0.23	CLAYEY SANDY SILT&SILT
55.17	55.68	2.24	5.23	-0.22	CLAYEY SILT&SILTY CLAYS
55.24	47.87	2.5	6.04	-0.22	CLAYS
55.3	42.18	2.56	5.87	-0.22	CLAYS
55.37	37.89	2.38	4.79	-0.21	CLAYEY SILT&SILTY CLAYS
55.43	35.65	2.31	3.84	-0.22	CLAYEY SILT&SILTY CLAYS
55.5	37.86	2.33	3.12	-0.22	CLAYEY SANDY SILT&SILT
55.56	46.85	2.3	2.54	-0.21	CLAYEY SANDY SILT&SILT
55.63	60.77	2.22	2.08	-0.21	SILTY SAND
55.69	79.14	2.01	1.67	-0.21	SILTY SAND
55.76	101.35	1.72	1.29	-0.21	SANDS
55.83	121.51	1.42	0.99	-0.21	SANDS
55.89	135.11	1.12	0.75	-0.21	SANDS
55.96	141.1	1.25	0.81	-0.21	SANDS
56.02	147.09	1.36	0.87	-0.21	SANDS
56.09	153.08	1.45	0.91	-0.2	SANDS
56.15	159.08	1.52	0.94	-0.2	SANDS
56.22	160.93	1.6	0.98	-0.21	SANDS
56.29	161.45	1.65	1	-0.21	SANDS
56.35	161.03	1.71	1.02	-0.2	SANDS
56.42	161.45	1.75	1.03	-0.2	SANDS
56.48	163.04	1.78	1.02	-0.2	SANDS
56.55	166.28	1.84	1.02	-0.19	SANDS
56.61	171.08	1.92	1.04	-0.19	SANDS
56.68	176.9	2.01	1.06	-0.2	SANDS
56.74	182.95	2.14	1.1	-0.2	SANDS
56.81	188.58	2.27	1.15	-0.2	SANDS
56.88	193.26	2.34	1.17	-0.2	SANDS
56.94	196.97	2.43	1.19	-0.19	SANDS
57.01	199.38	2.5	1.22	-0.19	SANDS
57.07	201.79	2.58	1.24	-0.2	SANDS
57.14	204.2	2.66	1.27	-0.19	SANDS
57.2	206.79	2.72	1.29	-0.19	SANDS
57.27	209.16	2.76	1.3	-0.19	SANDS
57.33	211.4	2.82	1.32	-0.19	SANDS
57.4	212.87	2.95	1.39	-0.18	SANDS
57.47	214.31	3.13	1.48	-0.19	SANDS
57.53	214.25	3.3	1.59	-0.18	SANDS
57.6	213.96	3.43	1.69	-0.18	SANDS

US EPA ARCHIVE DOCUMENT

57.66	211.47	3.54	1.8	-0.17	SANDS
57.73	207.91	3.65	1.92	-0.18	SANDS
57.79	202.82	3.72	2.03	-0.18	SANDS
57.86	195.69	3.63	2.05	-0.18	SANDS
57.93	187.4	3.44	2.01	-0.18	SANDS
57.99	178.95	3.19	1.89	-0.18	SANDS
58.06	169.99	3	1.78	-0.18	SANDS
58.12	165.45	2.81	1.65	-0.17	SANDS
58.19	163.56	2.61	1.5	-0.18	SANDS
58.25	165	2.51	1.39	-0.17	SANDS
58.32	169.86	2.43	1.31	-0.18	SANDS
58.38	176.17	2.42	1.26	-0.17	SANDS
58.45	183.18	2.44	1.23	-0.16	SANDS
58.52	189.92	2.53	1.24	-0.17	SANDS
58.58	195.85	2.61	1.25	-0.17	SANDS
58.65	200.68	2.71	1.26	-0.16	SANDS
58.71	206.28	2.8	1.27	-0.16	SANDS
58.78	211.98	2.88	1.29	-0.16	SANDS
58.84	217.16	2.66	1.16	-0.16	SANDS
58.91	222.35	2.65	1.14	-0.15	SANDS
58.97	227.85	2.64	1.12	-0.15	SANDS
59.04	231.15	2.63	1.1	-0.14	SANDS
59.11	234.46	2.62	1.09	-0.14	SANDS
59.17	237.76	2.8	1.15	-0.14	SANDS
59.24	241.07	2.94	1.2	-0.14	SANDS
59.3	243.43	3.11	1.26	-0.13	SANDS
59.37	244.62	3.24	1.3	-0.13	SANDS
59.43	245.67	3.46	1.38	-0.13	SANDS
59.5	248.11	3.68	1.46	-0.13	SANDS
59.57	250.7	3.83	1.52	-0.13	SANDS
59.63	252.56	3.94	1.57	-0.12	SANDS
59.7	252.49	4.04	1.61	-0.12	SANDS
59.76	251.82	4.14	1.65	-0.12	SANDS
59.83	251.12	4.16	1.66	-0.12	SANDS
59.89	251.02	4.19	1.68	-0.12	SANDS
59.96	250.88	4.17	1.69	-0.12	SANDS
60.02	250.75	4.12	1.7	-0.13	SANDS
60.09	250.61	4.16	1.76	-0.12	SANDS
60.16	250.48	4.16	1.81	-0.12	SANDS
60.22	243.82	4.14	1.86	-0.11	SANDS
60.29	234.57	4.08	1.91	-0.11	SANDS
60.35	225.51	4.02	1.94	-0.11	SANDS
60.42	216.71	3.92	1.97	-0.11	SANDS
60.48	209.58	3.77	1.97	-0.11	SANDS
60.55	202.98	3.5	1.9	-0.11	SANDS
60.61	196.87	3.31	1.89	-0.11	SANDS
60.68	189.48	3.19	1.92	-0.12	SANDS
60.75	180.81	3.07	1.96	-0.11	SANDS
60.81	171.3	2.87	1.95	-0.11	SANDS
60.88	161.51	2.68	1.93	-0.11	SANDS
60.94	152.64	2.48	1.9	-0.11	SANDS
61.01	142.68	2.29	1.87	-0.11	SILTY SAND

US EPA ARCHIVE DOCUMENT

61.07	132.72	2.26	1.97	-0.11	SILTY SAND
61.14	122.76	2.14	1.98	-0.11	SILTY SAND
61.21	119.11	2.2	2.14	-0.11	SILTY SAND
61.27	112.8	2.11	2.14	-0.11	SILTY SAND
61.34	105.54	1.92	2.01	-0.11	SILTY SAND
61.4	96.99	1.81	1.92	-0.11	SILTY SAND
61.47	91.91	1.7	1.79	-0.11	SILTY SAND
61.53	91.88	1.6	1.63	-0.12	SILTY SAND
61.6	92.58	1.49	1.44	-0.12	SILTY SAND
61.66	94.44	1.36	1.22	-0.12	SANDS
61.73	97.09	1.25	1.04	-0.12	SANDS
61.8	102.28	1.19	0.9	-0.12	SANDS
61.86	111.81	1.13	0.78	-0.12	SANDS
61.93	124.01	1.15	0.73	-0.12	SANDS
61.99	137.35	1.23	0.72	-0.11	SANDS
62.06	148.13	1.37	0.74	-0.14	SANDS
62.12	164.87	1.53	0.77	-0.14	SANDS
62.19	179.85	1.74	0.82	-0.14	SANDS
62.25	194.06	1.97	0.89	-0.14	SANDS
62.32	207.78	2.16	0.94	-0.13	SANDS
62.39	220.3	2.32	0.98	-0.13	SANDS
62.45	229.64	2.46	1.01	-0.13	SANDS
62.52	236.3	2.6	1.04	-0.13	SANDS
62.58	241.32	2.7	1.06	-0.12	SANDS
62.65	246.22	2.78	1.08	-0.12	SANDS
62.71	252.04	2.8	1.09	-0.12	SANDS
62.78	259.05	2.64	1.03	-0.12	SANDS
62.85	264.01	2.48	0.98	-0.12	SANDS
62.91	263.47	2.32	0.94	-0.12	SANDS
62.98	257.14	2.16	0.89	-0.12	SANDS
63.04	250.81	2.42	1.02	-0.13	SANDS
63.11	244.48	2.61	1.12	-0.13	SANDS
63.17	238.15	2.86	1.25	-0.13	SANDS
63.24	234.92	3.08	1.37	-0.12	SANDS
63.3	232.33	3.22	1.46	-0.12	SANDS
63.37	227.05	3.36	1.55	-0.12	SANDS
63.44	221.9	3.58	1.69	-0.12	SANDS
63.5	217.54	3.62	1.74	-0.12	SANDS
63.57	214.34	3.61	1.76	-0.12	SANDS
63.63	211.14	3.61	1.79	-0.12	SANDS
63.7	207.02	3.64	1.83	-0.11	SANDS
63.76	202.79	3.57	1.82	-0.12	SANDS
63.83	198.98	3.51	1.81	-0.12	SANDS
63.89	196.52	3.45	1.79	-0.12	SANDS
63.96	194.69	3.38	1.77	-0.12	SANDS
64.03	192.85	3.32	1.75	-0.13	SANDS
64.09	191.03	3.25	1.73	-0.12	SANDS
64.16	189.19	3.21	1.72	-0.12	SANDS
64.22	188.65	3.15	1.7	-0.12	SANDS
64.29	188.13	3.11	1.69	-0.12	SANDS
64.35	187.11	3.09	1.69	-0.12	SANDS
64.42	184.84	3.12	1.71	-0.12	SANDS

US EPA ARCHIVE DOCUMENT

64.49	182.37	3.16	1.74	-0.12	SANDS
64.55	181.19	3.18	1.76	-0.12	SANDS
64.62	180.65	3.1	1.72	-0.11	SANDS
64.68	181	2.95	1.64	-0.12	SANDS
64.75	181.42	2.74	1.52	-0.12	SANDS
64.81	180.96	2.64	1.47	-0.11	SANDS
64.88	179.31	2.48	1.37	-0.12	SANDS
64.94	178.12	2.47	1.35	-0.12	SANDS
65.01	178.47	2.36	1.27	-0.11	SANDS
65.08	180.69	2.28	1.2	-0.13	SANDS
65.14	182.92	2.26	1.18	-0.12	SANDS
65.21	187.21	2.33	1.2	-0.12	SANDS
65.27	191.59	2.38	1.23	-0.12	SANDS
65.34	195.21	2.43	1.26	-0.12	SANDS
65.4	197.06	2.51	1.32	-0.12	SANDS
65.47	197.39	2.64	1.42	-0.12	SANDS
65.53	195.08	2.79	1.56	-0.12	SANDS
65.6	190.92	2.9	1.69	-0.12	SANDS
65.67	185.22	2.92	1.78	-0.12	SANDS
65.73	177.09	2.9	1.85	-0.12	SANDS
65.8	167.72	2.87	1.92	-0.12	SANDS
65.86	158.56	2.67	1.86	-0.12	SANDS
65.93	151.3	2.47	1.79	-0.12	SANDS
65.99	145.8	2.27	1.71	-0.13	SANDS
66.06	140.29	2.07	1.63	-0.12	SANDS
66.13	134.79	2.03	1.67	-0.13	SANDS
66.19	129.29	2.01	1.71	-0.13	SANDS
66.26	123.78	2.04	1.81	-0.14	SILTY SAND
66.32	119.56	2.12	1.93	-0.14	SILTY SAND
66.39	114.47	2.23	2.09	-0.15	SILTY SAND
66.45	109.76	2.33	2.22	-0.15	SILTY SAND
66.52	106.56	2.37	2.29	-0.16	SILTY SAND
66.58	104.42	2.41	2.34	-0.16	SILTY SAND
66.65	103.33	2.49	2.42	-0.16	SILTY SAND
66.72	102.69	2.57	2.49	-0.17	SILTY SAND
66.78	102.34	2.67	2.56	-0.17	SILTY SAND
66.85	102.47	2.66	2.49	-0.16	SILTY SAND
66.91	102.5	2.59	2.36	-0.16	SILTY SAND
66.98	104.55	2.53	2.23	-0.16	SILTY SAND
67.04	103.68	2.47	2.1	-0.2	SILTY SAND
67.11	111.52	2.39	1.95	-0.2	SILTY SAND
67.17	116.39	2.31	1.83	-0.2	SILTY SAND
67.24	120.74	2.23	1.71	-0.19	SILTY SAND
67.31	124.71	2.08	1.56	-0.19	SANDS
67.37	128.77	1.96	1.44	-0.19	SANDS
67.44	132.39	1.95	1.41	-0.19	SANDS
67.5	135.49	1.97	1.41	-0.18	SANDS
67.57	138.02	2.01	1.43	-0.18	SANDS
67.63	139.84	2.05	1.46	-0.17	SANDS
67.7	140.93	2.09	1.49	-0.16	SANDS
67.77	141.76	2.12	1.52	-0.16	SANDS
67.83	141.73	2.18	1.58	-0.16	SANDS

US EPA ARCHIVE DOCUMENT

67.9	141.48	2.11	1.54	-0.16	SANDS
67.96	138.12	2.09	1.54	-0.15	SANDS
68.03	134.76	2.07	1.53	-0.16	SANDS
68.09	136.93	2.04	1.52	-0.16	SANDS
68.16	136.1	2.01	1.51	-0.16	SANDS
68.22	134.79	1.99	1.51	-0.16	SANDS
68.29	133.54	1.99	1.52	-0.16	SANDS
68.36	132.32	2.02	1.56	-0.16	SANDS
68.42	131.27	2.02	1.57	-0.16	SANDS
68.49	130.44	2.01	1.58	-0.16	SANDS
68.55	129.03	2.01	1.58	-0.16	SANDS
68.62	128.07	2.01	1.6	-0.16	SANDS
68.68	126.98	2.03	1.62	-0.16	SANDS
68.75	126.34	2.05	1.64	-0.16	SANDS
68.81	125.7	1.91	1.54	-0.17	SANDS
68.88	125.03	1.77	1.44	-0.16	SANDS
68.95	124.61	1.64	1.34	-0.16	SANDS
69.01	123.53	1.5	1.24	-0.16	SANDS
69.08	122.45	1.59	1.34	-0.16	SANDS
69.14	121.37	1.66	1.41	-0.16	SANDS
69.21	120.29	1.7	1.48	-0.16	SANDS
69.27	118.98	1.72	1.52	-0.16	SANDS
69.34	117.28	1.76	1.59	-0.16	SANDS
69.41	114.79	1.86	1.71	-0.16	SILTY SAND
69.47	111.24	1.9	1.78	-0.17	SILTY SAND
69.54	108.32	1.94	1.83	-0.17	SILTY SAND
69.6	107.91	2.16	2.04	-0.17	SILTY SAND
69.67	106.73	2.42	2.28	-0.17	SILTY SAND
69.73	103.81	2.51	2.35	-0.17	SILTY SAND
69.8	104.2	2.5	2.31	-0.17	SILTY SAND
69.86	105.7	2.48	2.27	-0.17	SILTY SAND
69.93	107.78	2.46	2.23	-0.17	SILTY SAND
70	109	2.59	2.32	-0.18	SILTY SAND
70.06	110.23	2.63	2.36	-0.17	SILTY SAND
70.13	111.45	2.68	2.41	-0.18	SILTY SAND
70.19	112.68	2.73	2.47	-0.17	SILTY SAND
70.26	112.93	2.69	2.47	-0.17	SILTY SAND
70.32	111.88	2.82	2.62	-0.17	SILTY SAND
70.39	110.5	3.1	2.9	-0.18	SILTY SAND
70.45	108.52	3.31	3.14	-0.17	CLAYEY SANDY SILT&SILT
70.52	105.79	3.09	3.01	-0.17	SILTY SAND
70.59	105.09	3.03	3.06	-0.17	SILTY SAND
70.65	105.35	2.97	3.07	-0.18	SILTY SAND
70.72	105.92	2.9	3.04	-0.17	SILTY SAND
70.78	101.73	3.18	3.32	-0.18	CLAYEY SANDY SILT&SILT
70.85	92.77	3.45	3.57	-0.18	CLAYEY SANDY SILT&SILT
70.91	83.81	3.21	3.24	-0.17	CLAYEY SANDY SILT&SILT
70.98	89.48	3.24	3.17	-0.17	CLAYEY SANDY SILT&SILT
71.05	99.08	3.21	3.11	-0.17	CLAYEY SANDY SILT&SILT
71.11	107.01	3.09	3.05	-0.18	SILTY SAND
71.18	108.29	2.91	3.01	-0.17	SILTY SAND
71.24	107.07	2.63	2.91	-0.18	SILTY SAND

US EPA ARCHIVE DOCUMENT

71.31	102.76	2.47	3	-0.17	SILTY SAND
71.37	95.17	2.36	3.21	-0.17	CLAYEY SANDY SILT&SILT
71.44	87.84	2.4	3.69	-0.17	CLAYEY SANDY SILT&SILT
71.5	80.1	2.69	4.72	-0.17	CLAYEY SILT&SILTY CLAYS
71.57	69	2.99	6.08	-0.18	CLAYS
71.64	58.72	3.13	7.23	-0.17	CLAYS
71.7	50.11	3.21	8.24	-0.18	CLAYS
71.77	44.7	2.99	8.33	-0.17	CLAYS
71.83	39.4	2.77	8.22	-0.18	CLAYS
71.9	33.6	2.55	8.05	-0.17	CLAYS
71.96	33.09	2.34	7.73	-0.18	CLAYS
72.03	32.57	2.3	8.08	-0.2	CLAYS
72.09	32.06	2.2	8.33	-0.2	CLAYS
72.16	31.55	2.1	8.55	-0.19	CLAYS
72.23	27.49	2.07	9.07	-0.19	CLAYS
72.29	24.55	1.95	8.78	-0.19	CLAYS
72.36	22.3	1.74	7.74	-0.19	CLAYS
72.42	20.77	1.44	6.12	-0.19	CLAYS
72.49	20.96	1.28	5.18	-0.19	CLAYS
72.55	20.74	1.19	4.61	-0.2	CLAYEY SILT&SILTY CLAYS
72.62	23.9	1.17	4.3	-0.2	CLAYEY SILT&SILTY CLAYS
72.69	26.14	1.15	4.01	-0.19	CLAYEY SILT&SILTY CLAYS
72.75	28.8	1.15	3.44	-0.2	CLAYEY SILT&SILTY CLAYS
72.82	27.52	1.1	2.84	-0.2	CLAYEY SANDY SILT&SILT
72.88	27.52	1.11	2.47	-0.2	CLAYEY SANDY SILT&SILT
72.95	29.19	1.32	2.52	-0.19	CLAYEY SANDY SILT&SILT
73.01	33.31	1.54	2.53	-0.19	CLAYEY SANDY SILT&SILT
73.08	53.82	1.71	2.48	-0.2	CLAYEY SANDY SILT&SILT
73.14	60.51	1.79	2.39	-0.21	SILTY SAND
73.21	65.5	1.81	2.27	-0.2	SILTY SAND
73.28	71.84	1.83	2.16	-0.2	SILTY SAND
73.34	78.63	1.83	2.07	-0.2	SILTY SAND
73.41	84	1.81	1.98	-0.2	SILTY SAND
73.47	87.97	1.73	1.84	-0.21	SILTY SAND
73.54	90.69	1.62	1.69	-0.2	SILTY SAND
73.6	93.22	1.52	1.54	-0.21	SILTY SAND
73.67	95.4	1.44	1.44	-0.21	SILTY SAND
73.73	97.41	1.42	1.4	-0.21	SANDS
73.8	99.59	1.43	1.4	-0.21	SANDS
73.87	101.31	1.6	1.54	-0.2	SILTY SAND
73.93	103.23	0.77	0.73	-0.21	SANDS
74	105.41	0.86	0.79	-0.2	SANDS
74.06	100.29	0.94	0.85	-0.21	SANDS
74.13	104.26	1.03	0.91	-0.21	SANDS
74.19	109.41	1.13	0.97	-0.21	SANDS
74.26	112.52	1.23	1.03	-0.21	SANDS
74.32	114.69	1.34	1.11	-0.21	SANDS
74.39	117.09	1.5	1.21	-0.21	SANDS
74.46	119.65	1.64	1.3	-0.2	SANDS
74.52	122.21	1.75	1.37	-0.21	SANDS
74.59	124.74	1.85	1.42	-0.21	SANDS
74.65	126.79	1.94	1.47	-0.2	SANDS

US EPA ARCHIVE DOCUMENT

74.72	129.09	2.03	1.53	-0.2	SANDS
74.78	131.24	2.1	1.57	-0.2	SANDS
74.85	133.13	2.17	1.61	-0.2	SANDS
74.92	134.82	2.13	1.57	-0.2	SANDS
74.98	136.17	2.16	1.58	-0.2	SANDS
75.05	132.39	2.19	1.6	-0.2	SANDS
75.11	136.55	2.23	1.61	-0.21	SANDS
75.18	137.22	2.25	1.62	-0.2	SANDS
75.24	137.86	2.25	1.61	-0.2	SANDS
75.31	138.89	2.26	1.62	-0.2	SANDS
75.37	140.01	2.42	1.73	-0.2	SANDS
75.44	140.71	2.6	1.85	-0.2	SILTY SAND
75.51	140.13	2.82	1.98	-0.2	SILTY SAND
75.57	139.01	3.07	2.12	-0.2	SILTY SAND
75.64	138.82	3.33	2.24	-0.2	SILTY SAND
75.7	140.01	3.52	2.3	-0.2	SILTY SAND
75.77	143.65	3.3	2.08	-0.2	SILTY SAND
75.83	150.47	3.09	1.88	-0.2	SANDS
75.9	156.84	2.87	1.7	-0.2	SANDS
75.96	161.8	2.65	1.54	-0.2	SANDS
76.03	166.78	2.62	1.49	-0.2	SANDS
76.1	171.74	2.55	1.44	-0.19	SANDS
76.16	176.71	2.48	1.39	-0.18	SANDS
76.23	179.34	2.44	1.37	-0.18	SANDS
76.29	179.75	2.45	1.4	-0.18	SANDS
76.36	178.82	2.62	1.53	-0.18	SANDS
76.42	177.54	2.67	1.58	-0.17	SANDS
76.49	176.29	2.87	1.72	-0.18	SANDS
76.56	171.43	3.26	1.97	-0.18	SANDS
76.62	165.8	3.56	2.17	-0.18	SILTY SAND
76.69	161.48	3.71	2.26	-0.18	SILTY SAND
76.75	163.46	3.85	2.33	-0.18	SILTY SAND
76.82	165.26	4	2.4	-0.18	SILTY SAND
76.88	164.72	3.95	2.35	-0.19	SILTY SAND
76.95	164.19	3.96	2.33	-0.19	SILTY SAND
77.01	163.65	3.91	2.27	-0.19	SILTY SAND
77.08	170.31	3.73	2.14	-0.18	SILTY SAND
77.15	172.49	3.66	2.09	-0.19	SILTY SAND
77.21	174.02	3.65	2.08	-0.18	SILTY SAND
77.28	175.84	3.64	2.08	-0.18	SILTY SAND
77.34	177.09	3.62	2.09	-0.18	SILTY SAND
77.41	177.51	3.6	2.12	-0.18	SILTY SAND
77.47	175.94	3.55	2.16	-0.18	SILTY SAND
77.54	173.38	3.54	2.25	-0.18	SILTY SAND
77.6	169.83	3.53	2.38	-0.18	SILTY SAND
77.67	164.62	3.7	2.64	-0.17	SILTY SAND
77.74	158.56	4.25	3.2	-0.17	SILTY SAND
77.8	145.96	4.66	3.72	-0.17	CLAYEY SANDY SILT&SILT
77.87	131.04	4.74	4	-0.17	CLAYEY SANDY SILT&SILT
77.93	121.44	5.04	4.47	-0.17	CLAYEY SANDY SILT&SILT
78	120.48	5.43	5.03	-0.18	CLAYEY SILT&SILTY CLAYS
78.06	119.01	5.8	5.67	-0.18	CLAYEY SILT&SILTY CLAYS

US EPA ARCHIVE DOCUMENT

78.13	112.9	6.1	6.39	-0.18	CLAYS
78.2	105	6.18	6.94	-0.17	CLAYS
78.26	96.52	6.42	7.75	-0.18	CLAYS
78.33	92.99	6.28	8.18	-0.17	CLAYS
78.39	87.62	6.14	8.67	-0.17	CLAYS
78.46	77.7	6.11	9.2	-0.17	CLAYS
78.52	73.79	5.98	9.26	-0.17	CLAYS
78.59	68.03	5.72	8.89	-0.18	CLAYS
78.65	60.83	5.38	8.33	-0.18	CLAYS
78.72	57.38	4.59	6.84	-0.17	CLAYS
78.79	60.45	4.52	6.57	-0.17	CLAYS
78.85	67.01	4.45	6.49	-0.18	CLAYS
78.92	72.2	4.37	6.53	-0.18	CLAYS
78.98	69.67	4.3	6.67	-0.17	CLAYS
79.05	76.45	4.19	6.72	-0.19	CLAYS
79.11	66.75	4.11	6.94	-0.19	CLAYS
79.18	59.2	4.11	7.08	-0.19	CLAYS
79.24	57.31	4.05	6.94	-0.19	CLAYS
79.31	57.06	4.04	6.82	-0.19	CLAYS
79.38	57.54	3.79	6.2	-0.19	CLAYS
79.44	58.02	3.41	5.34	-0.18	CLAYEY SILT&SILTY CLAYS
79.51	59.43	3.13	4.63	-0.18	CLAYEY SILT&SILTY CLAYS
79.57	61.25	3.52	4.92	-0.19	CLAYEY SILT&SILTY CLAYS
79.64	62.14	3.52	4.68	-0.19	CLAYEY SILT&SILTY CLAYS
79.7	68.26	3.53	4.48	-0.19	CLAYEY SILT&SILTY CLAYS
79.77	74.37	3.53	4.36	-0.19	CLAYEY SILT&SILTY CLAYS
79.84	80.48	3.93	4.75	-0.18	CLAYEY SILT&SILTY CLAYS
79.9	82.14	4.24	4.95	-0.19	CLAYEY SILT&SILTY CLAYS
79.97	84.64	4.52	4.88	-0.19	CLAYEY SILT&SILTY CLAYS
80.03	82.88	4.62	4.47	-0.19	CLAYEY SILT&SILTY CLAYS
80.1	81.38	4.61	3.93	-0.18	CLAYEY SANDY SILT&SILT
80.16	84.67	4.57	3.38	-0.19	CLAYEY SANDY SILT&SILT
80.23	98.88	4.49	2.82	-0.19	SILTY SAND
80.29	122.76	4.87	2.57	-0.18	SILTY SAND
80.36	149.44	5.55	2.47	-0.18	SILTY SAND
80.43	168.1	6.23	2.33	-0.17	SILTY SAND
80.49	188.97	6.76	2.16	-0.17	SANDS
80.56	225.86	6.77	1.89	-0.17	SANDS
80.62	279.63	6.88	1.72	-0.16	SANDS
80.69	337.58	6.74	1.55	-0.16	SANDS
80.75	404.4	6.6	1.41	-0.16	SANDS
80.82	445.04	6.46	1.32	-0.16	SANDS
80.88	460	6.32	1.24	-0.16	SANDS
80.95	474.95	6.4	1.21	-0.16	SANDS
81.02	489.91	6.44	1.18	-0.14	SANDS
81.08	527.61	6.53	1.16	-0.14	SANDS
81.15	543.74	6.7	1.18	-0.13	SANDS
81.21	561.75	7.07	1.25	-0.13	SANDS
81.28	573.78	7.59	1.36	-0.12	SANDS
81.34	581.34	8.06	1.49	-0.12	SANDS
81.41	576.41	8	1.54	-0.1	SANDS
81.48	563.42	7.99	1.62	-0.09	SANDS

US EPA ARCHIVE DOCUMENT

81.54	540.98	8.1	1.75	-0.1	SANDS
81.61	512.21	8.02	1.84	-0.09	SANDS
81.67	480.12	7.6	1.85	-0.09	SANDS
81.74	448.28	7.43	1.92	-0.09	SANDS
81.8	413.23	7.26	1.97	-0.09	SANDS
81.87	386.32	7.09	2	-0.1	SANDS
81.93	373.02	6.92	2.01	-0.11	SANDS
82	359.73	6.77	2.03	-0.09	SANDS
82.07	346.43	6.59	2.03	-0.08	SANDS
82.13	333.13	6.37	2.01	-0.08	SANDS
82.2	329.42	6.18	2	-0.07	SANDS
82.26	321.33	6.07	2.01	-0.08	SANDS
82.33	313.9	6.04	2.05	-0.08	SANDS
82.39	304.68	6.19	2.16	-0.08	SANDS
82.46	296.24	6.39	2.28	-0.08	SANDS
82.52	289.51	6.34	2.32	-0.08	SANDS
82.59	283.56	6.24	2.34	-0.08	SANDS
82.66	277.1	6.04	2.32	-0.08	SANDS
82.72	270.73	5.58	2.21	-0.08	SANDS
82.79	263.28	5.13	2.09	-0.08	SANDS
82.85	256.49	4.67	1.96	-0.08	SANDS
82.92	249.22	4.21	1.82	-0.08	SANDS
82.98	241.95	4.25	1.9	-0.08	SANDS
83.05	234.68	4.17	1.92	-0.08	SANDS
83.12	227.4	4.02	1.91	-0.09	SANDS
83.18	221.13	3.83	1.88	-0.08	SANDS
83.25	213.73	3.65	1.85	-0.08	SANDS
83.31	206.53	3.46	1.81	-0.08	SANDS
83.38	199.24	3.42	1.84	-0.08	SANDS
83.44	192.97	3.3	1.81	-0.09	SANDS
83.51	187.3	3.16	1.75	-0.1	SANDS
83.57	182.18	3.04	1.68	-0.12	SANDS
83.64	178.31	2.94	1.6	-0.12	SANDS
83.71	177.06	2.81	1.49	-0.14	SANDS
83.77	178.34	2.53	1.29	-0.14	SANDS
83.84	182.41	2.33	1.14	-0.15	SANDS
83.9	189.38	2.21	1.02	-0.16	SANDS
83.97	192.55	2.15	0.94	-0.09	SANDS
84.03	209.19	2.11	0.87	-0.11	SANDS
84.1	222.02	2.13	0.83	-0.11	SANDS
84.16	235.02	2.18	0.81	-0.1	SANDS
84.23	248.3	2.26	0.8	-0.1	SANDS
84.3	261.77	2.35	0.79	-0.09	SANDS
84.36	275.85	2.46	0.79	-0.08	SANDS
84.43	290.35	2.61	0.81	-0.09	SANDS
84.49	304.14	2.73	0.82	-0.08	SANDS
84.56	317.07	2.87	0.84	-0.08	SANDS
84.62	329.84	3.01	0.86	-0.09	SANDS
84.69	340.91	2.81	0.79	-0.09	SANDS
84.75	351.22	2.61	0.72	-0.08	SANDS
84.82	359.86	2.41	0.66	-0.08	SANDS
84.89	361.75	2.66	0.72	-0.08	SANDS

US EPA ARCHIVE DOCUMENT

84.95	363.65	2.92	0.79	-0.09	SANDS
85.02	365.54	3.18	0.85	-0.08	SANDS
85.08	367.44	3.41	0.91	-0.07	SANDS
85.15	374.22	3.61	0.96	-0.08	SANDS
85.21	377.26	3.73	1	-0.08	SANDS
85.28	379.31	3.88	1.05	-0.07	SANDS
85.35	378.51	4.09	1.12	-0.08	SANDS
85.41	376.88	4.2	1.17	-0.08	SANDS
85.48	372.05	4.23	1.2	-0.08	SANDS
85.54	364.14	4.23	1.21	-0.08	SANDS
85.61	355.34	4.19	1.21	-0.07	SANDS
85.67	347.85	4.17	1.21	-0.08	SANDS
85.74	342.73	4.04	1.17	-0.08	SANDS
85.8	341.55	3.91	1.12	-0.08	SANDS
85.87	345.62	3.79	1.07	-0.08	SANDS
85.94	347.59	3.66	1.02	-0.07	SANDS
86	349.57	3.61	0.98	-0.06	SANDS
86.07	351.55	3.52	0.93	-0.06	SANDS
86.13	353.52	3.5	0.9	-0.05	SANDS
86.2	367.08	3.52	0.87	-0.06	SANDS
86.26	381.13	3.6	0.86	-0.06	SANDS
86.33	395.09	3.68	0.85	-0.06	SANDS
86.39	413.78	3.99	0.88	-0.06	SANDS
86.46	430.39	4.37	0.93	-0.05	SANDS
86.53	444.31	4.56	0.93	-0.06	SANDS
86.59	451.38	4.72	0.92	-0.06	SANDS
86.66	470.17	4.77	0.89	-0.06	SANDS
86.72	498.39	4.42	0.8	-0.06	SANDS
86.79	529.49	4.39	0.77	-0.06	SANDS
86.85	557.98	4.36	0.74	-0.05	SANDS
86.92	575.7	4.33	0.72	-0.04	SANDS
86.99	571.42	4.3	0.71	-0.05	SANDS
87.05	588.29	4.35	0.71	-0.05	SANDS
87.12	605.17	4.4	0.71	-0.05	SANDS
87.18	622.04	4.45	0.71	-0.05	SANDS
87.25	621.24	4.33	0.68	-0.05	SANDS
87.31	620.44	4.12	0.65	-0.06	SANDS
87.38	619.64	4.19	0.65	-0.05	SANDS
87.44	647.26	4.25	0.66	-0.04	SANDS
87.51	647.78	4.32	0.66	-0.03	SANDS
87.58	648.3	4.58	0.7	-0.04	SANDS
87.64	648.82	4.77	0.73	-0.04	SANDS
87.71	650.29	4.64	0.71	-0.03	SANDS
87.77	651.75	4.73	0.73	-0.03	SANDS
87.84	653.22	4.66	0.71	-0.02	SANDS

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :8802.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.006	0.013
0.1	0.001	0.006	0.012
0.15	0.004	0.006	0.013
0.2	0.001	0.005	0.011
0.25	0.002	0.006	0.013
0.3	0.001	0.004	0.013
0.35	0.002	0.006	0.013
0.4	0.001	0.006	0.011
0.45	0.002	0.007	0.013
0.5	0.001	0.005	0.012
0.55	0.002	0.006	0.013
0.6	0	0.004	0.012
0.65	0.002	0.006	0.013
0.7	0.001	0.006	0.009
0.75	0.002	0.006	0.01
0.8	0	0.005	0.006
0.85	0.002	0.006	0.007
0.9	0.001	0.006	0.006
0.95	0.002	0.006	0.009
1	0.001	0.005	0.007
1.05	0.002	0.007	0.009
1.1	0.002	0.005	0.006
1.15	0.002	0.006	0.009
1.2	0.002	0.004	0.006
1.25	0.004	0.007	0.009
1.3	0.002	0.005	0.007
1.35	0.002	0.007	0.009
1.4	0.001	0.007	0.007
1.45	0.002	0.007	0.009
1.5	0.001	0.006	0.009
1.55	0.002	0.006	0.009
1.6	0	0.005	0.007
1.65	0.002	0.006	0.009
1.7	0.001	0.006	0.007
1.75	0.004	0.006	0.009
1.8	0	0.005	0.006
1.85	0.004	0.006	0.009

US EPA ARCHIVE DOCUMENT

1.9	0.001	0.005	0.007
1.95	0.002	0.006	0.01
2	0.001	0.005	0.01
2.05	0.002	0.006	0.01
2.1	0	0.005	0.009
2.15	0.002	0.006	0.01
2.2	0.002	0.005	0.01
2.25	0.002	0.006	0.01
2.3	0.001	0.005	0.01
2.35	0.004	0.007	0.011
2.4	0.001	0.005	0.007
2.45	0.004	0.006	0.009
2.5	0.001	0.006	0.007
2.55	0.002	0.007	0.009
2.6	0.001	0.006	0.006
2.65	0.002	0.006	0.009
2.7	0.002	0.005	0.006
2.75	0.004	0.007	0.009
2.8	0.001	0.005	0.006
2.85	0.002	0.006	0.009
2.9	0.001	0.005	0.007
2.95	0.002	0.006	0.009
3	0.001	0.005	0.007
3.05	0.002	0.007	0.009
3.1	0.002	0.005	0.007
3.15	0.004	0.006	0.01
3.2	0.002	0.005	0.01
3.25	0.004	0.007	0.01
3.3	0.002	0.006	0.005
3.35	0.004	0.006	0.007
3.4	0.001	0.006	0.006
3.45	0.004	0.006	0.007
3.5	0.002	0.005	0.006
3.55	0.004	0.006	0.007
3.6	0.001	0.005	0.005
3.65	0.004	0.006	0.007
3.7	0.001	0.005	0.006
3.75	0.004	0.006	0.007
3.8	0.002	0.005	0.005
3.85	0.004	0.007	0.007
3.9	0.002	0.005	0.005
3.95	0.004	0.006	0.007
4	0.001	0.005	0.006
4.05	0.004	0.006	0.007
4.1	0.001	0.006	0.007
4.15	0.004	0.006	0.007
4.2	0.002	0.005	0.007

US EPA ARCHIVE DOCUMENT

4.25	0.004	0.007	0.009
4.3	0.002	0.006	0.005
4.35	0.004	0.006	0.007
4.4	0.002	0.006	0.004
4.45	0.004	0.006	0.006
4.5	0.004	0.006	0.005
4.55	0.004	0.006	0.006
4.6	0.001	0.005	0.006
4.65	0.004	0.006	0.007
4.7	0.002	0.005	0.006
4.75	0.004	0.007	0.007
4.8	0.002	0.005	0.006
4.85	0.004	0.006	0.007
4.9	0.002	0.005	0.005
4.95	0.004	0.007	0.006
5	0.002	0.005	0.006
5.05	0.004	0.006	0.007
5.1	0.002	0.005	0.006
5.15	0.004	0.006	0.007
5.2	0.002	0.006	0.006
5.25	0.005	0.007	0.009
5.3	0.004	0.006	0.006
5.35	0.004	0.006	0.006
5.4	0.002	0.006	0.005
5.45	0.004	0.007	0.007
5.5	0.002	0.006	0.005
5.55	0.004	0.006	0.006
5.6	0.004	0.005	0.006
5.65	0.005	0.006	0.006
5.7	0.002	0.005	0.005
5.75	0.005	0.006	0.006
5.8	0.004	0.006	0.004
5.85	0.004	0.006	0.006
5.9	0.002	0.004	0.005
5.95	0.005	0.007	0.006
6	0.004	0.005	0.005
6.05	0.005	0.007	0.006
6.1	0.004	0.005	0.004
6.15	0.005	0.006	0.007
6.2	0.002	0.005	0.005
6.25	0.005	0.006	0.007
6.3	0.004	0.005	0.005
6.35	0.006	0.007	0.007
6.4	0.004	0.006	0.001
6.45	0.005	0.006	0.004
6.5	0.004	0.006	0.002
6.55	0.005	0.006	0.004

US EPA ARCHIVE DOCUMENT

6.6	0.004	0.005	0.002
6.65	0.005	0.007	0.004
6.7	0.005	0.005	0.002
6.75	0.005	0.006	0.004
6.8	0.004	0.005	0.002
6.85	0.005	0.006	0.004
6.9	0.004	0.005	0.002
6.95	0.005	0.006	0.004
7	0.002	0.006	0.002
7.05	0.005	0.007	0.004
7.1	0.004	0.006	0.002
7.15	0.005	0.007	0.004
7.2	0.004	0.006	0.004
7.25	0.006	0.006	0.005
7.3	0.004	0.006	0.001
7.35	0.006	0.007	0.005
7.4	0.004	0.005	0.004
7.45	0.006	0.006	0.005
7.5	0.005	0.005	0.004
7.55	0.006	0.007	0.005
7.6	0.005	0.006	0.004
7.65	0.006	0.006	0.005
7.7	0.005	0.006	0.004
7.75	0.006	0.006	0.005
7.8	0.004	0.005	0.002
7.85	0.006	0.006	0.004
7.9	0.005	0.005	0.002
7.95	0.006	0.006	0.005
8	0.005	0.005	0.004
8.05	0.006	0.006	0.004
8.1	0.005	0.006	0.002
8.15	0.006	0.006	0.004
8.2	0.005	0.005	0.004
8.25	0.006	0.007	0.005
8.3	0.005	0.006	0.002
8.35	0.006	0.006	0.005
8.4	0.005	0.005	0.004
8.45	0.006	0.006	0.005
8.5	0.005	0.005	0.004
8.55	0.006	0.006	0.004
8.6	0.005	0.006	0.002
8.65	0.006	0.006	0.005
8.7	0.004	0.005	0.004
8.75	0.006	0.006	0.005
8.8	0.005	0.006	0.004
8.85	0.006	0.007	0.005
8.9	0.004	0.005	0.002

US EPA ARCHIVE DOCUMENT

8.95	0.006	0.006	0.004
9	0.005	0.005	0.002
9.05	0.006	0.007	0.005
9.1	0.006	0.005	0.002
9.15	0.007	0.007	0.005
9.2	0.005	0.006	0.002
9.25	0.007	0.007	0.005
9.3	0.005	0.005	0.001
9.35	0.006	0.006	0.002
9.4	0.006	0.005	0.001
9.45	0.006	0.006	0.002
9.5	0.006	0.006	0
9.55	0.006	0.006	0.002
9.6	0.006	0.006	0.001
9.65	0.006	0.006	0.002
9.7	0.006	0.005	0
9.75	0.007	0.006	0.002
9.8	0.004	0.006	0
9.85	0.007	0.006	0.002
9.9	0.006	0.006	0.002
9.95	0.007	0.006	0.002
10	0.006	0.006	0.001
10.05	0.006	0.006	0.002
10.1	0.004	0.005	0.002
10.15	0.006	0.006	0.004
10.2	0.006	0.006	0.001
10.25	0.007	0.007	0.005
10.3	0.005	0.006	0.001
10.35	0.006	0.007	0.005
10.4	0.005	0.006	0.002
10.45	0.007	0.007	0.004
10.5	0.006	0.005	0.002
10.55	0.007	0.006	0.005
10.6	0.006	0.005	0.002
10.65	0.007	0.006	0.004
10.7	0.006	0.006	0.002
10.75	0.007	0.006	0.005
10.8	0.007	0.006	0.002
10.85	0.007	0.007	0.005
10.9	0.006	0.005	0.002
10.95	0.006	0.006	0.004
11	0.006	0.006	0.002
11.05	0.007	0.006	0.005
11.1	0.006	0.006	0.004
11.15	0.007	0.006	0.005
11.2	0.007	0.005	0.004
11.25	0.009	0.007	0.006

US EPA ARCHIVE DOCUMENT

11.3	0.005	0.005	0.005
11.35	0.007	0.006	0.006
11.4	0.007	0.006	0.005
11.45	0.007	0.007	0.006
11.5	0.007	0.006	0.005
11.55	0.007	0.006	0.006
11.6	0.005	0.006	0.005
11.65	0.007	0.006	0.006
11.7	0.006	0.006	0.004
11.75	0.007	0.006	0.006
11.8	0.006	0.005	0.005
11.85	0.007	0.006	0.006
11.9	0.006	0.005	0.004
11.95	0.007	0.006	0.006
12	0.006	0.006	0.005
12.05	0.007	0.006	0.006
12.1	0.005	0.005	0.005
12.15	0.009	0.006	0.006
12.2	0.007	0.006	0.005
12.25	0.009	0.007	0.007
12.3	0.006	0.006	0.005
12.35	0.007	0.007	0.007
12.4	0.007	0.006	0.005
12.45	0.009	0.006	0.006
12.5	0.006	0.005	0.005
12.55	0.009	0.006	0.007
12.6	0.004	0.005	0.005
12.65	0.009	0.007	0.007
12.7	0.006	0.005	0.007
12.75	0.009	0.006	0.007
12.8	0.006	0.006	0.006
12.85	0.009	0.006	0.007
12.9	0.005	0.006	0.006
12.95	0.009	0.006	0.007
13	0.005	0.006	0.005
13.05	0.009	0.006	0.007
13.1	0.004	0.006	0.006
13.15	0.009	0.006	0.007
13.2	0.006	0.006	0.005
13.25	0.011	0.009	0.007
13.3	0.007	0.005	0.005
13.35	0.012	0.007	0.007
13.4	0.009	0.006	0.006
13.45	0.013	0.007	0.007
13.5	0.012	0.006	0.006
13.55	0.012	0.007	0.007
13.6	0.006	0.006	0.005

US EPA ARCHIVE DOCUMENT

13.65	0.011	0.006	0.007
13.7	0.01	0.006	0.005
13.75	0.012	0.007	0.007
13.8	0.004	0.006	0.005
13.85	0.012	0.006	0.009
13.9	0.006	0.005	0.009
13.95	0.013	0.006	0.009
14	0.013	0.005	0.006
14.05	0.013	0.006	0.007
14.1	0.01	0.006	0.007
14.15	0.011	0.007	0.007
14.2	0.011	0.005	0.006
14.25	0.013	0.006	0.007
14.3	0.007	0.006	0.005
14.35	0.013	0.007	0.009
14.4	0.005	0.006	0.007
14.45	0.011	0.006	0.009
14.5	0.005	0.006	0.006
14.55	0.011	0.007	0.01
14.6	0.006	0.006	0.01
14.65	0.011	0.006	0.01
14.7	0.004	0.004	0.007
14.75	0.011	0.007	0.009
14.8	0.007	0.006	0.007
14.85	0.011	0.007	0.01
14.9	0.006	0.006	0.007
14.95	0.011	0.007	0.01
15	0.01	0.006	0.006
15.05	0.011	0.006	0.009
15.1	0.009	0.005	0.009
15.15	0.011	0.006	0.009
15.2	0.009	0.005	0.009
15.25	0.012	0.007	0.011
15.3	0.007	0.005	0.009
15.35	0.009	0.006	0.01
15.4	0.007	0.005	0.007
15.45	0.009	0.006	0.01
15.5	0.007	0.005	0.007
15.55	0.009	0.006	0.01
15.6	0.007	0.005	0.009
15.65	0.009	0.006	0.01
15.7	0.006	0.005	0.009
15.75	0.009	0.006	0.01
15.8	0.007	0.006	0.009
15.85	0.01	0.006	0.01
15.9	0.006	0.006	0.007
15.95	0.009	0.006	0.01

US EPA ARCHIVE DOCUMENT

16	0.007	0.006	0.007
16.05	0.01	0.006	0.01
16.1	0.009	0.005	0.01
16.15	0.01	0.006	0.01
16.2	0.007	0.006	0.007
16.25	0.01	0.007	0.012
16.3	0.006	0.005	0.01
16.35	0.009	0.006	0.011
16.4	0.009	0.005	0.01
16.45	0.009	0.006	0.011
16.5	0.007	0.006	0.01
16.55	0.009	0.006	0.011
16.6	0.005	0.005	0.01
16.65	0.009	0.007	0.011
16.7	0.007	0.005	0.011
16.75	0.009	0.006	0.011
16.8	0.007	0.005	0.009
16.85	0.01	0.007	0.011
16.9	0.009	0.005	0.009
16.95	0.009	0.006	0.01
17	0.006	0.005	0.007
17.05	0.009	0.006	0.011
17.1	0.007	0.006	0.009
17.15	0.01	0.006	0.011
17.2	0.007	0.005	0.01
17.25	0.01	0.007	0.013
17.3	0.006	0.005	0.012
17.35	0.009	0.006	0.012
17.4	0.006	0.005	0.011
17.45	0.009	0.006	0.012
17.5	0.007	0.005	0.011
17.55	0.009	0.006	0.012
17.6	0.007	0.006	0.011
17.65	0.009	0.006	0.012
17.7	0.007	0.005	0.012
17.75	0.009	0.006	0.012
17.8	0.007	0.005	0.011
17.85	0.01	0.006	0.012
17.9	0.007	0.006	0.011
17.95	0.009	0.006	0.012
18	0.007	0.005	0.011
18.05	0.009	0.006	0.012
18.1	0.007	0.006	0.012
18.15	0.009	0.006	0.012
18.2	0.009	0.005	0.011
18.25	0.011	0.009	0.017
18.3	0.007	0.006	0.015

US EPA ARCHIVE DOCUMENT

18.35	0.009	0.006	0.017
18.4	0.007	0.006	0.015
18.45	0.009	0.006	0.016
18.5	0.007	0.006	0.016
18.55	0.009	0.006	0.016
18.6	0.006	0.006	0.013
18.65	0.009	0.006	0.016
18.7	0.007	0.005	0.013
18.75	0.009	0.006	0.016
18.8	0.007	0.005	0.015
18.85	0.009	0.006	0.016
18.9	0.007	0.005	0.013
18.95	0.009	0.006	0.016
19	0.009	0.006	0.015
19.05	0.01	0.007	0.017
19.1	0.009	0.005	0.016
19.15	0.01	0.006	0.016
19.2	0.009	0.006	0.016
19.25	0.01	0.009	0.02
19.3	0.007	0.005	0.016
19.35	0.009	0.007	0.018
19.4	0.007	0.005	0.017
19.45	0.009	0.006	0.02
19.5	0.007	0.005	0.017
19.55	0.009	0.007	0.018
19.6	0.007	0.006	0.017
19.65	0.009	0.006	0.018
19.7	0.007	0.006	0.016
19.75	0.009	0.006	0.018
19.8	0.007	0.006	0.016
19.85	0.009	0.006	0.018
19.9	0.007	0.005	0.017
19.95	0.009	0.006	0.018
20	0.007	0.006	0.016
20.05	0.01	0.006	0.018
20.1	0.007	0.005	0.017
20.15	0.01	0.006	0.018
20.2	0.007	0.006	0.017
20.25	0.01	0.007	0.022
20.3	0.009	0.006	0.018
20.35	0.009	0.006	0.022
20.4	0.007	0.005	0.021
20.45	0.009	0.006	0.021
20.5	0.007	0.006	0.02
20.55	0.009	0.006	0.022
20.6	0.007	0.006	0.021
20.65	0.009	0.006	0.021

US EPA ARCHIVE DOCUMENT

20.7	0.007	0.005	0.018
20.75	0.009	0.006	0.022
20.8	0.009	0.005	0.016
20.85	0.009	0.006	0.022
20.9	0.007	0.005	0.017
20.95	0.009	0.006	0.021
21	0.009	0.005	0.018
21.05	0.009	0.006	0.021
21.1	0.006	0.005	0.021
21.15	0.009	0.007	0.027
21.2	0.007	0.004	0.02
21.25	0.009	0.006	0.026
21.3	0.007	0.005	0.023
21.35	0.009	0.006	0.026
21.4	0.006	0.005	0.021
21.45	0.009	0.006	0.024
21.5	0.006	0.005	0.022
21.55	0.009	0.006	0.024
21.6	0.007	0.006	0.021
21.65	0.009	0.006	0.027
21.7	0.009	0.005	0.024
21.75	0.009	0.006	0.026
21.8	0.006	0.005	0.017
21.85	0.009	0.007	0.027
21.9	0.009	0.005	0.022
21.95	0.009	0.006	0.026
22	0.007	0.006	0.022
22.05	0.009	0.007	0.027
22.1	0.009	0.005	0.024
22.15	0.009	0.006	0.027
22.2	0.007	0.006	0.017
22.25	0.009	0.007	0.027
22.3	0.007	0.006	0.022
22.35	0.009	0.006	0.023
22.4	0.007	0.005	0.021
22.45	0.009	0.006	0.022
22.5	0.009	0.005	0.02
22.55	0.009	0.006	0.022
22.6	0.009	0.005	0.02
22.65	0.009	0.006	0.022
22.7	0.007	0.005	0.02
22.75	0.009	0.006	0.022
22.8	0.007	0.005	0.02
22.85	0.009	0.006	0.022
22.9	0.007	0.005	0.021
22.95	0.009	0.006	0.022
23	0.007	0.005	0.02

US EPA ARCHIVE DOCUMENT

23.05	0.009	0.006	0.022
23.1	0.007	0.006	0.022
23.15	0.009	0.006	0.022
23.2	0.009	0.005	0.021
23.25	0.01	0.007	0.023
23.3	0.006	0.005	0.021
23.35	0.009	0.007	0.022
23.4	0.007	0.004	0.022
23.45	0.009	0.006	0.022
23.5	0.007	0.005	0.022
23.55	0.009	0.006	0.022
23.6	0.007	0.005	0.021
23.65	0.009	0.006	0.022
23.7	0.007	0.005	0.021
23.75	0.009	0.006	0.022
23.8	0.007	0.006	0.021
23.85	0.009	0.006	0.022
23.9	0.006	0.005	0.022
23.95	0.009	0.006	0.023
24	0.009	0.005	0.021
24.05	0.009	0.006	0.022
24.1	0.007	0.005	0.021
24.15	0.009	0.007	0.022
24.2	0.007	0.005	0.021
24.25	0.01	0.007	0.024
24.3	0.009	0.005	0.021
24.35	0.009	0.006	0.023
24.4	0.007	0.005	0.021
24.45	0.009	0.007	0.023
24.5	0.007	0.005	0.021
24.55	0.009	0.006	0.023
24.6	0.007	0.005	0.023
24.65	0.009	0.006	0.023
24.7	0.006	0.004	0.021
24.75	0.009	0.006	0.023
24.8	0.007	0.005	0.022
24.85	0.009	0.007	0.023
24.9	0.007	0.005	0.021
24.95	0.009	0.006	0.023
25	0.007	0.005	0.022
25.05	0.009	0.006	0.023
25.1	0.006	0.006	0.022
25.15	0.009	0.006	0.023
25.2	0.007	0.004	0.022
25.25	0.01	0.007	0.024
25.3	0.006	0.005	0.022
25.35	0.009	0.006	0.023

US EPA ARCHIVE DOCUMENT

25.4	0.006	0.005	0.021
25.45	0.009	0.006	0.024
25.5	0.007	0.005	0.022
25.55	0.009	0.006	0.023
25.6	0.006	0.004	0.021
25.65	0.009	0.006	0.023
25.7	0.007	0.005	0.022
25.75	0.009	0.006	0.023
25.8	0.007	0.005	0.022
25.85	0.009	0.006	0.023
25.9	0.005	0.006	0.022
25.95	0.009	0.006	0.023
26	0.006	0.005	0.022
26.05	0.009	0.006	0.023
26.1	0.007	0.004	0.022
26.15	0.009	0.006	0.023
26.2	0.007	0.005	0.021
26.25	0.01	0.006	0.023
26.3	0.009	0.006	0.021
26.35	0.01	0.007	0.028
26.4	0.006	0.006	0.024
26.45	0.007	0.006	0.026
26.5	0.006	0.005	0.024
26.55	0.009	0.006	0.027
26.6	0.007	0.005	0.024
26.65	0.007	0.006	0.027
26.7	0.006	0.006	0.023
26.75	0.009	0.006	0.026
26.8	0.007	0.006	0.024
26.85	0.009	0.006	0.026
26.9	0.007	0.005	0.024
26.95	0.009	0.006	0.027
27	0.006	0.005	0.024
27.05	0.009	0.006	0.027
27.1	0.006	0.005	0.026
27.15	0.009	0.006	0.027
27.2	0.006	0.005	0.024
27.25	0.009	0.007	0.028
27.3	0.006	0.005	0.026
27.35	0.007	0.006	0.027
27.4	0.006	0.004	0.024
27.45	0.007	0.006	0.027
27.5	0.006	0.005	0.027
27.55	0.007	0.006	0.027
27.6	0.006	0.005	0.026
27.65	0.007	0.006	0.027
27.7	0.006	0.005	0.026

US EPA ARCHIVE DOCUMENT

27.75	0.007	0.006	0.027
27.8	0.006	0.005	0.027
27.85	0.007	0.006	0.027
27.9	0.007	0.005	0.026
27.95	0.007	0.006	0.027
28	0.006	0.005	0.026
28.05	0.007	0.006	0.027
28.1	0.006	0.005	0.026
28.15	0.007	0.006	0.027
28.2	0.005	0.005	0.026
28.25	0.009	0.007	0.028
28.3	0.006	0.005	0.026
28.35	0.007	0.006	0.028
28.4	0.006	0.005	0.026
28.45	0.007	0.006	0.027
28.5	0.006	0.005	0.026
28.55	0.007	0.006	0.027
28.6	0.006	0.006	0.027
28.65	0.007	0.006	0.028
28.7	0.006	0.005	0.027
28.75	0.007	0.006	0.028
28.8	0.006	0.005	0.026
28.85	0.007	0.006	0.028
28.9	0.007	0.005	0.026
28.95	0.007	0.006	0.028
29	0.006	0.005	0.026
29.05	0.007	0.006	0.027
29.1	0.007	0.005	0.026
29.15	0.007	0.006	0.028
29.2	0.006	0.005	0.026
29.25	0.007	0.006	0.028
29.3	0.005	0.005	0.026
29.35	0.007	0.006	0.028
29.4	0.005	0.005	0.027
29.45	0.007	0.006	0.028
29.5	0.006	0.005	0.028
29.55	0.007	0.006	0.028
29.6	0.007	0.005	0.026
29.65	0.007	0.006	0.027
29.7	0.006	0.006	0.027
29.75	0.007	0.006	0.028
29.8	0.006	0.005	0.027
29.85	0.007	0.006	0.028
29.9	0.006	0.005	0.027
29.95	0.007	0.006	0.027
30	0.006	0.005	0.027
30.05	0.007	0.006	0.028

US EPA ARCHIVE DOCUMENT

30.1	0.006	0.005	0.027
30.15	0.007	0.006	0.028
30.2	0.006	0.005	0.027
30.25	0.007	0.006	0.028
30.3	0.005	0.006	0.028
30.35	0.007	0.006	0.028
30.4	0.005	0.005	0.027
30.45	0.007	0.006	0.028
30.5	0.007	0.005	0.028
30.55	0.007	0.006	0.028
30.6	0.006	0.005	0.028
30.65	0.007	0.006	0.028
30.7	0.006	0.004	0.027
30.75	0.007	0.006	0.028
30.8	0.006	0.005	0.027
30.85	0.007	0.006	0.028
30.9	0.006	0.004	0.027
30.95	0.007	0.006	0.028
31	0.006	0.005	0.027
31.05	0.007	0.006	0.028
31.1	0.006	0.005	0.027
31.15	0.007	0.006	0.029
31.2	0.006	0.005	0.027
31.25	0.007	0.006	0.029
31.3	0.006	0.004	0.028
31.35	0.007	0.006	0.029
31.4	0.006	0.005	0.027
31.45	0.007	0.006	0.028
31.5	0.006	0.005	0.027
31.55	0.007	0.006	0.028
31.6	0.007	0.004	0.027
31.65	0.007	0.006	0.028
31.7	0.006	0.006	0.028
31.75	0.007	0.006	0.028
31.8	0.007	0.005	0.027
31.85	0.007	0.006	0.028
31.9	0.006	0.005	0.027
31.95	0.007	0.006	0.028
32	0.006	0.005	0.027
32.05	0.009	0.006	0.028
32.1	0.006	0.005	0.027
32.15	0.007	0.006	0.028
32.2	0.006	0.005	0.026
32.25	0.009	0.006	0.031
32.3	0.006	0.004	0.031
32.35	0.007	0.005	0.031
32.4	0.006	0.005	0.029

US EPA ARCHIVE DOCUMENT

32.45	0.007	0.005	0.032
32.5	0.005	0.004	0.032
32.55	0.007	0.005	0.032
32.6	0.007	0.004	0.029
32.65	0.007	0.006	0.032
32.7	0.006	0.004	0.031
32.75	0.007	0.005	0.031
32.8	0.006	0.004	0.029
32.85	0.006	0.006	0.031
32.9	0.005	0.005	0.031
32.95	0.007	0.005	0.031
33	0.006	0.004	0.029
33.05	0.007	0.005	0.032
33.1	0.006	0.005	0.032
33.15	0.007	0.005	0.032
33.2	0.005	0.005	0.029
33.25	0.007	0.006	0.034
33.3	0.007	0.004	0.031
33.35	0.007	0.005	0.033
33.4	0.005	0.005	0.032
33.45	0.007	0.005	0.034
33.5	0.005	0.005	0.032
33.55	0.007	0.006	0.033
33.6	0.004	0.005	0.033
33.65	0.007	0.005	0.033
33.7	0.006	0.004	0.032
33.75	0.007	0.005	0.034
33.8	0.006	0.005	0.034
33.85	0.007	0.006	0.034
33.9	0.006	0.005	0.033
33.95	0.006	0.005	0.033
34	0.006	0.005	0.033
34.05	0.007	0.006	0.033
34.1	0.006	0.005	0.032
34.15	0.007	0.005	0.033
34.2	0.005	0.004	0.033
34.25	0.007	0.005	0.033
34.3	0.005	0.005	0.032
34.35	0.007	0.006	0.035
34.4	0.006	0.004	0.033
34.45	0.006	0.005	0.034
34.5	0.006	0.004	0.033
34.55	0.007	0.006	0.034
34.6	0.006	0.005	0.033
34.65	0.007	0.005	0.034
34.7	0.005	0.004	0.034
34.75	0.007	0.005	0.035

US EPA ARCHIVE DOCUMENT

34.8	0.006	0.005	0.033
34.85	0.006	0.005	0.034
34.9	0.006	0.005	0.033
34.95	0.007	0.005	0.034
35	0.006	0.004	0.033
35.05	0.009	0.005	0.034
35.1	0.006	0.005	0.034
35.15	0.007	0.005	0.034
35.2	0.006	0.004	0.034
35.25	0.006	0.005	0.034
35.3	0.006	0.004	0.033
35.35	0.007	0.006	0.037
35.4	0.005	0.004	0.033
35.45	0.007	0.005	0.035
35.5	0.007	0.005	0.033
35.55	0.007	0.005	0.035
35.6	0.007	0.004	0.034
35.65	0.007	0.005	0.034
35.7	0.006	0.004	0.034
35.75	0.007	0.005	0.035
35.8	0.007	0.004	0.034
35.85	0.007	0.005	0.035
35.9	0.007	0.005	0.033
35.95	0.007	0.005	0.035
36	0.005	0.005	0.034
36.05	0.007	0.005	0.035
36.1	0.006	0.004	0.033
36.15	0.007	0.005	0.035
36.2	0.005	0.005	0.033
36.25	0.007	0.006	0.035
36.3	0.006	0.004	0.034
36.35	0.007	0.006	0.037
36.4	0.006	0.004	0.034
36.45	0.007	0.005	0.037
36.5	0.006	0.004	0.035
36.55	0.007	0.005	0.035
36.6	0.006	0.002	0.035
36.65	0.007	0.006	0.037
36.7	0.005	0.005	0.035
36.75	0.007	0.005	0.037
36.8	0.006	0.005	0.034
36.85	0.007	0.006	0.037
36.9	0.006	0.005	0.034
36.95	0.007	0.005	0.037
37	0.006	0.004	0.035
37.05	0.007	0.005	0.035
37.1	0.006	0.004	0.034

US EPA ARCHIVE DOCUMENT

37.15	0.007	0.005	0.035
37.2	0.006	0.005	0.035
37.25	0.009	0.006	0.038
37.3	0.006	0.002	0.037
37.35	0.007	0.005	0.038
37.4	0.005	0.004	0.035
37.45	0.007	0.005	0.038
37.5	0.005	0.005	0.035
37.55	0.007	0.005	0.038
37.6	0.006	0.004	0.035
37.65	0.007	0.005	0.038
37.7	0.006	0.004	0.035
37.75	0.009	0.005	0.037
37.8	0.005	0.004	0.034
37.85	0.007	0.005	0.037
37.9	0.006	0.005	0.037
37.95	0.007	0.005	0.038
38	0.005	0.004	0.035
38.05	0.007	0.005	0.037
38.1	0.005	0.005	0.037
38.15	0.007	0.005	0.037
38.2	0.007	0.004	0.035
38.25	0.007	0.006	0.042
38.3	0.007	0.004	0.04
38.35	0.007	0.006	0.04
38.4	0.006	0.004	0.039
38.45	0.007	0.005	0.04
38.5	0.005	0.005	0.039
38.55	0.007	0.005	0.04
38.6	0.005	0.005	0.039
38.65	0.007	0.005	0.04
38.7	0.006	0.004	0.039
38.75	0.007	0.005	0.04
38.8	0.006	0.004	0.039
38.85	0.007	0.005	0.04
38.9	0.006	0.005	0.039
38.95	0.007	0.005	0.04
39	0.006	0.004	0.04
39.05	0.007	0.005	0.04
39.1	0.006	0.005	0.04
39.15	0.007	0.005	0.042
39.2	0.006	0.005	0.039
39.25	0.009	0.006	0.043
39.3	0.007	0.005	0.04
39.35	0.007	0.005	0.04
39.4	0.006	0.004	0.039
39.45	0.007	0.005	0.04

US EPA ARCHIVE DOCUMENT

39.5	0.006	0.005	0.039
39.55	0.007	0.005	0.042
39.6	0.006	0.004	0.039
39.65	0.007	0.005	0.042
39.7	0.005	0.005	0.04
39.75	0.007	0.005	0.042
39.8	0.006	0.005	0.04
39.85	0.007	0.005	0.04
39.9	0.006	0.005	0.04
39.95	0.007	0.005	0.042
40	0.006	0.005	0.038
40.05	0.007	0.005	0.042
40.1	0.006	0.004	0.04
40.15	0.007	0.005	0.042
40.2	0.006	0.005	0.039
40.25	0.007	0.006	0.043
40.3	0.006	0.004	0.042
40.35	0.007	0.005	0.043
40.4	0.005	0.004	0.042
40.45	0.007	0.005	0.043
40.5	0.006	0.005	0.04
40.55	0.007	0.005	0.043
40.6	0.007	0.005	0.042
40.65	0.007	0.005	0.043
40.7	0.006	0.005	0.04
40.75	0.007	0.005	0.043
40.8	0.006	0.004	0.04
40.85	0.007	0.005	0.043
40.9	0.005	0.005	0.043
40.95	0.007	0.005	0.043
41	0.006	0.004	0.042
41.05	0.007	0.005	0.043
41.1	0.005	0.004	0.042
41.15	0.007	0.005	0.043
41.2	0.006	0.004	0.042
41.25	0.009	0.005	0.044
41.3	0.006	0.004	0.042
41.35	0.007	0.005	0.043
41.4	0.006	0.005	0.042
41.45	0.007	0.005	0.043
41.5	0.006	0.005	0.04
41.55	0.007	0.005	0.043
41.6	0.006	0.004	0.04
41.65	0.007	0.005	0.043
41.7	0.006	0.005	0.043
41.75	0.007	0.005	0.043
41.8	0.006	0.004	0.039

US EPA ARCHIVE DOCUMENT

41.85	0.007	0.005	0.043
41.9	0.005	0.005	0.039
41.95	0.007	0.005	0.043
42	0.006	0.004	0.04
42.05	0.007	0.006	0.043
42.1	0.006	0.004	0.039
42.15	0.007	0.005	0.043
42.2	0.005	0.004	0.043
42.25	0.009	0.006	0.046
42.3	0.007	0.004	0.043
42.35	0.007	0.005	0.045
42.4	0.006	0.004	0.043
42.45	0.007	0.005	0.045
42.5	0.006	0.004	0.037
42.55	0.007	0.005	0.045
42.6	0.005	0.005	0.043
42.65	0.007	0.005	0.045
42.7	0.006	0.004	0.042
42.75	0.007	0.005	0.045
42.8	0.007	0.005	0.042
42.85	0.007	0.005	0.046
42.9	0.007	0.002	0.039
42.95	0.007	0.005	0.045
43	0.006	0.005	0.037
43.05	0.007	0.005	0.045
43.1	0.007	0.005	0.043
43.15	0.007	0.005	0.045
43.2	0.006	0.004	0.04
43.25	0.009	0.006	0.045
43.3	0.007	0.004	0.042
43.35	0.007	0.005	0.043
43.4	0.007	0.004	0.042
43.45	0.009	0.005	0.043
43.5	0.007	0.004	0.04
43.55	0.009	0.005	0.043
43.6	0.006	0.004	0.042
43.65	0.007	0.005	0.043
43.7	0.005	0.004	0.04
43.75	0.007	0.005	0.043
43.8	0.006	0.004	0.04
43.85	0.009	0.005	0.043
43.9	0.007	0.004	0.04
43.95	0.009	0.005	0.043
44	0.007	0.004	0.04
44.05	0.009	0.005	0.043
44.1	0.006	0.005	0.042
44.15	0.007	0.005	0.043

US EPA ARCHIVE DOCUMENT

44.2	0.007	0.005	0.042
44.25	0.009	0.006	0.044
44.3	0.006	0.004	0.043
44.35	0.007	0.005	0.043
44.4	0.006	0.005	0.043
44.45	0.007	0.005	0.043
44.5	0.007	0.004	0.043
44.55	0.009	0.005	0.044
44.6	0.007	0.005	0.043
44.65	0.007	0.005	0.044
44.7	0.007	0.004	0.042
44.75	0.009	0.005	0.044
44.8	0.006	0.005	0.042
44.85	0.009	0.005	0.044
44.9	0.007	0.004	0.043
44.95	0.007	0.005	0.044
45	0.007	0.004	0.043
45.05	0.009	0.005	0.044
45.1	0.006	0.005	0.042
45.15	0.009	0.006	0.044
45.2	0.007	0.004	0.043
45.25	0.011	0.01	0.045
45.3	0.007	0.005	0.044
45.35	0.009	0.005	0.044
45.4	0.009	0.004	0.044
45.45	0.009	0.005	0.045
45.5	0.009	0.004	0.043
45.55	0.009	0.005	0.045
45.6	0.007	0.005	0.044
45.65	0.009	0.005	0.045
45.7	0.006	0.004	0.044
45.75	0.009	0.005	0.045
45.8	0.007	0.005	0.045
45.85	0.009	0.005	0.045
45.9	0.006	0.004	0.042
45.95	0.009	0.005	0.045
46	0.009	0.004	0.044
46.05	0.009	0.005	0.045
46.1	0.009	0.004	0.044
46.15	0.009	0.005	0.045
46.2	0.007	0.005	0.044
46.25	0.01	0.009	0.046
46.3	0.007	0.004	0.045
46.35	0.009	0.005	0.046
46.4	0.007	0.005	0.045
46.45	0.009	0.005	0.046
46.5	0.009	0.004	0.045

US EPA ARCHIVE DOCUMENT

46.55	0.009	0.005	0.046
46.6	0.007	0.002	0.046
46.65	0.007	0.005	0.046
46.7	0.007	0.005	0.045
46.75	0.007	0.005	0.046
46.8	0.007	0.005	0.046
46.85	0.009	0.005	0.046
46.9	0.007	0.004	0.044
46.95	0.009	0.005	0.046
47	0.007	0.004	0.045
47.05	0.007	0.005	0.046
47.1	0.007	0.004	0.046
47.15	0.009	0.005	0.046
47.2	0.007	0.005	0.044
47.25	0.009	0.006	0.048
47.3	0.006	0.004	0.046
47.35	0.007	0.005	0.048
47.4	0.006	0.004	0.045
47.45	0.007	0.005	0.046
47.5	0.007	0.004	0.045
47.55	0.009	0.005	0.046
47.6	0.006	0.004	0.045
47.65	0.007	0.005	0.046
47.7	0.007	0.004	0.045
47.75	0.009	0.005	0.046
47.8	0.007	0.004	0.045
47.85	0.009	0.005	0.046
47.9	0.007	0.004	0.045
47.95	0.009	0.005	0.048
48	0.006	0.004	0.046
48.05	0.009	0.005	0.046
48.1	0.006	0.004	0.045
48.15	0.009	0.005	0.046
48.2	0.006	0.002	0.046
48.25	0.009	0.005	0.049
48.3	0.006	0.004	0.048
48.35	0.009	0.005	0.048
48.4	0.006	0.004	0.048
48.45	0.009	0.005	0.048
48.5	0.007	0.004	0.048
48.55	0.007	0.005	0.049
48.6	0.007	0.004	0.046
48.65	0.009	0.005	0.049
48.7	0.006	0.004	0.048
48.75	0.009	0.005	0.049
48.8	0.007	0.005	0.048
48.85	0.009	0.005	0.049

US EPA ARCHIVE DOCUMENT

48.9	0.006	0.004	0.049
48.95	0.007	0.005	0.049
49	0.007	0.004	0.048
49.05	0.009	0.005	0.049
49.1	0.007	0.005	0.048
49.15	0.007	0.005	0.049
49.2	0.007	0.005	0.048
49.25	0.009	0.006	0.05
49.3	0.007	0.005	0.048
49.35	0.009	0.006	0.049
49.4	0.006	0.005	0.049
49.45	0.009	0.005	0.049
49.5	0.007	0.005	0.048
49.55	0.009	0.005	0.05
49.6	0.009	0.004	0.05
49.65	0.009	0.005	0.05
49.7	0.007	0.005	0.049
49.75	0.009	0.005	0.05
49.8	0.007	0.005	0.05
49.85	0.009	0.006	0.05
49.9	0.007	0.005	0.049
49.95	0.009	0.006	0.05
50	0.007	0.005	0.049
50.05	0.009	0.006	0.05
50.1	0.007	0.004	0.049
50.15	0.009	0.006	0.051
50.2	0.009	0.005	0.049
50.25	0.01	0.006	0.051
50.3	0.007	0.002	0.05
50.35	0.009	0.005	0.051
50.4	0.007	0.004	0.05
50.45	0.009	0.005	0.051
50.5	0.007	0.004	0.051
50.55	0.009	0.005	0.051
50.6	0.009	0.005	0.05
50.65	0.01	0.005	0.053
50.7	0.009	0.004	0.049
50.75	0.009	0.005	0.051
50.8	0.007	0.005	0.05
50.85	0.01	0.005	0.051
50.9	0.007	0.004	0.05
50.95	0.009	0.006	0.051
51	0.007	0.004	0.05
51.05	0.009	0.005	0.053
51.1	0.009	0.005	0.05
51.15	0.009	0.005	0.051
51.2	0.007	0.005	0.05

US EPA ARCHIVE DOCUMENT

51.25	0.01	0.006	0.053
51.3	0.009	0.004	0.051
51.35	0.009	0.005	0.053
51.4	0.009	0.005	0.051
51.45	0.009	0.005	0.053
51.5	0.007	0.004	0.053
51.55	0.01	0.006	0.053
51.6	0.006	0.005	0.051
51.65	0.01	0.006	0.053
51.7	0.009	0.005	0.05
51.75	0.009	0.005	0.054
51.8	0.007	0.004	0.051
51.85	0.01	0.005	0.054
51.9	0.009	0.005	0.053
51.95	0.009	0.005	0.053
52	0.007	0.004	0.051
52.05	0.01	0.005	0.053
52.1	0.009	0.004	0.05
52.15	0.009	0.005	0.053
52.2	0.007	0.004	0.051
52.25	0.01	0.006	0.054
52.3	0.009	0.004	0.054
52.35	0.009	0.005	0.054
52.4	0.007	0.004	0.053
52.45	0.009	0.005	0.054
52.5	0.007	0.005	0.053
52.55	0.009	0.005	0.054
52.6	0.007	0.005	0.054
52.65	0.009	0.005	0.054
52.7	0.009	0.004	0.053
52.75	0.01	0.005	0.054
52.8	0.007	0.005	0.054
52.85	0.009	0.005	0.054
52.9	0.007	0.002	0.053
52.95	0.009	0.005	0.054
53	0.009	0.004	0.051
53.05	0.009	0.005	0.054
53.1	0.007	0.004	0.051
53.15	0.009	0.005	0.054
53.2	0.007	0.004	0.051
53.25	0.01	0.006	0.056
53.3	0.01	0.004	0.054
53.35	0.01	0.005	0.056
53.4	0.009	0.004	0.055
53.45	0.009	0.005	0.056
53.5	0.009	0.004	0.055
53.55	0.009	0.005	0.056

US EPA ARCHIVE DOCUMENT

53.6	0.006	0.004	0.055
53.65	0.009	0.005	0.056
53.7	0.007	0.004	0.055
53.75	0.009	0.006	0.056
53.8	0.009	0.004	0.055
53.85	0.009	0.006	0.056
53.9	0.007	0.004	0.055
53.95	0.009	0.005	0.056
54	0.007	0.004	0.055
54.05	0.009	0.005	0.057
54.1	0.007	0.005	0.055
54.15	0.009	0.005	0.056
54.2	0.009	0.004	0.055
54.25	0.009	0.005	0.06
54.3	0.007	0.004	0.059
54.35	0.009	0.005	0.059
54.4	0.007	0.002	0.059
54.45	0.009	0.004	0.06
54.5	0.007	0.004	0.057
54.55	0.009	0.005	0.06
54.6	0.007	0.004	0.057
54.65	0.007	0.005	0.06
54.7	0.007	0.004	0.057
54.75	0.009	0.005	0.06
54.8	0.007	0.002	0.057
54.85	0.009	0.005	0.06
54.9	0.007	0.004	0.057
54.95	0.009	0.005	0.06
55	0.007	0.004	0.056
55.05	0.009	0.005	0.06
55.1	0.007	0.004	0.059
55.15	0.009	0.005	0.06
55.2	0.007	0.004	0.059
55.25	0.009	0.005	0.06
55.3	0.006	0.002	0.059
55.35	0.01	0.005	0.063
55.4	0.007	0.004	0.059
55.45	0.009	0.005	0.062
55.5	0.007	0.002	0.057
55.55	0.009	0.005	0.061
55.6	0.007	0.002	0.06
55.65	0.009	0.004	0.061
55.7	0.007	0.004	0.059
55.75	0.009	0.004	0.062
55.8	0.007	0.002	0.06
55.85	0.009	0.004	0.062
55.9	0.009	0.004	0.061

US EPA ARCHIVE DOCUMENT

55.95	0.01	0.005	0.062
56	0.007	0.002	0.057
56.05	0.01	0.004	0.061
56.1	0.007	0.002	0.06
56.15	0.009	0.004	0.061
56.2	0.009	0.002	0.059
56.25	0.01	0.005	0.062
56.3	0.007	0.004	0.061
56.35	0.009	0.004	0.062
56.4	0.007	0.004	0.06
56.45	0.009	0.005	0.062
56.5	0.007	0.002	0.06
56.55	0.009	0.004	0.062
56.6	0.007	0.004	0.061
56.65	0.009	0.005	0.062
56.7	0.007	0.004	0.061
56.75	0.009	0.005	0.062
56.8	0.007	0.004	0.061
56.85	0.009	0.005	0.062
56.9	0.009	0.004	0.06
56.95	0.009	0.005	0.062
57	0.007	0.002	0.061
57.05	0.009	0.005	0.062
57.1	0.007	0.004	0.061
57.15	0.009	0.004	0.062
57.2	0.007	0.004	0.061
57.25	0.01	0.005	0.065
57.3	0.007	0.004	0.062
57.35	0.009	0.005	0.063
57.4	0.006	0.004	0.062
57.45	0.009	0.005	0.063
57.5	0.009	0.004	0.062
57.55	0.01	0.005	0.065
57.6	0.009	0.004	0.062
57.65	0.009	0.004	0.063
57.7	0.007	0.004	0.062
57.75	0.009	0.004	0.063
57.8	0.009	0.002	0.063
57.85	0.01	0.005	0.063
57.9	0.007	0.004	0.063
57.95	0.009	0.005	0.063
58	0.007	0.004	0.063
58.05	0.009	0.005	0.063
58.1	0.007	0.004	0.062
58.15	0.009	0.005	0.063
58.2	0.009	0.004	0.063
58.25	0.009	0.005	0.071

US EPA ARCHIVE DOCUMENT

58.3	0.006	0.004	0.07
58.35	0.009	0.005	0.07
58.4	0.007	0.004	0.068
58.45	0.009	0.005	0.07
58.5	0.009	0.004	0.068
58.55	0.009	0.004	0.07
58.6	0.007	0.004	0.068
58.65	0.009	0.004	0.07
58.7	0.007	0.002	0.07
58.75	0.009	0.005	0.07
58.8	0.009	0.004	0.068
58.85	0.009	0.005	0.07
58.9	0.007	0.004	0.07
58.95	0.009	0.005	0.07
59	0.007	0.004	0.068
59.05	0.009	0.004	0.07
59.1	0.007	0.004	0.068
59.15	0.009	0.005	0.07
59.2	0.007	0.004	0.07
59.25	0.009	0.006	0.071
59.3	0.007	0.004	0.067
59.35	0.01	0.005	0.072
59.4	0.006	0.004	0.071
59.45	0.009	0.005	0.072
59.5	0.007	0.002	0.071
59.55	0.01	0.005	0.072
59.6	0.007	0.004	0.071
59.65	0.009	0.005	0.071
59.7	0.009	0.004	0.07
59.75	0.009	0.005	0.072
59.8	0.007	0.004	0.07
59.85	0.009	0.005	0.072
59.9	0.009	0.005	0.071
59.95	0.009	0.005	0.072
60	0.007	0.002	0.071
60.05	0.009	0.005	0.072
60.1	0.007	0.004	0.07
60.15	0.009	0.004	0.072
60.2	0.007	0.004	0.07
60.25	0.01	0.005	0.074
60.3	0.007	0.002	0.072
60.35	0.009	0.004	0.073
60.4	0.009	0.002	0.071
60.45	0.009	0.004	0.073
60.5	0.009	0.002	0.071
60.55	0.009	0.004	0.073
60.6	0.007	0.004	0.071

US EPA ARCHIVE DOCUMENT

60.65	0.009	0.005	0.073
60.7	0.007	0.004	0.072
60.75	0.009	0.004	0.073
60.8	0.006	0.002	0.072
60.85	0.009	0.004	0.073
60.9	0.009	0.002	0.072
60.95	0.009	0.004	0.073
61	0.007	0.004	0.073
61.05	0.009	0.004	0.073
61.1	0.007	0.002	0.072
61.15	0.009	0.004	0.073
61.2	0.007	0.002	0.071
61.25	0.01	0.005	0.074
61.3	0.007	0.004	0.072
61.35	0.009	0.004	0.073
61.4	0.007	0.002	0.072
61.45	0.009	0.004	0.073
61.5	0.007	0.004	0.072
61.55	0.009	0.004	0.073
61.6	0.006	0.002	0.073
61.65	0.007	0.004	0.073
61.7	0.006	0.002	0.072
61.75	0.009	0.005	0.073
61.8	0.007	0.004	0.072
61.85	0.009	0.005	0.074
61.9	0.007	0.002	0.072
61.95	0.009	0.004	0.073
62	0.007	0.004	0.071
62.05	0.009	0.004	0.073
62.1	0.007	0.002	0.072
62.15	0.009	0.004	0.073
62.2	0.007	0.004	0.072
62.25	0.009	0.005	0.076
62.3	0.006	0.002	0.073
62.35	0.009	0.004	0.074
62.4	0.007	0.004	0.072
62.45	0.009	0.004	0.074
62.5	0.007	0.002	0.072
62.55	0.009	0.004	0.074
62.6	0.007	0.002	0.072
62.65	0.009	0.004	0.074
62.7	0.007	0.004	0.072
62.75	0.009	0.004	0.074
62.8	0.007	0.002	0.073
62.85	0.009	0.004	0.074
62.9	0.007	0.002	0.072
62.95	0.009	0.004	0.074

US EPA ARCHIVE DOCUMENT

63	0.007	0.002	0.073
63.05	0.007	0.004	0.074
63.1	0.007	0.001	0.073
63.15	0.009	0.004	0.074
63.2	0.006	0.002	0.073
63.25	0.009	0.004	0.074
63.3	0.007	0.002	0.072
63.35	0.009	0.004	0.077
63.4	0.007	0.002	0.074
63.45	0.009	0.004	0.077
63.5	0.006	0.004	0.076
63.55	0.009	0.004	0.077
63.6	0.007	0.002	0.077
63.65	0.009	0.004	0.077
63.7	0.007	0.002	0.076
63.75	0.009	0.004	0.077
63.8	0.007	0.002	0.076
63.85	0.009	0.004	0.077
63.9	0.006	0.002	0.074
63.95	0.009	0.004	0.077
64	0.007	0.002	0.074
64.05	0.009	0.004	0.077
64.1	0.007	0.002	0.074
64.15	0.009	0.004	0.077
64.2	0.007	0.002	0.074
64.25	0.01	0.004	0.078
64.3	0.007	0.002	0.076
64.35	0.009	0.004	0.077
64.4	0.007	0.002	0.076
64.45	0.009	0.004	0.078
64.5	0.007	0.002	0.076
64.55	0.009	0.004	0.078
64.6	0.007	0.002	0.076
64.65	0.009	0.004	0.078
64.7	0.006	0.004	0.077
64.75	0.009	0.004	0.078
64.8	0.007	0.002	0.078
64.85	0.009	0.004	0.078
64.9	0.007	0.002	0.076
64.95	0.009	0.004	0.077
65	0.007	0.004	0.076
65.05	0.009	0.004	0.077
65.1	0.009	0.002	0.076
65.15	0.009	0.004	0.078
65.2	0.007	0.001	0.076
65.25	0.01	0.004	0.081
65.3	0.007	0.002	0.078

US EPA ARCHIVE DOCUMENT

65.35	0.01	0.004	0.079
65.4	0.007	0.002	0.077
65.45	0.009	0.004	0.079
65.5	0.007	0.002	0.077
65.55	0.009	0.004	0.078
65.6	0.005	0.002	0.077
65.65	0.009	0.004	0.079
65.7	0.006	0.002	0.077
65.75	0.009	0.004	0.079
65.8	0.007	0.002	0.079
65.85	0.009	0.004	0.079
65.9	0.007	0.002	0.078
65.95	0.009	0.004	0.079
66	0.006	0.004	0.078
66.05	0.009	0.004	0.079
66.1	0.009	0.002	0.078
66.15	0.009	0.004	0.079
66.2	0.007	0.002	0.077
66.25	0.01	0.004	0.082
66.3	0.007	0.004	0.082
66.35	0.01	0.004	0.082
66.4	0.007	0.002	0.078
66.45	0.009	0.004	0.082
66.5	0.009	0.002	0.079
66.55	0.009	0.004	0.082
66.6	0.006	0.002	0.082
66.65	0.01	0.004	0.082
66.7	0.009	0.004	0.081
66.75	0.009	0.004	0.083
66.8	0.009	0.002	0.081
66.85	0.009	0.004	0.082
66.9	0.006	0.002	0.081
66.95	0.01	0.004	0.083
67	0.007	0.002	0.083
67.05	0.009	0.004	0.083
67.1	0.005	0.002	0.082
67.15	0.01	0.004	0.083
67.2	0.007	0.002	0.082
67.25	0.01	0.004	0.087
67.3	0.007	0.002	0.082
67.35	0.01	0.004	0.084
67.4	0.007	0.001	0.083
67.45	0.01	0.004	0.084
67.5	0.009	0.001	0.083
67.55	0.01	0.004	0.084
67.6	0.009	0.002	0.083
67.65	0.009	0.004	0.084

US EPA ARCHIVE DOCUMENT

67.7	0.009	0.002	0.084
67.75	0.009	0.004	0.084
67.8	0.009	0.002	0.082
67.85	0.01	0.004	0.084
67.9	0.009	0.002	0.083
67.95	0.01	0.004	0.084
68	0.007	0.002	0.084
68.05	0.01	0.004	0.084
68.1	0.007	0.004	0.083
68.15	0.009	0.004	0.084
68.2	0.007	0.002	0.082
68.25	0.01	0.005	0.092
68.3	0.009	0.002	0.088
68.35	0.009	0.004	0.092
68.4	0.009	0.002	0.09
68.45	0.01	0.004	0.09
68.5	0.01	0.004	0.089
68.55	0.01	0.004	0.09
68.6	0.007	0.002	0.09
68.65	0.01	0.004	0.092
68.7	0.009	0.004	0.09
68.75	0.01	0.004	0.092
68.8	0.009	0.002	0.089
68.85	0.01	0.004	0.092
68.9	0.009	0.002	0.09
68.95	0.01	0.004	0.092
69	0.009	0.004	0.09
69.05	0.01	0.004	0.092
69.1	0.009	0.002	0.09
69.15	0.01	0.004	0.092
69.2	0.009	0.002	0.09
69.25	0.01	0.005	0.095
69.3	0.009	0.001	0.093
69.35	0.01	0.004	0.095
69.4	0.007	0.002	0.094
69.45	0.01	0.004	0.095
69.5	0.007	0.004	0.094
69.55	0.01	0.004	0.095
69.6	0.009	0.004	0.094
69.65	0.01	0.004	0.095
69.7	0.01	0.002	0.094
69.75	0.01	0.004	0.095
69.8	0.009	0.002	0.094
69.85	0.01	0.004	0.095
69.9	0.009	0.002	0.094
69.95	0.01	0.004	0.095
70	0.009	0.002	0.094

US EPA ARCHIVE DOCUMENT

70.05	0.01	0.004	0.094
70.1	0.009	0.002	0.094
70.15	0.01	0.005	0.095
70.2	0.007	0.002	0.093
70.25	0.01	0.004	0.094
70.3	0.007	0.004	0.093
70.35	0.009	0.004	0.094
70.4	0.007	0.002	0.092
70.45	0.009	0.004	0.094
70.5	0.009	0.002	0.093
70.55	0.009	0.004	0.094
70.6	0.009	0.004	0.093
70.65	0.01	0.004	0.094
70.7	0.007	0.002	0.092
70.75	0.009	0.004	0.094
70.8	0.009	0.002	0.092
70.85	0.01	0.004	0.094
70.9	0.007	0.002	0.093
70.95	0.009	0.004	0.094
71	0.009	0.002	0.092
71.05	0.009	0.004	0.094
71.1	0.007	0.001	0.092
71.15	0.01	0.004	0.094
71.2	0.009	0.002	0.092
71.25	0.01	0.004	0.095
71.3	0.009	0.004	0.093
71.35	0.009	0.004	0.095
71.4	0.007	0.002	0.093
71.45	0.009	0.004	0.095
71.5	0.007	0.002	0.093
71.55	0.009	0.004	0.094
71.6	0.009	0.004	0.093
71.65	0.009	0.004	0.094
71.7	0.009	0.002	0.094
71.75	0.009	0.004	0.094
71.8	0.007	0.002	0.093
71.85	0.009	0.004	0.095
71.9	0.007	0.002	0.093
71.95	0.009	0.004	0.094
72	0.009	0.002	0.093
72.05	0.009	0.004	0.095
72.1	0.009	0.002	0.093
72.15	0.01	0.004	0.096
72.2	0.009	0.001	0.092
72.25	0.009	0.002	0.094
72.3	0.007	0.001	0.092
72.35	0.01	0.004	0.094

US EPA ARCHIVE DOCUMENT

72.4	0.007	0.002	0.093
72.45	0.009	0.004	0.094
72.5	0.007	0.002	0.093
72.55	0.009	0.004	0.094
72.6	0.007	0.002	0.093
72.65	0.009	0.002	0.094
72.7	0.007	0.002	0.093
72.75	0.009	0.002	0.094
72.8	0.007	0.002	0.094
72.85	0.009	0.002	0.094
72.9	0.007	0.001	0.092
72.95	0.009	0.002	0.094
73	0.006	0.001	0.093
73.05	0.009	0.004	0.094
73.1	0.007	0.002	0.092
73.15	0.01	0.004	0.096
73.2	0.007	0.002	0.093
73.25	0.009	0.002	0.095
73.3	0.007	0.002	0.093
73.35	0.009	0.002	0.096
73.4	0.009	0.001	0.094
73.45	0.009	0.002	0.095
73.5	0.007	0.002	0.094
73.55	0.009	0.002	0.096
73.6	0.007	0.002	0.094
73.65	0.01	0.002	0.095
73.7	0.007	0.002	0.094
73.75	0.009	0.002	0.095
73.8	0.007	0.001	0.094
73.85	0.009	0.002	0.095
73.9	0.009	0.002	0.094
73.95	0.009	0.002	0.095
74	0.009	0	0.093
74.05	0.009	0.004	0.095
74.1	0.007	0.002	0.094
74.15	0.01	0.004	0.096
74.2	0.007	0.002	0.094
74.25	0.009	0.004	0.095
74.3	0.007	0.002	0.093
74.35	0.009	0.002	0.095
74.4	0.007	0.001	0.094
74.45	0.009	0.004	0.095
74.5	0.007	0.002	0.094
74.55	0.009	0.004	0.095
74.6	0.009	0.001	0.095
74.65	0.009	0.002	0.095
74.7	0.006	0.002	0.094

US EPA ARCHIVE DOCUMENT

74.75	0.009	0.002	0.095
74.8	0.007	0.001	0.094
74.85	0.009	0.002	0.095
74.9	0.009	0.001	0.094
74.95	0.009	0.002	0.095
75	0.007	0.002	0.095
75.05	0.009	0.002	0.095
75.1	0.006	0.001	0.093
75.15	0.01	0.002	0.095
75.2	0.007	0.001	0.094
75.25	0.01	0.004	0.098
75.3	0.007	0.002	0.094
75.35	0.009	0.002	0.095
75.4	0.007	0.002	0.093
75.45	0.009	0.002	0.095
75.5	0.007	0.002	0.094
75.55	0.009	0.002	0.094
75.6	0.007	0.002	0.094
75.65	0.009	0.002	0.095
75.7	0.007	0.002	0.094
75.75	0.009	0.002	0.094
75.8	0.007	0.001	0.093
75.85	0.01	0.002	0.095
75.9	0.009	0.001	0.094
75.95	0.01	0.004	0.095
76	0.007	0.001	0.094
76.05	0.01	0.004	0.094
76.1	0.007	0.001	0.094
76.15	0.01	0.004	0.098
76.2	0.007	0.001	0.095
76.25	0.009	0.002	0.098
76.3	0.007	0.001	0.098
76.35	0.009	0.002	0.098
76.4	0.007	0.001	0.096
76.45	0.01	0.002	0.098
76.5	0.01	0.001	0.095
76.55	0.01	0.002	0.098
76.6	0.009	0.002	0.096
76.65	0.009	0.002	0.098
76.7	0.009	0.001	0.096
76.75	0.01	0.004	0.098
76.8	0.009	0.002	0.095
76.85	0.01	0.002	0.098
76.9	0.009	0.001	0.095
76.95	0.01	0.002	0.098
77	0.009	0.002	0.095
77.05	0.01	0.002	0.099

US EPA ARCHIVE DOCUMENT

77.1	0.009	0.001	0.096
77.15	0.011	0.004	0.101
77.2	0.01	0.002	0.096
77.25	0.011	0.004	0.099
77.3	0.01	0.001	0.096
77.35	0.011	0.002	0.099
77.4	0.009	0.001	0.098
77.45	0.01	0.004	0.1
77.5	0.009	0.001	0.098
77.55	0.011	0.004	0.099
77.6	0.007	0.001	0.096
77.65	0.011	0.004	0.099
77.7	0.007	0.001	0.098
77.75	0.011	0.004	0.099
77.8	0.01	0.002	0.098
77.85	0.011	0.004	0.099
77.9	0.009	0.001	0.098
77.95	0.011	0.004	0.1
78	0.01	0.004	0.096
78.05	0.011	0.004	0.1
78.1	0.007	0.001	0.1
78.15	0.012	0.004	0.103
78.2	0.009	0.001	0.103
78.25	0.01	0.002	0.103
78.3	0.007	0.001	0.1
78.35	0.01	0.002	0.103
78.4	0.007	0.001	0.101
78.45	0.01	0.004	0.103
78.5	0.007	0.001	0.1
78.55	0.01	0.002	0.103
78.6	0.01	0.001	0.101
78.65	0.01	0.002	0.103
78.7	0.007	0.002	0.101
78.75	0.01	0.004	0.103
78.8	0.007	0.001	0.103
78.85	0.01	0.004	0.104
78.9	0.009	0.001	0.101
78.95	0.01	0.002	0.103
79	0.009	0.002	0.101
79.05	0.011	0.004	0.105
79.1	0.009	0.001	0.105
79.15	0.01	0.004	0.106
79.2	0.007	0	0.105
79.25	0.009	0.002	0.106
79.3	0.007	0.001	0.105
79.35	0.01	0.004	0.106
79.4	0.007	0.001	0.104

US EPA ARCHIVE DOCUMENT

79.45	0.01	0.004	0.106
79.5	0.009	0	0.104
79.55	0.01	0.002	0.106
79.6	0.009	0.001	0.105
79.65	0.01	0.002	0.105
79.7	0.007	0.001	0.105
79.75	0.01	0.002	0.106
79.8	0.009	0.001	0.105
79.85	0.01	0.004	0.106
79.9	0.009	0.002	0.105
79.95	0.01	0.002	0.106
80	0.007	0.001	0.106
80.05	0.01	0.004	0.106
80.1	0.009	0.002	0.104
80.15	0.01	0.004	0.109
80.2	0.009	0.002	0.105
80.25	0.01	0.004	0.107
80.3	0.009	0.001	0.106
80.35	0.01	0.002	0.107
80.4	0.01	0.001	0.106
80.45	0.01	0.002	0.107
80.5	0.009	0	0.107
80.55	0.009	0.002	0.107
80.6	0.007	0.001	0.107
80.65	0.01	0.004	0.109
80.7	0.009	0.004	0.107
80.75	0.01	0.004	0.107
80.8	0.009	0	0.107
80.85	0.01	0.002	0.107
80.9	0.006	0.001	0.106
80.95	0.01	0.002	0.107
81	0.009	0.001	0.105
81.05	0.01	0.002	0.107
81.1	0.007	0	0.106
81.15	0.011	0.004	0.11
81.2	0.01	0.001	0.107
81.25	0.01	0.002	0.109
81.3	0.007	0.001	0.107
81.35	0.01	0.002	0.107
81.4	0.007	0.002	0.106
81.45	0.009	0.002	0.107
81.5	0.009	0.002	0.105
81.55	0.01	0.002	0.106
81.6	0.007	0.001	0.106
81.65	0.01	0.004	0.106
81.7	0.007	0.001	0.1
81.75	0.01	0.004	0.103

US EPA ARCHIVE DOCUMENT

81.8	0.007	0	0.099
81.85	0.01	0.004	0.101
81.9	0.01	0.001	0.1
81.95	0.01	0.004	0.1
82	0.009	0.002	0.098

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :8803.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.004	0.001	0.055
0.1	0.001	0.001	0.053
0.15	0.002	0.001	0.055
0.2	0.002	0	0.053
0.25	0.002	0.001	0.055
0.3	0.002	0.001	0.054
0.35	0.002	0.001	0.054
0.4	0.002	0.001	0.053
0.45	0.002	0.001	0.055
0.5	0.002	0.001	0.053
0.55	0.004	0.002	0.054
0.6	0.002	0	0.053
0.65	0.002	0.001	0.054
0.7	0.001	0	0.054
0.75	0.004	0.002	0.054
0.8	0.002	0	0.053
0.85	0.004	0.001	0.054
0.9	0.001	0.001	0.05
0.95	0.004	0.002	0.054
1	0.002	0.001	0.053
1.05	0.004	0.001	0.053
1.1	0.001	0.001	0.05
1.15	0.004	0.002	0.053
1.2	0.001	0.001	0.051
1.25	0.004	0.002	0.053
1.3	0.002	0	0.048
1.35	0.002	0.001	0.049
1.4	0.001	0.001	0.048
1.45	0.004	0.001	0.05
1.5	0.002	0	0.048
1.55	0.002	0.001	0.049
1.6	0.001	0	0.048
1.65	0.004	0.001	0.05
1.7	0.002	0	0.049
1.75	0.004	0.002	0.049
1.8	0.002	0.001	0.046
1.85	0.002	0.001	0.049

US EPA ARCHIVE DOCUMENT

1.9	0.001	0.001	0.048
1.95	0.004	0.001	0.049
2	0.001	0.001	0.046
2.05	0.004	0.002	0.049
2.1	0.001	0	0.049
2.15	0.002	0.002	0.049
2.2	0.002	0	0.048
2.25	0.004	0.002	0.049
2.3	0.001	0	0.048
2.35	0.004	0.002	0.049
2.4	0.002	0.001	0.046
2.45	0.004	0.002	0.048
2.5	0.001	0	0.046
2.55	0.004	0.001	0.046
2.6	0.001	0.001	0.046
2.65	0.004	0.001	0.048
2.7	0.002	0.001	0.045
2.75	0.004	0.001	0.048
2.8	0.001	0.001	0.046
2.85	0.004	0.001	0.048
2.9	0.001	0.001	0.045
2.95	0.002	0.001	0.046
3	0.002	0.001	0.045
3.05	0.004	0.002	0.048
3.1	0.002	0	0.046
3.15	0.004	0.002	0.048
3.2	0.002	0.001	0.046
3.25	0.004	0.002	0.048
3.3	0.002	0	0.045
3.35	0.004	0.002	0.048
3.4	0.002	0	0.045
3.45	0.004	0.002	0.045
3.5	0.002	0.002	0.044
3.55	0.004	0.002	0.045
3.6	0.001	0	0.044
3.65	0.004	0.002	0.045
3.7	0.001	0.001	0.044
3.75	0.004	0.002	0.045
3.8	0.001	0.002	0.044
3.85	0.004	0.002	0.045
3.9	0.002	0.001	0.045
3.95	0.004	0.002	0.045
4	0.002	0	0.045
4.05	0.004	0.002	0.045
4.1	0.002	0	0.044
4.15	0.004	0.002	0.045
4.2	0.001	0.002	0.044

US EPA ARCHIVE DOCUMENT

4.25	0.005	0.004	0.046
4.3	0.002	0.001	0.043
4.35	0.004	0.002	0.044
4.4	0.001	0.001	0.042
4.45	0.004	0.002	0.044
4.5	0.001	0.001	0.043
4.55	0.004	0.002	0.044
4.6	0.002	0.001	0.042
4.65	0.004	0.002	0.044
4.7	0.002	0.001	0.043
4.75	0.004	0.002	0.044
4.8	0.001	0.001	0.042
4.85	0.004	0.002	0.044
4.9	0.002	0.001	0.043
4.95	0.004	0.002	0.044
5	0.002	0.001	0.042
5.05	0.004	0.002	0.044
5.1	0.002	0.001	0.043
5.15	0.004	0.002	0.044
5.2	0.002	0.001	0.042
5.25	0.004	0.004	0.044
5.3	0.002	0.001	0.04
5.35	0.004	0.002	0.042
5.4	0.002	0.001	0.042
5.45	0.004	0.002	0.042
5.5	0.002	0.001	0.04
5.55	0.004	0.002	0.042
5.6	0.002	0.001	0.04
5.65	0.004	0.002	0.042
5.7	0.002	0.002	0.04
5.75	0.004	0.002	0.042
5.8	0.004	0.001	0.04
5.85	0.004	0.002	0.042
5.9	0.002	0.001	0.04
5.95	0.004	0.002	0.042
6	0.002	0.002	0.04
6.05	0.004	0.002	0.043
6.1	0.002	0.001	0.04
6.15	0.004	0.002	0.042
6.2	0.004	0.001	0.04
6.25	0.005	0.002	0.042
6.3	0.002	0.001	0.039
6.35	0.004	0.002	0.043
6.4	0.004	0.002	0.039
6.45	0.004	0.002	0.042
6.5	0.004	0.001	0.039
6.55	0.005	0.002	0.04

US EPA ARCHIVE DOCUMENT

6.6	0.004	0.002	0.04
6.65	0.004	0.002	0.04
6.7	0.004	0.002	0.04
6.75	0.004	0.002	0.04
6.8	0.004	0.002	0.039
6.85	0.005	0.002	0.042
6.9	0.002	0.002	0.039
6.95	0.004	0.002	0.04
7	0.002	0.001	0.039
7.05	0.004	0.002	0.04
7.1	0.002	0.001	0.039
7.15	0.004	0.004	0.04
7.2	0.002	0.002	0.039
7.25	0.005	0.004	0.042
7.3	0.004	0.001	0.039
7.35	0.005	0.002	0.042
7.4	0.002	0.002	0.039
7.45	0.005	0.002	0.04
7.5	0.004	0.002	0.039
7.55	0.004	0.002	0.04
7.6	0.004	0.001	0.039
7.65	0.005	0.002	0.04
7.7	0.002	0.001	0.039
7.75	0.005	0.002	0.04
7.8	0.002	0.001	0.039
7.85	0.005	0.002	0.04
7.9	0.002	0.001	0.039
7.95	0.005	0.002	0.04
8	0.004	0.001	0.039
8.05	0.005	0.002	0.04
8.1	0.004	0.001	0.038
8.15	0.005	0.002	0.04
8.2	0.004	0.002	0.039
8.25	0.005	0.004	0.04
8.3	0.005	0.001	0.037
8.35	0.005	0.002	0.039
8.4	0.002	0.002	0.038
8.45	0.005	0.004	0.038
8.5	0.004	0.001	0.037
8.55	0.005	0.004	0.038
8.6	0.004	0.002	0.037
8.65	0.005	0.002	0.038
8.7	0.004	0.002	0.037
8.75	0.005	0.002	0.038
8.8	0.004	0.002	0.038
8.85	0.005	0.002	0.038
8.9	0.004	0.002	0.037

US EPA ARCHIVE DOCUMENT

8.95	0.005	0.002	0.038
9	0.002	0.001	0.037
9.05	0.005	0.004	0.038
9.1	0.002	0.001	0.037
9.15	0.005	0.002	0.038
9.2	0.004	0.002	0.037
9.25	0.005	0.004	0.039
9.3	0.004	0.002	0.037
9.35	0.005	0.002	0.038
9.4	0.005	0.001	0.035
9.45	0.005	0.004	0.038
9.5	0.005	0.001	0.037
9.55	0.005	0.004	0.038
9.6	0.002	0.001	0.037
9.65	0.005	0.004	0.038
9.7	0.004	0.004	0.035
9.75	0.005	0.004	0.038
9.8	0.005	0.002	0.037
9.85	0.005	0.002	0.038
9.9	0.005	0.002	0.037
9.95	0.005	0.002	0.038
10	0.004	0.002	0.037
10.05	0.005	0.004	0.038
10.1	0.005	0.002	0.037
10.15	0.005	0.004	0.038
10.2	0.004	0.001	0.037
10.25	0.006	0.004	0.039
10.3	0.005	0.002	0.034
10.35	0.005	0.004	0.037
10.4	0.004	0.002	0.035
10.45	0.006	0.004	0.037
10.5	0.004	0.002	0.034
10.55	0.005	0.002	0.037
10.6	0.004	0.002	0.035
10.65	0.005	0.002	0.037
10.7	0.004	0.002	0.034
10.75	0.006	0.004	0.037
10.8	0.004	0.002	0.037
10.85	0.006	0.002	0.037
10.9	0.004	0.002	0.035
10.95	0.005	0.004	0.037
11	0.004	0.001	0.035
11.05	0.005	0.002	0.037
11.1	0.004	0.002	0.035
11.15	0.005	0.004	0.037
11.2	0.004	0.002	0.035
11.25	0.006	0.004	0.038

US EPA ARCHIVE DOCUMENT

11.3	0.005	0.002	0.035
11.35	0.006	0.004	0.037
11.4	0.005	0.002	0.034
11.45	0.006	0.004	0.037
11.5	0.005	0.002	0.035
11.55	0.006	0.004	0.037
11.6	0.004	0.002	0.034
11.65	0.006	0.004	0.037
11.7	0.006	0.002	0.035
11.75	0.006	0.002	0.037
11.8	0.005	0.002	0.035
11.85	0.006	0.004	0.037
11.9	0.004	0.002	0.034
11.95	0.006	0.004	0.037
12	0.004	0.001	0.034
12.05	0.006	0.004	0.037
12.1	0.004	0.002	0.035
12.15	0.006	0.004	0.037
12.2	0.005	0.002	0.035
12.25	0.006	0.004	0.038
12.3	0.005	0.002	0.037
12.35	0.005	0.004	0.037
12.4	0.004	0.002	0.035
12.45	0.006	0.004	0.037
12.5	0.004	0.001	0.037
12.55	0.005	0.004	0.037
12.6	0.004	0.002	0.035
12.65	0.006	0.004	0.037
12.7	0.005	0.002	0.035
12.75	0.006	0.004	0.038
12.8	0.004	0.002	0.034
12.85	0.005	0.004	0.037
12.9	0.004	0.002	0.035
12.95	0.006	0.004	0.037
13	0.005	0.002	0.035
13.05	0.006	0.002	0.037
13.1	0.004	0.002	0.035
13.15	0.006	0.004	0.035
13.2	0.005	0.002	0.035
13.25	0.006	0.004	0.037
13.3	0.005	0.002	0.033
13.35	0.005	0.004	0.035
13.4	0.005	0.002	0.033
13.45	0.006	0.004	0.035
13.5	0.006	0.002	0.034
13.55	0.006	0.004	0.035
13.6	0.004	0.002	0.033

US EPA ARCHIVE DOCUMENT

13.65	0.006	0.004	0.035
13.7	0.004	0.002	0.034
13.75	0.006	0.004	0.035
13.8	0.004	0.002	0.034
13.85	0.006	0.004	0.035
13.9	0.004	0.002	0.033
13.95	0.006	0.004	0.035
14	0.005	0.002	0.034
14.05	0.006	0.004	0.035
14.1	0.005	0.002	0.034
14.15	0.006	0.004	0.035
14.2	0.005	0.002	0.033
14.25	0.006	0.004	0.035
14.3	0.005	0.002	0.034
14.35	0.006	0.004	0.038
14.4	0.005	0.002	0.037
14.45	0.006	0.004	0.038
14.5	0.005	0.002	0.035
14.55	0.006	0.004	0.037
14.6	0.004	0.002	0.035
14.65	0.006	0.004	0.038
14.7	0.005	0.001	0.035
14.75	0.006	0.004	0.038
14.8	0.005	0.001	0.035
14.85	0.006	0.004	0.038
14.9	0.005	0.002	0.037
14.95	0.006	0.004	0.037
15	0.006	0.002	0.035
15.05	0.006	0.004	0.037
15.1	0.005	0.002	0.035
15.15	0.007	0.004	0.037
15.2	0.005	0.002	0.035
15.25	0.006	0.005	0.038
15.3	0.005	0.002	0.035
15.35	0.006	0.004	0.035
15.4	0.005	0.004	0.035
15.45	0.006	0.004	0.035
15.5	0.005	0.004	0.035
15.55	0.006	0.004	0.035
15.6	0.004	0.004	0.035
15.65	0.006	0.004	0.035
15.7	0.005	0.002	0.035
15.75	0.006	0.004	0.035
15.8	0.005	0.004	0.034
15.85	0.006	0.004	0.035
15.9	0.005	0.002	0.034
15.95	0.006	0.004	0.035

US EPA ARCHIVE DOCUMENT

16	0.005	0.002	0.034
16.05	0.006	0.004	0.035
16.1	0.006	0.002	0.034
16.15	0.006	0.004	0.035
16.2	0.005	0.002	0.034
16.25	0.007	0.004	0.037
16.3	0.005	0.004	0.033
16.35	0.007	0.004	0.034
16.4	0.005	0.004	0.033
16.45	0.006	0.004	0.034
16.5	0.005	0.002	0.033
16.55	0.006	0.004	0.034
16.6	0.004	0.002	0.033
16.65	0.006	0.004	0.034
16.7	0.005	0.002	0.033
16.75	0.006	0.004	0.034
16.8	0.005	0.004	0.034
16.85	0.007	0.004	0.034
16.9	0.005	0.002	0.034
16.95	0.007	0.004	0.034
17	0.005	0.004	0.033
17.05	0.007	0.004	0.034
17.1	0.004	0.002	0.033
17.15	0.007	0.004	0.034
17.2	0.006	0.002	0.033
17.25	0.007	0.005	0.035
17.3	0.005	0.004	0.033
17.35	0.006	0.004	0.035
17.4	0.005	0.002	0.034
17.45	0.006	0.004	0.035
17.5	0.005	0.002	0.033
17.55	0.006	0.004	0.035
17.6	0.005	0.002	0.034
17.65	0.006	0.004	0.035
17.7	0.005	0.002	0.032
17.75	0.006	0.004	0.035
17.8	0.005	0.002	0.034
17.85	0.006	0.004	0.035
17.9	0.006	0.004	0.033
17.95	0.006	0.004	0.035
18	0.004	0.002	0.033
18.05	0.006	0.004	0.035
18.1	0.005	0.002	0.034
18.15	0.006	0.004	0.034
18.2	0.005	0.004	0.033
18.25	0.006	0.005	0.035
18.3	0.005	0.002	0.033

US EPA ARCHIVE DOCUMENT

18.35	0.006	0.004	0.035
18.4	0.005	0.004	0.034
18.45	0.007	0.004	0.035
18.5	0.006	0.001	0.032
18.55	0.006	0.004	0.034
18.6	0.006	0.004	0.034
18.65	0.007	0.004	0.035
18.7	0.007	0.004	0.033
18.75	0.007	0.005	0.034
18.8	0.006	0.002	0.033
18.85	0.006	0.004	0.035
18.9	0.005	0.004	0.034
18.95	0.006	0.004	0.034
19	0.006	0.002	0.033
19.05	0.006	0.005	0.035
19.1	0.006	0.002	0.033
19.15	0.006	0.005	0.034
19.2	0.006	0.002	0.034
19.25	0.007	0.005	0.035
19.3	0.006	0.002	0.033
19.35	0.007	0.004	0.035
19.4	0.005	0.002	0.034
19.45	0.006	0.004	0.035
19.5	0.006	0.004	0.034
19.55	0.007	0.004	0.035
19.6	0.005	0.002	0.034
19.65	0.007	0.004	0.035
19.7	0.006	0.004	0.033
19.75	0.007	0.004	0.035
19.8	0.006	0.004	0.034
19.85	0.006	0.005	0.035
19.9	0.006	0.004	0.034
19.95	0.006	0.005	0.035
20	0.006	0.002	0.033
20.05	0.006	0.005	0.035
20.1	0.006	0.002	0.033
20.15	0.006	0.005	0.035
20.2	0.006	0.004	0.033
20.25	0.009	0.006	0.035
20.3	0.006	0.004	0.033
20.35	0.006	0.005	0.034
20.4	0.006	0.002	0.032
20.45	0.006	0.004	0.034
20.5	0.006	0.004	0.034
20.55	0.007	0.004	0.034
20.6	0.006	0.004	0.033
20.65	0.006	0.004	0.034

US EPA ARCHIVE DOCUMENT

20.7	0.005	0.004	0.032
20.75	0.006	0.005	0.034
20.8	0.006	0.004	0.034
20.85	0.007	0.004	0.035
20.9	0.005	0.004	0.034
20.95	0.007	0.004	0.034
21	0.005	0.002	0.033
21.05	0.006	0.004	0.034
21.1	0.005	0.004	0.034
21.15	0.007	0.004	0.035
21.2	0.005	0.004	0.033
21.25	0.007	0.005	0.035
21.3	0.006	0.004	0.034
21.35	0.006	0.005	0.035
21.4	0.005	0.004	0.033
21.45	0.006	0.004	0.034
21.5	0.006	0.002	0.034
21.55	0.006	0.004	0.034
21.6	0.006	0.004	0.033
21.65	0.007	0.004	0.034
21.7	0.006	0.004	0.033
21.75	0.007	0.004	0.034
21.8	0.006	0.004	0.033
21.85	0.006	0.004	0.035
21.9	0.006	0.002	0.033
21.95	0.006	0.005	0.035
22	0.006	0.004	0.033
22.05	0.006	0.004	0.035
22.1	0.006	0.002	0.033
22.15	0.006	0.005	0.035
22.2	0.006	0.004	0.034
22.25	0.006	0.005	0.035
22.3	0.006	0.004	0.034
22.35	0.01	0.007	0.035
22.4	0.006	0.005	0.032
22.45	0.006	0.006	0.034
22.5	0.005	0.005	0.032
22.55	0.006	0.005	0.034
22.6	0.005	0.005	0.033
22.65	0.007	0.005	0.034
22.7	0.005	0.002	0.032
22.75	0.007	0.005	0.033
22.8	0.006	0.005	0.032
22.85	0.007	0.005	0.034
22.9	0.005	0.005	0.033
22.95	0.007	0.006	0.033
23	0.005	0.004	0.033

US EPA ARCHIVE DOCUMENT

23.05	0.007	0.005	0.033
23.1	0.006	0.002	0.033
23.15	0.006	0.005	0.034
23.2	0.006	0.002	0.033
23.25	0.007	0.006	0.034
23.3	0.005	0.002	0.033
23.35	0.006	0.005	0.033
23.4	0.005	0.004	0.032
23.45	0.006	0.005	0.034
23.5	0.005	0.004	0.032
23.55	0.006	0.005	0.034
23.6	0.005	0.004	0.033
23.65	0.006	0.005	0.033
23.7	0.005	0.004	0.033
23.75	0.007	0.005	0.034
23.8	0.005	0.005	0.032
23.85	0.007	0.005	0.034
23.9	0.006	0.002	0.033
23.95	0.006	0.005	0.034
24	0.005	0.004	0.033
24.05	0.006	0.005	0.034
24.1	0.006	0.004	0.033
24.15	0.006	0.005	0.033
24.2	0.005	0.004	0.033
24.25	0.009	0.006	0.034
24.3	0.005	0.004	0.032
24.35	0.006	0.005	0.034
24.4	0.005	0.005	0.033
24.45	0.006	0.005	0.033
24.5	0.005	0.004	0.033
24.55	0.006	0.005	0.033
24.6	0.005	0.004	0.032
24.65	0.006	0.005	0.034
24.7	0.005	0.004	0.033
24.75	0.006	0.005	0.034
24.8	0.006	0.004	0.032
24.85	0.006	0.005	0.034
24.9	0.005	0.004	0.033
24.95	0.006	0.005	0.034
25	0.005	0.002	0.032
25.05	0.006	0.004	0.034
25.1	0.005	0.004	0.033
25.15	0.006	0.005	0.034
25.2	0.006	0.004	0.033
25.25	0.007	0.006	0.034
25.3	0.005	0.004	0.031
25.35	0.007	0.005	0.034

US EPA ARCHIVE DOCUMENT

25.4	0.006	0.004	0.032
25.45	0.007	0.005	0.033
25.5	0.006	0.002	0.032
25.55	0.007	0.005	0.033
25.6	0.005	0.004	0.032
25.65	0.006	0.005	0.033
25.7	0.005	0.004	0.031
25.75	0.006	0.005	0.033
25.8	0.005	0.004	0.032
25.85	0.007	0.005	0.034
25.9	0.005	0.004	0.032
25.95	0.007	0.005	0.033
26	0.005	0.004	0.032
26.05	0.007	0.005	0.033
26.1	0.007	0.004	0.032
26.15	0.007	0.005	0.033
26.2	0.005	0.004	0.032
26.25	0.007	0.005	0.033
26.3	0.006	0.002	0.033
26.35	0.007	0.006	0.035
26.4	0.005	0.004	0.034
26.45	0.006	0.005	0.035
26.5	0.006	0.005	0.034
26.55	0.006	0.005	0.035
26.6	0.005	0.004	0.033
26.65	0.006	0.005	0.035
26.7	0.005	0.004	0.034
26.75	0.006	0.005	0.035
26.8	0.005	0.005	0.034
26.85	0.007	0.005	0.035
26.9	0.005	0.002	0.034
26.95	0.006	0.005	0.035
27	0.006	0.004	0.034
27.05	0.006	0.005	0.035
27.1	0.004	0.004	0.034
27.15	0.006	0.005	0.035
27.2	0.005	0.005	0.034
27.25	0.006	0.005	0.035
27.3	0.006	0.004	0.034
27.35	0.007	0.006	0.037
27.4	0.005	0.004	0.034
27.45	0.006	0.005	0.037
27.5	0.005	0.005	0.033
27.55	0.006	0.005	0.035
27.6	0.005	0.004	0.033
27.65	0.006	0.005	0.035
27.7	0.005	0.005	0.033

US EPA ARCHIVE DOCUMENT

27.75	0.006	0.005	0.035
27.8	0.005	0.004	0.033
27.85	0.006	0.005	0.035
27.9	0.005	0.004	0.034
27.95	0.006	0.005	0.035
28	0.005	0.004	0.033
28.05	0.006	0.005	0.035
28.1	0.005	0.004	0.032
28.15	0.006	0.005	0.035
28.2	0.006	0.004	0.034
28.25	0.007	0.005	0.038
28.3	0.004	0.004	0.034
28.35	0.005	0.005	0.035
28.4	0.004	0.002	0.034
28.45	0.006	0.005	0.035
28.5	0.005	0.004	0.033
28.55	0.006	0.005	0.035
28.6	0.004	0.004	0.033
28.65	0.005	0.005	0.034
28.7	0.005	0.004	0.034
28.75	0.005	0.005	0.035
28.8	0.004	0.004	0.035
28.85	0.006	0.005	0.035
28.9	0.004	0.002	0.034
28.95	0.006	0.005	0.034
29	0.004	0.004	0.034
29.05	0.005	0.005	0.035
29.1	0.005	0.004	0.034
29.15	0.006	0.005	0.035
29.2	0.004	0.004	0.033
29.25	0.005	0.005	0.034
29.3	0.004	0.002	0.033
29.35	0.006	0.005	0.034
29.4	0.004	0.004	0.034
29.45	0.006	0.005	0.034
29.5	0.005	0.004	0.033
29.55	0.005	0.005	0.034
29.6	0.004	0.004	0.034
29.65	0.005	0.005	0.034
29.7	0.004	0.004	0.033
29.75	0.005	0.005	0.034
29.8	0.004	0.004	0.033
29.85	0.005	0.005	0.034
29.9	0.004	0.004	0.033
29.95	0.005	0.005	0.034
30	0.005	0.004	0.034
30.05	0.005	0.005	0.034

US EPA ARCHIVE DOCUMENT

30.1	0.004	0.002	0.033
30.15	0.006	0.005	0.035
30.2	0.005	0.004	0.033
30.25	0.005	0.005	0.034
30.3	0.004	0.004	0.033
30.35	0.005	0.005	0.034
30.4	0.005	0.004	0.032
30.45	0.005	0.005	0.034
30.5	0.004	0.004	0.033
30.55	0.005	0.005	0.034
30.6	0.005	0.004	0.032
30.65	0.005	0.005	0.034
30.7	0.004	0.004	0.034
30.75	0.005	0.005	0.034
30.8	0.004	0.004	0.032
30.85	0.005	0.005	0.033
30.9	0.004	0.004	0.032
30.95	0.005	0.005	0.033
31	0.004	0.004	0.033
31.05	0.005	0.005	0.033
31.1	0.004	0.004	0.033
31.15	0.006	0.005	0.034
31.2	0.004	0.004	0.032
31.25	0.005	0.005	0.033
31.3	0.005	0.005	0.032
31.35	0.005	0.005	0.032
31.4	0.005	0.004	0.031
31.45	0.005	0.005	0.033
31.5	0.002	0.004	0.031
31.55	0.005	0.005	0.033
31.6	0.004	0.004	0.031
31.65	0.005	0.005	0.032
31.7	0.005	0.004	0.032
31.75	0.005	0.005	0.032
31.8	0.004	0.004	0.031
31.85	0.005	0.005	0.033
31.9	0.005	0.004	0.031
31.95	0.005	0.005	0.033
32	0.004	0.004	0.032
32.05	0.005	0.005	0.033
32.1	0.004	0.004	0.032
32.15	0.006	0.006	0.033
32.2	0.005	0.005	0.029
32.25	0.005	0.005	0.029
32.3	0.004	0.004	0.028
32.35	0.005	0.005	0.031
32.4	0.004	0.005	0.029

US EPA ARCHIVE DOCUMENT

32.45	0.005	0.005	0.031
32.5	0.004	0.004	0.029
32.55	0.005	0.005	0.029
32.6	0.005	0.005	0.028
32.65	0.006	0.005	0.031
32.7	0.005	0.004	0.028
32.75	0.005	0.005	0.029
32.8	0.005	0.004	0.029
32.85	0.005	0.005	0.029
32.9	0.005	0.004	0.028
32.95	0.005	0.005	0.031
33	0.004	0.004	0.028
33.05	0.005	0.005	0.029
33.1	0.004	0.004	0.029
33.15	0.006	0.006	0.033
33.2	0.004	0.004	0.031
33.25	0.005	0.005	0.032
33.3	0.005	0.004	0.032
33.35	0.005	0.005	0.032
33.4	0.005	0.004	0.031
33.45	0.005	0.005	0.032
33.5	0.004	0.005	0.029
33.55	0.005	0.005	0.032
33.6	0.005	0.005	0.031
33.65	0.005	0.005	0.032
33.7	0.004	0.004	0.032
33.75	0.005	0.005	0.032
33.8	0.004	0.004	0.032
33.85	0.006	0.005	0.032
33.9	0.004	0.004	0.031
33.95	0.005	0.005	0.032
34	0.005	0.004	0.031
34.05	0.006	0.006	0.033
34.1	0.004	0.004	0.031
34.15	0.006	0.005	0.032
34.2	0.004	0.004	0.029
34.25	0.005	0.005	0.032
34.3	0.004	0.004	0.031
34.35	0.006	0.005	0.032
34.4	0.005	0.004	0.029
34.45	0.005	0.005	0.032
34.5	0.005	0.004	0.031
34.55	0.005	0.005	0.031
34.6	0.004	0.005	0.031
34.65	0.006	0.005	0.032
34.7	0.004	0.004	0.031
34.75	0.005	0.005	0.032

US EPA ARCHIVE DOCUMENT

34.8	0.005	0.005	0.031
34.85	0.005	0.005	0.032
34.9	0.005	0.004	0.029
34.95	0.005	0.005	0.032
35	0.005	0.005	0.029
35.05	0.005	0.005	0.032
35.1	0.005	0.004	0.029
35.15	0.005	0.005	0.032
35.2	0.004	0.004	0.029
35.25	0.006	0.006	0.033
35.3	0.004	0.005	0.029
35.35	0.005	0.005	0.031
35.4	0.005	0.004	0.029
35.45	0.005	0.005	0.031
35.5	0.004	0.004	0.029
35.55	0.006	0.005	0.031
35.6	0.004	0.004	0.029
35.65	0.005	0.005	0.029
35.7	0.005	0.005	0.028
35.75	0.006	0.005	0.031
35.8	0.002	0.004	0.029
35.85	0.005	0.005	0.031
35.9	0.005	0.004	0.028
35.95	0.005	0.005	0.031
36	0.005	0.004	0.029
36.05	0.005	0.005	0.029
36.1	0.005	0.004	0.029
36.15	0.005	0.005	0.031
36.2	0.004	0.004	0.029
36.25	0.007	0.005	0.033
36.3	0.004	0.005	0.032
36.35	0.005	0.005	0.033
36.4	0.004	0.004	0.031
36.45	0.006	0.005	0.033
36.5	0.005	0.004	0.029
36.55	0.006	0.005	0.033
36.6	0.005	0.004	0.032
36.65	0.005	0.005	0.033
36.7	0.005	0.004	0.031
36.75	0.005	0.005	0.033
36.8	0.004	0.004	0.032
36.85	0.005	0.005	0.033
36.9	0.005	0.004	0.032
36.95	0.005	0.005	0.033
37	0.005	0.005	0.031
37.05	0.005	0.005	0.033
37.1	0.004	0.004	0.032

US EPA ARCHIVE DOCUMENT

37.15	0.005	0.005	0.032
37.2	0.004	0.004	0.031
37.25	0.006	0.005	0.033
37.3	0.005	0.004	0.029
37.35	0.006	0.005	0.032
37.4	0.004	0.005	0.031
37.45	0.005	0.005	0.032
37.5	0.002	0.002	0.031
37.55	0.005	0.005	0.032
37.6	0.005	0.004	0.031
37.65	0.005	0.005	0.032
37.7	0.004	0.004	0.031
37.75	0.005	0.005	0.032
37.8	0.005	0.004	0.031
37.85	0.006	0.005	0.032
37.9	0.004	0.005	0.031
37.95	0.006	0.005	0.031
38	0.005	0.004	0.031
38.05	0.006	0.005	0.032
38.1	0.004	0.005	0.032
38.15	0.006	0.006	0.033
38.2	0.004	0.004	0.032
38.25	0.006	0.005	0.032
38.3	0.004	0.004	0.029
38.35	0.006	0.005	0.032
38.4	0.004	0.005	0.032
38.45	0.006	0.005	0.032
38.5	0.004	0.004	0.029
38.55	0.006	0.005	0.032
38.6	0.005	0.005	0.029
38.65	0.006	0.005	0.032
38.7	0.005	0.004	0.029
38.75	0.005	0.005	0.032
38.8	0.004	0.004	0.031
38.85	0.006	0.005	0.032
38.9	0.004	0.004	0.029
38.95	0.005	0.005	0.032
39	0.005	0.004	0.029
39.05	0.006	0.005	0.032
39.1	0.004	0.004	0.031
39.15	0.006	0.005	0.032
39.2	0.004	0.005	0.031
39.25	0.006	0.006	0.033
39.3	0.004	0.004	0.029
39.35	0.005	0.005	0.032
39.4	0.004	0.004	0.029
39.45	0.006	0.005	0.032

US EPA ARCHIVE DOCUMENT

39.5	0.004	0.005	0.028
39.55	0.006	0.005	0.032
39.6	0.002	0.004	0.027
39.65	0.006	0.005	0.032
39.7	0.004	0.004	0.028
39.75	0.005	0.005	0.032
39.8	0.005	0.005	0.032
39.85	0.006	0.005	0.032
39.9	0.005	0.005	0.032
39.95	0.006	0.005	0.033
40	0.004	0.004	0.028
40.05	0.005	0.005	0.032
40.1	0.002	0.005	0.032
40.15	0.006	0.005	0.032
40.2	0.005	0.004	0.029
40.25	0.006	0.006	0.032
40.3	0.005	0.005	0.028
40.35	0.005	0.005	0.032
40.4	0.004	0.005	0.031
40.45	0.005	0.005	0.032
40.5	0.004	0.004	0.029
40.55	0.005	0.005	0.031
40.6	0.005	0.005	0.027
40.65	0.005	0.005	0.032
40.7	0.004	0.004	0.031
40.75	0.005	0.005	0.031
40.8	0.004	0.004	0.029
40.85	0.006	0.005	0.031
40.9	0.005	0.005	0.029
40.95	0.005	0.005	0.031
41	0.005	0.004	0.031
41.05	0.005	0.005	0.031
41.1	0.004	0.005	0.029
41.15	0.006	0.006	0.032
41.2	0.004	0.004	0.027
41.25	0.005	0.005	0.029
41.3	0.005	0.005	0.028
41.35	0.006	0.005	0.029
41.4	0.004	0.004	0.027
41.45	0.005	0.005	0.029
41.5	0.004	0.004	0.027
41.55	0.005	0.005	0.029
41.6	0.004	0.004	0.028
41.65	0.005	0.005	0.029
41.7	0.005	0.004	0.028
41.75	0.005	0.005	0.029
41.8	0.004	0.002	0.028

US EPA ARCHIVE DOCUMENT

41.85	0.005	0.005	0.029
41.9	0.005	0.004	0.028
41.95	0.005	0.005	0.029
42	0.004	0.004	0.028
42.05	0.005	0.005	0.029
42.1	0.004	0.004	0.028
42.15	0.006	0.006	0.031
42.2	0.004	0.004	0.027
42.25	0.005	0.005	0.029
42.3	0.004	0.002	0.027
42.35	0.005	0.005	0.028
42.4	0.004	0.004	0.027
42.45	0.005	0.005	0.028
42.5	0.005	0.002	0.027
42.55	0.005	0.005	0.028
42.6	0.004	0.005	0.028
42.65	0.005	0.005	0.028
42.7	0.005	0.005	0.027
42.75	0.005	0.005	0.028
42.8	0.004	0.005	0.027
42.85	0.005	0.005	0.028
42.9	0.004	0.004	0.027
42.95	0.005	0.005	0.028
43	0.004	0.004	0.027
43.05	0.005	0.005	0.028
43.1	0.005	0.004	0.026
43.15	0.006	0.006	0.029
43.2	0.005	0.004	0.026
43.25	0.005	0.005	0.028
43.3	0.005	0.004	0.026
43.35	0.005	0.005	0.028
43.4	0.004	0.004	0.027
43.45	0.005	0.005	0.027
43.5	0.004	0.005	0.026
43.55	0.005	0.005	0.028
43.6	0.004	0.004	0.027
43.65	0.005	0.005	0.027
43.7	0.004	0.005	0.026
43.75	0.005	0.005	0.028
43.8	0.004	0.005	0.026
43.85	0.005	0.006	0.028
43.9	0.004	0.004	0.027
43.95	0.005	0.005	0.028
44	0.004	0.004	0.027
44.05	0.005	0.005	0.028
44.1	0.005	0.004	0.027
44.15	0.006	0.006	0.029

US EPA ARCHIVE DOCUMENT

44.2	0.005	0.004	0.026
44.25	0.006	0.005	0.027
44.3	0.005	0.004	0.027
44.35	0.005	0.005	0.027
44.4	0.005	0.005	0.027
44.45	0.005	0.005	0.028
44.5	0.004	0.004	0.026
44.55	0.005	0.005	0.027
44.6	0.004	0.004	0.026
44.65	0.006	0.006	0.027
44.7	0.005	0.004	0.027
44.75	0.005	0.005	0.027
44.8	0.005	0.004	0.026
44.85	0.005	0.006	0.027
44.9	0.005	0.005	0.026
44.95	0.005	0.005	0.027
45	0.004	0.004	0.026
45.05	0.006	0.005	0.027
45.1	0.004	0.004	0.026
45.15	0.006	0.006	0.029
45.2	0.005	0.004	0.026
45.25	0.005	0.005	0.028
45.3	0.005	0.004	0.027
45.35	0.006	0.006	0.028
45.4	0.005	0.005	0.027
45.45	0.005	0.006	0.028
45.5	0.005	0.004	0.027
45.55	0.006	0.006	0.027
45.6	0.004	0.004	0.026
45.65	0.005	0.005	0.028
45.7	0.005	0.005	0.026
45.75	0.005	0.005	0.028
45.8	0.005	0.005	0.027
45.85	0.005	0.005	0.028
45.9	0.004	0.005	0.027
45.95	0.005	0.005	0.028
46	0.005	0.005	0.028
46.05	0.006	0.005	0.028
46.1	0.005	0.005	0.026
46.15	0.006	0.006	0.029
46.2	0.005	0.005	0.024
46.25	0.005	0.005	0.026
46.3	0.004	0.004	0.024
46.35	0.006	0.005	0.026
46.4	0.004	0.004	0.024
46.45	0.006	0.005	0.026
46.5	0.005	0.004	0.026

US EPA ARCHIVE DOCUMENT

46.55	0.006	0.005	0.026
46.6	0.004	0.004	0.024
46.65	0.006	0.005	0.026
46.7	0.004	0.004	0.024
46.75	0.006	0.005	0.026
46.8	0.005	0.004	0.024
46.85	0.006	0.005	0.026
46.9	0.004	0.004	0.024
46.95	0.006	0.005	0.026
47	0.005	0.004	0.026
47.05	0.005	0.005	0.026
47.1	0.005	0.004	0.023
47.15	0.006	0.006	0.026
47.2	0.005	0.005	0.023
47.25	0.006	0.006	0.024
47.3	0.006	0.006	0.023
47.35	0.006	0.006	0.024
47.4	0.005	0.004	0.023
47.45	0.006	0.005	0.026
47.5	0.005	0.004	0.023
47.55	0.006	0.005	0.026
47.6	0.005	0.004	0.024
47.65	0.006	0.005	0.024
47.7	0.004	0.005	0.022
47.75	0.006	0.005	0.026
47.8	0.005	0.004	0.026
47.85	0.006	0.005	0.026
47.9	0.005	0.004	0.024
47.95	0.006	0.005	0.026
48	0.006	0.005	0.023
48.05	0.006	0.005	0.026
48.1	0.005	0.004	0.026
48.15	0.006	0.006	0.027
48.2	0.005	0.004	0.024
48.25	0.005	0.005	0.026
48.3	0.004	0.004	0.026
48.35	0.006	0.005	0.026
48.4	0.005	0.004	0.024
48.45	0.005	0.005	0.026
48.5	0.005	0.005	0.026
48.55	0.005	0.005	0.026
48.6	0.004	0.004	0.024
48.65	0.005	0.005	0.026
48.7	0.004	0.005	0.026
48.75	0.006	0.005	0.027
48.8	0.005	0.004	0.024
48.85	0.006	0.005	0.026

US EPA ARCHIVE DOCUMENT

48.9	0.002	0.004	0.024
48.95	0.006	0.005	0.026
49	0.004	0.005	0.026
49.05	0.005	0.005	0.026
49.1	0.005	0.004	0.024
49.15	0.006	0.005	0.026
49.2	0.005	0.005	0.023
49.25	0.005	0.005	0.024
49.3	0.005	0.004	0.023
49.35	0.006	0.006	0.026
49.4	0.005	0.005	0.023
49.45	0.006	0.005	0.026
49.5	0.005	0.004	0.024
49.55	0.006	0.005	0.026
49.6	0.005	0.004	0.026
49.65	0.006	0.005	0.026
49.7	0.005	0.004	0.023
49.75	0.006	0.005	0.026
49.8	0.005	0.004	0.024
49.85	0.006	0.005	0.026
49.9	0.005	0.004	0.023
49.95	0.006	0.005	0.026
50	0.005	0.004	0.026
50.05	0.006	0.005	0.026
50.1	0.004	0.005	0.024
50.15	0.007	0.006	0.028
50.2	0.005	0.006	0.027
50.25	0.006	0.006	0.027
50.3	0.005	0.005	0.027
50.35	0.006	0.006	0.027
50.4	0.005	0.005	0.026
50.45	0.006	0.005	0.027
50.5	0.005	0.005	0.026
50.55	0.006	0.006	0.027
50.6	0.006	0.005	0.026
50.65	0.006	0.005	0.027
50.7	0.005	0.005	0.026
50.75	0.006	0.005	0.027
50.8	0.005	0.004	0.026
50.85	0.006	0.005	0.027
50.9	0.005	0.004	0.026
50.95	0.006	0.006	0.027
51	0.005	0.005	0.026
51.05	0.006	0.005	0.028
51.1	0.005	0.005	0.024
51.15	0.007	0.006	0.027
51.2	0.005	0.004	0.024

US EPA ARCHIVE DOCUMENT

51.25	0.006	0.005	0.026
51.3	0.005	0.004	0.026
51.35	0.006	0.005	0.027
51.4	0.005	0.004	0.026
51.45	0.006	0.005	0.027
51.5	0.005	0.005	0.026
51.55	0.006	0.005	0.027
51.6	0.005	0.004	0.024
51.65	0.006	0.005	0.027
51.7	0.005	0.004	0.024
51.75	0.005	0.005	0.026
51.8	0.004	0.004	0.023
51.85	0.006	0.005	0.026
51.9	0.005	0.005	0.026
51.95	0.006	0.005	0.027
52	0.005	0.005	0.026
52.05	0.006	0.005	0.026
52.1	0.005	0.004	0.026
52.15	0.006	0.006	0.028
52.2	0.005	0.004	0.026
52.25	0.006	0.005	0.027
52.3	0.004	0.004	0.024
52.35	0.006	0.005	0.027
52.4	0.004	0.005	0.023
52.45	0.006	0.005	0.027
52.5	0.005	0.004	0.026
52.55	0.006	0.006	0.027
52.6	0.005	0.004	0.023
52.65	0.006	0.005	0.027
52.7	0.005	0.004	0.023
52.75	0.006	0.005	0.026
52.8	0.004	0.004	0.023
52.85	0.006	0.005	0.027
52.9	0.004	0.005	0.027
52.95	0.006	0.005	0.027
53	0.004	0.002	0.026
53.05	0.006	0.006	0.026
53.1	0.005	0.004	0.022
53.15	0.007	0.011	0.028
53.2	0.005	0.004	0.023
53.25	0.006	0.005	0.026
53.3	0.004	0.004	0.023
53.35	0.006	0.005	0.026
53.4	0.004	0.005	0.023
53.45	0.006	0.005	0.026
53.5	0.006	0.004	0.024
53.55	0.007	0.005	0.026

US EPA ARCHIVE DOCUMENT

53.6	0.004	0.004	0.024
53.65	0.006	0.005	0.026
53.7	0.005	0.005	0.023
53.75	0.006	0.005	0.026
53.8	0.005	0.004	0.026
53.85	0.006	0.005	0.026
53.9	0.005	0.004	0.023
53.95	0.006	0.005	0.026
54	0.005	0.005	0.024
54.05	0.007	0.005	0.026
54.1	0.006	0.005	0.024
54.15	0.007	0.006	0.026
54.2	0.006	0.004	0.024
54.25	0.006	0.006	0.026
54.3	0.006	0.004	0.023
54.35	0.006	0.006	0.026
54.4	0.004	0.005	0.023
54.45	0.006	0.006	0.024
54.5	0.005	0.004	0.023
54.55	0.006	0.005	0.024
54.6	0.005	0.005	0.023
54.65	0.006	0.006	0.024
54.7	0.005	0.004	0.024
54.75	0.006	0.006	0.024
54.8	0.006	0.005	0.024
54.85	0.006	0.005	0.026
54.9	0.006	0.004	0.023
54.95	0.007	0.006	0.026
55	0.005	0.006	0.024
55.05	0.006	0.006	0.024
55.1	0.005	0.005	0.024
55.15	0.007	0.006	0.027
55.2	0.005	0.004	0.024
55.25	0.006	0.006	0.024
55.3	0.005	0.005	0.023
55.35	0.006	0.006	0.024
55.4	0.004	0.005	0.023
55.45	0.006	0.006	0.024
55.5	0.005	0.005	0.023
55.55	0.006	0.006	0.024
55.6	0.005	0.002	0.024
55.65	0.006	0.005	0.024
55.7	0.005	0.004	0.023
55.75	0.006	0.006	0.024
55.8	0.005	0.005	0.023
55.85	0.006	0.006	0.024
55.9	0.005	0.005	0.023

US EPA ARCHIVE DOCUMENT

55.95	0.006	0.006	0.024
56	0.005	0.006	0.023
56.05	0.006	0.006	0.026
56.1	0.005	0.004	0.023
56.15	0.006	0.006	0.029
56.2	0.005	0.005	0.028
56.25	0.005	0.005	0.029
56.3	0.004	0.004	0.027
56.35	0.005	0.005	0.029
56.4	0.005	0.005	0.026
56.45	0.006	0.005	0.029
56.5	0.004	0.004	0.028
56.55	0.005	0.006	0.029
56.6	0.005	0.004	0.028
56.65	0.006	0.006	0.029
56.7	0.004	0.005	0.028
56.75	0.006	0.005	0.029
56.8	0.005	0.004	0.028
56.85	0.005	0.005	0.028
56.9	0.005	0.004	0.028
56.95	0.006	0.005	0.029
57	0.005	0.004	0.028
57.05	0.006	0.005	0.029
57.1	0.005	0.005	0.028
57.15	0.006	0.006	0.029
57.2	0.005	0.002	0.023
57.25	0.005	0.005	0.026
57.3	0.005	0.004	0.024
57.35	0.005	0.005	0.026
57.4	0.005	0.004	0.024
57.45	0.006	0.005	0.026
57.5	0.005	0.004	0.024
57.55	0.005	0.005	0.026
57.6	0.004	0.004	0.024
57.65	0.005	0.005	0.026
57.7	0.002	0.004	0.026
57.75	0.005	0.005	0.026
57.8	0.005	0.004	0.023
57.85	0.006	0.005	0.026
57.9	0.004	0.004	0.024
57.95	0.005	0.005	0.026
58	0.005	0.005	0.024
58.05	0.006	0.005	0.026
58.1	0.004	0.004	0.024
58.15	0.006	0.006	0.027
58.2	0.005	0.005	0.023
58.25	0.005	0.005	0.026

US EPA ARCHIVE DOCUMENT

58.3	0.005	0.004	0.023
58.35	0.005	0.005	0.026
58.4	0.004	0.004	0.024
58.45	0.006	0.005	0.026
58.5	0.004	0.004	0.026
58.55	0.005	0.005	0.026
58.6	0.005	0.004	0.023
58.65	0.005	0.005	0.026
58.7	0.004	0.004	0.024
58.75	0.005	0.005	0.026
58.8	0.004	0.004	0.023
58.85	0.005	0.005	0.026
58.9	0.004	0.005	0.024
58.95	0.005	0.005	0.026
59	0.004	0.004	0.024
59.05	0.005	0.005	0.026
59.1	0.005	0.004	0.024
59.15	0.006	0.006	0.027
59.2	0.005	0.005	0.024
59.25	0.005	0.005	0.024
59.3	0.005	0.004	0.024
59.35	0.005	0.006	0.026
59.4	0.004	0.004	0.023
59.45	0.005	0.006	0.026
59.5	0.002	0.005	0.023
59.55	0.005	0.006	0.026
59.6	0.005	0.002	0.023
59.65	0.006	0.005	0.024
59.7	0.004	0.002	0.023
59.75	0.005	0.005	0.026
59.8	0.004	0.004	0.024
59.85	0.005	0.005	0.026
59.9	0.005	0.004	0.024
59.95	0.005	0.006	0.026
60	0.004	0.004	0.023
60.05	0.005	0.005	0.024
60.1	0.005	0.004	0.023
60.15	0.006	0.006	0.027
60.2	0.004	0.005	0.024
60.25	0.005	0.005	0.026
60.3	0.004	0.004	0.024
60.35	0.005	0.006	0.026
60.4	0.004	0.005	0.026
60.45	0.005	0.006	0.027
60.5	0.004	0.005	0.024
60.55	0.005	0.005	0.026
60.6	0.004	0.005	0.024

US EPA ARCHIVE DOCUMENT

60.65	0.005	0.005	0.026
60.7	0.004	0.005	0.026
60.75	0.005	0.006	0.026
60.8	0.005	0.005	0.024
60.85	0.005	0.005	0.026
60.9	0.004	0.004	0.024
60.95	0.006	0.005	0.026
61	0.005	0.004	0.024
61.05	0.006	0.005	0.026
61.1	0.004	0.005	0.023
61.15	0.006	0.006	0.027
61.2	0.004	0.004	0.024
61.25	0.006	0.005	0.026
61.3	0.005	0.004	0.024
61.35	0.005	0.005	0.026
61.4	0.004	0.004	0.024
61.45	0.005	0.005	0.026
61.5	0.005	0.002	0.024
61.55	0.005	0.006	0.026
61.6	0.005	0.005	0.024
61.65	0.006	0.005	0.026
61.7	0.004	0.004	0.023
61.75	0.005	0.005	0.026
61.8	0.005	0.004	0.024
61.85	0.005	0.005	0.026
61.9	0.005	0.005	0.024
61.95	0.006	0.005	0.026
62	0.004	0.004	0.024
62.05	0.005	0.005	0.026
62.1	0.004	0.004	0.024
62.15	0.006	0.006	0.027
62.2	0.004	0.004	0.022
62.25	0.006	0.006	0.023
62.3	0.004	0.002	0.022
62.35	0.005	0.005	0.023
62.4	0.004	0.005	0.022
62.45	0.005	0.005	0.023
62.5	0.005	0.004	0.021
62.55	0.005	0.005	0.023
62.6	0.004	0.004	0.021
62.65	0.005	0.005	0.023
62.7	0.004	0.005	0.021
62.75	0.005	0.005	0.023
62.8	0.004	0.004	0.022
62.85	0.005	0.005	0.023
62.9	0.004	0.004	0.022
62.95	0.005	0.005	0.023

US EPA ARCHIVE DOCUMENT

63	0.005	0.004	0.022
63.05	0.006	0.005	0.023
63.1	0.004	0.004	0.022
63.15	0.005	0.005	0.023
63.2	0.004	0.004	0.022
63.25	0.006	0.006	0.024
63.3	0.004	0.004	0.02
63.35	0.006	0.005	0.022
63.4	0.004	0.002	0.022
63.45	0.005	0.005	0.022
63.5	0.004	0.004	0.021
63.55	0.005	0.005	0.022
63.6	0.004	0.005	0.021
63.65	0.005	0.005	0.022
63.7	0.005	0.004	0.021
63.75	0.006	0.005	0.022
63.8	0.005	0.005	0.021
63.85	0.005	0.005	0.022
63.9	0.004	0.004	0.021
63.95	0.005	0.005	0.022
64	0.005	0.004	0.02
64.05	0.005	0.005	0.022
64.1	0.004	0.004	0.022
64.15	0.006	0.006	0.023
64.2	0.004	0.005	0.02
64.25	0.006	0.005	0.022
64.3	0.004	0.005	0.02
64.35	0.006	0.005	0.022
64.4	0.005	0.004	0.021
64.45	0.005	0.005	0.022
64.5	0.005	0.005	0.022
64.55	0.005	0.005	0.022
64.6	0.004	0.004	0.021
64.65	0.005	0.005	0.022
64.7	0.005	0.005	0.021
64.75	0.005	0.005	0.022
64.8	0.005	0.005	0.021
64.85	0.005	0.005	0.022
64.9	0.004	0.004	0.021
64.95	0.005	0.005	0.022
65	0.004	0.004	0.02
65.05	0.005	0.005	0.022
65.1	0.004	0.004	0.021
65.15	0.006	0.006	0.023
65.2	0.004	0.004	0.018
65.25	0.005	0.005	0.021
65.3	0.004	0.004	0.02

US EPA ARCHIVE DOCUMENT

65.35	0.005	0.005	0.021
65.4	0.004	0.004	0.02
65.45	0.005	0.005	0.021
65.5	0.004	0.004	0.018
65.55	0.005	0.005	0.021
65.6	0.004	0.004	0.02
65.65	0.005	0.005	0.021
65.7	0.004	0.004	0.02
65.75	0.006	0.005	0.021
65.8	0.005	0.005	0.018
65.85	0.005	0.005	0.021
65.9	0.004	0.005	0.02
65.95	0.005	0.005	0.021
66	0.004	0.005	0.02
66.05	0.005	0.005	0.021
66.1	0.004	0.004	0.02
66.15	0.006	0.006	0.022
66.2	0.004	0.004	0.018
66.25	0.006	0.005	0.02
66.3	0.004	0.004	0.02
66.35	0.005	0.005	0.02
66.4	0.004	0.005	0.018
66.45	0.006	0.005	0.02
66.5	0.005	0.005	0.018
66.55	0.006	0.005	0.02
66.6	0.004	0.004	0.018
66.65	0.005	0.005	0.02
66.7	0.004	0.005	0.018
66.75	0.005	0.005	0.02
66.8	0.004	0.004	0.018
66.85	0.005	0.005	0.02
66.9	0.004	0.004	0.018
66.95	0.005	0.005	0.02
67	0.002	0.004	0.018
67.05	0.005	0.005	0.02
67.1	0.005	0.005	0.018
67.15	0.006	0.006	0.021
67.2	0.004	0.002	0.017
67.25	0.006	0.005	0.02
67.3	0.004	0.004	0.017
67.35	0.006	0.006	0.02
67.4	0.004	0.004	0.017
67.45	0.006	0.005	0.02
67.5	0.005	0.004	0.017
67.55	0.005	0.005	0.02
67.6	0.004	0.005	0.018
67.65	0.005	0.005	0.02

US EPA ARCHIVE DOCUMENT

67.7	0.004	0.005	0.017
67.75	0.005	0.005	0.02
67.8	0.004	0.004	0.017
67.85	0.005	0.005	0.02
67.9	0.005	0.004	0.017
67.95	0.006	0.005	0.018
68	0.004	0.004	0.017
68.05	0.006	0.005	0.02
68.1	0.006	0.004	0.017
68.15	0.006	0.006	0.02
68.2	0.004	0.004	0.016
68.25	0.005	0.005	0.018
68.3	0.005	0.004	0.017
68.35	0.005	0.005	0.018
68.4	0.004	0.002	0.016
68.45	0.006	0.005	0.018
68.5	0.005	0.002	0.017
68.55	0.005	0.006	0.018
68.6	0.004	0.005	0.017
68.65	0.005	0.005	0.018
68.7	0.004	0.005	0.017
68.75	0.005	0.005	0.018
68.8	0.004	0.004	0.017
68.85	0.005	0.005	0.018
68.9	0.004	0.004	0.016
68.95	0.005	0.005	0.018
69	0.005	0.005	0.016
69.05	0.005	0.006	0.018
69.1	0.004	0.004	0.016
69.15	0.006	0.006	0.018
69.2	0.004	0.004	0.016
69.25	0.005	0.005	0.017
69.3	0.004	0.004	0.016
69.35	0.005	0.005	0.017
69.4	0.004	0.004	0.016
69.45	0.005	0.005	0.017
69.5	0.004	0.004	0.016
69.55	0.005	0.005	0.017
69.6	0.005	0.002	0.016
69.65	0.005	0.005	0.017
69.7	0.004	0.005	0.017
69.75	0.005	0.005	0.017
69.8	0.004	0.004	0.016
69.85	0.005	0.005	0.017
69.9	0.005	0.004	0.016
69.95	0.005	0.005	0.016
70	0.004	0.004	0.016

US EPA ARCHIVE DOCUMENT

70.05	0.005	0.005	0.017
70.1	0.004	0.005	0.016
70.15	0.005	0.006	0.017
70.2	0.005	0.004	0.016
70.25	0.006	0.005	0.017
70.3	0.004	0.004	0.016
70.35	0.005	0.006	0.017
70.4	0.005	0.004	0.016
70.45	0.005	0.005	0.017
70.5	0.005	0.004	0.016
70.55	0.005	0.005	0.017
70.6	0.004	0.004	0.017
70.65	0.005	0.005	0.017
70.7	0.004	0.005	0.017
70.75	0.005	0.005	0.017
70.8	0.004	0.004	0.016
70.85	0.005	0.005	0.017
70.9	0.005	0.004	0.017
70.95	0.005	0.005	0.017
71	0.004	0.004	0.017
71.05	0.005	0.005	0.017
71.1	0.005	0.002	0.017
71.15	0.006	0.006	0.018
71.2	0.004	0.005	0.016
71.25	0.005	0.005	0.017
71.3	0.005	0.004	0.015
71.35	0.005	0.005	0.016
71.4	0.005	0.005	0.015
71.45	0.005	0.005	0.017
71.5	0.004	0.004	0.016
71.55	0.005	0.005	0.016
71.6	0.004	0.004	0.016
71.65	0.006	0.005	0.017
71.7	0.004	0.004	0.016
71.75	0.005	0.005	0.017
71.8	0.005	0.004	0.016
71.85	0.005	0.005	0.016
71.9	0.005	0.004	0.016
71.95	0.005	0.006	0.017
72	0.005	0.004	0.016
72.05	0.005	0.006	0.017
72.1	0.005	0.004	0.016
72.15	0.006	0.006	0.017
72.2	0.005	0.004	0.016
72.25	0.006	0.005	0.017
72.3	0.005	0.004	0.016
72.35	0.005	0.005	0.017

US EPA ARCHIVE DOCUMENT

72.4	0.005	0.005	0.016
72.45	0.005	0.006	0.017
72.5	0.005	0.004	0.016
72.55	0.006	0.006	0.017
72.6	0.005	0.004	0.016
72.65	0.006	0.005	0.017
72.7	0.005	0.005	0.016
72.75	0.005	0.005	0.017
72.8	0.005	0.002	0.016
72.85	0.005	0.005	0.017
72.9	0.005	0.004	0.016
72.95	0.005	0.005	0.017
73	0.005	0.004	0.016
73.05	0.005	0.005	0.017
73.1	0.005	0.004	0.015
73.15	0.006	0.006	0.018
73.2	0.005	0.005	0.017
73.25	0.006	0.006	0.018
73.3	0.005	0.004	0.018
73.35	0.006	0.005	0.018
73.4	0.005	0.004	0.017
73.45	0.006	0.006	0.018
73.5	0.005	0.005	0.017
73.55	0.006	0.005	0.018
73.6	0.005	0.004	0.017
73.65	0.005	0.005	0.018
73.7	0.005	0.004	0.017
73.75	0.006	0.006	0.018
73.8	0.005	0.004	0.017
73.85	0.006	0.006	0.018
73.9	0.005	0.004	0.018
73.95	0.006	0.005	0.018
74	0.005	0.005	0.017
74.05	0.005	0.005	0.018
74.1	0.005	0.005	0.017
74.15	0.006	0.006	0.018
74.2	0.005	0.004	0.017
74.25	0.006	0.005	0.018
74.3	0.005	0.005	0.017
74.35	0.006	0.005	0.017
74.4	0.005	0.004	0.017
74.45	0.006	0.006	0.018
74.5	0.005	0.004	0.017
74.55	0.006	0.006	0.017
74.6	0.005	0.002	0.017
74.65	0.006	0.005	0.018
74.7	0.005	0.004	0.017

US EPA ARCHIVE DOCUMENT

74.75	0.006	0.005	0.017
74.8	0.004	0.004	0.017
74.85	0.006	0.005	0.018
74.9	0.005	0.005	0.017
74.95	0.006	0.005	0.018
75	0.005	0.005	0.017
75.05	0.006	0.006	0.018
75.1	0.005	0.004	0.017
75.15	0.006	0.006	0.018
75.2	0.005	0.004	0.016
75.25	0.006	0.006	0.017
75.3	0.005	0.005	0.015
75.35	0.006	0.006	0.016
75.4	0.005	0.004	0.016
75.45	0.006	0.006	0.016
75.5	0.005	0.002	0.015
75.55	0.005	0.005	0.016
75.6	0.004	0.004	0.015
75.65	0.006	0.006	0.015
75.7	0.005	0.006	0.013
75.75	0.006	0.006	0.015
75.8	0.005	0.005	0.015
75.85	0.006	0.006	0.015
75.9	0.005	0.005	0.012
75.95	0.006	0.006	0.013
76	0.005	0.005	0.013
76.05	0.006	0.006	0.015
76.1	0.005	0.005	0.011
76.15	0.006	0.006	0.012
76.2	0.005	0.005	0.011
76.25	0.006	0.006	0.012
76.3	0.005	0.005	0.011
76.35	0.006	0.006	0.012
76.4	0.005	0.005	0.01
76.45	0.006	0.006	0.012
76.5	0.005	0.006	0.011
76.55	0.006	0.006	0.012
76.6	0.005	0.004	0.011
76.65	0.006	0.006	0.011
76.7	0.005	0.005	0.011
76.75	0.006	0.006	0.012
76.8	0.005	0.005	0.011
76.85	0.006	0.006	0.011
76.9	0.005	0.005	0.01
76.95	0.006	0.006	0.011
77	0.005	0.005	0.01
77.05	0.006	0.006	0.012

US EPA ARCHIVE DOCUMENT

77.1	0.005	0.004	0.009
77.15	0.006	0.006	0.01
77.2	0.005	0.005	0.009
77.25	0.006	0.006	0.01
77.3	0.005	0.005	0.007
77.35	0.006	0.006	0.01
77.4	0.006	0.005	0.009
77.45	0.006	0.006	0.01
77.5	0.005	0.005	0.009
77.55	0.006	0.006	0.009
77.6	0.006	0.005	0.009
77.65	0.006	0.007	0.009
77.7	0.005	0.004	0.006
77.75	0.006	0.006	0.009
77.8	0.005	0.004	0.007
77.85	0.006	0.006	0.009
77.9	0.005	0.006	0.009
77.95	0.006	0.006	0.009
78	0.006	0.004	0.009
78.05	0.006	0.006	0.01
78.1	0.005	0.005	0.005
78.15	0.006	0.006	0.007
78.2	0.005	0.006	0.005
78.25	0.006	0.006	0.007
78.3	0.005	0.005	0.006
78.35	0.006	0.006	0.007
78.4	0.005	0.005	0.006
78.45	0.006	0.006	0.007
78.5	0.005	0.005	0.006
78.55	0.006	0.007	0.007
78.6	0.005	0.004	0.006
78.65	0.006	0.006	0.007
78.7	0.005	0.005	0.006
78.75	0.006	0.006	0.007
78.8	0.005	0.004	0.006
78.85	0.006	0.006	0.006
78.9	0.005	0.004	0.006
78.95	0.006	0.007	0.007
79	0.005	0.004	0.006
79.05	0.006	0.006	0.006
79.1	0.006	0.005	0.005
79.15	0.006	0.006	0.006
79.2	0.005	0.005	0.005
79.25	0.006	0.006	0.006
79.3	0.005	0.005	0.004
79.35	0.006	0.006	0.006
79.4	0.005	0.005	0.004

US EPA ARCHIVE DOCUMENT

79.45	0.006	0.007	0.006
79.5	0.005	0.005	0.004
79.55	0.006	0.006	0.005
79.6	0.005	0.004	0.004
79.65	0.006	0.006	0.005
79.7	0.005	0.006	0.004
79.75	0.006	0.006	0.005
79.8	0.005	0.005	0.004
79.85	0.006	0.006	0.005
79.9	0.005	0.005	0.004
79.95	0.006	0.006	0.005
80	0.006	0.005	0.005
80.05	0.006	0.006	0.005
80.1	0.005	0.005	0.004
80.15	0.006	0.006	0.005
80.2	0.005	0.004	0.004
80.25	0.006	0.007	0.005
80.3	0.005	0.005	0.002
80.35	0.006	0.006	0.004
80.4	0.005	0.005	0.002
80.45	0.006	0.006	0.004
80.5	0.005	0.005	0.002
80.55	0.006	0.006	0.004
80.6	0.005	0.006	0.002
80.65	0.006	0.006	0.004
80.7	0.005	0.005	0.002
80.75	0.006	0.006	0.004
80.8	0.005	0.005	0.002
80.85	0.006	0.006	0.004
80.9	0.005	0.005	0.004
80.95	0.006	0.006	0.004
81	0.005	0.005	0.002
81.05	0.006	0.006	0.004
81.1	0.005	0.005	0.002
81.15	0.006	0.007	0.004
81.2	0.005	0.005	0.002
81.25	0.007	0.007	0.004
81.3	0.005	0.006	0.002
81.35	0.006	0.006	0.002
81.4	0.006	0.006	0.001
81.45	0.006	0.006	0.002
81.5	0.005	0.005	0.001
81.55	0.006	0.006	0.002
81.6	0.006	0.005	0.002
81.65	0.006	0.006	0.002
81.7	0.005	0.005	0.002
81.75	0.006	0.006	0.002

US EPA ARCHIVE DOCUMENT

81.8	0.005	0.005	0.002
81.85	0.006	0.006	0.002
81.9	0.005	0.006	0.001
81.95	0.006	0.006	0.002
82	0.005	0.005	0.001
82.05	0.006	0.006	0.002
82.1	0.006	0.004	0.002
82.15	0.006	0.006	0.002
82.2	0.005	0.004	0.002
82.25	0.006	0.007	0.004
82.3	0.005	0.005	0
82.35	0.006	0.006	0.002
82.4	0.006	0.004	0.001
82.45	0.006	0.007	0.002
82.5	0.005	0.005	0
82.55	0.007	0.007	0.002
82.6	0.006	0.005	0.001
82.65	0.006	0.007	0.002
82.7	0.006	0.004	0.001
82.75	0.006	0.007	0.002
82.8	0.006	0.005	0.001
82.85	0.006	0.007	0.002
82.9	0.006	0.006	0
82.95	0.006	0.007	0.002
83	0.006	0.005	0.002
83.05	0.006	0.007	0.004
83.1	0.006	0.006	0.004
83.15	0.007	0.007	0.004
83.2	0.006	0.005	0.002
83.25	0.007	0.007	0.002
83.3	0.006	0.006	0.001
83.35	0.007	0.007	0.007
83.4	0.006	0.005	0.007

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :8804.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.002	0.048
0.1	0.001	0.002	0.046
0.15	0.002	0.002	0.048
0.2	0.002	0.001	0.046
0.25	0.002	0.002	0.048
0.3	0.001	0.002	0.046
0.35	0.002	0.002	0.046
0.4	0.002	0.002	0.046
0.45	0.002	0.002	0.046
0.5	0.001	0.001	0.045
0.55	0.002	0.002	0.048
0.6	0.001	0.002	0.046
0.65	0.004	0.002	0.048
0.7	0.001	0.002	0.045
0.75	0.002	0.004	0.048
0.8	0.001	0.002	0.045
0.85	0.002	0.004	0.045
0.9	0.002	0.002	0.042
0.95	0.002	0.002	0.045
1	0.001	0.002	0.042
1.05	0.004	0.004	0.043
1.1	0.002	0.001	0.039
1.15	0.005	0.004	0.04
1.2	0.004	0.002	0.039
1.25	0.004	0.002	0.039
1.3	0.002	0.002	0.038
1.35	0.004	0.002	0.04
1.4	0.002	0.001	0.038
1.45	0.004	0.004	0.04
1.5	0.002	0.001	0.039
1.55	0.004	0.002	0.04
1.6	0.001	0.001	0.039
1.65	0.004	0.004	0.04
1.7	0.002	0.002	0.038
1.75	0.004	0.004	0.04
1.8	0.001	0.002	0.038
1.85	0.004	0.002	0.039

US EPA ARCHIVE DOCUMENT

1.9	0.002	0.002	0.038
1.95	0.004	0.004	0.04
2	0.001	0.001	0.038
2.05	0.004	0.004	0.04
2.1	0.001	0.002	0.039
2.15	0.005	0.004	0.04
2.2	0.004	0.004	0.039
2.25	0.005	0.004	0.04
2.3	0.002	0.002	0.039
2.35	0.005	0.004	0.04
2.4	0.004	0.002	0.039
2.45	0.005	0.002	0.04
2.5	0.002	0.001	0.039
2.55	0.004	0.002	0.039
2.6	0.002	0.002	0.039
2.65	0.004	0.004	0.04
2.7	0.002	0.002	0.038
2.75	0.005	0.004	0.04
2.8	0.002	0.002	0.039
2.85	0.004	0.002	0.04
2.9	0.002	0.001	0.039
2.95	0.005	0.004	0.04
3	0.004	0.002	0.039
3.05	0.005	0.004	0.04
3.1	0.004	0.002	0.038
3.15	0.005	0.004	0.04
3.2	0.002	0.001	0.038
3.25	0.005	0.004	0.04
3.3	0.004	0.001	0.037
3.35	0.005	0.004	0.039
3.4	0.002	0.002	0.038
3.45	0.005	0.004	0.039
3.5	0.001	0.001	0.038
3.55	0.005	0.004	0.039
3.6	0.004	0.002	0.038
3.65	0.005	0.004	0.039
3.7	0.002	0.002	0.038
3.75	0.005	0.004	0.038
3.8	0.004	0.002	0.037
3.85	0.005	0.004	0.039
3.9	0.004	0.001	0.038
3.95	0.005	0.004	0.039
4	0.004	0.002	0.038
4.05	0.005	0.002	0.04
4.1	0.004	0.002	0.038
4.15	0.006	0.004	0.04
4.2	0.004	0.002	0.038

US EPA ARCHIVE DOCUMENT

4.25	0.005	0.004	0.038
4.3	0.002	0.002	0.037
4.35	0.005	0.004	0.038
4.4	0.002	0.002	0.035
4.45	0.005	0.004	0.038
4.5	0.002	0.002	0.037
4.55	0.005	0.002	0.038
4.6	0.004	0.002	0.037
4.65	0.006	0.002	0.038
4.7	0.002	0.001	0.035
4.75	0.006	0.004	0.038
4.8	0.004	0.002	0.037
4.85	0.005	0.004	0.038
4.9	0.001	0.002	0.037
4.95	0.005	0.002	0.038
5	0.001	0.001	0.035
5.05	0.006	0.004	0.038
5.1	0.002	0.001	0.037
5.15	0.009	0.004	0.038
5.2	0.007	0.002	0.034
5.25	0.009	0.004	0.034
5.3	0.004	0.002	0.033
5.35	0.007	0.002	0.034
5.4	0.006	0.001	0.033
5.45	0.009	0.004	0.035
5.5	0.002	0.002	0.033
5.55	0.009	0.002	0.035
5.6	0	0.001	0.033
5.65	0.007	0.004	0.034
5.7	0.001	0.002	0.033
5.75	0.009	0.004	0.034
5.8	0	0.002	0.033
5.85	0.009	0.004	0.034
5.9	0.006	0.002	0.033
5.95	0.009	0.002	0.034
6	0.001	0.002	0.033
6.05	0.009	0.002	0.035
6.1	0.005	0.002	0.034
6.15	0.009	0.004	0.037
6.2	0.002	0.002	0.037
6.25	0.011	0.004	0.039
6.3	0.007	0.001	0.034
6.35	0.009	0.002	0.035
6.4	0.006	0.002	0.033
6.45	0.009	0.004	0.035
6.5	0	0.001	0.034
6.55	0.009	0.002	0.035

US EPA ARCHIVE DOCUMENT

6.6	0.004	0.001	0.034
6.65	0.007	0.002	0.035
6.7	0.002	0.001	0.034
6.75	0.009	0.004	0.035
6.8	0.006	0.001	0.033
6.85	0.009	0.004	0.035
6.9	0	0.002	0.034
6.95	0.009	0.004	0.035
7	0.002	0.002	0.033
7.05	0.009	0.004	0.035
7.1	0	0.002	0.032
7.15	0.01	0.004	0.035
7.2	0.006	0.002	0.033
7.25	0.009	0.004	0.035
7.3	0.004	0.002	0.033
7.35	0.006	0.004	0.034
7.4	0.005	0.001	0.033
7.45	0.006	0.004	0.034
7.5	0.001	0.002	0.033
7.55	0.006	0.004	0.035
7.6	0.005	0.001	0.033
7.65	0.006	0.004	0.034
7.7	0.004	0.002	0.034
7.75	0.005	0.004	0.035
7.8	0.002	0.002	0.033
7.85	0.006	0.002	0.035
7.9	0.002	0.002	0.034
7.95	0.005	0.004	0.035
8	0.004	0.002	0.034
8.05	0.006	0.004	0.035
8.1	0.004	0.002	0.034
8.15	0.006	0.004	0.037
8.2	0.004	0.001	0.029
8.25	0.006	0.004	0.031
8.3	0.005	0.002	0.029
8.35	0.005	0.002	0.031
8.4	0.004	0.001	0.031
8.45	0.006	0.004	0.032
8.5	0.004	0.002	0.029
8.55	0.006	0.004	0.031
8.6	0.004	0.001	0.029
8.65	0.006	0.004	0.031
8.7	0.005	0.002	0.029
8.75	0.006	0.004	0.032
8.8	0.005	0.002	0.031
8.85	0.006	0.004	0.032
8.9	0.004	0.002	0.031

US EPA ARCHIVE DOCUMENT

8.95	0.006	0.004	0.031
9	0.004	0.002	0.028
9.05	0.006	0.004	0.032
9.1	0.004	0.002	0.029
9.15	0.006	0.004	0.031
9.2	0.005	0.002	0.028
9.25	0.006	0.004	0.029
9.3	0.005	0.004	0.028
9.35	0.006	0.004	0.031
9.4	0.005	0.002	0.029
9.45	0.006	0.004	0.031
9.5	0.005	0.002	0.031
9.55	0.006	0.004	0.031
9.6	0.005	0.004	0.029
9.65	0.006	0.004	0.031
9.7	0.004	0.002	0.028
9.75	0.006	0.004	0.031
9.8	0.004	0.004	0.029
9.85	0.006	0.004	0.031
9.9	0.005	0.001	0.028
9.95	0.006	0.004	0.031
10	0.005	0.002	0.029
10.05	0.006	0.004	0.031
10.1	0.005	0.001	0.029
10.15	0.006	0.004	0.031
10.2	0.004	0.001	0.028
10.25	0.006	0.004	0.031
10.3	0.005	0.002	0.029
10.35	0.006	0.005	0.032
10.4	0.005	0.002	0.029
10.45	0.006	0.004	0.031
10.5	0.005	0.001	0.029
10.55	0.006	0.004	0.032
10.6	0.005	0.002	0.031
10.65	0.006	0.004	0.032
10.7	0.005	0.002	0.031
10.75	0.006	0.004	0.031
10.8	0.005	0.002	0.029
10.85	0.006	0.004	0.032
10.9	0.005	0.002	0.028
10.95	0.006	0.004	0.032
11	0.005	0.002	0.031
11.05	0.006	0.004	0.031
11.1	0.005	0.001	0.029
11.15	0.006	0.004	0.032
11.2	0.005	0.002	0.031
11.25	0.006	0.004	0.032

US EPA ARCHIVE DOCUMENT

11.3	0.005	0.002	0.028
11.35	0.007	0.004	0.032
11.4	0.005	0.002	0.028
11.45	0.006	0.004	0.033
11.5	0.005	0.002	0.028
11.55	0.006	0.004	0.032
11.6	0.005	0.002	0.029
11.65	0.006	0.004	0.032
11.7	0.006	0.002	0.029
11.75	0.006	0.004	0.032
11.8	0.005	0.002	0.028
11.85	0.006	0.004	0.032
11.9	0.005	0.001	0.028
11.95	0.006	0.004	0.032
12	0.005	0.002	0.028
12.05	0.006	0.004	0.032
12.1	0.005	0.002	0.031
12.15	0.006	0.004	0.032
12.2	0.005	0.002	0.027
12.25	0.006	0.004	0.032
12.3	0.005	0.002	0.026
12.35	0.007	0.005	0.037
12.4	0.005	0.002	0.029
12.45	0.007	0.004	0.033
12.5	0.005	0.002	0.028
12.55	0.006	0.004	0.034
12.6	0.005	0.002	0.029
12.65	0.006	0.004	0.033
12.7	0.005	0.002	0.028
12.75	0.006	0.004	0.034
12.8	0.005	0.004	0.031
12.85	0.006	0.004	0.031
12.9	0.004	0.002	0.029
12.95	0.006	0.004	0.033
13	0.005	0.002	0.031
13.05	0.006	0.004	0.034
13.1	0.006	0.002	0.027
13.15	0.006	0.004	0.034
13.2	0.006	0.002	0.031
13.25	0.006	0.004	0.032
13.3	0.005	0.002	0.031
13.35	0.007	0.004	0.033
13.4	0.005	0.002	0.031
13.45	0.006	0.004	0.031
13.5	0.006	0.002	0.028
13.55	0.006	0.004	0.031
13.6	0.006	0.004	0.029

US EPA ARCHIVE DOCUMENT

13.65	0.007	0.004	0.029
13.7	0.006	0.002	0.027
13.75	0.007	0.004	0.031
13.8	0.006	0.002	0.029
13.85	0.006	0.004	0.029
13.9	0.005	0.002	0.029
13.95	0.006	0.004	0.029
14	0.006	0.002	0.029
14.05	0.006	0.004	0.031
14.1	0.005	0.002	0.028
14.15	0.006	0.004	0.031
14.2	0.006	0.004	0.028
14.25	0.007	0.004	0.029
14.3	0.005	0.002	0.029
14.35	0.007	0.004	0.031
14.4	0.006	0.004	0.031
14.45	0.007	0.005	0.032
14.5	0.005	0.001	0.029
14.55	0.006	0.004	0.029
14.6	0.005	0.001	0.028
14.65	0.007	0.004	0.029
14.7	0.006	0.002	0.029
14.75	0.006	0.004	0.029
14.8	0.005	0.002	0.029
14.85	0.006	0.004	0.029
14.9	0.005	0.002	0.029
14.95	0.007	0.004	0.031
15	0.006	0.002	0.029
15.05	0.006	0.004	0.031
15.1	0.006	0.002	0.029
15.15	0.007	0.004	0.031
15.2	0.006	0.002	0.029
15.25	0.007	0.004	0.031
15.3	0.006	0.002	0.027
15.35	0.007	0.004	0.031
15.4	0.005	0.004	0.028
15.45	0.006	0.004	0.031
15.5	0.005	0.002	0.029
15.55	0.006	0.004	0.031
15.6	0.005	0.004	0.027
15.65	0.007	0.004	0.031
15.7	0.006	0.002	0.028
15.75	0.007	0.004	0.029
15.8	0.006	0.002	0.027
15.85	0.007	0.004	0.029
15.9	0.006	0.002	0.027
15.95	0.006	0.004	0.029

US EPA ARCHIVE DOCUMENT

16	0.006	0.002	0.029
16.05	0.006	0.004	0.029
16.1	0.005	0.002	0.028
16.15	0.007	0.004	0.029
16.2	0.005	0.002	0.029
16.25	0.007	0.004	0.029
16.3	0.005	0.002	0.028
16.35	0.007	0.004	0.031
16.4	0.005	0.002	0.028
16.45	0.006	0.004	0.029
16.5	0.006	0.001	0.027
16.55	0.006	0.004	0.028
16.6	0.006	0.002	0.027
16.65	0.006	0.004	0.028
16.7	0.006	0.002	0.028
16.75	0.006	0.004	0.028
16.8	0.006	0.002	0.027
16.85	0.007	0.004	0.029
16.9	0.006	0.002	0.027
16.95	0.006	0.005	0.029
17	0.005	0.001	0.028
17.05	0.007	0.004	0.029
17.1	0.005	0.004	0.028
17.15	0.006	0.004	0.029
17.2	0.006	0.004	0.029
17.25	0.006	0.004	0.029
17.3	0.005	0.002	0.028
17.35	0.007	0.005	0.031
17.4	0.006	0.002	0.028
17.45	0.007	0.004	0.029
17.5	0.005	0.002	0.028
17.55	0.007	0.004	0.029
17.6	0.006	0.002	0.028
17.65	0.007	0.004	0.029
17.7	0.006	0.002	0.028
17.75	0.007	0.004	0.029
17.8	0.006	0.002	0.028
17.85	0.007	0.004	0.029
17.9	0.007	0.002	0.028
17.95	0.007	0.004	0.029
18	0.006	0.002	0.028
18.05	0.007	0.004	0.029
18.1	0.006	0.004	0.028
18.15	0.007	0.004	0.029
18.2	0.006	0.002	0.028
18.25	0.007	0.004	0.031
18.3	0.006	0.004	0.028

US EPA ARCHIVE DOCUMENT

18.35	0.007	0.004	0.031
18.4	0.005	0.002	0.027
18.45	0.006	0.004	0.029
18.5	0.005	0.002	0.028
18.55	0.007	0.004	0.029
18.6	0.006	0.002	0.028
18.65	0.007	0.004	0.031
18.7	0.005	0.002	0.029
18.75	0.006	0.004	0.029
18.8	0.006	0.002	0.029
18.85	0.006	0.004	0.029
18.9	0.005	0.002	0.028
18.95	0.007	0.004	0.031
19	0.006	0.002	0.027
19.05	0.007	0.004	0.029
19.1	0.006	0.002	0.028
19.15	0.007	0.004	0.031
19.2	0.005	0.002	0.028
19.25	0.007	0.004	0.031
19.3	0.005	0.002	0.029
19.35	0.007	0.004	0.031
19.4	0.006	0.002	0.028
19.45	0.007	0.004	0.029
19.5	0.006	0.001	0.028
19.55	0.007	0.004	0.029
19.6	0.005	0.004	0.027
19.65	0.007	0.004	0.031
19.7	0.005	0.002	0.028
19.75	0.007	0.004	0.029
19.8	0.005	0.002	0.029
19.85	0.007	0.004	0.029
19.9	0.005	0.002	0.029
19.95	0.006	0.004	0.029
20	0.006	0.002	0.027
20.05	0.007	0.004	0.029
20.1	0.004	0.002	0.029
20.15	0.006	0.004	0.029
20.2	0.005	0.004	0.028
20.25	0.007	0.004	0.031
20.3	0.006	0.002	0.028
20.35	0.007	0.005	0.031
20.4	0.006	0.002	0.029
20.45	0.007	0.004	0.031
20.5	0.006	0.002	0.029
20.55	0.007	0.004	0.031
20.6	0.006	0.002	0.029
20.65	0.006	0.004	0.031

US EPA ARCHIVE DOCUMENT

20.7	0.005	0.002	0.029
20.75	0.007	0.004	0.031
20.8	0.006	0.002	0.029
20.85	0.007	0.004	0.031
20.9	0.006	0.004	0.031
20.95	0.007	0.004	0.031
21	0.005	0.004	0.031
21.05	0.007	0.004	0.031
21.1	0.005	0.002	0.029
21.15	0.007	0.004	0.031
21.2	0.006	0.002	0.031
21.25	0.006	0.004	0.031
21.3	0.006	0.002	0.031
21.35	0.009	0.005	0.032
21.4	0.006	0.002	0.031
21.45	0.007	0.004	0.032
21.5	0.006	0.004	0.031
21.55	0.007	0.004	0.032
21.6	0.005	0.002	0.031
21.65	0.007	0.004	0.032
21.7	0.006	0.004	0.031
21.75	0.007	0.004	0.032
21.8	0.006	0.004	0.031
21.85	0.007	0.004	0.033
21.9	0.006	0.002	0.029
21.95	0.007	0.004	0.032
22	0.006	0.002	0.031
22.05	0.007	0.004	0.032
22.1	0.007	0.002	0.029
22.15	0.007	0.004	0.032
22.2	0.006	0.002	0.031
22.25	0.007	0.004	0.032
22.3	0.006	0.004	0.031
22.35	0.007	0.004	0.032
22.4	0.006	0.002	0.032
22.45	0.009	0.007	0.034
22.5	0.006	0.002	0.032
22.55	0.007	0.004	0.034
22.6	0.006	0.004	0.033
22.65	0.007	0.004	0.034
22.7	0.006	0.004	0.033
22.75	0.007	0.004	0.034
22.8	0.006	0.004	0.033
22.85	0.007	0.004	0.033
22.9	0.007	0.002	0.033
22.95	0.007	0.004	0.034
23	0.005	0.002	0.033

US EPA ARCHIVE DOCUMENT

23.05	0.007	0.004	0.034
23.1	0.006	0.004	0.032
23.15	0.007	0.004	0.034
23.2	0.006	0.002	0.033
23.25	0.007	0.004	0.034
23.3	0.006	0.002	0.032
23.35	0.009	0.005	0.035
23.4	0.007	0.002	0.035
23.45	0.007	0.004	0.037
23.5	0.006	0.002	0.037
23.55	0.007	0.004	0.037
23.6	0.006	0.002	0.034
23.65	0.007	0.004	0.035
23.7	0.006	0.002	0.034
23.75	0.007	0.004	0.035
23.8	0.005	0.001	0.035
23.85	0.007	0.004	0.035
23.9	0.006	0.002	0.033
23.95	0.007	0.004	0.037
24	0.006	0.002	0.034
24.05	0.007	0.004	0.037
24.1	0.007	0.002	0.033
24.15	0.007	0.004	0.035
24.2	0.006	0.002	0.034
24.25	0.007	0.004	0.037
24.3	0.006	0.002	0.034
24.35	0.007	0.005	0.037
24.4	0.006	0.002	0.034
24.45	0.007	0.004	0.034
24.5	0.006	0.002	0.032
24.55	0.007	0.004	0.034
24.6	0.006	0.002	0.033
24.65	0.007	0.004	0.034
24.7	0.005	0.002	0.033
24.75	0.006	0.004	0.034
24.8	0.006	0.002	0.032
24.85	0.006	0.004	0.034
24.9	0.006	0.002	0.032
24.95	0.006	0.004	0.035
25	0.005	0.004	0.033
25.05	0.006	0.004	0.034
25.1	0.006	0.004	0.032
25.15	0.007	0.004	0.034
25.2	0.006	0.002	0.033
25.25	0.006	0.004	0.034
25.3	0.006	0.004	0.033
25.35	0.007	0.005	0.034

US EPA ARCHIVE DOCUMENT

25.4	0.006	0.004	0.033
25.45	0.007	0.004	0.033
25.5	0.005	0.001	0.032
25.55	0.007	0.004	0.033
25.6	0.005	0.004	0.032
25.65	0.007	0.004	0.033
25.7	0.005	0.002	0.033
25.75	0.006	0.004	0.033
25.8	0.006	0.002	0.033
25.85	0.006	0.004	0.034
25.9	0.005	0.004	0.032
25.95	0.007	0.004	0.034
26	0.005	0.002	0.032
26.05	0.007	0.004	0.033
26.1	0.005	0.002	0.032
26.15	0.006	0.004	0.034
26.2	0.005	0.002	0.032
26.25	0.007	0.004	0.033
26.3	0.005	0.002	0.032
26.35	0.007	0.005	0.034
26.4	0.006	0.002	0.033
26.45	0.006	0.004	0.034
26.5	0.005	0.002	0.033
26.55	0.006	0.004	0.033
26.6	0.005	0.002	0.032
26.65	0.007	0.004	0.033
26.7	0.005	0.002	0.032
26.75	0.007	0.004	0.033
26.8	0.006	0.002	0.032
26.85	0.007	0.004	0.034
26.9	0.006	0.002	0.033
26.95	0.007	0.004	0.034
27	0.005	0.004	0.032
27.05	0.007	0.004	0.033
27.1	0.006	0.002	0.033
27.15	0.007	0.004	0.034
27.2	0.006	0.002	0.033
27.25	0.007	0.004	0.034
27.3	0.005	0.002	0.032
27.35	0.009	0.006	0.034
27.4	0.005	0.002	0.032
27.45	0.007	0.004	0.033
27.5	0.005	0.002	0.033
27.55	0.006	0.004	0.033
27.6	0.006	0.002	0.032
27.65	0.007	0.004	0.033
27.7	0.005	0.002	0.033

US EPA ARCHIVE DOCUMENT

27.75	0.007	0.004	0.033
27.8	0.006	0.002	0.033
27.85	0.007	0.004	0.033
27.9	0.005	0.002	0.033
27.95	0.007	0.004	0.034
28	0.006	0.004	0.033
28.05	0.007	0.004	0.034
28.1	0.005	0.002	0.033
28.15	0.007	0.004	0.034
28.2	0.006	0.004	0.032
28.25	0.007	0.004	0.034
28.3	0.006	0.002	0.032
28.35	0.007	0.005	0.039
28.4	0.006	0.002	0.037
28.45	0.007	0.004	0.038
28.5	0.005	0.002	0.035
28.55	0.007	0.004	0.038
28.6	0.005	0.002	0.037
28.65	0.006	0.004	0.038
28.7	0.006	0.002	0.035
28.75	0.007	0.004	0.038
28.8	0.006	0.002	0.037
28.85	0.007	0.004	0.038
28.9	0.005	0.004	0.037
28.95	0.007	0.004	0.038
29	0.006	0.004	0.037
29.05	0.006	0.004	0.038
29.1	0.005	0.002	0.037
29.15	0.006	0.004	0.038
29.2	0.006	0.002	0.037
29.25	0.006	0.004	0.038
29.3	0.005	0.002	0.037
29.35	0.007	0.005	0.039
29.4	0.006	0.002	0.034
29.45	0.007	0.004	0.037
29.5	0.005	0.002	0.035
29.55	0.007	0.004	0.035
29.6	0.004	0.002	0.034
29.65	0.007	0.004	0.037
29.7	0.005	0.004	0.034
29.75	0.006	0.004	0.037
29.8	0.005	0.002	0.034
29.85	0.006	0.004	0.037
29.9	0.005	0.002	0.035
29.95	0.006	0.004	0.037
30	0.006	0.002	0.034
30.05	0.006	0.004	0.035

US EPA ARCHIVE DOCUMENT

30.1	0.005	0.002	0.035
30.15	0.007	0.004	0.037
30.2	0.005	0.002	0.034
30.25	0.006	0.004	0.037
30.3	0.006	0.004	0.034
30.35	0.007	0.004	0.039
30.4	0.005	0.002	0.037
30.45	0.007	0.004	0.04
30.5	0.006	0.002	0.039
30.55	0.006	0.004	0.04
30.6	0.005	0.002	0.04
30.65	0.006	0.004	0.04
30.7	0.006	0.001	0.039
30.75	0.006	0.004	0.04
30.8	0.005	0.002	0.039
30.85	0.006	0.004	0.04
30.9	0.006	0.002	0.039
30.95	0.006	0.004	0.04
31	0.005	0.004	0.038
31.05	0.006	0.004	0.042
31.1	0.006	0.002	0.039
31.15	0.006	0.004	0.042
31.2	0.005	0.002	0.039
31.25	0.006	0.004	0.04
31.3	0.005	0.001	0.039
31.35	0.007	0.004	0.042
31.4	0.005	0.002	0.039
31.45	0.007	0.004	0.04
31.5	0.005	0.002	0.039
31.55	0.006	0.004	0.04
31.6	0.005	0.001	0.039
31.65	0.006	0.004	0.04
31.7	0.005	0.002	0.039
31.75	0.006	0.004	0.04
31.8	0.006	0.002	0.04
31.85	0.006	0.004	0.04
31.9	0.006	0.002	0.039
31.95	0.006	0.004	0.04
32	0.006	0.001	0.039
32.05	0.006	0.004	0.04
32.1	0.005	0.002	0.039
32.15	0.006	0.004	0.042
32.2	0.005	0.002	0.039
32.25	0.006	0.004	0.042
32.3	0.005	0.002	0.04
32.35	0.007	0.006	0.043
32.4	0.006	0.004	0.042

US EPA ARCHIVE DOCUMENT

32.45	0.007	0.004	0.042
32.5	0.006	0.002	0.04
32.55	0.007	0.004	0.043
32.6	0.006	0.004	0.042
32.65	0.007	0.004	0.043
32.7	0.006	0.002	0.042
32.75	0.007	0.004	0.043
32.8	0.006	0.002	0.042
32.85	0.007	0.004	0.043
32.9	0.006	0.002	0.04
32.95	0.007	0.004	0.042
33	0.006	0.002	0.04
33.05	0.006	0.004	0.043
33.1	0.006	0.002	0.042
33.15	0.007	0.004	0.043
33.2	0.005	0.004	0.042
33.25	0.007	0.004	0.043
33.3	0.007	0.002	0.042
33.35	0.009	0.006	0.044
33.4	0.006	0.002	0.043
33.45	0.007	0.004	0.043
33.5	0.006	0.002	0.042
33.55	0.007	0.004	0.043
33.6	0.007	0.002	0.042
33.65	0.007	0.005	0.043
33.7	0.006	0.002	0.042
33.75	0.006	0.005	0.043
33.8	0.006	0.004	0.043
33.85	0.007	0.004	0.043
33.9	0.006	0.002	0.043
33.95	0.007	0.004	0.043
34	0.006	0.002	0.042
34.05	0.007	0.004	0.043
34.1	0.007	0.002	0.043
34.15	0.007	0.004	0.043
34.2	0.006	0.002	0.042
34.25	0.007	0.004	0.043
34.3	0.006	0.002	0.042
34.35	0.007	0.005	0.045
34.4	0.005	0.002	0.04
34.45	0.006	0.004	0.042
34.5	0.005	0.002	0.042
34.55	0.007	0.004	0.043
34.6	0.005	0.004	0.042
34.65	0.006	0.004	0.043
34.7	0.005	0.002	0.042
34.75	0.006	0.004	0.042

US EPA ARCHIVE DOCUMENT

34.8	0.006	0.002	0.04
34.85	0.007	0.004	0.043
34.9	0.006	0.002	0.04
34.95	0.006	0.004	0.043
35	0.006	0.002	0.043
35.05	0.006	0.004	0.043
35.1	0.005	0.004	0.04
35.15	0.007	0.004	0.043
35.2	0.005	0.002	0.042
35.25	0.006	0.004	0.043
35.3	0.006	0.002	0.04
35.35	0.007	0.005	0.043
35.4	0.005	0.001	0.038
35.45	0.006	0.004	0.04
35.5	0.006	0.002	0.038
35.55	0.007	0.004	0.04
35.6	0.005	0.002	0.039
35.65	0.006	0.004	0.04
35.7	0.005	0.002	0.039
35.75	0.006	0.004	0.04
35.8	0.006	0.002	0.039
35.85	0.006	0.004	0.04
35.9	0.005	0.002	0.039
35.95	0.006	0.004	0.04
36	0.005	0.004	0.038
36.05	0.006	0.004	0.04
36.1	0.005	0.002	0.039
36.15	0.006	0.004	0.04
36.2	0.006	0.001	0.039
36.25	0.007	0.004	0.04
36.3	0.006	0.002	0.039
36.35	0.007	0.005	0.04
36.4	0.006	0.002	0.037
36.45	0.006	0.004	0.039
36.5	0.004	0.004	0.038
36.55	0.006	0.005	0.04
36.6	0.006	0.002	0.039
36.65	0.006	0.005	0.039
36.7	0.005	0.005	0.038
36.75	0.006	0.005	0.039
36.8	0.005	0.004	0.037
36.85	0.007	0.004	0.039
36.9	0.006	0.004	0.039
36.95	0.007	0.005	0.039
37	0.005	0.001	0.038
37.05	0.007	0.005	0.039
37.1	0.005	0.004	0.039

US EPA ARCHIVE DOCUMENT

37.15	0.006	0.005	0.039
37.2	0.006	0.001	0.038
37.25	0.007	0.005	0.04
37.3	0.006	0.004	0.039
37.35	0.006	0.004	0.04
37.4	0.005	0.002	0.038
37.45	0.006	0.002	0.04
37.5	0.005	0.002	0.039
37.55	0.006	0.004	0.04
37.6	0.004	0.002	0.039
37.65	0.006	0.004	0.04
37.7	0.004	0.004	0.039
37.75	0.006	0.004	0.04
37.8	0.005	0.002	0.039
37.85	0.006	0.004	0.04
37.9	0.005	0.002	0.039
37.95	0.006	0.004	0.04
38	0.005	0.002	0.039
38.05	0.006	0.002	0.04
38.1	0.005	0.002	0.039
38.15	0.006	0.004	0.04
38.2	0.006	0.004	0.039
38.25	0.006	0.004	0.04
38.3	0.005	0.002	0.039
38.35	0.007	0.004	0.042
38.4	0.005	0.002	0.038
38.45	0.006	0.004	0.04
38.5	0.005	0.002	0.039
38.55	0.006	0.004	0.04
38.6	0.006	0.002	0.039
38.65	0.007	0.004	0.04
38.7	0.005	0.002	0.039
38.75	0.006	0.002	0.04
38.8	0.005	0.001	0.039
38.85	0.006	0.004	0.04
38.9	0.005	0.001	0.039
38.95	0.006	0.004	0.04
39	0.004	0.002	0.039
39.05	0.006	0.004	0.04
39.1	0.005	0.001	0.039
39.15	0.006	0.004	0.04
39.2	0.005	0.002	0.039
39.25	0.007	0.002	0.04
39.3	0.005	0.002	0.04
39.35	0.006	0.004	0.04
39.4	0.006	0.001	0.037
39.45	0.006	0.004	0.039

US EPA ARCHIVE DOCUMENT

39.5	0.005	0.001	0.039
39.55	0.006	0.004	0.039
39.6	0.005	0.002	0.038
39.65	0.006	0.004	0.039
39.7	0.004	0.002	0.039
39.75	0.006	0.004	0.039
39.8	0.005	0.002	0.037
39.85	0.006	0.004	0.039
39.9	0.005	0.004	0.039
39.95	0.006	0.004	0.039
40	0.005	0.002	0.038
40.05	0.006	0.002	0.04
40.1	0.004	0.001	0.038
40.15	0.006	0.004	0.039
40.2	0.005	0.001	0.038
40.25	0.006	0.004	0.039
40.3	0.006	0.002	0.037
40.35	0.006	0.004	0.04
40.4	0.005	0.002	0.039
40.45	0.006	0.004	0.04
40.5	0.005	0.002	0.039
40.55	0.006	0.002	0.039
40.6	0.006	0.002	0.038
40.65	0.006	0.002	0.04
40.7	0.005	0.002	0.038
40.75	0.006	0.004	0.04
40.8	0.005	0.002	0.038
40.85	0.006	0.004	0.039
40.9	0.005	0.002	0.039
40.95	0.006	0.004	0.04
41	0.005	0.001	0.04
41.05	0.006	0.004	0.04
41.1	0.005	0.001	0.038
41.15	0.006	0.002	0.04
41.2	0.005	0.001	0.039
41.25	0.006	0.004	0.039
41.3	0.005	0.001	0.038
41.35	0.007	0.004	0.042
41.4	0.005	0.002	0.038
41.45	0.006	0.004	0.039
41.5	0.005	0.001	0.038
41.55	0.006	0.004	0.039
41.6	0.005	0.001	0.038
41.65	0.006	0.002	0.039
41.7	0.005	0.002	0.038
41.75	0.006	0.002	0.039
41.8	0.005	0.002	0.038

US EPA ARCHIVE DOCUMENT

41.85	0.006	0.002	0.039
41.9	0.006	0.002	0.038
41.95	0.006	0.004	0.039
42	0.006	0.002	0.038
42.05	0.006	0.004	0.039
42.1	0.005	0.001	0.037
42.15	0.006	0.002	0.039
42.2	0.004	0.001	0.038
42.25	0.006	0.004	0.039
42.3	0.004	0.001	0.038
42.35	0.006	0.004	0.04
42.4	0.006	0.002	0.039
42.45	0.006	0.004	0.039
42.5	0.005	0.002	0.038
42.55	0.006	0.004	0.039
42.6	0.005	0.001	0.037
42.65	0.007	0.004	0.04
42.7	0.006	0.002	0.04
42.75	0.006	0.004	0.04
42.8	0.005	0.001	0.037
42.85	0.006	0.004	0.039
42.9	0.004	0.002	0.037
42.95	0.007	0.004	0.04
43	0.005	0.004	0.038
43.05	0.006	0.004	0.039
43.1	0.005	0.001	0.038
43.15	0.007	0.004	0.039
43.2	0.006	0.002	0.038
43.25	0.006	0.004	0.039
43.3	0.005	0.002	0.038
43.35	0.007	0.004	0.042
43.4	0.005	0.001	0.035
43.45	0.007	0.004	0.039
43.5	0.005	0.002	0.037
43.55	0.006	0.004	0.038
43.6	0.005	0.004	0.035
43.65	0.006	0.004	0.038
43.7	0.005	0.002	0.037
43.75	0.006	0.002	0.038
43.8	0.004	0.002	0.035
43.85	0.006	0.004	0.038
43.9	0.005	0.002	0.035
43.95	0.006	0.002	0.038
44	0.005	0.002	0.035
44.05	0.006	0.002	0.038
44.1	0.004	0.002	0.037
44.15	0.006	0.002	0.037

US EPA ARCHIVE DOCUMENT

44.2	0.004	0.001	0.035
44.25	0.006	0.002	0.038
44.3	0.006	0.001	0.035
44.35	0.006	0.004	0.039
44.4	0.005	0.002	0.038
44.45	0.006	0.004	0.039
44.5	0.005	0.001	0.038
44.55	0.006	0.002	0.039
44.6	0.005	0.002	0.038
44.65	0.006	0.002	0.039
44.7	0.005	0.001	0.038
44.75	0.006	0.004	0.039
44.8	0.005	0.002	0.038
44.85	0.006	0.002	0.039
44.9	0.005	0.001	0.038
44.95	0.006	0.004	0.039
45	0.006	0.002	0.037
45.05	0.006	0.002	0.039
45.1	0.006	0.001	0.038
45.15	0.006	0.002	0.039
45.2	0.005	0.002	0.038
45.25	0.006	0.002	0.039
45.3	0.006	0.001	0.038
45.35	0.007	0.004	0.04
45.4	0.006	0.001	0.037
45.45	0.006	0.004	0.038
45.5	0.006	0.001	0.037
45.55	0.006	0.002	0.039
45.6	0.005	0.001	0.037
45.65	0.006	0.004	0.039
45.7	0.006	0.002	0.037
45.75	0.006	0.002	0.039
45.8	0.004	0.002	0.037
45.85	0.006	0.002	0.039
45.9	0.005	0.002	0.037
45.95	0.006	0.002	0.039
46	0.005	0.001	0.038
46.05	0.006	0.002	0.038
46.1	0.005	0.002	0.038
46.15	0.006	0.002	0.039
46.2	0.005	0.002	0.038
46.25	0.006	0.004	0.039
46.3	0.005	0.002	0.037
46.35	0.007	0.004	0.042
46.4	0.005	0.002	0.039
46.45	0.006	0.002	0.04
46.5	0.006	0.002	0.038

US EPA ARCHIVE DOCUMENT

46.55	0.006	0.002	0.04
46.6	0.005	0.002	0.039
46.65	0.006	0.004	0.04
46.7	0.005	0.001	0.039
46.75	0.007	0.004	0.04
46.8	0.006	0.001	0.038
46.85	0.006	0.002	0.04
46.9	0.005	0.002	0.039
46.95	0.006	0.002	0.04
47	0.006	0.002	0.039
47.05	0.006	0.002	0.04
47.1	0.005	0.001	0.039
47.15	0.006	0.002	0.04
47.2	0.005	0.002	0.039
47.25	0.006	0.002	0.04
47.3	0.005	0.002	0.039
47.35	0.007	0.004	0.042
47.4	0.005	0.001	0.042
47.45	0.006	0.004	0.042
47.5	0.004	0.001	0.04
47.55	0.006	0.002	0.042
47.6	0.006	0.002	0.04
47.65	0.006	0.004	0.042
47.7	0.006	0.002	0.04
47.75	0.006	0.004	0.042
47.8	0.006	0.001	0.042
47.85	0.007	0.004	0.042
47.9	0.006	0.001	0.042
47.95	0.006	0.004	0.042
48	0.005	0.001	0.04
48.05	0.006	0.002	0.042
48.1	0.006	0.001	0.042
48.15	0.007	0.002	0.043
48.2	0.005	0.002	0.04
48.25	0.007	0.004	0.043
48.3	0.006	0.004	0.039
48.35	0.007	0.004	0.044
48.4	0.006	0.002	0.043
48.45	0.006	0.002	0.044
48.5	0.005	0.002	0.043
48.55	0.006	0.002	0.044
48.6	0.006	0.002	0.043
48.65	0.006	0.002	0.044
48.7	0.006	0.001	0.042
48.75	0.006	0.002	0.043
48.8	0.006	0.001	0.043
48.85	0.006	0.002	0.043

US EPA ARCHIVE DOCUMENT

48.9	0.006	0.001	0.043
48.95	0.006	0.002	0.044
49	0.006	0.001	0.043
49.05	0.006	0.002	0.044
49.1	0.005	0.001	0.042
49.15	0.006	0.002	0.044
49.2	0.005	0.002	0.042
49.25	0.006	0.002	0.044
49.3	0.005	0.002	0.043
49.35	0.007	0.004	0.045
49.4	0.006	0	0.043
49.45	0.007	0.002	0.044
49.5	0.005	0.001	0.043
49.55	0.006	0.004	0.044
49.6	0.006	0.001	0.043
49.65	0.007	0.004	0.044
49.7	0.006	0.002	0.043
49.75	0.007	0.002	0.044
49.8	0.005	0.001	0.042
49.85	0.007	0.002	0.044
49.9	0.006	0.001	0.043
49.95	0.006	0.004	0.044
50	0.005	0.002	0.043
50.05	0.007	0.002	0.044
50.1	0.005	0.002	0.043
50.15	0.006	0.002	0.044
50.2	0.005	0.002	0.042
50.25	0.006	0.002	0.044
50.3	0.005	0.001	0.042
50.35	0.007	0.004	0.046
50.4	0.006	0.002	0.044
50.45	0.007	0.002	0.045
50.5	0.007	0.002	0.045
50.55	0.007	0.002	0.045
50.6	0.006	0.001	0.044
50.65	0.006	0.002	0.045
50.7	0.006	0.001	0.044
50.75	0.007	0.004	0.046
50.8	0.006	0.002	0.044
50.85	0.007	0.004	0.046
50.9	0.005	0.002	0.046
50.95	0.007	0.004	0.046
51	0.006	0.002	0.045
51.05	0.007	0.002	0.046
51.1	0.006	0.001	0.045
51.15	0.006	0.002	0.046
51.2	0.006	0.002	0.045

US EPA ARCHIVE DOCUMENT

51.25	0.007	0.002	0.046
51.3	0.005	0.001	0.045
51.35	0.007	0.004	0.048
51.4	0.006	0.001	0.045
51.45	0.006	0.004	0.048
51.5	0.006	0.004	0.045
51.55	0.007	0.004	0.048
51.6	0.006	0.002	0.045
51.65	0.007	0.004	0.048
51.7	0.006	0.002	0.046
51.75	0.007	0.002	0.048
51.8	0.005	0.002	0.045
51.85	0.007	0.002	0.048
51.9	0.006	0.002	0.046
51.95	0.007	0.004	0.048
52	0.005	0.002	0.045
52.05	0.007	0.002	0.048
52.1	0.006	0.002	0.046
52.15	0.007	0.002	0.048
52.2	0.006	0.002	0.046
52.25	0.007	0.004	0.048
52.3	0.006	0.002	0.046
52.35	0.009	0.007	0.049
52.4	0.005	0.002	0.049
52.45	0.007	0.004	0.05
52.5	0.006	0.004	0.049
52.55	0.007	0.004	0.049
52.6	0.006	0.002	0.048
52.65	0.007	0.004	0.049
52.7	0.006	0.002	0.049
52.75	0.007	0.002	0.049
52.8	0.006	0.001	0.048
52.85	0.007	0.002	0.05
52.9	0.006	0.001	0.048
52.95	0.007	0.002	0.049
53	0.006	0.002	0.048
53.05	0.007	0.004	0.05
53.1	0.006	0.002	0.048
53.15	0.007	0.004	0.05
53.2	0.005	0.002	0.048
53.25	0.007	0.004	0.05
53.3	0.006	0.004	0.049
53.35	0.007	0.004	0.051
53.4	0.006	0.002	0.049
53.45	0.007	0.004	0.05
53.5	0.006	0.002	0.048
53.55	0.007	0.004	0.05

US EPA ARCHIVE DOCUMENT

53.6	0.005	0.002	0.049
53.65	0.007	0.004	0.05
53.7	0.007	0.002	0.049
53.75	0.007	0.004	0.05
53.8	0.006	0.004	0.049
53.85	0.007	0.004	0.05
53.9	0.005	0.002	0.049
53.95	0.007	0.004	0.05
54	0.007	0.002	0.05
54.05	0.007	0.004	0.05
54.1	0.007	0.002	0.049
54.15	0.009	0.004	0.051
54.2	0.005	0.001	0.049
54.25	0.009	0.004	0.051
54.3	0.007	0.001	0.048
54.35	0.009	0.005	0.053
54.4	0.006	0.001	0.05
54.45	0.007	0.004	0.051
54.5	0.006	0.002	0.049
54.55	0.007	0.004	0.05
54.6	0.007	0.002	0.05
54.65	0.007	0.004	0.05
54.7	0.005	0.002	0.049
54.75	0.007	0.004	0.05
54.8	0.006	0.002	0.05
54.85	0.007	0.004	0.05
54.9	0.007	0.002	0.049
54.95	0.007	0.004	0.051
55	0.007	0.002	0.049
55.05	0.009	0.004	0.05
55.1	0.006	0.001	0.05
55.15	0.009	0.002	0.05
55.2	0.006	0.002	0.049
55.25	0.007	0.004	0.051
55.3	0.006	0.002	0.05
55.35	0.009	0.004	0.051
55.4	0.006	0.002	0.051
55.45	0.009	0.005	0.051
55.5	0.006	0.001	0.049
55.55	0.007	0.004	0.05
55.6	0.005	0.002	0.049
55.65	0.009	0.004	0.051
55.7	0.007	0.001	0.049
55.75	0.009	0.004	0.05
55.8	0.005	0.002	0.049
55.85	0.009	0.004	0.051
55.9	0.006	0.002	0.051

US EPA ARCHIVE DOCUMENT

55.95	0.009	0.004	0.051
56	0.006	0.002	0.049
56.05	0.009	0.004	0.051
56.1	0.005	0.001	0.05
56.15	0.009	0.004	0.05
56.2	0.006	0.001	0.05
56.25	0.009	0.002	0.05
56.3	0.006	0.002	0.049
56.35	0.009	0.004	0.053
56.4	0.006	0.001	0.051
56.45	0.007	0.002	0.054
56.5	0.006	0.002	0.051
56.55	0.007	0.002	0.053
56.6	0.006	0.002	0.051
56.65	0.007	0.004	0.053
56.7	0.006	0.002	0.051
56.75	0.007	0.004	0.053
56.8	0.005	0.002	0.051
56.85	0.007	0.002	0.054
56.9	0.006	0.001	0.051
56.95	0.007	0.002	0.053
57	0.006	0.002	0.053
57.05	0.007	0.004	0.053
57.1	0.006	0.002	0.051
57.15	0.007	0.004	0.053
57.2	0.006	0.002	0.051
57.25	0.007	0.004	0.053
57.3	0.006	0.002	0.051
57.35	0.007	0.004	0.055
57.4	0.006	0.002	0.053
57.45	0.007	0.004	0.054
57.5	0.006	0.001	0.051
57.55	0.007	0.004	0.054
57.6	0.006	0.002	0.053
57.65	0.007	0.004	0.055
57.7	0.006	0.002	0.053
57.75	0.007	0.004	0.054
57.8	0.005	0.002	0.054
57.85	0.007	0.002	0.054
57.9	0.006	0.001	0.051
57.95	0.007	0.004	0.054
58	0.006	0.002	0.051
58.05	0.007	0.004	0.055
58.1	0.006	0.002	0.051
58.15	0.007	0.004	0.055
58.2	0.006	0.002	0.055
58.25	0.007	0.002	0.055

US EPA ARCHIVE DOCUMENT

58.3	0.005	0.001	0.053
58.35	0.007	0.004	0.055
58.4	0.006	0.001	0.051
58.45	0.007	0.002	0.053
58.5	0.005	0.001	0.051
58.55	0.006	0.002	0.051
58.6	0.006	0.001	0.05
58.65	0.007	0.004	0.051
58.7	0.006	0.002	0.051
58.75	0.007	0.002	0.053
58.8	0.006	0.001	0.05
58.85	0.007	0.004	0.051
58.9	0.006	0.002	0.05
58.95	0.007	0.002	0.053
59	0.006	0.002	0.05
59.05	0.007	0.004	0.053
59.1	0.006	0.002	0.051
59.15	0.007	0.004	0.053
59.2	0.007	0.001	0.05
59.25	0.007	0.004	0.051
59.3	0.006	0.002	0.05
59.35	0.007	0.004	0.055
59.4	0.006	0.001	0.053
59.45	0.007	0.002	0.055
59.5	0.006	0.001	0.054
59.55	0.007	0.004	0.056
59.6	0.005	0.001	0.054
59.65	0.007	0.002	0.055
59.7	0.006	0.001	0.054
59.75	0.007	0.002	0.055
59.8	0.005	0.002	0.053
59.85	0.007	0.002	0.055
59.9	0.006	0.002	0.054
59.95	0.007	0.002	0.055
60	0.005	0.002	0.053
60.05	0.007	0.004	0.055
60.1	0.006	0.001	0.053
60.15	0.007	0.002	0.055
60.2	0.006	0.002	0.054
60.25	0.007	0.002	0.055
60.3	0.006	0.002	0.054
60.35	0.007	0.004	0.056
60.4	0.005	0.001	0.053
60.45	0.006	0.002	0.054
60.5	0.005	0.001	0.054
60.55	0.007	0.002	0.055
60.6	0.006	0.001	0.054

US EPA ARCHIVE DOCUMENT

60.65	0.007	0.002	0.055
60.7	0.006	0.001	0.054
60.75	0.007	0.002	0.055
60.8	0.005	0.001	0.054
60.85	0.006	0.002	0.055
60.9	0.005	0.001	0.054
60.95	0.007	0.002	0.055
61	0.006	0.001	0.054
61.05	0.007	0.002	0.055
61.1	0.006	0.001	0.054
61.15	0.007	0.002	0.055
61.2	0.005	0.002	0.053
61.25	0.007	0.004	0.054
61.3	0.006	0.002	0.054
61.35	0.007	0.004	0.055
61.4	0.005	0.002	0.051
61.45	0.006	0.002	0.053
61.5	0.006	0.001	0.051
61.55	0.007	0.002	0.053
61.6	0.005	0.001	0.051
61.65	0.007	0.002	0.054
61.7	0.006	0.001	0.053
61.75	0.007	0.002	0.053
61.8	0.005	0.002	0.051
61.85	0.007	0.002	0.053
61.9	0.006	0.001	0.05
61.95	0.007	0.002	0.054
62	0.006	0.002	0.053
62.05	0.007	0.002	0.053
62.1	0.006	0.001	0.051
62.15	0.007	0.002	0.053
62.2	0.006	0.001	0.053
62.25	0.007	0.002	0.054
62.3	0.006	0.002	0.053
62.35	0.007	0.002	0.054
62.4	0.006	0.001	0.051
62.45	0.007	0.004	0.054
62.5	0.005	0.002	0.051
62.55	0.007	0.004	0.053
62.6	0.006	0.001	0.051
62.65	0.007	0.002	0.053
62.7	0.007	0.002	0.051
62.75	0.007	0.002	0.053
62.8	0.006	0.002	0.051
62.85	0.007	0.002	0.053
62.9	0.006	0.002	0.053
62.95	0.007	0.002	0.053

US EPA ARCHIVE DOCUMENT

63	0.007	0.001	0.053
63.05	0.007	0.002	0.053
63.1	0.006	0.002	0.051
63.15	0.007	0.004	0.053
63.2	0.007	0.001	0.051
63.25	0.007	0.002	0.053
63.3	0.005	0.001	0.051
63.35	0.007	0.002	0.054
63.4	0.007	0.001	0.051
63.45	0.007	0.004	0.057
63.5	0.006	0.001	0.055
63.55	0.007	0.002	0.056
63.6	0.005	0.001	0.056
63.65	0.007	0.002	0.056
63.7	0.005	0.001	0.055
63.75	0.006	0.002	0.056
63.8	0.006	0.001	0.056
63.85	0.006	0.002	0.057
63.9	0.005	0.002	0.055
63.95	0.006	0.002	0.056
64	0.006	0.001	0.055
64.05	0.007	0.002	0.057
64.1	0.006	0.001	0.056
64.15	0.007	0.002	0.056
64.2	0.005	0.001	0.055
64.25	0.007	0.002	0.056
64.3	0.006	0	0.055
64.35	0.007	0.004	0.057
64.4	0.006	0.002	0.054
64.45	0.007	0.002	0.056
64.5	0.006	0.001	0.054
64.55	0.006	0.002	0.055
64.6	0.005	0.001	0.054
64.65	0.006	0.002	0.055
64.7	0.005	0.001	0.054
64.75	0.006	0.002	0.055
64.8	0.005	0.001	0.054
64.85	0.006	0.004	0.055
64.9	0.006	0.002	0.055
64.95	0.006	0.002	0.055
65	0.006	0.002	0.054
65.05	0.007	0.002	0.055
65.1	0.006	0.001	0.053
65.15	0.006	0.002	0.055
65.2	0.005	0	0.054
65.25	0.006	0.002	0.055
65.3	0.006	0.001	0.054

US EPA ARCHIVE DOCUMENT

65.35	0.007	0.004	0.057
65.4	0.005	0.001	0.055
65.45	0.007	0.002	0.056
65.5	0.006	0.001	0.054
65.55	0.006	0.002	0.056
65.6	0.006	0	0.055
65.65	0.007	0.002	0.055
65.7	0.006	0.001	0.055
65.75	0.007	0.002	0.055
65.8	0.006	0.001	0.053
65.85	0.007	0.002	0.055
65.9	0.007	0.001	0.054
65.95	0.007	0.002	0.055
66	0.006	0.001	0.055
66.05	0.007	0.002	0.056
66.1	0.005	0.001	0.054
66.15	0.007	0.002	0.056
66.2	0.005	0.001	0.055
66.25	0.007	0.002	0.055
66.3	0.007	0.001	0.054
66.35	0.007	0.002	0.059
66.4	0.005	0.001	0.055
66.45	0.006	0.002	0.057
66.5	0.006	0.001	0.055
66.55	0.007	0.002	0.057
66.6	0.005	0.001	0.056
66.65	0.007	0.002	0.057
66.7	0.006	0.001	0.056
66.75	0.007	0.002	0.057
66.8	0.006	0.001	0.056
66.85	0.007	0.002	0.057
66.9	0.006	0.001	0.055
66.95	0.007	0.002	0.056
67	0.006	0.001	0.055
67.05	0.007	0.002	0.057
67.1	0.006	0.001	0.057
67.15	0.006	0.002	0.057
67.2	0.006	0.001	0.056
67.25	0.007	0.002	0.057
67.3	0.005	0.001	0.056
67.35	0.007	0.002	0.059
67.4	0.005	0.001	0.056
67.45	0.007	0.002	0.057
67.5	0.006	0.001	0.056
67.55	0.007	0.002	0.057
67.6	0.006	0.001	0.057
67.65	0.007	0.002	0.059

US EPA ARCHIVE DOCUMENT

67.7	0.006	0	0.056
67.75	0.007	0.002	0.057
67.8	0.006	0.001	0.056
67.85	0.007	0.002	0.057
67.9	0.005	0.001	0.056
67.95	0.007	0.002	0.057
68	0.006	0.001	0.056
68.05	0.007	0.002	0.059
68.1	0.006	0.001	0.057
68.15	0.007	0.002	0.057
68.2	0.006	0.001	0.055
68.25	0.006	0.002	0.057
68.3	0.006	0.001	0.056
68.35	0.007	0.002	0.06
68.4	0.006	0	0.057
68.45	0.007	0.002	0.06
68.5	0.007	0.001	0.057
68.55	0.007	0.002	0.06
68.6	0.005	0	0.059
68.65	0.007	0.002	0.06
68.7	0.006	0.001	0.057
68.75	0.007	0.002	0.06
68.8	0.006	0.001	0.059
68.85	0.007	0.002	0.06
68.9	0.006	0.001	0.059
68.95	0.007	0.002	0.06
69	0.006	0.001	0.059
69.05	0.009	0.002	0.061
69.1	0.006	0.001	0.059
69.15	0.007	0.002	0.061
69.2	0.005	0.001	0.06
69.25	0.007	0.004	0.06
69.3	0.005	0.001	0.059
69.35	0.007	0.004	0.06
69.4	0.005	0.001	0.055
69.45	0.007	0.002	0.055
69.5	0.005	0.001	0.053
69.55	0.007	0.002	0.054
69.6	0.006	0.001	0.053
69.65	0.007	0.002	0.054
69.7	0.006	0.001	0.051
69.75	0.007	0.002	0.054
69.8	0.005	0.001	0.051
69.85	0.007	0.002	0.053
69.9	0.005	0.002	0.05
69.95	0.007	0.002	0.053
70	0.006	0.001	0.05

US EPA ARCHIVE DOCUMENT

70.05	0.007	0.002	0.053
70.1	0.007	0.001	0.053
70.15	0.007	0.002	0.053
70.2	0.006	0.001	0.05
70.25	0.007	0.002	0.053
70.3	0.006	0.001	0.051
70.35	0.007	0.004	0.053
70.4	0.006	0.001	0.044
70.45	0.007	0.002	0.045
70.5	0.005	0.001	0.044
70.55	0.007	0.002	0.045
70.6	0.006	0.001	0.043
70.65	0.007	0.002	0.044
70.7	0.006	0.001	0.043
70.75	0.006	0.002	0.044
70.8	0.006	0.002	0.042
70.85	0.006	0.002	0.044
70.9	0.005	0.001	0.043
70.95	0.006	0.004	0.044
71	0.005	0.001	0.042
71.05	0.007	0.002	0.044
71.1	0.006	0	0.043
71.15	0.007	0.002	0.044
71.2	0.006	0.002	0.042
71.25	0.007	0.002	0.043
71.3	0.006	0.001	0.043
71.35	0.007	0.004	0.044
71.4	0.005	0.001	0.035
71.45	0.007	0.004	0.035
71.5	0.005	0.001	0.034
71.55	0.006	0.004	0.035
71.6	0.005	0.002	0.034
71.65	0.007	0.002	0.035
71.7	0.004	0.001	0.034
71.75	0.006	0.002	0.034
71.8	0.005	0.002	0.033
71.85	0.006	0.004	0.034
71.9	0.004	0.002	0.033
71.95	0.007	0.002	0.034
72	0.005	0.001	0.033
72.05	0.006	0.002	0.035
72.1	0.005	0.001	0.032
72.15	0.006	0.002	0.034
72.2	0.005	0.002	0.033
72.25	0.006	0.002	0.034
72.3	0.006	0.001	0.033
72.35	0.007	0.004	0.035

US EPA ARCHIVE DOCUMENT

72.4	0.005	0.002	0.032
72.45	0.007	0.004	0.033
72.5	0.006	0.002	0.029
72.55	0.007	0.004	0.032
72.6	0.006	0.002	0.029
72.65	0.006	0.004	0.031
72.7	0.006	0.001	0.029
72.75	0.006	0.004	0.031
72.8	0.006	0.001	0.029
72.85	0.006	0.004	0.031
72.9	0.005	0.001	0.029
72.95	0.007	0.004	0.031
73	0.005	0.002	0.029
73.05	0.006	0.004	0.031
73.1	0.005	0.001	0.029
73.15	0.007	0.004	0.031
73.2	0.005	0.002	0.029
73.25	0.007	0.004	0.031
73.3	0.006	0.001	0.029
73.35	0.007	0.004	0.031
73.4	0.006	0.001	0.024
73.45	0.007	0.002	0.026
73.5	0.005	0.002	0.024
73.55	0.006	0.004	0.026
73.6	0.005	0.002	0.024
73.65	0.007	0.002	0.026
73.7	0.006	0.002	0.023
73.75	0.006	0.002	0.024
73.8	0.006	0.001	0.023
73.85	0.006	0.004	0.026
73.9	0.005	0.001	0.022
73.95	0.006	0.004	0.024
74	0.006	0.001	0.023
74.05	0.006	0.004	0.024
74.1	0.005	0.002	0.022
74.15	0.006	0.002	0.024
74.2	0.006	0.001	0.023
74.25	0.007	0.002	0.024
74.3	0.006	0.002	0.023
74.35	0.009	0.004	0.024
74.4	0.005	0.002	0.021
74.45	0.007	0.002	0.021
74.5	0.005	0.001	0.018
74.55	0.006	0.004	0.021
74.6	0.006	0.001	0.018
74.65	0.006	0.004	0.021
74.7	0.005	0.001	0.018

US EPA ARCHIVE DOCUMENT

74.75	0.007	0.004	0.021
74.8	0.005	0.001	0.017
74.85	0.006	0.002	0.021
74.9	0.006	0.002	0.018
74.95	0.007	0.004	0.021
75	0.005	0.002	0.017
75.05	0.006	0.002	0.02
75.1	0.005	0.001	0.015
75.15	0.007	0.002	0.02
75.2	0.005	0.002	0.016
75.25	0.007	0.004	0.02
75.3	0.005	0.001	0.017
75.35	0.007	0.004	0.02
75.4	0.005	0.002	0.011
75.45	0.006	0.004	0.011
75.5	0.006	0.001	0.011
75.55	0.006	0.002	0.012
75.6	0.005	0.002	0.007
75.65	0.006	0.002	0.012
75.7	0.005	0.001	0.01
75.75	0.006	0.004	0.012
75.8	0.006	0.002	0.011
75.85	0.006	0.002	0.011
75.9	0.005	0.002	0.011
75.95	0.006	0.002	0.011
76	0.005	0.001	0.01
76.05	0.006	0.004	0.012
76.1	0.004	0.002	0.009
76.15	0.007	0.004	0.012
76.2	0.005	0.001	0.011
76.25	0.006	0.004	0.012
76.3	0.005	0.001	0.01
76.35	0.007	0.004	0.013
76.4	0.005	0.002	0.006
76.45	0.007	0.004	0.01
76.5	0.005	0.002	0.005
76.55	0.006	0.002	0.009
76.6	0.006	0.001	0.006
76.65	0.006	0.004	0.01
76.7	0.005	0.002	0.005
76.75	0.006	0.002	0.009
76.8	0.005	0.001	0.006
76.85	0.006	0.002	0.009
76.9	0.005	0.001	0.006
76.95	0.006	0.002	0.01
77	0.006	0.002	0.005
77.05	0.006	0.002	0.01

US EPA ARCHIVE DOCUMENT

77.1	0.005	0.002	0.007
77.15	0.006	0.002	0.01
77.2	0.005	0.001	0.009
77.25	0.006	0.002	0.01
77.3	0.005	0.001	0.005
77.35	0.007	0.004	0.012
77.4	0.005	0.002	0.009
77.45	0.006	0.002	0.01
77.5	0.005	0.002	0.007
77.55	0.006	0.002	0.01
77.6	0.005	0.002	0.009
77.65	0.006	0.002	0.01
77.7	0.005	0.001	0.01
77.75	0.006	0.002	0.012
77.8	0.005	0.001	0.007
77.85	0.006	0.002	0.01
77.9	0.005	0.002	0.007
77.95	0.006	0.002	0.011
78	0.006	0.001	0.007
78.05	0.006	0.002	0.01
78.1	0.005	0.001	0.007
78.15	0.006	0.004	0.01
78.2	0.005	0.002	0.01
78.25	0.006	0.002	0.01
78.3	0.004	0.001	0.007
78.35	0.006	0.002	0.01
78.4	0.006	0.001	0.01
78.45	0.007	0.002	0.01
78.5	0.006	0.002	0.006
78.55	0.006	0.002	0.01
78.6	0.005	0.002	0.007
78.65	0.006	0.004	0.01
78.7	0.006	0.002	0.01
78.75	0.006	0.002	0.01
78.8	0.005	0.002	0.007
78.85	0.006	0.004	0.01
78.9	0.005	0.001	0.007
78.95	0.007	0.002	0.009
79	0.006	0.001	0.007
79.05	0.007	0.002	0.01
79.1	0.005	0.001	0.007
79.15	0.007	0.002	0.01
79.2	0.006	0.002	0.006
79.25	0.007	0.004	0.01
79.3	0.006	0.002	0.009
79.35	0.006	0.002	0.009
79.4	0.006	0.001	0.009

US EPA ARCHIVE DOCUMENT

79.45	0.007	0.004	0.011
79.5	0.006	0.001	0.007
79.55	0.007	0.002	0.01
79.6	0.005	0.001	0.007
79.65	0.007	0.004	0.009
79.7	0.004	0.001	0.006
79.75	0.007	0.002	0.009
79.8	0.006	0.001	0.005
79.85	0.007	0.002	0.009
79.9	0.006	0.001	0.006
79.95	0.007	0.004	0.009
80	0.005	0.001	0.005
80.05	0.006	0.002	0.009
80.1	0.006	0.001	0.006
80.15	0.007	0.002	0.009
80.2	0.006	0.001	0.006
80.25	0.007	0.002	0.009
80.3	0.006	0.002	0.007
80.35	0.006	0.004	0.009
80.4	0.005	0.002	0.009
80.45	0.007	0.004	0.01
80.5	0.005	0.001	0.004
80.55	0.007	0.004	0.007
80.6	0.006	0.001	0.006
80.65	0.007	0.002	0.007
80.7	0.006	0.002	0.005
80.75	0.006	0.004	0.007
80.8	0.005	0.002	0.005
80.85	0.007	0.002	0.009
80.9	0.006	0.001	0.004
80.95	0.007	0.004	0.007
81	0.005	0.001	0.005
81.05	0.007	0.004	0.009
81.1	0.006	0.002	0.007
81.15	0.006	0.004	0.01
81.2	0.005	0.001	0.004
81.25	0.006	0.002	0.007
81.3	0.006	0.002	0.005
81.35	0.007	0.004	0.007
81.4	0.006	0.002	0
81.45	0.007	0.004	0.005
81.5	0.005	0.002	0.002
81.55	0.006	0.004	0.006
81.6	0.006	0	0.004
81.65	0.007	0.004	0.007
81.7	0.005	0.002	0.004

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :8805.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.004	0.034
0.1	0.001	0.002	0.033
0.15	0.002	0.004	0.034
0.2	0.001	0.002	0.033
0.25	0.002	0.004	0.034
0.3	0.001	0.004	0.032
0.35	0.002	0.004	0.034
0.4	0.002	0.002	0.034
0.45	0.002	0.004	0.034
0.5	0.001	0.002	0.033
0.55	0.002	0.004	0.034
0.6	0.002	0.001	0.033
0.65	0.002	0.004	0.034
0.7	0.002	0.002	0.034
0.75	0.002	0.004	0.034
0.8	0.001	0.002	0.034
0.85	0.002	0.004	0.034
0.9	0.001	0.002	0.034
0.95	0.002	0.004	0.034
1	0.001	0.002	0.033
1.05	0.004	0.004	0.034
1.1	0.001	0.002	0.033
1.15	0.004	0.004	0.034
1.2	0.001	0.001	0.033
1.25	0.004	0.005	0.034
1.3	0.002	0.001	0.031
1.35	0.004	0.004	0.033
1.4	0.001	0.002	0.032
1.45	0.002	0.004	0.033
1.5	0.001	0.002	0.031
1.55	0.002	0.004	0.032
1.6	0.001	0.002	0.031
1.65	0.002	0.004	0.032
1.7	0.001	0.002	0.032
1.75	0.004	0.004	0.032
1.8	0.002	0.004	0.032
1.85	0.004	0.004	0.033

US EPA ARCHIVE DOCUMENT

1.9	0.001	0.002	0.031
1.95	0.004	0.004	0.032
2	0.001	0.002	0.032
2.05	0.002	0.004	0.033
2.1	0.002	0.004	0.033
2.15	0.004	0.004	0.033
2.2	0.002	0.001	0.031
2.25	0.004	0.004	0.034
2.3	0.001	0.001	0.032
2.35	0.002	0.004	0.033
2.4	0.002	0.001	0.032
2.45	0.004	0.004	0.033
2.5	0.001	0.004	0.032
2.55	0.004	0.004	0.033
2.6	0.002	0.002	0.033
2.65	0.004	0.004	0.033
2.7	0.004	0.001	0.032
2.75	0.004	0.004	0.033
2.8	0.002	0.002	0.031
2.85	0.004	0.004	0.033
2.9	0.002	0.001	0.032
2.95	0.004	0.004	0.033
3	0.002	0.001	0.032
3.05	0.002	0.004	0.033
3.1	0.001	0.001	0.032
3.15	0.004	0.004	0.033
3.2	0.001	0.001	0.031
3.25	0.004	0.004	0.034
3.3	0.002	0.001	0.032
3.35	0.004	0.004	0.034
3.4	0.002	0.002	0.032
3.45	0.004	0.004	0.033
3.5	0.001	0.004	0.032
3.55	0.002	0.004	0.033
3.6	0.002	0.002	0.033
3.65	0.004	0.004	0.033
3.7	0.002	0.002	0.031
3.75	0.004	0.004	0.033
3.8	0.002	0.004	0.032
3.85	0.004	0.004	0.033
3.9	0.002	0.002	0.033
3.95	0.004	0.004	0.033
4	0.002	0.002	0.033
4.05	0.004	0.004	0.034
4.1	0.002	0.002	0.031
4.15	0.005	0.004	0.037
4.2	0.002	0.001	0.034

US EPA ARCHIVE DOCUMENT

4.25	0.004	0.004	0.035
4.3	0.002	0.002	0.033
4.35	0.005	0.004	0.035
4.4	0.005	0.002	0.034
4.45	0.005	0.004	0.035
4.5	0.001	0.001	0.034
4.55	0.004	0.004	0.035
4.6	0.002	0.002	0.035
4.65	0.005	0.004	0.035
4.7	0.002	0.002	0.034
4.75	0.005	0.004	0.035
4.8	0.002	0.002	0.034
4.85	0.005	0.004	0.035
4.9	0.001	0.001	0.034
4.95	0.004	0.004	0.035
5	0.004	0.002	0.035
5.05	0.005	0.004	0.035
5.1	0.002	0.001	0.035
5.15	0.005	0.004	0.038
5.2	0.005	0.004	0.038
5.25	0.005	0.004	0.039
5.3	0.002	0.002	0.037
5.35	0.005	0.004	0.038
5.4	0.002	0.001	0.037
5.45	0.004	0.004	0.039
5.5	0.004	0.001	0.037
5.55	0.004	0.004	0.038
5.6	0.004	0.002	0.038
5.65	0.004	0.004	0.038
5.7	0.002	0.002	0.038
5.75	0.005	0.004	0.038
5.8	0.002	0.004	0.037
5.85	0.004	0.004	0.038
5.9	0.002	0.004	0.037
5.95	0.004	0.004	0.039
6	0.002	0.001	0.038
6.05	0.004	0.004	0.039
6.1	0.002	0.002	0.037
6.15	0.005	0.005	0.04
6.2	0.004	0.002	0.038
6.25	0.004	0.004	0.039
6.3	0.004	0.002	0.037
6.35	0.005	0.004	0.039
6.4	0.004	0.002	0.038
6.45	0.005	0.004	0.04
6.5	0.004	0.002	0.038
6.55	0.005	0.004	0.04

US EPA ARCHIVE DOCUMENT

6.6	0.004	0.002	0.038
6.65	0.005	0.004	0.039
6.7	0.004	0.001	0.039
6.75	0.004	0.004	0.04
6.8	0.004	0.002	0.039
6.85	0.004	0.004	0.04
6.9	0.002	0.001	0.038
6.95	0.005	0.004	0.039
7	0.004	0.004	0.039
7.05	0.005	0.004	0.04
7.1	0.004	0.001	0.038
7.15	0.006	0.004	0.044
7.2	0.005	0.002	0.043
7.25	0.005	0.004	0.044
7.3	0.005	0.002	0.042
7.35	0.005	0.002	0.044
7.4	0.005	0.002	0.043
7.45	0.005	0.004	0.044
7.5	0.004	0.002	0.043
7.55	0.005	0.004	0.044
7.6	0.004	0.002	0.044
7.65	0.005	0.004	0.045
7.7	0.004	0.002	0.044
7.75	0.005	0.004	0.045
7.8	0.004	0.002	0.043
7.85	0.005	0.004	0.044
7.9	0.004	0.002	0.043
7.95	0.005	0.004	0.045
8	0.005	0.002	0.043
8.05	0.005	0.002	0.044
8.1	0.005	0.002	0.044
8.15	0.006	0.004	0.049
8.2	0.004	0.002	0.045
8.25	0.005	0.004	0.048
8.3	0.005	0.002	0.045
8.35	0.006	0.004	0.046
8.4	0.004	0.002	0.045
8.45	0.005	0.004	0.046
8.5	0.005	0.002	0.045
8.55	0.005	0.002	0.046
8.6	0.005	0.002	0.045
8.65	0.006	0.002	0.048
8.7	0.005	0.002	0.046
8.75	0.005	0.004	0.048
8.8	0.004	0.002	0.046
8.85	0.006	0.004	0.048
8.9	0.004	0.002	0.046

US EPA ARCHIVE DOCUMENT

8.95	0.005	0.002	0.048
9	0.005	0.002	0.046
9.05	0.006	0.004	0.048
9.1	0.004	0.002	0.046
9.15	0.007	0.004	0.05
9.2	0.005	0.002	0.049
9.25	0.007	0.004	0.05
9.3	0.005	0.001	0.049
9.35	0.006	0.004	0.05
9.4	0.005	0.002	0.049
9.45	0.006	0.004	0.05
9.5	0.005	0.002	0.05
9.55	0.006	0.004	0.051
9.6	0.005	0.001	0.049
9.65	0.006	0.004	0.051
9.7	0.005	0.001	0.049
9.75	0.006	0.002	0.051
9.8	0.005	0.001	0.05
9.85	0.006	0.004	0.051
9.9	0.005	0.002	0.05
9.95	0.006	0.004	0.051
10	0.006	0	0.049
10.05	0.006	0.004	0.051
10.1	0.005	0.001	0.05
10.15	0.006	0.004	0.051
10.2	0.005	0.002	0.05
10.25	0.007	0.005	0.054
10.3	0.005	0.004	0.051
10.35	0.006	0.004	0.053
10.4	0.006	0.002	0.053
10.45	0.006	0.004	0.053
10.5	0.006	0.001	0.053
10.55	0.006	0.004	0.053
10.6	0.005	0.002	0.051
10.65	0.006	0.004	0.053
10.7	0.005	0.002	0.053
10.75	0.007	0.004	0.054
10.8	0.005	0.001	0.053
10.85	0.006	0.004	0.054
10.9	0.005	0.004	0.053
10.95	0.006	0.004	0.054
11	0.005	0.002	0.051
11.05	0.006	0.004	0.054
11.1	0.005	0.004	0.051
11.15	0.006	0.004	0.054
11.2	0.005	0.002	0.053
11.25	0.007	0.004	0.057

US EPA ARCHIVE DOCUMENT

11.3	0.005	0.002	0.056
11.35	0.007	0.004	0.057
11.4	0.006	0.002	0.055
11.45	0.006	0.004	0.056
11.5	0.006	0.002	0.055
11.55	0.006	0.004	0.056
11.6	0.005	0.004	0.056
11.65	0.007	0.004	0.057
11.7	0.006	0.001	0.055
11.75	0.007	0.005	0.057
11.8	0.006	0.002	0.056
11.85	0.007	0.004	0.057
11.9	0.004	0.001	0.056
11.95	0.007	0.004	0.057
12	0.006	0.004	0.055
12.05	0.006	0.004	0.059
12.1	0.005	0.002	0.055
12.15	0.006	0.004	0.057
12.2	0.005	0.001	0.056
12.25	0.007	0.005	0.06
12.3	0.006	0.001	0.059
12.35	0.007	0.004	0.06
12.4	0.006	0.002	0.057
12.45	0.007	0.004	0.06
12.5	0.005	0.002	0.06
12.55	0.007	0.004	0.061
12.6	0.005	0.001	0.06
12.65	0.007	0.004	0.061
12.7	0.005	0.002	0.059
12.75	0.007	0.004	0.061
12.8	0.006	0.001	0.06
12.85	0.006	0.004	0.06
12.9	0.005	0.004	0.06
12.95	0.007	0.004	0.06
13	0.005	0.002	0.059
13.05	0.007	0.004	0.06
13.1	0.006	0.001	0.06
13.15	0.007	0.004	0.061
13.2	0.006	0.004	0.06
13.25	0.007	0.005	0.063
13.3	0.006	0.002	0.062
13.35	0.007	0.004	0.063
13.4	0.006	0.002	0.062
13.45	0.007	0.004	0.063
13.5	0.007	0.002	0.062
13.55	0.007	0.004	0.063
13.6	0.005	0.002	0.062

US EPA ARCHIVE DOCUMENT

13.65	0.007	0.004	0.063
13.7	0.007	0.001	0.061
13.75	0.007	0.004	0.063
13.8	0.006	0.002	0.062
13.85	0.007	0.004	0.063
13.9	0.006	0.002	0.062
13.95	0.007	0.004	0.063
14	0.006	0.001	0.062
14.05	0.007	0.004	0.063
14.1	0.007	0.002	0.062
14.15	0.007	0.005	0.065
14.2	0.006	0.004	0.061
14.25	0.009	0.005	0.067
14.3	0.006	0.002	0.066
14.35	0.007	0.004	0.067
14.4	0.006	0.002	0.065
14.45	0.007	0.004	0.066
14.5	0.006	0.002	0.065
14.55	0.007	0.004	0.066
14.6	0.005	0.004	0.065
14.65	0.006	0.004	0.067
14.7	0.006	0.004	0.066
14.75	0.007	0.004	0.067
14.8	0.006	0.002	0.066
14.85	0.007	0.004	0.067
14.9	0.006	0.001	0.066
14.95	0.007	0.004	0.067
15	0.006	0.004	0.066
15.05	0.007	0.004	0.066
15.1	0.006	0.004	0.065
15.15	0.009	0.005	0.067
15.2	0.006	0.002	0.066
15.25	0.009	0.005	0.07
15.3	0.007	0.002	0.067
15.35	0.007	0.004	0.07
15.4	0.006	0.004	0.068
15.45	0.007	0.004	0.07
15.5	0.006	0.002	0.068
15.55	0.007	0.004	0.07
15.6	0.006	0.002	0.068
15.65	0.007	0.004	0.07
15.7	0.006	0.001	0.067
15.75	0.007	0.004	0.07
15.8	0.006	0.004	0.068
15.85	0.007	0.004	0.07
15.9	0.006	0.001	0.067
15.95	0.007	0.004	0.071

US EPA ARCHIVE DOCUMENT

16	0.005	0.002	0.068
16.05	0.007	0.004	0.07
16.1	0.006	0.001	0.068
16.15	0.007	0.004	0.07
16.2	0.006	0.002	0.07
16.25	0.009	0.005	0.072
16.3	0.006	0.002	0.068
16.35	0.007	0.004	0.07
16.4	0.005	0.002	0.068
16.45	0.007	0.004	0.07
16.5	0.006	0.001	0.07
16.55	0.007	0.004	0.071
16.6	0.006	0.004	0.068
16.65	0.007	0.005	0.071
16.7	0.006	0.001	0.07
16.75	0.007	0.004	0.071
16.8	0.006	0.002	0.07
16.85	0.006	0.005	0.07
16.9	0.006	0.002	0.07
16.95	0.007	0.004	0.071
17	0.005	0.001	0.07
17.05	0.007	0.004	0.07
17.1	0.005	0.002	0.068
17.15	0.007	0.004	0.071
17.2	0.005	0.004	0.07
17.25	0.007	0.005	0.072
17.3	0.006	0.001	0.068
17.35	0.007	0.004	0.07
17.4	0.006	0.004	0.068
17.45	0.007	0.004	0.068
17.5	0.006	0.004	0.067
17.55	0.007	0.004	0.07
17.6	0.006	0.002	0.067
17.65	0.007	0.004	0.07
17.7	0.005	0.001	0.067
17.75	0.007	0.004	0.07
17.8	0.006	0.001	0.068
17.85	0.007	0.004	0.07
17.9	0.006	0.001	0.066
17.95	0.007	0.004	0.068
18	0.006	0.002	0.068
18.05	0.007	0.004	0.068
18.1	0.006	0.002	0.067
18.15	0.007	0.004	0.068
18.2	0.005	0.002	0.065
18.25	0.007	0.005	0.07
18.3	0.005	0.004	0.067

US EPA ARCHIVE DOCUMENT

18.35	0.007	0.004	0.067
18.4	0.006	0.002	0.065
18.45	0.007	0.004	0.067
18.5	0.005	0.004	0.067
18.55	0.006	0.004	0.067
18.6	0.005	0.002	0.065
18.65	0.007	0.004	0.067
18.7	0.005	0.001	0.065
18.75	0.007	0.004	0.067
18.8	0.006	0.002	0.065
18.85	0.007	0.004	0.067
18.9	0.005	0.002	0.065
18.95	0.007	0.004	0.067
19	0.006	0.002	0.066
19.05	0.006	0.004	0.067
19.1	0.005	0.001	0.065
19.15	0.007	0.004	0.067
19.2	0.005	0.004	0.063
19.25	0.007	0.004	0.067
19.3	0.006	0.002	0.059
19.35	0.006	0.004	0.061
19.4	0.006	0.002	0.059
19.45	0.006	0.004	0.061
19.5	0.005	0	0.059
19.55	0.006	0.002	0.061
19.6	0.006	0.002	0.059
19.65	0.006	0.004	0.061
19.7	0.006	0.002	0.06
19.75	0.006	0.004	0.061
19.8	0.006	0.001	0.06
19.85	0.007	0.004	0.061
19.9	0.005	0.001	0.06
19.95	0.007	0.004	0.06
20	0.005	0.001	0.06
20.05	0.006	0.004	0.061
20.1	0.006	0.002	0.06
20.15	0.007	0.004	0.061
20.2	0.006	0.002	0.06
20.25	0.007	0.005	0.061
20.3	0.005	0.002	0.056
20.35	0.007	0.004	0.057
20.4	0.006	0.002	0.055
20.45	0.007	0.004	0.056
20.5	0.005	0.002	0.056
20.55	0.007	0.004	0.057
20.6	0.005	0.002	0.056
20.65	0.007	0.004	0.056

US EPA ARCHIVE DOCUMENT

20.7	0.005	0.002	0.054
20.75	0.007	0.004	0.057
20.8	0.005	0.002	0.056
20.85	0.007	0.004	0.057
20.9	0.006	0.001	0.056
20.95	0.006	0.004	0.057
21	0.006	0.002	0.055
21.05	0.006	0.004	0.057
21.1	0.006	0.002	0.055
21.15	0.007	0.005	0.059
21.2	0.005	0.002	0.055
21.25	0.007	0.004	0.056
21.3	0.006	0.001	0.055
21.35	0.006	0.004	0.056
21.4	0.006	0.002	0.054
21.45	0.006	0.004	0.056
21.5	0.005	0.002	0.055
21.55	0.006	0.004	0.056
21.6	0.006	0.004	0.054
21.65	0.006	0.004	0.056
21.7	0.005	0.002	0.056
21.75	0.006	0.004	0.056
21.8	0.005	0.001	0.055
21.85	0.006	0.004	0.056
21.9	0.006	0.002	0.055
21.95	0.006	0.004	0.056
22	0.005	0.002	0.053
22.05	0.006	0.004	0.056
22.1	0.005	0.002	0.055
22.15	0.007	0.004	0.056
22.2	0.005	0.002	0.055
22.25	0.007	0.005	0.057
22.3	0.005	0.002	0.053
22.35	0.006	0.002	0.054
22.4	0.005	0.001	0.054
22.45	0.006	0.004	0.054
22.5	0.005	0.001	0.054
22.55	0.006	0.004	0.055
22.6	0.005	0.001	0.053
22.65	0.006	0.004	0.055
22.7	0.006	0.002	0.054
22.75	0.006	0.004	0.055
22.8	0.006	0	0.053
22.85	0.006	0.004	0.054
22.9	0.006	0.001	0.053
22.95	0.006	0.004	0.054
23	0.006	0.002	0.054

US EPA ARCHIVE DOCUMENT

23.05	0.006	0.004	0.055
23.1	0.006	0.002	0.053
23.15	0.007	0.005	0.055
23.2	0.005	0.002	0.054
23.25	0.006	0.004	0.054
23.3	0.005	0.002	0.051
23.35	0.006	0.004	0.054
23.4	0.005	0.002	0.053
23.45	0.006	0.004	0.054
23.5	0.005	0.002	0.053
23.55	0.006	0.004	0.054
23.6	0.005	0.002	0.051
23.65	0.006	0.004	0.054
23.7	0.005	0.001	0.053
23.75	0.006	0.004	0.054
23.8	0.005	0.002	0.053
23.85	0.006	0.004	0.054
23.9	0.006	0.002	0.053
23.95	0.006	0.004	0.054
24	0.005	0.002	0.053
24.05	0.006	0.004	0.053
24.1	0.005	0.001	0.053
24.15	0.007	0.005	0.054
24.2	0.005	0.001	0.051
24.25	0.006	0.004	0.053
24.3	0.006	0.001	0.05
24.35	0.007	0.004	0.053
24.4	0.004	0.001	0.051
24.45	0.006	0.004	0.053
24.5	0.005	0.001	0.05
24.55	0.006	0.004	0.053
24.6	0.004	0.001	0.05
24.65	0.006	0.004	0.053
24.7	0.006	0.002	0.051
24.75	0.006	0.002	0.053
24.8	0.005	0.001	0.051
24.85	0.006	0.004	0.053
24.9	0.004	0.002	0.053
24.95	0.006	0.004	0.054
25	0.005	0.002	0.051
25.05	0.006	0.004	0.053
25.1	0.005	0.001	0.05
25.15	0.007	0.004	0.053
25.2	0.006	0.002	0.049
25.25	0.006	0.004	0.051
25.3	0.005	0.004	0.05
25.35	0.006	0.004	0.05

US EPA ARCHIVE DOCUMENT

25.4	0.005	0.002	0.049
25.45	0.006	0.004	0.05
25.5	0.005	0.001	0.049
25.55	0.006	0.004	0.051
25.6	0.006	0.002	0.051
25.65	0.006	0.004	0.051
25.7	0.005	0.002	0.049
25.75	0.006	0.004	0.051
25.8	0.006	0.002	0.049
25.85	0.006	0.002	0.051
25.9	0.005	0.002	0.05
25.95	0.006	0.004	0.051
26	0.006	0.002	0.05
26.05	0.006	0.004	0.051
26.1	0.005	0.002	0.05
26.15	0.006	0.004	0.051
26.2	0.005	0.002	0.05
26.25	0.007	0.004	0.053
26.3	0.005	0.002	0.048
26.35	0.006	0.004	0.05
26.4	0.006	0.002	0.049
26.45	0.006	0.004	0.051
26.5	0.005	0.001	0.049
26.55	0.006	0.004	0.05
26.6	0.006	0.002	0.049
26.65	0.007	0.004	0.05
26.7	0.005	0.001	0.049
26.75	0.007	0.004	0.05
26.8	0.005	0.002	0.048
26.85	0.006	0.004	0.05
26.9	0.005	0.002	0.049
26.95	0.006	0.004	0.05
27	0.006	0.002	0.048
27.05	0.006	0.004	0.05
27.1	0.005	0.002	0.048
27.15	0.007	0.005	0.05
27.2	0.005	0.002	0.048
27.25	0.006	0.004	0.048
27.3	0.006	0.002	0.048
27.35	0.006	0.004	0.049
27.4	0.005	0.002	0.048
27.45	0.006	0.004	0.049
27.5	0.005	0.002	0.048
27.55	0.006	0.004	0.049
27.6	0.006	0.002	0.046
27.65	0.006	0.004	0.049
27.7	0.006	0.004	0.046

US EPA ARCHIVE DOCUMENT

27.75	0.006	0.004	0.049
27.8	0.005	0.002	0.048
27.85	0.006	0.004	0.049
27.9	0.005	0.002	0.046
27.95	0.006	0.004	0.049
28	0.005	0.002	0.046
28.05	0.006	0.002	0.049
28.1	0.005	0.002	0.046
28.15	0.007	0.004	0.05
28.2	0.005	0.002	0.045
28.25	0.006	0.005	0.048
28.3	0.006	0.002	0.046
28.35	0.006	0.002	0.048
28.4	0.005	0	0.046
28.45	0.006	0.004	0.048
28.5	0.006	0.002	0.048
28.55	0.006	0.004	0.048
28.6	0.005	0.002	0.046
28.65	0.006	0.004	0.048
28.7	0.006	0.002	0.046
28.75	0.006	0.004	0.048
28.8	0.006	0.002	0.046
28.85	0.006	0.004	0.048
28.9	0.004	0.004	0.046
28.95	0.006	0.004	0.048
29	0.005	0.002	0.046
29.05	0.006	0.004	0.048
29.1	0.005	0.002	0.045
29.15	0.007	0.005	0.048
29.2	0.005	0.004	0.045
29.25	0.006	0.005	0.046
29.3	0.005	0.002	0.046
29.35	0.006	0.004	0.046
29.4	0.004	0.002	0.045
29.45	0.006	0.004	0.046
29.5	0.005	0.001	0.045
29.55	0.006	0.004	0.046
29.6	0.005	0.004	0.046
29.65	0.006	0.004	0.046
29.7	0.006	0.004	0.045
29.75	0.006	0.004	0.046
29.8	0.005	0.002	0.045
29.85	0.006	0.004	0.046
29.9	0.006	0.002	0.044
29.95	0.006	0.004	0.046
30	0.005	0.002	0.046
30.05	0.006	0.002	0.046

US EPA ARCHIVE DOCUMENT

30.1	0.005	0.001	0.045
30.15	0.007	0.005	0.048
30.2	0.006	0.004	0.044
30.25	0.007	0.004	0.046
30.3	0.004	0.002	0.045
30.35	0.007	0.004	0.046
30.4	0.006	0.001	0.045
30.45	0.006	0.004	0.046
30.5	0.005	0.002	0.045
30.55	0.007	0.004	0.046
30.6	0.006	0.004	0.045
30.65	0.007	0.004	0.046
30.7	0.005	0.001	0.045
30.75	0.007	0.004	0.046
30.8	0.005	0.002	0.045
30.85	0.006	0.004	0.046
30.9	0.004	0.001	0.044
30.95	0.006	0.004	0.046
31	0.005	0.002	0.045
31.05	0.007	0.004	0.046
31.1	0.005	0.002	0.045
31.15	0.009	0.005	0.048
31.2	0.004	0.002	0.044
31.25	0.007	0.004	0.045
31.3	0.004	0.002	0.044
31.35	0.007	0.004	0.045
31.4	0.004	0.002	0.044
31.45	0.007	0.004	0.045
31.5	0.005	0.002	0.044
31.55	0.007	0.004	0.045
31.6	0.005	0.001	0.045
31.65	0.006	0.004	0.046
31.7	0.005	0.002	0.045
31.75	0.007	0.004	0.046
31.8	0.007	0.004	0.044
31.85	0.007	0.005	0.045
31.9	0.004	0.001	0.044
31.95	0.007	0.005	0.045
32	0.006	0.002	0.044
32.05	0.007	0.004	0.045
32.1	0.005	0.002	0.045
32.15	0.007	0.004	0.045
32.2	0.005	0.004	0.043
32.25	0.006	0.004	0.045
32.3	0.005	0.002	0.044
32.35	0.006	0.004	0.045
32.4	0.002	0.002	0.044

US EPA ARCHIVE DOCUMENT

32.45	0.009	0.004	0.046
32.5	0.006	0.002	0.045
32.55	0.009	0.005	0.046
32.6	0.005	0.002	0.045
32.65	0.007	0.004	0.046
32.7	0.007	0.002	0.045
32.75	0.007	0.004	0.046
32.8	0.005	0.002	0.044
32.85	0.007	0.004	0.046
32.9	0.007	0.004	0.044
32.95	0.007	0.004	0.046
33	0.005	0.001	0.045
33.05	0.007	0.004	0.046
33.1	0.005	0.002	0.044
33.15	0.007	0.004	0.046
33.2	0.005	0.002	0.045
33.25	0.007	0.004	0.046
33.3	0.006	0.001	0.045
33.35	0.007	0.004	0.046
33.4	0.007	0.002	0.045
33.45	0.007	0.004	0.046
33.5	0.006	0.002	0.045
33.55	0.009	0.005	0.048
33.6	0.006	0.002	0.046
33.65	0.007	0.004	0.048
33.7	0.005	0.001	0.045
33.75	0.007	0.004	0.048
33.8	0.005	0.001	0.048
33.85	0.007	0.004	0.048
33.9	0.005	0.002	0.046
33.95	0.006	0.004	0.048
34	0.004	0.002	0.046
34.05	0.006	0.004	0.048
34.1	0.005	0.004	0.046
34.15	0.007	0.004	0.048
34.2	0.006	0.001	0.046
34.25	0.006	0.004	0.048
34.3	0.005	0.002	0.045
34.35	0.006	0.004	0.048
34.4	0.004	0.002	0.045
34.45	0.006	0.004	0.048
34.5	0.004	0.002	0.046
34.55	0.006	0.004	0.048
34.6	0.005	0.002	0.046
34.65	0.007	0.004	0.049
34.7	0.006	0.001	0.044
34.75	0.006	0.004	0.045

US EPA ARCHIVE DOCUMENT

34.8	0.005	0.001	0.044
34.85	0.006	0.004	0.045
34.9	0.005	0.002	0.044
34.95	0.006	0.004	0.045
35	0.006	0.004	0.044
35.05	0.006	0.004	0.045
35.1	0.005	0.002	0.044
35.15	0.006	0.004	0.045
35.2	0.004	0.002	0.045
35.25	0.006	0.004	0.045
35.3	0.005	0.002	0.044
35.35	0.006	0.004	0.045
35.4	0.005	0.004	0.043
35.45	0.006	0.004	0.045
35.5	0.006	0.002	0.044
35.55	0.007	0.005	0.048
35.6	0.004	0.001	0.043
35.65	0.006	0.004	0.044
35.7	0.005	0.002	0.042
35.75	0.006	0.004	0.043
35.8	0.004	0.002	0.043
35.85	0.006	0.004	0.044
35.9	0.004	0.001	0.043
35.95	0.006	0.004	0.044
36	0.005	0.002	0.042
36.05	0.006	0.004	0.044
36.1	0.004	0.002	0.043
36.15	0.006	0.004	0.044
36.2	0.004	0.002	0.042
36.25	0.006	0.004	0.044
36.3	0.004	0.002	0.043
36.35	0.006	0.004	0.043
36.4	0.005	0.001	0.042
36.45	0.006	0.004	0.043
36.5	0.005	0.001	0.042
36.55	0.006	0.005	0.045
36.6	0.004	0.002	0.042
36.65	0.006	0.004	0.043
36.7	0.005	0.002	0.042
36.75	0.006	0.004	0.043
36.8	0.005	0.001	0.042
36.85	0.006	0.004	0.042
36.9	0.004	0.001	0.042
36.95	0.006	0.004	0.042
37	0.005	0.001	0.04
37.05	0.006	0.004	0.043
37.1	0.005	0.001	0.04

US EPA ARCHIVE DOCUMENT

37.15	0.006	0.005	0.043
37.2	0.005	0.004	0.04
37.25	0.006	0.004	0.043
37.3	0.005	0.001	0.042
37.35	0.006	0.004	0.043
37.4	0.005	0.002	0.042
37.45	0.006	0.005	0.043
37.5	0.005	0.002	0.04
37.55	0.006	0.004	0.042
37.6	0.005	0.002	0.04
37.65	0.006	0.004	0.04
37.7	0.004	0.002	0.039
37.75	0.006	0.004	0.04
37.8	0.005	0.002	0.04
37.85	0.006	0.004	0.042
37.9	0.004	0.004	0.04
37.95	0.006	0.004	0.042
38	0.005	0.001	0.039
38.05	0.006	0.004	0.042
38.1	0.002	0.001	0.039
38.15	0.006	0.004	0.042
38.2	0.004	0.002	0.039
38.25	0.006	0.004	0.042
38.3	0.005	0.002	0.039
38.35	0.006	0.004	0.042
38.4	0.005	0.002	0.04
38.45	0.006	0.005	0.042
38.5	0.005	0.002	0.04
38.55	0.006	0.005	0.042
38.6	0.005	0.004	0.04
38.65	0.005	0.004	0.042
38.7	0.004	0.002	0.042
38.75	0.006	0.004	0.042
38.8	0.005	0.004	0.04
38.85	0.006	0.004	0.042
38.9	0.005	0.002	0.042
38.95	0.006	0.004	0.042
39	0.004	0.001	0.04
39.05	0.006	0.004	0.042
39.1	0.004	0.002	0.04
39.15	0.006	0.004	0.042
39.2	0.004	0.004	0.04
39.25	0.006	0.004	0.042
39.3	0.005	0.002	0.042
39.35	0.006	0.004	0.042
39.4	0.005	0.004	0.042
39.45	0.006	0.005	0.043

US EPA ARCHIVE DOCUMENT

39.5	0.005	0.002	0.042
39.55	0.006	0.004	0.042
39.6	0.005	0.002	0.04
39.65	0.006	0.004	0.042
39.7	0.005	0.001	0.039
39.75	0.006	0.004	0.043
39.8	0.005	0.002	0.04
39.85	0.006	0.004	0.043
39.9	0.004	0.002	0.039
39.95	0.006	0.005	0.042
40	0.004	0.002	0.042
40.05	0.006	0.004	0.042
40.1	0.004	0.001	0.04
40.15	0.006	0.004	0.042
40.2	0.005	0.002	0.04
40.25	0.006	0.004	0.042
40.3	0.005	0.004	0.04
40.35	0.007	0.005	0.043
40.4	0.005	0.002	0.042
40.45	0.006	0.004	0.043
40.5	0.005	0.001	0.04
40.55	0.007	0.004	0.042
40.6	0.004	0.002	0.039
40.65	0.007	0.004	0.042
40.7	0.005	0.002	0.04
40.75	0.006	0.004	0.043
40.8	0.005	0.002	0.04
40.85	0.006	0.004	0.042
40.9	0.004	0.004	0.04
40.95	0.006	0.004	0.042
41	0.005	0.002	0.04
41.05	0.006	0.004	0.042
41.1	0.005	0.001	0.042
41.15	0.006	0.004	0.042
41.2	0.005	0.002	0.04
41.25	0.006	0.004	0.042
41.3	0.005	0.002	0.04
41.35	0.006	0.005	0.043
41.4	0.006	0.002	0.04
41.45	0.006	0.004	0.042
41.5	0.006	0.004	0.039
41.55	0.006	0.005	0.042
41.6	0.006	0.002	0.04
41.65	0.006	0.005	0.043
41.7	0.005	0.002	0.042
41.75	0.006	0.004	0.042
41.8	0.005	0.001	0.04

US EPA ARCHIVE DOCUMENT

41.85	0.006	0.004	0.042
41.9	0.005	0.002	0.04
41.95	0.006	0.004	0.042
42	0.006	0.002	0.04
42.05	0.006	0.004	0.043
42.1	0.005	0.002	0.04
42.15	0.006	0.004	0.042
42.2	0.005	0.002	0.042
42.25	0.006	0.004	0.042
42.3	0.006	0.002	0.042
42.35	0.007	0.005	0.043
42.4	0.005	0.002	0.042
42.45	0.006	0.004	0.042
42.5	0.006	0.002	0.039
42.55	0.006	0.004	0.042
42.6	0.006	0.002	0.04
42.65	0.006	0.004	0.04
42.7	0.005	0.001	0.039
42.75	0.006	0.004	0.042
42.8	0.005	0.002	0.04
42.85	0.006	0.004	0.042
42.9	0.005	0.002	0.04
42.95	0.006	0.004	0.042
43	0.005	0.002	0.04
43.05	0.006	0.004	0.042
43.1	0.005	0.002	0.04
43.15	0.006	0.004	0.042
43.2	0.006	0.001	0.04
43.25	0.006	0.005	0.042
43.3	0.005	0.004	0.04
43.35	0.007	0.005	0.043
43.4	0.005	0.002	0.04
43.45	0.006	0.004	0.04
43.5	0.005	0.002	0.04
43.55	0.006	0.004	0.042
43.6	0.006	0.004	0.039
43.65	0.007	0.004	0.042
43.7	0.005	0.002	0.04
43.75	0.006	0.004	0.042
43.8	0.006	0.002	0.039
43.85	0.006	0.004	0.04
43.9	0.005	0.002	0.04
43.95	0.006	0.004	0.042
44	0.006	0.002	0.04
44.05	0.007	0.005	0.04
44.1	0.005	0.001	0.04
44.15	0.007	0.005	0.042

US EPA ARCHIVE DOCUMENT

44.2	0.006	0.002	0.039
44.25	0.006	0.004	0.042
44.3	0.005	0.002	0.04
44.35	0.007	0.005	0.042
44.4	0.005	0.002	0.039
44.45	0.006	0.004	0.042
44.5	0.006	0.002	0.039
44.55	0.006	0.004	0.042
44.6	0.005	0.002	0.039
44.65	0.006	0.004	0.042
44.7	0.006	0.004	0.04
44.75	0.006	0.004	0.042
44.8	0.005	0.002	0.038
44.85	0.006	0.004	0.042
44.9	0.005	0.002	0.04
44.95	0.007	0.005	0.042
45	0.006	0.002	0.039
45.05	0.007	0.004	0.042
45.1	0.007	0.004	0.038
45.15	0.007	0.004	0.042
45.2	0.005	0.002	0.04
45.25	0.007	0.005	0.042
45.3	0.004	0.002	0.039
45.35	0.006	0.004	0.04
45.4	0.006	0.004	0.04
45.45	0.006	0.004	0.04
45.5	0.005	0.002	0.04
45.55	0.007	0.004	0.04
45.6	0.005	0.002	0.04
45.65	0.006	0.004	0.04
45.7	0.005	0.002	0.039
45.75	0.006	0.004	0.04
45.8	0.006	0.002	0.039
45.85	0.006	0.004	0.04
45.9	0.006	0.002	0.04
45.95	0.006	0.004	0.04
46	0.006	0.004	0.038
46.05	0.007	0.004	0.042
46.1	0.005	0.004	0.039
46.15	0.006	0.004	0.042
46.2	0.005	0.002	0.04
46.25	0.007	0.005	0.042
46.3	0.006	0.001	0.039
46.35	0.006	0.005	0.04
46.4	0.006	0.002	0.039
46.45	0.006	0.004	0.04
46.5	0.005	0.002	0.04

US EPA ARCHIVE DOCUMENT

46.55	0.006	0.004	0.04
46.6	0.005	0.002	0.039
46.65	0.006	0.004	0.04
46.7	0.005	0.002	0.039
46.75	0.006	0.005	0.04
46.8	0.005	0.001	0.039
46.85	0.006	0.004	0.04
46.9	0.005	0.001	0.039
46.95	0.006	0.005	0.04
47	0.006	0.002	0.039
47.05	0.006	0.005	0.04
47.1	0.006	0.002	0.039
47.15	0.006	0.005	0.04
47.2	0.005	0.002	0.04
47.25	0.007	0.005	0.042
47.3	0.005	0.004	0.038
47.35	0.006	0.004	0.04
47.4	0.005	0.002	0.039
47.45	0.006	0.004	0.04
47.5	0.005	0.002	0.038
47.55	0.006	0.004	0.04
47.6	0.005	0.004	0.039
47.65	0.006	0.004	0.04
47.7	0.005	0.002	0.039
47.75	0.006	0.004	0.04
47.8	0.006	0.002	0.039
47.85	0.007	0.004	0.04
47.9	0.005	0.002	0.038
47.95	0.007	0.004	0.042
48	0.005	0.004	0.039
48.05	0.007	0.005	0.04
48.1	0.005	0.002	0.039
48.15	0.006	0.004	0.04
48.2	0.005	0.004	0.038
48.25	0.007	0.005	0.042
48.3	0.005	0.004	0.039
48.35	0.006	0.004	0.04
48.4	0.006	0.004	0.039
48.45	0.006	0.005	0.04
48.5	0.005	0.002	0.039
48.55	0.006	0.004	0.04
48.6	0.005	0.002	0.04
48.65	0.006	0.004	0.04
48.7	0.006	0.002	0.039
48.75	0.007	0.004	0.042
48.8	0.005	0.002	0.039
48.85	0.006	0.005	0.04

US EPA ARCHIVE DOCUMENT

48.9	0.005	0.001	0.039
48.95	0.006	0.004	0.04
49	0.006	0.002	0.039
49.05	0.006	0.004	0.04
49.1	0.005	0.002	0.039
49.15	0.006	0.005	0.04
49.2	0.006	0.002	0.039
49.25	0.007	0.005	0.042
49.3	0.005	0.004	0.039
49.35	0.006	0.005	0.04
49.4	0.005	0.002	0.038
49.45	0.006	0.004	0.04
49.5	0.005	0.002	0.039
49.55	0.006	0.004	0.04
49.6	0.005	0.002	0.039
49.65	0.006	0.005	0.042
49.7	0.006	0.004	0.039
49.75	0.006	0.004	0.04
49.8	0.005	0.002	0.04
49.85	0.006	0.004	0.04
49.9	0.005	0.002	0.039
49.95	0.006	0.005	0.042
50	0.005	0.004	0.04
50.05	0.006	0.004	0.042
50.1	0.004	0.002	0.039
50.15	0.006	0.004	0.04
50.2	0.005	0.002	0.039
50.25	0.007	0.005	0.042
50.3	0.005	0.002	0.038
50.35	0.006	0.004	0.04
50.4	0.005	0.002	0.039
50.45	0.006	0.004	0.04
50.5	0.005	0.002	0.039
50.55	0.006	0.004	0.04
50.6	0.004	0.002	0.039
50.65	0.006	0.004	0.04
50.7	0.004	0.002	0.039
50.75	0.006	0.004	0.04
50.8	0.005	0.001	0.039
50.85	0.006	0.004	0.04
50.9	0.005	0.004	0.039
50.95	0.006	0.004	0.04
51	0.005	0.001	0.038
51.05	0.006	0.004	0.04
51.1	0.005	0.002	0.039
51.15	0.006	0.004	0.04
51.2	0.006	0.001	0.038

US EPA ARCHIVE DOCUMENT

51.25	0.006	0.005	0.04
51.3	0.005	0.002	0.039
51.35	0.006	0.004	0.04
51.4	0.005	0.002	0.038
51.45	0.006	0.004	0.039
51.5	0.005	0.004	0.039
51.55	0.005	0.004	0.039
51.6	0.005	0.002	0.038
51.65	0.006	0.004	0.04
51.7	0.005	0.002	0.039
51.75	0.006	0.004	0.04
51.8	0.005	0.002	0.038
51.85	0.005	0.004	0.04
51.9	0.005	0.002	0.039
51.95	0.006	0.004	0.04
52	0.005	0.002	0.039
52.05	0.006	0.004	0.039
52.1	0.004	0.004	0.039
52.15	0.006	0.004	0.039
52.2	0.005	0.002	0.038
52.25	0.007	0.005	0.042
52.3	0.005	0.001	0.038
52.35	0.006	0.004	0.04
52.4	0.004	0.002	0.039
52.45	0.006	0.004	0.04
52.5	0.005	0.002	0.039
52.55	0.006	0.004	0.039
52.6	0.005	0.004	0.038
52.65	0.006	0.005	0.04
52.7	0.005	0.001	0.038
52.75	0.006	0.004	0.04
52.8	0.005	0.004	0.039
52.85	0.006	0.005	0.04
52.9	0.005	0.002	0.038
52.95	0.006	0.004	0.039
53	0.005	0.002	0.038
53.05	0.006	0.004	0.04
53.1	0.006	0.002	0.038
53.15	0.006	0.004	0.04
53.2	0.004	0.004	0.039
53.25	0.006	0.005	0.04
53.3	0.005	0.004	0.038
53.35	0.006	0.004	0.039
53.4	0.005	0.002	0.038
53.45	0.006	0.004	0.039
53.5	0.004	0.002	0.039
53.55	0.006	0.004	0.039

US EPA ARCHIVE DOCUMENT

53.6	0.005	0.002	0.038
53.65	0.006	0.005	0.039
53.7	0.005	0.002	0.038
53.75	0.006	0.004	0.04
53.8	0.005	0.002	0.039
53.85	0.006	0.004	0.04
53.9	0.005	0.002	0.038
53.95	0.006	0.004	0.04
54	0.004	0.002	0.038
54.05	0.006	0.004	0.039
54.1	0.005	0.004	0.038
54.15	0.006	0.005	0.04
54.2	0.005	0.002	0.039
54.25	0.006	0.004	0.04
54.3	0.005	0.002	0.039
54.35	0.006	0.004	0.039
54.4	0.005	0.002	0.039
54.45	0.006	0.004	0.04
54.5	0.005	0.001	0.039
54.55	0.006	0.005	0.039
54.6	0.005	0.004	0.037
54.65	0.006	0.005	0.039
54.7	0.005	0.002	0.039
54.75	0.006	0.004	0.039
54.8	0.006	0.002	0.038
54.85	0.006	0.004	0.039
54.9	0.004	0.004	0.038
54.95	0.006	0.004	0.04
55	0.004	0.002	0.038
55.05	0.006	0.004	0.04
55.1	0.005	0.002	0.038
55.15	0.006	0.005	0.04
55.2	0.004	0.002	0.037
55.25	0.006	0.004	0.039
55.3	0.005	0.004	0.037
55.35	0.006	0.004	0.039
55.4	0.004	0.002	0.037
55.45	0.006	0.004	0.039
55.5	0.004	0.002	0.037
55.55	0.006	0.004	0.039
55.6	0.005	0.002	0.038
55.65	0.006	0.004	0.039
55.7	0.005	0.002	0.038
55.75	0.005	0.004	0.039
55.8	0.005	0.002	0.038
55.85	0.006	0.004	0.039
55.9	0.005	0.002	0.039

US EPA ARCHIVE DOCUMENT

55.95	0.006	0.004	0.039
56	0.005	0.004	0.038
56.05	0.006	0.005	0.039
56.1	0.005	0.002	0.038
56.15	0.006	0.005	0.042
56.2	0.006	0.004	0.039
56.25	0.006	0.004	0.042
56.3	0.005	0.004	0.039
56.35	0.006	0.004	0.04
56.4	0.005	0.002	0.039
56.45	0.006	0.005	0.04
56.5	0.005	0.002	0.04
56.55	0.006	0.004	0.042
56.6	0.006	0.002	0.039
56.65	0.006	0.005	0.042
56.7	0.004	0.004	0.039
56.75	0.006	0.005	0.042
56.8	0.005	0.002	0.039
56.85	0.006	0.004	0.042
56.9	0.006	0.004	0.04
56.95	0.006	0.004	0.042
57	0.005	0.002	0.04
57.05	0.006	0.005	0.042
57.1	0.005	0.004	0.04
57.15	0.007	0.005	0.043
57.2	0.005	0.004	0.039
57.25	0.006	0.005	0.04
57.3	0.005	0.002	0.039
57.35	0.006	0.005	0.04
57.4	0.006	0.004	0.039
57.45	0.006	0.005	0.04
57.5	0.006	0.004	0.039
57.55	0.006	0.004	0.04
57.6	0.005	0.004	0.039
57.65	0.006	0.005	0.04
57.7	0.006	0.002	0.039
57.75	0.006	0.005	0.04
57.8	0.005	0.002	0.039
57.85	0.006	0.005	0.04
57.9	0.005	0.002	0.04
57.95	0.006	0.005	0.04
58	0.005	0.004	0.038
58.05	0.006	0.005	0.04
58.1	0.005	0.004	0.039
58.15	0.007	0.005	0.042
58.2	0.006	0.004	0.037
58.25	0.006	0.005	0.039

US EPA ARCHIVE DOCUMENT

58.3	0.006	0.002	0.037
58.35	0.007	0.005	0.039
58.4	0.005	0.004	0.038
58.45	0.007	0.005	0.039
58.5	0.005	0.002	0.038
58.55	0.006	0.005	0.039
58.6	0.006	0.004	0.038
58.65	0.006	0.005	0.039
58.7	0.006	0.002	0.039
58.75	0.006	0.005	0.04
58.8	0.005	0.002	0.039
58.85	0.006	0.005	0.039
58.9	0.006	0.002	0.038
58.95	0.006	0.005	0.039
59	0.005	0.004	0.039
59.05	0.006	0.005	0.04
59.1	0.005	0.004	0.039
59.15	0.006	0.005	0.04
59.2	0.006	0.002	0.038
59.25	0.007	0.005	0.04
59.3	0.007	0.004	0.039
59.35	0.007	0.005	0.039
59.4	0.005	0.002	0.039
59.45	0.007	0.005	0.039
59.5	0.006	0.002	0.038
59.55	0.006	0.004	0.04
59.6	0.006	0.002	0.038
59.65	0.006	0.005	0.04
59.7	0.005	0.004	0.038
59.75	0.007	0.005	0.039
59.8	0.006	0.004	0.039
59.85	0.007	0.005	0.04
59.9	0.006	0.002	0.039
59.95	0.006	0.005	0.04
60	0.005	0.002	0.038
60.05	0.007	0.005	0.04
60.1	0.005	0.002	0.039
60.15	0.007	0.005	0.04
60.2	0.006	0.002	0.038
60.25	0.007	0.005	0.04
60.3	0.005	0.001	0.037
60.35	0.006	0.005	0.039
60.4	0.005	0.004	0.038
60.45	0.006	0.005	0.038
60.5	0.005	0.004	0.037
60.55	0.007	0.004	0.039
60.6	0.006	0.002	0.038

US EPA ARCHIVE DOCUMENT

60.65	0.007	0.006	0.039
60.7	0.006	0.004	0.038
60.75	0.006	0.006	0.039
60.8	0.005	0.002	0.039
60.85	0.007	0.005	0.039
60.9	0.006	0.004	0.038
60.95	0.007	0.005	0.038
61	0.004	0.002	0.037
61.05	0.006	0.006	0.039
61.1	0.005	0.004	0.038
61.15	0.007	0.006	0.039
61.2	0.005	0.004	0.037
61.25	0.006	0.005	0.039
61.3	0.005	0.002	0.037
61.35	0.006	0.005	0.039
61.4	0.005	0.005	0.037
61.45	0.006	0.005	0.038
61.5	0.004	0.002	0.037
61.55	0.006	0.005	0.038
61.6	0.006	0.002	0.038
61.65	0.006	0.005	0.038
61.7	0.006	0.004	0.038
61.75	0.006	0.005	0.038
61.8	0.006	0.001	0.038
61.85	0.006	0.005	0.038
61.9	0.005	0.002	0.037
61.95	0.006	0.005	0.038
62	0.005	0.002	0.037
62.05	0.006	0.005	0.039
62.1	0.006	0.001	0.037
62.15	0.007	0.006	0.044
62.2	0.004	0.001	0.043
62.25	0.006	0.005	0.043
62.3	0.006	0.002	0.043
62.35	0.006	0.005	0.043
62.4	0.005	0.002	0.043
62.45	0.006	0.005	0.043
62.5	0.005	0.002	0.043
62.55	0.006	0.005	0.043
62.6	0.006	0.004	0.042
62.65	0.006	0.005	0.043
62.7	0.005	0.005	0.043
62.75	0.006	0.005	0.043
62.8	0.005	0.005	0.043
62.85	0.006	0.005	0.043
62.9	0.006	0.004	0.043
62.95	0.006	0.005	0.043

US EPA ARCHIVE DOCUMENT

63	0.005	0.004	0.042
63.05	0.006	0.005	0.043
63.1	0.006	0.004	0.042
63.15	0.007	0.006	0.051
63.2	0.006	0.004	0.044
63.25	0.007	0.005	0.046
63.3	0.006	0.002	0.046
63.35	0.006	0.005	0.046
63.4	0.005	0.004	0.045
63.45	0.006	0.005	0.046
63.5	0.005	0.004	0.045
63.55	0.006	0.005	0.046
63.6	0.005	0.004	0.045
63.65	0.007	0.005	0.046
63.7	0.006	0.004	0.044
63.75	0.007	0.005	0.045
63.8	0.006	0.004	0.044
63.85	0.006	0.005	0.045
63.9	0.005	0.002	0.045
63.95	0.007	0.005	0.046
64	0.005	0.002	0.044
64.05	0.007	0.005	0.045
64.1	0.006	0.002	0.044
64.15	0.007	0.005	0.045
64.2	0.005	0.004	0.04
64.25	0.006	0.005	0.042
64.3	0.005	0.002	0.04
64.35	0.007	0.005	0.042
64.4	0.006	0.002	0.04
64.45	0.007	0.005	0.042
64.5	0.006	0.004	0.04
64.55	0.007	0.006	0.042
64.6	0.005	0.002	0.04
64.65	0.006	0.005	0.043
64.7	0.004	0.004	0.04
64.75	0.006	0.005	0.042
64.8	0.005	0.002	0.04
64.85	0.006	0.005	0.042
64.9	0.005	0.004	0.039
64.95	0.007	0.005	0.042
65	0.005	0.005	0.04
65.05	0.006	0.005	0.042
65.1	0.005	0.004	0.042
65.15	0.007	0.006	0.042
65.2	0.006	0.002	0.038
65.25	0.007	0.005	0.038
65.3	0.005	0.005	0.037

US EPA ARCHIVE DOCUMENT

65.35	0.007	0.005	0.039
65.4	0.006	0.004	0.038
65.45	0.007	0.005	0.039
65.5	0.006	0.002	0.037
65.55	0.007	0.005	0.039
65.6	0.006	0.004	0.037
65.65	0.006	0.005	0.039
65.7	0.005	0.002	0.038
65.75	0.006	0.005	0.039
65.8	0.006	0.004	0.038
65.85	0.006	0.005	0.039
65.9	0.005	0.004	0.038
65.95	0.007	0.005	0.039
66	0.006	0.004	0.037
66.05	0.006	0.005	0.039
66.1	0.006	0.004	0.038
66.15	0.006	0.005	0.039
66.2	0.005	0.004	0.038
66.25	0.007	0.005	0.039
66.3	0.006	0.004	0.038
66.35	0.007	0.005	0.039
66.4	0.005	0.004	0.037
66.45	0.006	0.005	0.039
66.5	0.005	0.004	0.038
66.55	0.006	0.005	0.038
66.6	0.006	0.002	0.038
66.65	0.006	0.005	0.039
66.7	0.005	0.002	0.037
66.75	0.005	0.005	0.038
66.8	0.005	0.004	0.037
66.85	0.006	0.004	0.038
66.9	0.006	0.004	0.037
66.95	0.006	0.005	0.039
67	0.005	0.002	0.037
67.05	0.006	0.005	0.039
67.1	0.006	0.002	0.038
67.15	0.006	0.005	0.039
67.2	0.005	0.002	0.038
67.25	0.006	0.005	0.039
67.3	0.005	0.004	0.037
67.35	0.006	0.005	0.039
67.4	0.006	0.004	0.037
67.45	0.006	0.005	0.049
67.5	0.005	0.004	0.046
67.55	0.006	0.004	0.048
67.6	0.006	0.004	0.046
67.65	0.006	0.005	0.048

US EPA ARCHIVE DOCUMENT

67.7	0.004	0.004	0.046
67.75	0.006	0.004	0.048
67.8	0.005	0.002	0.045
67.85	0.006	0.004	0.048
67.9	0.005	0.004	0.048
67.95	0.006	0.005	0.048
68	0.005	0.002	0.046
68.05	0.006	0.005	0.048
68.1	0.005	0.002	0.046
68.15	0.006	0.005	0.048
68.2	0.005	0.002	0.048
68.25	0.006	0.004	0.048
68.3	0.006	0.002	0.048
68.35	0.006	0.005	0.048
68.4	0.005	0.002	0.04
68.45	0.006	0.005	0.042
68.5	0.004	0.004	0.039
68.55	0.005	0.005	0.04
68.6	0.005	0.004	0.038
68.65	0.006	0.005	0.04
68.7	0.004	0.004	0.039
68.75	0.006	0.004	0.04
68.8	0.004	0.004	0.04
68.85	0.006	0.005	0.04
68.9	0.004	0.002	0.039
68.95	0.006	0.005	0.04
69	0.005	0.002	0.039
69.05	0.006	0.005	0.04
69.1	0.005	0.002	0.039
69.15	0.006	0.005	0.04
69.2	0.005	0.004	0.038
69.25	0.005	0.005	0.039
69.3	0.004	0.004	0.038
69.35	0.006	0.005	0.043
69.4	0.005	0.004	0.039
69.45	0.006	0.005	0.04
69.5	0.005	0.004	0.039
69.55	0.006	0.004	0.04
69.6	0.005	0.002	0.038
69.65	0.006	0.005	0.04
69.7	0.005	0.004	0.039
69.75	0.006	0.005	0.04
69.8	0.005	0.002	0.038
69.85	0.006	0.005	0.04
69.9	0.005	0.004	0.038
69.95	0.006	0.005	0.04
70	0.005	0.005	0.039

US EPA ARCHIVE DOCUMENT

70.05	0.006	0.005	0.04
70.1	0.005	0.004	0.039
70.15	0.006	0.005	0.039
70.2	0.005	0.004	0.038
70.25	0.005	0.005	0.039
70.3	0.004	0.002	0.039
70.35	0.006	0.005	0.042
70.4	0.005	0.004	0.039
70.45	0.006	0.004	0.04
70.5	0.004	0.004	0.039
70.55	0.006	0.005	0.04
70.6	0.005	0.004	0.039
70.65	0.006	0.005	0.04
70.7	0.004	0.002	0.039
70.75	0.006	0.004	0.04
70.8	0.004	0.002	0.039
70.85	0.005	0.005	0.04
70.9	0.005	0.004	0.039
70.95	0.005	0.004	0.04
71	0.004	0.004	0.039
71.05	0.005	0.005	0.04
71.1	0.005	0.004	0.038
71.15	0.006	0.005	0.04
71.2	0.005	0.004	0.039
71.25	0.006	0.005	0.04
71.3	0.005	0.004	0.039
71.35	0.007	0.005	0.043
71.4	0.004	0.004	0.038
71.45	0.007	0.005	0.039
71.5	0.005	0.004	0.038
71.55	0.006	0.005	0.04
71.6	0.005	0.002	0.037
71.65	0.006	0.005	0.039
71.7	0.005	0.002	0.038
71.75	0.006	0.004	0.04
71.8	0.005	0.002	0.038
71.85	0.006	0.005	0.039
71.9	0.005	0.004	0.038
71.95	0.006	0.005	0.039
72	0.004	0.004	0.039
72.05	0.006	0.005	0.039
72.1	0.005	0.002	0.037
72.15	0.006	0.005	0.039
72.2	0.005	0.004	0.038
72.25	0.006	0.005	0.039
72.3	0.005	0.002	0.038
72.35	0.006	0.005	0.039

US EPA ARCHIVE DOCUMENT

72.4	0.004	0.002	0.039
72.45	0.006	0.006	0.048
72.5	0.004	0.002	0.044
72.55	0.006	0.005	0.048
72.6	0.004	0.004	0.045
72.65	0.006	0.005	0.046
72.7	0.004	0.004	0.045
72.75	0.006	0.005	0.046
72.8	0.004	0.004	0.045
72.85	0.006	0.005	0.046
72.9	0.004	0.004	0.044
72.95	0.006	0.005	0.045
73	0.004	0.002	0.045
73.05	0.006	0.005	0.046
73.1	0.004	0.004	0.044
73.15	0.006	0.005	0.046
73.2	0.004	0.002	0.045
73.25	0.006	0.006	0.046
73.3	0.005	0.004	0.038
73.35	0.006	0.005	0.039
73.4	0.005	0.004	0.038
73.45	0.005	0.005	0.039
73.5	0.005	0.004	0.038
73.55	0.006	0.005	0.039
73.6	0.005	0.004	0.037
73.65	0.006	0.005	0.039
73.7	0.005	0.002	0.038
73.75	0.006	0.005	0.038
73.8	0.004	0.004	0.037
73.85	0.006	0.005	0.039
73.9	0.005	0.002	0.038
73.95	0.006	0.005	0.039
74	0.004	0.004	0.038
74.05	0.006	0.005	0.039
74.1	0.005	0.004	0.038
74.15	0.005	0.005	0.039
74.2	0.005	0.004	0.037
74.25	0.006	0.005	0.042
74.3	0.004	0.004	0.035
74.35	0.006	0.005	0.038
74.4	0.005	0.004	0.037
74.45	0.006	0.005	0.038
74.5	0.005	0.004	0.037
74.55	0.005	0.005	0.038
74.6	0.004	0.002	0.035
74.65	0.005	0.005	0.038
74.7	0.005	0.005	0.037

US EPA ARCHIVE DOCUMENT

74.75	0.006	0.005	0.038
74.8	0.004	0.002	0.037
74.85	0.005	0.005	0.038
74.9	0.005	0.005	0.037
74.95	0.005	0.005	0.038
75	0.005	0.004	0.037
75.05	0.006	0.005	0.038
75.1	0.005	0.004	0.035
75.15	0.005	0.005	0.038
75.2	0.005	0.004	0.037
75.25	0.006	0.004	0.038
75.3	0.005	0.004	0.037
75.35	0.006	0.005	0.04
75.4	0.005	0.004	0.037
75.45	0.006	0.005	0.039
75.5	0.005	0.002	0.038
75.55	0.006	0.005	0.039
75.6	0.004	0.002	0.037
75.65	0.006	0.005	0.039
75.7	0.005	0.004	0.038
75.75	0.006	0.005	0.039
75.8	0.005	0.002	0.038
75.85	0.006	0.005	0.039
75.9	0.005	0.004	0.038
75.95	0.006	0.005	0.039
76	0.004	0.004	0.038
76.05	0.006	0.005	0.039
76.1	0.005	0.004	0.038
76.15	0.006	0.005	0.039
76.2	0.005	0.002	0.038
76.25	0.006	0.005	0.039
76.3	0.006	0.002	0.038
76.35	0.006	0.005	0.039
76.4	0.005	0.002	0.037
76.45	0.006	0.005	0.038
76.5	0.004	0.004	0.035
76.55	0.006	0.004	0.038
76.6	0.002	0.004	0.035
76.65	0.006	0.005	0.038
76.7	0.005	0.002	0.037
76.75	0.006	0.005	0.037
76.8	0.004	0.004	0.035
76.85	0.006	0.005	0.037
76.9	0.004	0.002	0.037
76.95	0.006	0.005	0.038
77	0.005	0.004	0.037
77.05	0.006	0.005	0.038

US EPA ARCHIVE DOCUMENT

77.1	0.005	0.004	0.035
77.15	0.006	0.005	0.038
77.2	0.005	0.004	0.037
77.25	0.006	0.005	0.038
77.3	0.005	0.004	0.035
77.35	0.006	0.004	0.037
77.4	0.005	0.002	0.037
77.45	0.006	0.005	0.037
77.5	0.005	0.002	0.035
77.55	0.006	0.005	0.038
77.6	0.004	0.002	0.037
77.65	0.006	0.004	0.037
77.7	0.005	0.004	0.037
77.75	0.006	0.005	0.037
77.8	0.004	0.002	0.037
77.85	0.005	0.005	0.038
77.9	0.004	0.004	0.037
77.95	0.005	0.005	0.038
78	0.005	0.002	0.038
78.05	0.005	0.005	0.038
78.1	0.005	0.002	0.035
78.15	0.005	0.005	0.038
78.2	0.004	0.004	0.037
78.25	0.006	0.006	0.039
78.3	0.004	0.004	0.031
78.35	0.006	0.005	0.033
78.4	0.005	0.004	0.031
78.45	0.006	0.005	0.032
78.5	0.005	0.004	0.032
78.55	0.006	0.005	0.032
78.6	0.005	0.004	0.032
78.65	0.006	0.005	0.032
78.7	0.006	0.004	0.029
78.75	0.006	0.005	0.031
78.8	0.004	0.004	0.028
78.85	0.006	0.005	0.031
78.9	0.006	0.002	0.029
78.95	0.006	0.005	0.031
79	0.005	0.002	0.028
79.05	0.006	0.005	0.029
79.1	0.005	0.002	0.029
79.15	0.005	0.005	0.029
79.2	0.005	0.004	0.028
79.25	0.006	0.006	0.031
79.3	0.005	0.004	0.021
79.35	0.005	0.005	0.023
79.4	0.004	0.002	0.021

US EPA ARCHIVE DOCUMENT

79.45	0.005	0.005	0.022
79.5	0.005	0.002	0.022
79.55	0.006	0.005	0.023
79.6	0.004	0.002	0.021
79.65	0.007	0.005	0.023
79.7	0.004	0.004	0.021
79.75	0.007	0.004	0.023
79.8	0.005	0.002	0.021
79.85	0.005	0.005	0.022
79.9	0.002	0.004	0.022
79.95	0.005	0.005	0.023
80	0.004	0.004	0.021
80.05	0.006	0.005	0.023
80.1	0.004	0.004	0.021
80.15	0.006	0.005	0.023
80.2	0.004	0.004	0.021
80.25	0.007	0.005	0.023
80.3	0.004	0.002	0.017
80.35	0.005	0.005	0.018
80.4	0.004	0.004	0.017
80.45	0.005	0.005	0.018
80.5	0.004	0.004	0.016
80.55	0.005	0.005	0.017
80.6	0.004	0.002	0.017
80.65	0.006	0.005	0.018
80.7	0.005	0.004	0.017
80.75	0.007	0.005	0.018
80.8	0.004	0.004	0.016
80.85	0.005	0.004	0.018
80.9	0.004	0.002	0.016
80.95	0.005	0.005	0.018
81	0.004	0.002	0.016
81.05	0.006	0.005	0.018
81.1	0.005	0.002	0.016
81.15	0.005	0.005	0.018
81.2	0.005	0.002	0.017
81.25	0.006	0.005	0.018
81.3	0.004	0.004	0.012
81.35	0.006	0.005	0.013
81.4	0.004	0.002	0.012
81.45	0.006	0.005	0.013
81.5	0.004	0.004	0.013
81.55	0.006	0.005	0.013
81.6	0.004	0.002	0.011
81.65	0.006	0.005	0.013
81.7	0.005	0.001	0.012
81.75	0.005	0.005	0.013

US EPA ARCHIVE DOCUMENT

81.8	0.005	0.002	0.01
81.85	0.005	0.005	0.013
81.9	0.005	0.002	0.012
81.95	0.006	0.005	0.015
82	0.005	0.005	0.011
82.05	0.006	0.006	0.016
82.1	0.004	0.004	0.01
82.15	0.006	0.005	0.011
82.2	0.005	0.002	0.01
82.25	0.006	0.005	0.011
82.3	0.004	0.004	0.009
82.35	0.006	0.005	0.011
82.4	0.005	0.004	0.01
82.45	0.006	0.005	0.011
82.5	0.006	0.004	0.01
82.55	0.006	0.004	0.011
82.6	0.005	0.004	0.009
82.65	0.006	0.005	0.011
82.7	0.004	0.004	0.009
82.75	0.006	0.005	0.011
82.8	0.004	0.004	0.01
82.85	0.005	0.005	0.012
82.9	0.004	0.002	0.011
82.95	0.005	0.005	0.013
83	0.005	0.004	0.013
83.05	0.006	0.005	0.015
83.1	0.004	0.001	0.006
83.15	0.005	0.005	0.007
83.2	0.004	0.002	0.005
83.25	0.006	0.005	0.007
83.3	0.005	0.001	0.005
83.35	0.006	0.005	0.007
83.4	0.004	0.002	0.006
83.45	0.006	0.004	0.007
83.5	0.004	0.004	0.006
83.55	0.005	0.005	0.007
83.6	0.005	0.004	0.005
83.65	0.006	0.005	0.007
83.7	0.004	0.002	0.006
83.75	0.005	0.005	0.007
83.8	0.005	0.004	0.006
83.85	0.006	0.004	0.007
83.9	0.005	0.004	0.007
83.95	0.006	0.005	0.009
84	0.004	0.004	0.006
84.05	0.006	0.005	0.007
84.1	0.004	0.004	0.002

US EPA ARCHIVE DOCUMENT

84.15	0.006	0.004	0.004
84.2	0.004	0.004	0
84.25	0.006	0.005	0.004
84.3	0.002	0.002	0.002
84.35	0.006	0.005	0.002
84.4	0.002	0.004	0.001
84.45	0.006	0.004	0.002
84.5	0.002	0.004	0.001
84.55	0.006	0.005	0.002
84.6	0.002	0.002	0.001
84.65	0.006	0.005	0.004
84.7	0.004	0.002	0.001
84.75	0.006	0.005	0.004
84.8	0.002	0.002	0

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :8806.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.005	0.007
0.1	0.002	0.004	0.006
0.15	0.002	0.005	0.007
0.2	0.001	0.002	0.007
0.25	0.002	0.005	0.007
0.3	0.001	0.004	0.007
0.35	0.002	0.005	0.007
0.4	0.001	0.002	0.007
0.45	0.002	0.005	0.009
0.5	0.001	0.004	0.007
0.55	0.002	0.005	0.007
0.6	0.002	0.004	0.006
0.65	0.002	0.005	0.009
0.7	0.002	0.004	0.007
0.75	0.002	0.005	0.007
0.8	0.001	0.004	0.007
0.85	0.002	0.004	0.007
0.9	0.002	0.004	0.006
0.95	0.002	0.005	0.007
1	0.002	0.002	0.007
1.05	0.004	0.005	0.007
1.1	0.001	0.005	0.006
1.15	0.004	0.005	0.007
1.2	0.001	0.004	0.007
1.25	0.004	0.006	0.009
1.3	0.002	0.004	0.006
1.35	0.004	0.005	0.007
1.4	0.001	0.004	0.006
1.45	0.002	0.005	0.007
1.5	0.002	0.004	0.006
1.55	0.002	0.005	0.007
1.6	0.002	0.002	0.006
1.65	0.004	0.005	0.007
1.7	0.002	0.002	0.007
1.75	0.002	0.005	0.007
1.8	0.001	0.005	0.006
1.85	0.002	0.005	0.007

US EPA ARCHIVE DOCUMENT

1.9	0.001	0.004	0.006
1.95	0.004	0.005	0.007
2	0.002	0.004	0.006
2.05	0.002	0.005	0.007
2.1	0.002	0.004	0.007
2.15	0.004	0.005	0.007
2.2	0.001	0.005	0.007
2.25	0.004	0.005	0.009
2.3	0.002	0.004	0.007
2.35	0.002	0.005	0.007
2.4	0.002	0.005	0.007
2.45	0.002	0.005	0.007
2.5	0.002	0.002	0.007
2.55	0.004	0.005	0.007
2.6	0.002	0.004	0.007
2.65	0.004	0.005	0.009
2.7	0.002	0.005	0.007
2.75	0.004	0.005	0.009
2.8	0.002	0.005	0.007
2.85	0.002	0.005	0.009
2.9	0.002	0.004	0.007
2.95	0.004	0.005	0.009
3	0.002	0.002	0.007
3.05	0.002	0.005	0.009
3.1	0.002	0.004	0.007
3.15	0.002	0.005	0.009
3.2	0.001	0.004	0.006
3.25	0.004	0.006	0.01
3.3	0.002	0.005	0.007
3.35	0.002	0.005	0.01
3.4	0.002	0.004	0.007
3.45	0.002	0.005	0.009
3.5	0.001	0.004	0.009
3.55	0.002	0.005	0.009
3.6	0.001	0.004	0.009
3.65	0.002	0.005	0.009
3.7	0	0.005	0.007
3.75	0.002	0.005	0.009
3.8	0.002	0.004	0.009
3.85	0.002	0.005	0.009
3.9	0.002	0.004	0.007
3.95	0.002	0.005	0.009
4	0.001	0.005	0.007
4.05	0.002	0.005	0.009
4.1	0.001	0.005	0.007
4.15	0.002	0.005	0.009
4.2	0.001	0.004	0.007

US EPA ARCHIVE DOCUMENT

4.25	0.004	0.006	0.01
4.3	0.001	0.005	0.007
4.35	0.004	0.005	0.007
4.4	0.002	0.005	0.006
4.45	0.004	0.005	0.007
4.5	0.002	0.004	0.006
4.55	0.004	0.005	0.007
4.6	0.002	0.004	0.006
4.65	0.004	0.005	0.007
4.7	0.001	0.005	0.006
4.75	0.004	0.005	0.007
4.8	0.002	0.004	0.006
4.85	0.004	0.005	0.007
4.9	0.002	0.004	0.006
4.95	0.004	0.005	0.007
5	0.002	0.004	0.006
5.05	0.002	0.005	0.007
5.1	0.002	0.005	0.006
5.15	0.005	0.006	0.009
5.2	0.002	0.004	0.007
5.25	0.005	0.005	0.009
5.3	0.004	0.002	0.006
5.35	0.005	0.005	0.009
5.4	0.002	0.004	0.006
5.45	0.005	0.005	0.009
5.5	0.002	0.004	0.006
5.55	0.005	0.005	0.007
5.6	0.002	0.004	0.006
5.65	0.005	0.005	0.009
5.7	0.005	0.005	0.006
5.75	0.005	0.005	0.007
5.8	0.004	0.002	0.006
5.85	0.004	0.005	0.007
5.9	0.002	0.004	0.007
5.95	0.005	0.005	0.007
6	0.002	0.004	0.007
6.05	0.005	0.005	0.007
6.1	0.002	0.004	0.006
6.15	0.005	0.005	0.007
6.2	0.004	0.004	0.004
6.25	0.004	0.005	0.005
6.3	0.002	0.004	0.004
6.35	0.004	0.005	0.005
6.4	0.002	0.004	0.004
6.45	0.004	0.005	0.005
6.5	0.002	0.004	0.004
6.55	0.004	0.005	0.005

US EPA ARCHIVE DOCUMENT

6.6	0.002	0.004	0.004
6.65	0.004	0.005	0.005
6.7	0.002	0.002	0.004
6.75	0.004	0.005	0.005
6.8	0.002	0.004	0.005
6.85	0.004	0.005	0.005
6.9	0.004	0.004	0.005
6.95	0.004	0.005	0.005
7	0.002	0.004	0.004
7.05	0.004	0.005	0.005
7.1	0.002	0.004	0.004
7.15	0.005	0.005	0.006
7.2	0.002	0.002	0.004
7.25	0.004	0.005	0.004
7.3	0.004	0.004	0.004
7.35	0.004	0.005	0.005
7.4	0.004	0.004	0.004
7.45	0.004	0.004	0.004
7.5	0.002	0.004	0.004
7.55	0.004	0.005	0.004
7.6	0.004	0.004	0.004
7.65	0.004	0.005	0.005
7.7	0.004	0.002	0.004
7.75	0.004	0.005	0.005
7.8	0.002	0.004	0.004
7.85	0.004	0.005	0.004
7.9	0.002	0.002	0.004
7.95	0.004	0.005	0.005
8	0.002	0.002	0.004
8.05	0.004	0.005	0.005
8.1	0.002	0.004	0.004
8.15	0.005	0.005	0.005
8.2	0.004	0.004	0.002
8.25	0.005	0.005	0.004
8.3	0.002	0.002	0.002
8.35	0.005	0.004	0.004
8.4	0.004	0.004	0.002
8.45	0.004	0.004	0.004
8.5	0.002	0.004	0.002
8.55	0.004	0.004	0.004
8.6	0.002	0.004	0.002
8.65	0.004	0.005	0.004
8.7	0.004	0.002	0.001
8.75	0.004	0.005	0.004
8.8	0.004	0.002	0.002
8.85	0.004	0.005	0.004
8.9	0.004	0.002	0.002

US EPA ARCHIVE DOCUMENT

8.95	0.005	0.004	0.004
9	0.004	0.002	0.004
9.05	0.005	0.004	0.004
9.1	0.004	0.004	0.002
9.15	0.005	0.005	0.004
9.2	0.004	0.002	0.002
9.25	0.005	0.004	0.004
9.3	0.004	0.004	0.002
9.35	0.005	0.004	0.004
9.4	0.004	0.002	0.002
9.45	0.005	0.004	0.004
9.5	0.002	0.004	0.002
9.55	0.005	0.005	0.004
9.6	0.004	0.004	0.002
9.65	0.005	0.004	0.004
9.7	0.002	0.004	0.002
9.75	0.005	0.004	0.004
9.8	0.004	0.004	0.002
9.85	0.005	0.004	0.004
9.9	0.002	0.004	0.002
9.95	0.005	0.004	0.004
10	0.004	0.004	0.002
10.05	0.005	0.005	0.004
10.1	0.004	0.004	0.004
10.15	0.005	0.005	0.004
10.2	0.004	0.002	0.002
10.25	0.005	0.004	0.004
10.3	0.002	0.002	0.002
10.35	0.005	0.004	0.004
10.4	0.004	0.004	0.002
10.45	0.005	0.004	0.002
10.5	0.004	0.004	0.002
10.55	0.005	0.004	0.002
10.6	0.004	0.004	0.002
10.65	0.004	0.004	0.004
10.7	0.002	0.004	0.002
10.75	0.005	0.005	0.004
10.8	0.004	0.004	0.002
10.85	0.005	0.004	0.004
10.9	0.004	0.002	0.001
10.95	0.005	0.004	0.002
11	0.002	0.004	0.002
11.05	0.005	0.005	0.004
11.1	0.002	0.004	0.002
11.15	0.006	0.005	0.005
11.2	0.005	0.004	0.001
11.25	0.005	0.004	0.002

US EPA ARCHIVE DOCUMENT

11.3	0.004	0.004	0.001
11.35	0.005	0.004	0.002
11.4	0.004	0.004	0.001
11.45	0.005	0.004	0.002
11.5	0.004	0.004	0.001
11.55	0.005	0.004	0.002
11.6	0.004	0.004	0.001
11.65	0.005	0.004	0.002
11.7	0.004	0.004	0.001
11.75	0.005	0.004	0.002
11.8	0.004	0.004	0.001
11.85	0.005	0.004	0.002
11.9	0.004	0.002	0.001
11.95	0.006	0.005	0.005
12	0.005	0.002	0.002
12.05	0.005	0.004	0.004
12.1	0.005	0.004	0.002
12.15	0.005	0.004	0.004
12.2	0.005	0.004	0.002
12.25	0.005	0.004	0.004
12.3	0.004	0.002	0.002
12.35	0.005	0.004	0.004
12.4	0.005	0.002	0.001
12.45	0.005	0.004	0.004
12.5	0.004	0.004	0.002
12.55	0.005	0.004	0.004
12.6	0.005	0.002	0.002
12.65	0.005	0.004	0.002
12.7	0.004	0.004	0.001
12.75	0.005	0.005	0.004
12.8	0.005	0.002	0.002
12.85	0.005	0.004	0.002
12.9	0.004	0.004	0.002
12.95	0.005	0.004	0.004
13	0.005	0.002	0.002
13.05	0.005	0.005	0.004
13.1	0.004	0.004	0.001
13.15	0.006	0.005	0.006
13.2	0.004	0.002	0.001
13.25	0.005	0.004	0.002
13.3	0.005	0.004	0
13.35	0.005	0.004	0.002
13.4	0.004	0.004	0.001
13.45	0.005	0.004	0.002
13.5	0.005	0.004	0.001
13.55	0.005	0.004	0.002
13.6	0.004	0.004	0.001

US EPA ARCHIVE DOCUMENT

13.65	0.005	0.004	0.002
13.7	0.004	0.004	0.001
13.75	0.005	0.004	0.002
13.8	0.004	0.002	0.001
13.85	0.005	0.004	0.002
13.9	0.004	0.004	0
13.95	0.005	0.004	0.002
14	0.004	0.004	0.001
14.05	0.005	0.004	0.002
14.1	0.005	0.002	0.001
14.15	0.006	0.005	0.002
14.2	0.004	0.002	0.002
14.25	0.005	0.004	0.002
14.3	0.004	0.004	0.001
14.35	0.006	0.004	0.002
14.4	0.004	0.002	0.002
14.45	0.005	0.004	0.004
14.5	0.004	0.004	0.001
14.55	0.005	0.004	0.002
14.6	0.005	0.004	0.001
14.65	0.006	0.005	0.002
14.7	0.005	0.004	0.002
14.75	0.005	0.004	0.002
14.8	0.004	0.002	0.001
14.85	0.005	0.004	0.002
14.9	0.005	0.002	0.002
14.95	0.005	0.004	0.002
15	0.005	0.004	0.002
15.05	0.005	0.004	0.002
15.1	0.005	0.002	0.001
15.15	0.006	0.005	0.004
15.2	0.005	0.002	0.001
15.25	0.005	0.004	0.002
15.3	0.005	0.002	0.001
15.35	0.006	0.004	0.002
15.4	0.005	0.002	0.001
15.45	0.006	0.004	0.002
15.5	0.005	0.004	0.002
15.55	0.006	0.004	0.004
15.6	0.005	0.004	0.001
15.65	0.005	0.004	0.002
15.7	0.004	0.002	0.002
15.75	0.005	0.004	0.004
15.8	0.005	0.002	0.001
15.85	0.005	0.004	0.002
15.9	0.005	0.002	0.002
15.95	0.006	0.004	0.002

US EPA ARCHIVE DOCUMENT

16	0.005	0.004	0.002
16.05	0.006	0.004	0.004
16.1	0.005	0.002	0.002
16.15	0.006	0.005	0.004
16.2	0.005	0.004	0.002
16.25	0.006	0.004	0.002
16.3	0.006	0.004	0.002
16.35	0.006	0.004	0.002
16.4	0.005	0.002	0.002
16.45	0.006	0.004	0.002
16.5	0.005	0.002	0.002
16.55	0.006	0.005	0.002
16.6	0.005	0.002	0.001
16.65	0.006	0.004	0.002
16.7	0.004	0.002	0.002
16.75	0.006	0.004	0.004
16.8	0.005	0.004	0.002
16.85	0.006	0.004	0.002
16.9	0.006	0.004	0.002
16.95	0.006	0.005	0.004
17	0.006	0.002	0.002
17.05	0.006	0.005	0.004
17.1	0.006	0.004	0.004
17.15	0.007	0.005	0.006
17.2	0.005	0.004	0.004
17.25	0.006	0.005	0.006
17.3	0.005	0.002	0.002
17.35	0.006	0.005	0.005
17.4	0.005	0.002	0.004
17.45	0.006	0.004	0.005
17.5	0.005	0.002	0.004
17.55	0.006	0.005	0.005
17.6	0.006	0.002	0.004
17.65	0.006	0.004	0.005
17.7	0.005	0.004	0.005
17.75	0.006	0.005	0.005
17.8	0.005	0.002	0.002
17.85	0.006	0.004	0.005
17.9	0.005	0.002	0.005
17.95	0.006	0.004	0.005
18	0.006	0.002	0.005
18.05	0.006	0.005	0.005
18.1	0.005	0.002	0.002
18.15	0.007	0.006	0.007
18.2	0.006	0.002	0.006
18.25	0.006	0.005	0.007
18.3	0.006	0.004	0.005

US EPA ARCHIVE DOCUMENT

18.35	0.006	0.004	0.007
18.4	0.004	0.002	0.006
18.45	0.006	0.004	0.009
18.5	0.005	0.002	0.006
18.55	0.006	0.004	0.007
18.6	0.005	0.004	0.006
18.65	0.006	0.004	0.009
18.7	0.006	0.002	0.006
18.75	0.006	0.004	0.007
18.8	0.005	0.002	0.007
18.85	0.006	0.004	0.009
18.9	0.005	0.004	0.009
18.95	0.006	0.004	0.009
19	0.006	0.002	0.005
19.05	0.006	0.004	0.009
19.1	0.005	0.002	0.006
19.15	0.007	0.005	0.01
19.2	0.004	0.002	0.009
19.25	0.006	0.004	0.009
19.3	0.005	0.002	0.007
19.35	0.006	0.004	0.01
19.4	0.005	0.002	0.009
19.45	0.006	0.004	0.009
19.5	0.004	0.004	0.007
19.55	0.006	0.004	0.01
19.6	0.005	0.002	0.007
19.65	0.006	0.004	0.009
19.7	0.006	0.002	0.006
19.75	0.006	0.004	0.009
19.8	0.005	0.004	0.009
19.85	0.006	0.004	0.01
19.9	0.005	0.002	0.009
19.95	0.006	0.004	0.01
20	0.005	0.004	0.009
20.05	0.006	0.004	0.009
20.1	0.005	0.004	0.009
20.15	0.006	0.005	0.01
20.2	0.005	0.004	0.009
20.25	0.006	0.004	0.01
20.3	0.006	0.002	0.009
20.35	0.006	0.005	0.01
20.4	0.005	0.002	0.009
20.45	0.006	0.004	0.01
20.5	0.005	0.004	0.01
20.55	0.006	0.005	0.011
20.6	0.004	0.004	0.01
20.65	0.006	0.004	0.01

US EPA ARCHIVE DOCUMENT

20.7	0.006	0.004	0.01
20.75	0.006	0.005	0.01
20.8	0.006	0.004	0.01
20.85	0.006	0.004	0.011
20.9	0.005	0.004	0.009
20.95	0.006	0.004	0.011
21	0.005	0.002	0.01
21.05	0.006	0.004	0.01
21.1	0.005	0.002	0.009
21.15	0.006	0.005	0.012
21.2	0.005	0.004	0.01
21.25	0.006	0.005	0.011
21.3	0.005	0.002	0.011
21.35	0.006	0.004	0.011
21.4	0.005	0.004	0.009
21.45	0.006	0.004	0.011
21.5	0.005	0.002	0.01
21.55	0.006	0.004	0.011
21.6	0.005	0.004	0.01
21.65	0.006	0.005	0.011
21.7	0.005	0.004	0.01
21.75	0.006	0.004	0.011
21.8	0.005	0.004	0.01
21.85	0.007	0.005	0.011
21.9	0.005	0.004	0.009
21.95	0.006	0.004	0.011
22	0.005	0.004	0.01
22.05	0.006	0.004	0.011
22.1	0.004	0.004	0.01
22.15	0.006	0.004	0.011
22.2	0.005	0.002	0.01
22.25	0.006	0.005	0.012
22.3	0.005	0.004	0.011
22.35	0.006	0.004	0.011
22.4	0.005	0.002	0.011
22.45	0.006	0.004	0.012
22.5	0.004	0.002	0.011
22.55	0.006	0.004	0.011
22.6	0.005	0.004	0.01
22.65	0.006	0.004	0.012
22.7	0.005	0.002	0.01
22.75	0.006	0.005	0.012
22.8	0.006	0.004	0.011
22.85	0.006	0.004	0.011
22.9	0.005	0.002	0.01
22.95	0.006	0.004	0.011
23	0.006	0.002	0.01

US EPA ARCHIVE DOCUMENT

23.05	0.006	0.004	0.011
23.1	0.005	0.004	0.01
23.15	0.007	0.005	0.012
23.2	0.006	0.002	0.011
23.25	0.006	0.004	0.012
23.3	0.004	0.004	0.011
23.35	0.006	0.005	0.012
23.4	0.004	0.002	0.011
23.45	0.006	0.004	0.012
23.5	0.005	0.004	0.01
23.55	0.006	0.004	0.012
23.6	0.005	0.004	0.012
23.65	0.006	0.005	0.012
23.7	0.005	0.004	0.011
23.75	0.006	0.004	0.012
23.8	0.004	0.004	0.012
23.85	0.006	0.004	0.012
23.9	0.005	0.004	0.011
23.95	0.006	0.004	0.012
24	0.005	0.004	0.011
24.05	0.006	0.004	0.012
24.1	0.005	0.004	0.01
24.15	0.007	0.005	0.015
24.2	0.006	0.004	0.011
24.25	0.006	0.004	0.013
24.3	0.005	0.004	0.011
24.35	0.006	0.004	0.012
24.4	0.005	0.002	0.012
24.45	0.007	0.004	0.012
24.5	0.005	0.002	0.011
24.55	0.006	0.004	0.013
24.6	0.002	0.002	0.011
24.65	0.007	0.004	0.013
24.7	0.004	0.002	0.011
24.75	0.006	0.004	0.012
24.8	0.005	0.002	0.011
24.85	0.006	0.004	0.013
24.9	0.005	0.002	0.011
24.95	0.007	0.004	0.012
25	0.005	0.002	0.012
25.05	0.006	0.004	0.013
25.1	0.005	0.002	0.012
25.15	0.007	0.005	0.016
25.2	0.006	0.004	0.013
25.25	0.006	0.005	0.015
25.3	0.005	0.004	0.013
25.35	0.007	0.004	0.016

US EPA ARCHIVE DOCUMENT

25.4	0.004	0.002	0.013
25.45	0.006	0.004	0.015
25.5	0.005	0.004	0.013
25.55	0.006	0.004	0.015
25.6	0.005	0.004	0.015
25.65	0.006	0.005	0.015
25.7	0.005	0.004	0.013
25.75	0.006	0.005	0.015
25.8	0.004	0.004	0.013
25.85	0.006	0.005	0.015
25.9	0.004	0.002	0.013
25.95	0.006	0.004	0.015
26	0.005	0.004	0.013
26.05	0.006	0.004	0.015
26.1	0.004	0.004	0.015
26.15	0.007	0.005	0.017
26.2	0.004	0.002	0.015
26.25	0.006	0.005	0.016
26.3	0.004	0.004	0.015
26.35	0.006	0.004	0.016
26.4	0.004	0.004	0.016
26.45	0.006	0.004	0.016
26.5	0.005	0.004	0.015
26.55	0.006	0.004	0.016
26.6	0.006	0.004	0.015
26.65	0.006	0.004	0.017
26.7	0.005	0.002	0.017
26.75	0.006	0.004	0.017
26.8	0.004	0.004	0.016
26.85	0.006	0.004	0.016
26.9	0.006	0.002	0.015
26.95	0.006	0.004	0.016
27	0.002	0.002	0.015
27.05	0.005	0.004	0.016
27.1	0.005	0.002	0.016
27.15	0.006	0.005	0.017
27.2	0.004	0.002	0.015
27.25	0.006	0.004	0.016
27.3	0.004	0.002	0.015
27.35	0.005	0.004	0.017
27.4	0.002	0.002	0.015
27.45	0.005	0.004	0.016
27.5	0.004	0.004	0.015
27.55	0.006	0.004	0.016
27.6	0.005	0.004	0.015
27.65	0.005	0.004	0.016
27.7	0.004	0.004	0.016

US EPA ARCHIVE DOCUMENT

27.75	0.005	0.004	0.017
27.8	0.002	0.002	0.015
27.85	0.006	0.004	0.017
27.9	0.004	0.004	0.015
27.95	0.006	0.004	0.016
28	0.005	0.004	0.016
28.05	0.005	0.004	0.017
28.1	0.002	0.002	0.016
28.15	0.006	0.004	0.018
28.2	0.004	0.002	0.016
28.25	0.005	0.004	0.017
28.3	0.005	0.002	0.015
28.35	0.005	0.004	0.017
28.4	0.004	0.002	0.016
28.45	0.006	0.004	0.018
28.5	0.004	0.002	0.017
28.55	0.005	0.004	0.017
28.6	0.004	0.002	0.016
28.65	0.005	0.004	0.017
28.7	0.004	0.002	0.015
28.75	0.005	0.004	0.017
28.8	0.002	0.004	0.016
28.85	0.005	0.004	0.017
28.9	0.004	0.002	0.016
28.95	0.005	0.004	0.017
29	0.004	0.002	0.016
29.05	0.005	0.004	0.018
29.1	0.005	0.002	0.015
29.15	0.006	0.005	0.018
29.2	0.005	0.002	0.017
29.25	0.005	0.004	0.018
29.3	0.005	0.002	0.017
29.35	0.005	0.004	0.018
29.4	0.004	0.002	0.015
29.45	0.005	0.004	0.018
29.5	0.004	0.002	0.016
29.55	0.005	0.004	0.017
29.6	0.004	0.002	0.016
29.65	0.005	0.004	0.017
29.7	0.004	0.002	0.017
29.75	0.005	0.004	0.018
29.8	0.004	0.002	0.016
29.85	0.005	0.004	0.018
29.9	0.004	0.002	0.018
29.95	0.005	0.004	0.018
30	0.005	0.004	0.017
30.05	0.006	0.004	0.017

US EPA ARCHIVE DOCUMENT

30.1	0.004	0.004	0.016
30.15	0.005	0.004	0.018
30.2	0.004	0.002	0.016
30.25	0.006	0.004	0.02
30.3	0.004	0.002	0.016
30.35	0.005	0.004	0.017
30.4	0.004	0.004	0.017
30.45	0.005	0.004	0.017
30.5	0.005	0.004	0.017
30.55	0.005	0.004	0.017
30.6	0.004	0.002	0.016
30.65	0.005	0.004	0.017
30.7	0.002	0.004	0.016
30.75	0.005	0.004	0.018
30.8	0.004	0.002	0.016
30.85	0.005	0.004	0.017
30.9	0.004	0.002	0.016
30.95	0.005	0.004	0.017
31	0.004	0.002	0.016
31.05	0.005	0.004	0.017
31.1	0.004	0.002	0.016
31.15	0.005	0.004	0.02
31.2	0.004	0.002	0.016
31.25	0.005	0.004	0.018
31.3	0.004	0.002	0.016
31.35	0.005	0.004	0.018
31.4	0.004	0.002	0.016
31.45	0.004	0.004	0.017
31.5	0.002	0.001	0.015
31.55	0.005	0.004	0.02
31.6	0.002	0.004	0.016
31.65	0.005	0.004	0.017
31.7	0.002	0.004	0.017
31.75	0.005	0.004	0.018
31.8	0.004	0.002	0.016
31.85	0.005	0.004	0.018
31.9	0.005	0.004	0.017
31.95	0.005	0.004	0.018
32	0.002	0.001	0.015
32.05	0.005	0.004	0.018
32.1	0.004	0.002	0.015
32.15	0.006	0.005	0.021
32.2	0.005	0.004	0.016
32.25	0.005	0.004	0.017
32.3	0.004	0.004	0.017
32.35	0.005	0.004	0.017
32.4	0.004	0.002	0.016

US EPA ARCHIVE DOCUMENT

32.45	0.005	0.004	0.017
32.5	0.004	0.002	0.015
32.55	0.005	0.004	0.017
32.6	0.004	0.002	0.015
32.65	0.005	0.004	0.017
32.7	0.004	0.002	0.017
32.75	0.005	0.004	0.018
32.8	0.004	0.002	0.016
32.85	0.005	0.004	0.018
32.9	0.004	0.001	0.016
32.95	0.005	0.002	0.018
33	0.002	0.002	0.018
33.05	0.005	0.004	0.018
33.1	0.004	0.002	0.017
33.15	0.006	0.004	0.018
33.2	0.004	0.002	0.016
33.25	0.005	0.004	0.017
33.3	0.005	0.002	0.016
33.35	0.005	0.004	0.018
33.4	0.004	0.002	0.016
33.45	0.005	0.004	0.017
33.5	0.004	0.002	0.016
33.55	0.005	0.004	0.017
33.6	0.005	0.002	0.016
33.65	0.005	0.004	0.017
33.7	0.004	0.004	0.016
33.75	0.006	0.004	0.018
33.8	0.005	0.004	0.015
33.85	0.005	0.004	0.017
33.9	0.004	0.002	0.016
33.95	0.005	0.004	0.017
34	0.004	0.002	0.017
34.05	0.005	0.004	0.017
34.1	0.004	0.002	0.016
34.15	0.005	0.004	0.018
34.2	0.005	0.002	0.016
34.25	0.005	0.004	0.018
34.3	0.005	0.002	0.017
34.35	0.005	0.004	0.018
34.4	0.004	0.002	0.016
34.45	0.005	0.004	0.018
34.5	0.005	0.002	0.016
34.55	0.005	0.004	0.018
34.6	0.005	0.002	0.017
34.65	0.005	0.004	0.018
34.7	0.004	0.002	0.017
34.75	0.005	0.004	0.018

US EPA ARCHIVE DOCUMENT

34.8	0.004	0.001	0.017
34.85	0.005	0.004	0.018
34.9	0.004	0.001	0.017
34.95	0.005	0.004	0.018
35	0.004	0.002	0.017
35.05	0.005	0.004	0.02
35.1	0.004	0.002	0.017
35.15	0.006	0.004	0.02
35.2	0.004	0.002	0.018
35.25	0.005	0.004	0.018
35.3	0.005	0.002	0.018
35.35	0.005	0.004	0.018
35.4	0.004	0.002	0.017
35.45	0.005	0.004	0.018
35.5	0.005	0.004	0.017
35.55	0.005	0.004	0.018
35.6	0.004	0.002	0.017
35.65	0.005	0.004	0.02
35.7	0.004	0.002	0.017
35.75	0.005	0.004	0.018
35.8	0.004	0.004	0.018
35.85	0.005	0.005	0.018
35.9	0.004	0.002	0.017
35.95	0.005	0.004	0.02
36	0.004	0.002	0.018
36.05	0.005	0.004	0.02
36.1	0.004	0.002	0.018
36.15	0.006	0.004	0.021
36.2	0.004	0.004	0.017
36.25	0.005	0.004	0.02
36.3	0.004	0.002	0.017
36.35	0.005	0.004	0.02
36.4	0.004	0.004	0.018
36.45	0.005	0.004	0.02
36.5	0.004	0.002	0.018
36.55	0.006	0.004	0.02
36.6	0.004	0.002	0.018
36.65	0.006	0.004	0.02
36.7	0.005	0.002	0.018
36.75	0.005	0.004	0.02
36.8	0.004	0.002	0.018
36.85	0.005	0.004	0.02
36.9	0.005	0.002	0.018
36.95	0.005	0.004	0.02
37	0.005	0.002	0.018
37.05	0.006	0.004	0.02
37.1	0.005	0.002	0.018

US EPA ARCHIVE DOCUMENT

37.15	0.006	0.005	0.021
37.2	0.004	0.002	0.02
37.25	0.006	0.004	0.02
37.3	0.005	0.002	0.018
37.35	0.005	0.004	0.021
37.4	0.005	0.004	0.02
37.45	0.006	0.004	0.021
37.5	0.004	0.002	0.018
37.55	0.006	0.004	0.021
37.6	0.005	0.004	0.02
37.65	0.005	0.004	0.02
37.7	0.004	0.004	0.02
37.75	0.006	0.005	0.021
37.8	0.005	0.004	0.02
37.85	0.006	0.004	0.021
37.9	0.004	0.002	0.02
37.95	0.006	0.004	0.021
38	0.004	0.002	0.02
38.05	0.006	0.005	0.021
38.1	0.004	0.004	0.02
38.15	0.005	0.004	0.02
38.2	0.005	0.004	0.018
38.25	0.006	0.005	0.021
38.3	0.005	0.004	0.02
38.35	0.007	0.004	0.021
38.4	0.005	0.004	0.018
38.45	0.006	0.004	0.021
38.5	0.005	0.002	0.02
38.55	0.006	0.004	0.021
38.6	0.005	0.004	0.02
38.65	0.006	0.004	0.021
38.7	0.005	0.004	0.02
38.75	0.006	0.005	0.021
38.8	0.005	0.002	0.02
38.85	0.006	0.005	0.021
38.9	0.005	0.005	0.02
38.95	0.006	0.005	0.021
39	0.005	0.004	0.018
39.05	0.006	0.004	0.021
39.1	0.005	0.004	0.02
39.15	0.006	0.004	0.021
39.2	0.004	0.004	0.02
39.25	0.006	0.004	0.021
39.3	0.005	0.004	0.02
39.35	0.006	0.005	0.022
39.4	0.005	0.004	0.018
39.45	0.006	0.004	0.021

US EPA ARCHIVE DOCUMENT

39.5	0.005	0.002	0.02
39.55	0.006	0.004	0.021
39.6	0.005	0.004	0.02
39.65	0.006	0.004	0.021
39.7	0.005	0.004	0.02
39.75	0.006	0.004	0.021
39.8	0.005	0.004	0.02
39.85	0.006	0.004	0.021
39.9	0.005	0.002	0.02
39.95	0.006	0.004	0.021
40	0.006	0.002	0.02
40.05	0.006	0.004	0.021
40.1	0.005	0.002	0.02
40.15	0.005	0.004	0.021
40.2	0.004	0.004	0.02
40.25	0.006	0.005	0.022
40.3	0.004	0.002	0.021
40.35	0.006	0.005	0.023
40.4	0.005	0.004	0.021
40.45	0.006	0.004	0.022
40.5	0.004	0.004	0.02
40.55	0.006	0.005	0.022
40.6	0.006	0.002	0.021
40.65	0.006	0.005	0.022
40.7	0.004	0.004	0.021
40.75	0.006	0.005	0.022
40.8	0.004	0.004	0.021
40.85	0.006	0.004	0.022
40.9	0.005	0.004	0.021
40.95	0.006	0.004	0.022
41	0.005	0.004	0.021
41.05	0.006	0.004	0.022
41.1	0.006	0.004	0.021
41.15	0.006	0.004	0.022
41.2	0.005	0.004	0.022
41.25	0.007	0.005	0.023
41.3	0.005	0.002	0.021
41.35	0.006	0.004	0.023
41.4	0.004	0.002	0.021
41.45	0.006	0.004	0.023
41.5	0.005	0.004	0.022
41.55	0.006	0.004	0.023
41.6	0.005	0.004	0.021
41.65	0.006	0.004	0.023
41.7	0.005	0.002	0.022
41.75	0.006	0.004	0.023
41.8	0.005	0.002	0.021

US EPA ARCHIVE DOCUMENT

41.85	0.006	0.004	0.023
41.9	0.004	0.004	0.021
41.95	0.006	0.004	0.023
42	0.006	0.002	0.021
42.05	0.006	0.004	0.023
42.1	0.005	0.002	0.022
42.15	0.006	0.004	0.023
42.2	0.005	0.002	0.021
42.25	0.006	0.005	0.024
42.3	0.005	0.004	0.022
42.35	0.006	0.004	0.024
42.4	0.005	0.004	0.022
42.45	0.006	0.004	0.024
42.5	0.004	0.002	0.023
42.55	0.006	0.004	0.024
42.6	0.004	0.004	0.023
42.65	0.006	0.004	0.023
42.7	0.005	0.002	0.023
42.75	0.006	0.004	0.024
42.8	0.004	0.002	0.023
42.85	0.006	0.004	0.024
42.9	0.005	0.004	0.023
42.95	0.006	0.004	0.024
43	0.005	0.002	0.023
43.05	0.006	0.004	0.024
43.1	0.005	0.004	0.023
43.15	0.006	0.004	0.024
43.2	0.005	0.004	0.022
43.25	0.006	0.005	0.026
43.3	0.005	0.002	0.023
43.35	0.006	0.004	0.027
43.4	0.006	0.004	0.024
43.45	0.006	0.004	0.024
43.5	0.006	0.002	0.023
43.55	0.006	0.004	0.026
43.6	0.006	0.002	0.024
43.65	0.006	0.004	0.026
43.7	0.006	0.002	0.023
43.75	0.006	0.004	0.026
43.8	0.004	0.002	0.026
43.85	0.006	0.004	0.026
43.9	0.005	0.002	0.023
43.95	0.006	0.004	0.026
44	0.005	0.002	0.024
44.05	0.006	0.004	0.026
44.1	0.005	0.002	0.024
44.15	0.006	0.004	0.026

US EPA ARCHIVE DOCUMENT

44.2	0.005	0.002	0.023
44.25	0.006	0.005	0.027
44.3	0.005	0.002	0.024
44.35	0.006	0.004	0.026
44.4	0.004	0.002	0.026
44.45	0.006	0.004	0.027
44.5	0.005	0.004	0.024
44.55	0.005	0.004	0.026
44.6	0.005	0.002	0.026
44.65	0.006	0.004	0.026
44.7	0.005	0.002	0.024
44.75	0.005	0.004	0.027
44.8	0.004	0.004	0.024
44.85	0.006	0.004	0.027
44.9	0.005	0.002	0.026
44.95	0.006	0.004	0.026
45	0.005	0.002	0.026
45.05	0.006	0.004	0.027
45.1	0.005	0.002	0.026
45.15	0.006	0.004	0.026
45.2	0.005	0.002	0.024
45.25	0.007	0.005	0.027
45.3	0.005	0.002	0.026
45.35	0.006	0.004	0.027
45.4	0.005	0.002	0.026
45.45	0.006	0.004	0.027
45.5	0.005	0.004	0.026
45.55	0.006	0.004	0.027
45.6	0.005	0.002	0.026
45.65	0.006	0.004	0.027
45.7	0.005	0.004	0.026
45.75	0.006	0.004	0.027
45.8	0.005	0.002	0.026
45.85	0.006	0.004	0.027
45.9	0.005	0.004	0.026
45.95	0.006	0.004	0.027
46	0.004	0.001	0.026
46.05	0.006	0.004	0.027
46.1	0.005	0.002	0.026
46.15	0.006	0.004	0.028
46.2	0.005	0.004	0.026
46.25	0.006	0.004	0.029
46.3	0.004	0.002	0.027
46.35	0.006	0.004	0.028
46.4	0.005	0.002	0.027
46.45	0.006	0.004	0.028
46.5	0.005	0.002	0.028

US EPA ARCHIVE DOCUMENT

46.55	0.006	0.004	0.028
46.6	0.005	0.004	0.027
46.65	0.006	0.004	0.029
46.7	0.005	0.002	0.028
46.75	0.006	0.004	0.029
46.8	0.005	0.002	0.027
46.85	0.006	0.004	0.029
46.9	0.004	0.004	0.028
46.95	0.006	0.004	0.029
47	0.005	0.004	0.028
47.05	0.006	0.004	0.029
47.1	0.005	0.002	0.028
47.15	0.006	0.004	0.031
47.2	0.004	0.002	0.027
47.25	0.006	0.004	0.029
47.3	0.004	0.004	0.028
47.35	0.006	0.005	0.029
47.4	0.005	0.002	0.028
47.45	0.006	0.004	0.029
47.5	0.004	0.004	0.028
47.55	0.006	0.004	0.028
47.6	0.004	0.002	0.027
47.65	0.006	0.004	0.028
47.7	0.004	0.002	0.027
47.75	0.006	0.004	0.029
47.8	0.004	0.002	0.029
47.85	0.006	0.004	0.029
47.9	0.005	0.002	0.028
47.95	0.006	0.004	0.029
48	0.006	0.004	0.027
48.05	0.006	0.004	0.029
48.1	0.005	0.002	0.027
48.15	0.006	0.004	0.029
48.2	0.005	0.002	0.028
48.25	0.006	0.004	0.029
48.3	0.005	0.002	0.028
48.35	0.006	0.004	0.029
48.4	0.005	0.002	0.028
48.45	0.006	0.004	0.029
48.5	0.005	0.002	0.029
48.55	0.005	0.004	0.029
48.6	0.004	0.002	0.028
48.65	0.006	0.004	0.029
48.7	0.004	0.004	0.028
48.75	0.005	0.004	0.029
48.8	0.005	0.004	0.028
48.85	0.005	0.004	0.029

US EPA ARCHIVE DOCUMENT

48.9	0.005	0.002	0.027
48.95	0.006	0.004	0.029
49	0.005	0.002	0.029
49.05	0.006	0.004	0.029
49.1	0.005	0.002	0.027
49.15	0.006	0.004	0.029
49.2	0.005	0.004	0.028
49.25	0.006	0.005	0.033
49.3	0.004	0.002	0.032
49.35	0.006	0.004	0.033
49.4	0.004	0.002	0.031
49.45	0.006	0.004	0.033
49.5	0.004	0.002	0.032
49.55	0.005	0.004	0.033
49.6	0.005	0.002	0.031
49.65	0.005	0.004	0.033
49.7	0.004	0.002	0.033
49.75	0.006	0.004	0.033
49.8	0.004	0.001	0.032
49.85	0.005	0.004	0.033
49.9	0.004	0.002	0.032
49.95	0.005	0.004	0.033
50	0.005	0.002	0.032
50.05	0.006	0.004	0.033
50.1	0.004	0.002	0.032
50.15	0.005	0.002	0.033
50.2	0.005	0.001	0.033
50.25	0.006	0.004	0.034
50.3	0.004	0.002	0.032
50.35	0.006	0.004	0.033
50.4	0.004	0.002	0.031
50.45	0.005	0.004	0.033
50.5	0.004	0.002	0.032
50.55	0.005	0.002	0.032
50.6	0.004	0.002	0.032
50.65	0.005	0.004	0.033
50.7	0.004	0.001	0.032
50.75	0.005	0.004	0.033
50.8	0.005	0.002	0.033
50.85	0.005	0.002	0.033
50.9	0.004	0.002	0.032
50.95	0.005	0.004	0.033
51	0.004	0.002	0.032
51.05	0.005	0.004	0.033
51.1	0.005	0.002	0.033
51.15	0.005	0.004	0.033
51.2	0.005	0.002	0.032

US EPA ARCHIVE DOCUMENT

51.25	0.006	0.004	0.034
51.3	0.004	0.002	0.031
51.35	0.005	0.004	0.032
51.4	0.005	0.002	0.031
51.45	0.005	0.004	0.032
51.5	0.005	0.002	0.031
51.55	0.005	0.004	0.032
51.6	0.004	0.002	0.031
51.65	0.005	0.002	0.031
51.7	0.005	0.002	0.029
51.75	0.005	0.004	0.031
51.8	0.005	0.002	0.031
51.85	0.006	0.004	0.031
51.9	0.004	0.001	0.029
51.95	0.005	0.004	0.031
52	0.004	0.002	0.029
52.05	0.006	0.002	0.031
52.1	0.005	0.001	0.031
52.15	0.005	0.002	0.032
52.2	0.004	0.002	0.032
52.25	0.006	0.004	0.032
52.3	0.005	0.002	0.031
52.35	0.005	0.002	0.032
52.4	0.004	0.002	0.031
52.45	0.006	0.002	0.032
52.5	0.005	0.002	0.029
52.55	0.006	0.004	0.031
52.6	0.005	0.002	0.029
52.65	0.006	0.004	0.032
52.7	0.005	0.001	0.031
52.75	0.005	0.004	0.031
52.8	0.005	0.001	0.029
52.85	0.005	0.002	0.032
52.9	0.004	0.001	0.029
52.95	0.005	0.002	0.032
53	0.004	0.001	0.029
53.05	0.005	0.004	0.032
53.1	0.005	0.002	0.031
53.15	0.005	0.002	0.032
53.2	0.005	0.002	0.031
53.25	0.006	0.004	0.032
53.3	0.005	0.002	0.031
53.35	0.005	0.002	0.032
53.4	0.005	0.002	0.029
53.45	0.006	0.004	0.032
53.5	0.005	0.001	0.032
53.55	0.005	0.002	0.033

US EPA ARCHIVE DOCUMENT

53.6	0.005	0.002	0.031
53.65	0.005	0.004	0.033
53.7	0.004	0.002	0.032
53.75	0.006	0.004	0.032
53.8	0.004	0.002	0.031
53.85	0.005	0.004	0.032
53.9	0.005	0.002	0.031
53.95	0.006	0.002	0.032
54	0.004	0.001	0.031
54.05	0.005	0.004	0.032
54.1	0.005	0.001	0.031
54.15	0.007	0.004	0.035
54.2	0.005	0.002	0.034
54.25	0.005	0.002	0.035
54.3	0.005	0.002	0.034
54.35	0.005	0.002	0.034
54.4	0.004	0.002	0.033
54.45	0.005	0.002	0.034
54.5	0.004	0.001	0.034
54.55	0.006	0.004	0.034
54.6	0.005	0.002	0.033
54.65	0.006	0.004	0.034
54.7	0.005	0.002	0.034
54.75	0.006	0.004	0.034
54.8	0.004	0.002	0.033
54.85	0.005	0.002	0.034
54.9	0.004	0.002	0.034
54.95	0.006	0.002	0.034
55	0.004	0.001	0.033
55.05	0.005	0.002	0.034
55.1	0.004	0.002	0.033
55.15	0.006	0.004	0.034
55.2	0.002	0.001	0.033
55.25	0.006	0.004	0.034
55.3	0.005	0.002	0.031
55.35	0.005	0.004	0.033
55.4	0.004	0.001	0.033
55.45	0.005	0.004	0.033
55.5	0.005	0.002	0.031
55.55	0.005	0.002	0.032
55.6	0.005	0.002	0.032
55.65	0.005	0.002	0.033
55.7	0.004	0.002	0.032
55.75	0.006	0.004	0.033
55.8	0.005	0.001	0.031
55.85	0.005	0.002	0.032
55.9	0.004	0.002	0.032

US EPA ARCHIVE DOCUMENT

55.95	0.006	0.004	0.033
56	0.005	0.002	0.032
56.05	0.005	0.002	0.033
56.1	0.005	0.002	0.031
56.15	0.006	0.004	0.033
56.2	0.005	0.002	0.033
56.25	0.005	0.004	0.033
56.3	0.005	0.001	0.032
56.35	0.005	0.004	0.033
56.4	0.005	0.002	0.031
56.45	0.006	0.004	0.033
56.5	0.005	0.002	0.032
56.55	0.005	0.004	0.033
56.6	0.004	0.001	0.032
56.65	0.005	0.004	0.033
56.7	0.004	0.002	0.032
56.75	0.005	0.004	0.033
56.8	0.004	0.001	0.032
56.85	0.005	0.004	0.033
56.9	0.004	0.002	0.033
56.95	0.006	0.004	0.033
57	0.004	0.001	0.032
57.05	0.006	0.004	0.033
57.1	0.004	0.001	0.033
57.15	0.006	0.004	0.037
57.2	0.005	0.002	0.034
57.25	0.005	0.002	0.035
57.3	0.005	0.002	0.034
57.35	0.006	0.004	0.037
57.4	0.004	0.002	0.034
57.45	0.005	0.004	0.035
57.5	0.004	0.001	0.034
57.55	0.005	0.004	0.035
57.6	0.004	0.002	0.035
57.65	0.005	0.004	0.037
57.7	0.004	0.002	0.035
57.75	0.005	0.004	0.035
57.8	0.005	0.001	0.034
57.85	0.006	0.004	0.037
57.9	0.006	0.004	0.037
57.95	0.006	0.004	0.037
58	0.004	0.004	0.034
58.05	0.005	0.004	0.035
58.1	0.004	0.002	0.033
58.15	0.006	0.004	0.037
58.2	0.002	0.001	0.034
58.25	0.005	0.004	0.037

US EPA ARCHIVE DOCUMENT

58.3	0.004	0.002	0.034
58.35	0.005	0.002	0.035
58.4	0.005	0.001	0.034
58.45	0.005	0.002	0.035
58.5	0.005	0.001	0.035
58.55	0.005	0.002	0.035
58.6	0.004	0	0.035
58.65	0.005	0.004	0.035
58.7	0.004	0.002	0.034
58.75	0.005	0.004	0.035
58.8	0.004	0.002	0.035
58.85	0.005	0.002	0.035
58.9	0.005	0.001	0.034
58.95	0.005	0.002	0.037
59	0.004	0.002	0.035
59.05	0.005	0.004	0.035
59.1	0.004	0.002	0.035
59.15	0.006	0.004	0.037
59.2	0.004	0.002	0.033
59.25	0.005	0.002	0.035
59.3	0.004	0.001	0.034
59.35	0.005	0.002	0.035
59.4	0.004	0.001	0.033
59.45	0.005	0.002	0.034
59.5	0.004	0.002	0.034
59.55	0.005	0.002	0.034
59.6	0.005	0.001	0.033
59.65	0.005	0.002	0.035
59.7	0.004	0.002	0.032
59.75	0.005	0.002	0.034
59.8	0.004	0.001	0.033
59.85	0.005	0.002	0.034
59.9	0.005	0.002	0.034
59.95	0.005	0.004	0.034
60	0.004	0.001	0.034
60.05	0.005	0.002	0.035
60.1	0.004	0.002	0.033
60.15	0.006	0.004	0.035
60.2	0.004	0.002	0.034
60.25	0.005	0.002	0.034
60.3	0.004	0.001	0.033
60.35	0.005	0.002	0.035
60.4	0.002	0.001	0.034
60.45	0.005	0.004	0.035
60.5	0.004	0.001	0.033
60.55	0.005	0.002	0.035
60.6	0.004	0.002	0.034

US EPA ARCHIVE DOCUMENT

60.65	0.005	0.002	0.035
60.7	0.005	0.001	0.034
60.75	0.005	0.004	0.035
60.8	0.005	0.002	0.033
60.85	0.005	0.002	0.035
60.9	0.005	0.002	0.034
60.95	0.005	0.004	0.035
61	0.004	0.002	0.033
61.05	0.006	0.004	0.037
61.1	0.004	0.002	0.033
61.15	0.005	0.004	0.035
61.2	0.004	0.001	0.034
61.25	0.005	0.002	0.035
61.3	0.004	0.002	0.034
61.35	0.005	0.004	0.035
61.4	0.004	0.001	0.033
61.45	0.005	0.002	0.034
61.5	0.004	0.002	0.033
61.55	0.005	0.002	0.035
61.6	0.004	0.001	0.033
61.65	0.005	0.004	0.034
61.7	0.004	0.002	0.034
61.75	0.005	0.004	0.035
61.8	0.004	0	0.034
61.85	0.005	0.004	0.035
61.9	0.004	0.002	0.033
61.95	0.005	0.004	0.035
62	0.002	0.002	0.033
62.05	0.005	0.004	0.035
62.1	0.004	0.002	0.033
62.15	0.005	0.004	0.034
62.2	0.004	0.002	0.033
62.25	0.005	0.004	0.034
62.3	0.004	0.002	0.034
62.35	0.005	0.002	0.034
62.4	0.004	0.001	0.033
62.45	0.005	0.004	0.034
62.5	0.002	0.002	0.033
62.55	0.005	0.004	0.034
62.6	0.004	0.001	0.034
62.65	0.005	0.002	0.034
62.7	0.004	0.001	0.034
62.75	0.005	0.004	0.034
62.8	0.004	0.001	0.034
62.85	0.005	0.002	0.034
62.9	0.004	0.001	0.033
62.95	0.005	0.002	0.034

US EPA ARCHIVE DOCUMENT

63	0.004	0.002	0.034
63.05	0.005	0.004	0.035
63.1	0.004	0.001	0.034
63.15	0.005	0.004	0.035
63.2	0.005	0	0.034
63.25	0.005	0.004	0.035
63.3	0.004	0.002	0.034
63.35	0.005	0.002	0.035
63.4	0.004	0.001	0.034
63.45	0.005	0.004	0.035
63.5	0.005	0.001	0.034
63.55	0.006	0.004	0.035
63.6	0.005	0.001	0.033
63.65	0.005	0.004	0.035
63.7	0.004	0.001	0.034
63.75	0.005	0.002	0.035
63.8	0.004	0.001	0.034
63.85	0.005	0.002	0.035
63.9	0.004	0.002	0.033
63.95	0.005	0.004	0.035
64	0.005	0.001	0.035
64.05	0.006	0.004	0.037
64.1	0.002	0.002	0.033
64.15	0.005	0.004	0.034
64.2	0.005	0.001	0.033
64.25	0.006	0.004	0.035
64.3	0.004	0.001	0.034
64.35	0.006	0.004	0.035
64.4	0.004	0.002	0.034
64.45	0.005	0.002	0.035
64.5	0.005	0.001	0.034
64.55	0.005	0.004	0.035
64.6	0.005	0.004	0.034
64.65	0.005	0.004	0.035
64.7	0.004	0.001	0.034
64.75	0.005	0.002	0.035
64.8	0.005	0.002	0.033
64.85	0.005	0.004	0.035
64.9	0.005	0.002	0.033
64.95	0.005	0.004	0.034
65	0.005	0.001	0.034
65.05	0.005	0.004	0.034
65.1	0.005	0.001	0.033
65.15	0.005	0.004	0.034
65.2	0.004	0.001	0.033
65.25	0.005	0.002	0.034
65.3	0.004	0.001	0.034

US EPA ARCHIVE DOCUMENT

65.35	0.005	0.002	0.034
65.4	0.005	0.001	0.034
65.45	0.005	0.002	0.034
65.5	0.004	0.002	0.033
65.55	0.005	0.004	0.034
65.6	0.005	0.001	0.034
65.65	0.005	0.004	0.034
65.7	0.004	0.002	0.034
65.75	0.005	0.002	0.035
65.8	0.004	0.002	0.033
65.85	0.005	0.002	0.034
65.9	0.004	0.001	0.033
65.95	0.006	0.004	0.035
66	0.004	0.002	0.033
66.05	0.006	0.004	0.034
66.1	0.005	0.002	0.034
66.15	0.005	0.004	0.034
66.2	0.004	0.001	0.033
66.25	0.005	0.002	0.034
66.3	0.004	0	0.033
66.35	0.005	0.002	0.034
66.4	0.004	0.002	0.033
66.45	0.006	0.004	0.035
66.5	0.005	0.002	0.034
66.55	0.005	0.002	0.035
66.6	0.005	0.001	0.035
66.65	0.005	0.004	0.035
66.7	0.004	0.002	0.033
66.75	0.005	0.004	0.034
66.8	0.004	0.001	0.034
66.85	0.006	0.004	0.035
66.9	0.004	0.001	0.033
66.95	0.006	0.004	0.034
67	0.004	0.002	0.034
67.05	0.005	0.004	0.034
67.1	0.004	0.001	0.034
67.15	0.005	0.002	0.035
67.2	0.005	0.002	0.033
67.25	0.005	0.002	0.034
67.3	0.004	0.001	0.034
67.35	0.005	0.002	0.035
67.4	0.005	0	0.033
67.45	0.006	0.004	0.037
67.5	0.005	0	0.032
67.55	0.006	0.004	0.034
67.6	0.005	0.001	0.033
67.65	0.006	0.004	0.033

US EPA ARCHIVE DOCUMENT

67.7	0.005	0.001	0.032
67.75	0.005	0.002	0.033
67.8	0.005	0.001	0.033
67.85	0.005	0.002	0.033
67.9	0.005	0.001	0.033
67.95	0.006	0.002	0.033
68	0.004	0.001	0.032
68.05	0.005	0.002	0.033
68.1	0.004	0.001	0.033
68.15	0.005	0.004	0.033
68.2	0.005	0.002	0.033
68.25	0.006	0.002	0.034
68.3	0.006	0.001	0.032
68.35	0.006	0.004	0.034
68.4	0.005	0.001	0.033
68.45	0.006	0.004	0.034
68.5	0.004	0.001	0.033
68.55	0.006	0.004	0.035
68.6	0.005	0.001	0.034
68.65	0.006	0.004	0.035
68.7	0.004	0.002	0.034
68.75	0.006	0.004	0.035
68.8	0.005	0.001	0.034
68.85	0.006	0.004	0.035
68.9	0.005	0.002	0.034
68.95	0.006	0.004	0.037
69	0.005	0.002	0.034
69.05	0.006	0.004	0.035
69.1	0.005	0.004	0.035
69.15	0.006	0.004	0.035
69.2	0.005	0.004	0.035
69.25	0.006	0.004	0.035
69.3	0.005	0.004	0.035
69.35	0.006	0.004	0.037
69.4	0.005	0.002	0.034
69.45	0.006	0.004	0.037
69.5	0.005	0.002	0.033
69.55	0.006	0.002	0.034
69.6	0.005	0.002	0.032
69.65	0.006	0.004	0.034
69.7	0.005	0.002	0.032
69.75	0.006	0.004	0.034
69.8	0.004	0.001	0.032
69.85	0.006	0.002	0.033
69.9	0.005	0	0.032
69.95	0.006	0.002	0.033
70	0.004	0.001	0.033

US EPA ARCHIVE DOCUMENT

70.05	0.006	0.002	0.033
70.1	0.005	0.002	0.033
70.15	0.006	0.002	0.034
70.2	0.005	0.002	0.033
70.25	0.006	0.002	0.033
70.3	0.005	0	0.033
70.35	0.006	0.002	0.034
70.4	0.005	0.001	0.034
70.45	0.006	0.004	0.034
70.5	0.005	0.001	0.032
70.55	0.006	0.002	0.033
70.6	0.005	0.001	0.033
70.65	0.006	0.004	0.033
70.7	0.004	0.002	0.033
70.75	0.006	0.002	0.034
70.8	0.005	0.001	0.033
70.85	0.006	0.004	0.034
70.9	0.006	0.001	0.033
70.95	0.006	0.002	0.034
71	0.005	0.001	0.033
71.05	0.006	0.002	0.034
71.1	0.005	0.001	0.032
71.15	0.006	0.002	0.034
71.2	0.005	0.001	0.032
71.25	0.006	0.002	0.034
71.3	0.004	0.001	0.034
71.35	0.006	0.004	0.034
71.4	0.006	0.001	0.033
71.45	0.006	0.004	0.037
71.5	0.005	0.002	0.034
71.55	0.006	0.002	0.035
71.6	0.005	0.001	0.034
71.65	0.006	0.002	0.037
71.7	0.004	0.001	0.034
71.75	0.006	0.002	0.037
71.8	0.005	0.001	0.035
71.85	0.006	0.002	0.035
71.9	0.005	0.001	0.034
71.95	0.006	0.002	0.035
72	0.005	0.001	0.034
72.05	0.006	0.002	0.035
72.1	0.005	0.002	0.034
72.15	0.006	0.002	0.035
72.2	0.005	0	0.035
72.25	0.006	0.002	0.035
72.3	0.006	0.001	0.034
72.35	0.006	0.002	0.037

US EPA ARCHIVE DOCUMENT

72.4	0.005	0.002	0.037
72.45	0.007	0.004	0.037
72.5	0.006	0.001	0.035
72.55	0.006	0.002	0.037
72.6	0.004	0.002	0.035
72.65	0.006	0.004	0.037
72.7	0.005	0.001	0.035
72.75	0.006	0.002	0.037
72.8	0.005	0.001	0.035
72.85	0.006	0.002	0.038
72.9	0.005	0.001	0.034
72.95	0.006	0.002	0.037
73	0.004	0.001	0.034
73.05	0.005	0.002	0.037
73.1	0.005	0.001	0.035
73.15	0.006	0.002	0.037
73.2	0.005	0.001	0.035
73.25	0.006	0.002	0.038
73.3	0.004	0.001	0.034
73.35	0.006	0.002	0.037
73.4	0.004	0.001	0.035
73.45	0.006	0.004	0.037
73.5	0.005	0.001	0.034
73.55	0.005	0.002	0.035
73.6	0.005	0.001	0.034
73.65	0.006	0.002	0.035
73.7	0.005	0.002	0.034
73.75	0.006	0.002	0.037
73.8	0.005	0.001	0.033
73.85	0.006	0.004	0.035
73.9	0.005	0.001	0.034
73.95	0.006	0.002	0.035
74	0.005	0.002	0.034
74.05	0.006	0.002	0.035
74.1	0.004	0.001	0.034
74.15	0.006	0.002	0.035
74.2	0.005	0.001	0.035
74.25	0.006	0.002	0.035
74.3	0.005	0.002	0.033
74.35	0.005	0.002	0.035
74.4	0.005	0.001	0.034
74.45	0.006	0.004	0.038
74.5	0.005	0.001	0.035
74.55	0.006	0.004	0.035
74.6	0.004	0.002	0.035
74.65	0.006	0.002	0.037
74.7	0.006	0.002	0.035

US EPA ARCHIVE DOCUMENT

74.75	0.006	0.004	0.037
74.8	0.005	0.002	0.035
74.85	0.006	0.004	0.037
74.9	0.005	0.002	0.035
74.95	0.006	0.004	0.037
75	0.004	0.001	0.034
75.05	0.006	0.002	0.035
75.1	0.004	0.001	0.035
75.15	0.005	0.004	0.037
75.2	0.005	0.001	0.035
75.25	0.006	0.004	0.037
75.3	0.005	0.004	0.035
75.35	0.007	0.004	0.037
75.4	0.005	0.001	0.035
75.45	0.007	0.004	0.037
75.5	0.004	0.001	0.035
75.55	0.006	0.004	0.039
75.6	0.005	0.002	0.037
75.65	0.006	0.002	0.038
75.7	0.005	0.002	0.037
75.75	0.006	0.002	0.039
75.8	0.005	0.001	0.037
75.85	0.006	0.002	0.038
75.9	0.005	0.001	0.038
75.95	0.006	0.002	0.038
76	0.004	0.002	0.038
76.05	0.006	0.002	0.039
76.1	0.005	0.002	0.037
76.15	0.006	0.002	0.039
76.2	0.005	0.001	0.037
76.25	0.006	0.002	0.039
76.3	0.004	0.001	0.039
76.35	0.006	0.002	0.039
76.4	0.004	0.001	0.038
76.45	0.006	0.004	0.039
76.5	0.005	0.001	0.038
76.55	0.006	0.002	0.039
76.6	0.004	0.001	0.039
76.65	0.006	0.002	0.039
76.7	0.005	0.001	0.038
76.75	0.006	0.002	0.039
76.8	0.005	0.001	0.038
76.85	0.006	0.002	0.039
76.9	0.004	0.001	0.038
76.95	0.006	0.002	0.039
77	0.005	0.001	0.038
77.05	0.006	0.002	0.039

US EPA ARCHIVE DOCUMENT

77.1	0.005	0.002	0.038
77.15	0.005	0.002	0.039
77.2	0.005	0.001	0.039
77.25	0.005	0.002	0.039
77.3	0.005	0.002	0.038
77.35	0.005	0.002	0.039
77.4	0.005	0.001	0.038
77.45	0.006	0.004	0.039
77.5	0.005	0.002	0.038
77.55	0.006	0.004	0.038
77.6	0.004	0.004	0.038
77.65	0.006	0.004	0.038
77.7	0.005	0.001	0.037
77.75	0.006	0.004	0.039
77.8	0.004	0.002	0.037
77.85	0.006	0.002	0.038
77.9	0.005	0.002	0.037
77.95	0.006	0.004	0.039
78	0.005	0.004	0.039
78.05	0.006	0.004	0.039
78.1	0.004	0.002	0.038
78.15	0.006	0.002	0.039
78.2	0.005	0.002	0.039
78.25	0.006	0.002	0.039
78.3	0.005	0.001	0.039
78.35	0.006	0.002	0.039
78.4	0.005	0.001	0.038
78.45	0.007	0.004	0.059
78.5	0.006	0.002	0.046
78.55	0.006	0.002	0.046
78.6	0.004	0.001	0.045
78.65	0.006	0.004	0.046
78.7	0.005	0.002	0.044
78.75	0.006	0.004	0.046
78.8	0.006	0.002	0.043
78.85	0.006	0.004	0.044
78.9	0.005	0.001	0.043
78.95	0.006	0.004	0.044
79	0.004	0	0.042
79.05	0.007	0.004	0.044
79.1	0.007	0.001	0.042
79.15	0.007	0.004	0.044
79.2	0.004	0.001	0.04
79.25	0.006	0.004	0.04
79.3	0.005	0.001	0.038
79.35	0.007	0.004	0.039
79.4	0.004	0.001	0.035

US EPA ARCHIVE DOCUMENT

79.45	0.006	0.004	0.038
79.5	0.005	0.001	0.035
79.55	0.006	0.004	0.037
79.6	0.004	0.001	0.037
79.65	0.006	0.002	0.038
79.7	0.005	0.002	0.037
79.75	0.006	0.002	0.037
79.8	0.004	0.001	0.035
79.85	0.006	0.002	0.037
79.9	0.005	0.001	0.035
79.95	0.006	0.004	0.037
80	0.005	0.002	0.035
80.05	0.006	0.004	0.038
80.1	0.004	0.001	0.037
80.15	0.006	0.004	0.039
80.2	0.005	0	0.028
80.25	0.005	0.002	0.031
80.3	0.005	0.002	0.029
80.35	0.005	0.002	0.031
80.4	0.004	0.002	0.028

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :8807.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.009	0.013
0.1	0.001	0.006	0.011
0.15	0.002	0.009	0.013
0.2	0.001	0.007	0.011
0.25	0.002	0.009	0.013
0.3	0.002	0.007	0.011
0.35	0.002	0.009	0.012
0.4	0.001	0.006	0.012
0.45	0.004	0.009	0.013
0.5	0.002	0.007	0.011
0.55	0.004	0.009	0.012
0.6	0.001	0.007	0.011
0.65	0.004	0.01	0.012
0.7	0.001	0.009	0.007
0.75	0.004	0.011	0.009
0.8	0.001	0.007	0.007
0.85	0.004	0.01	0.009
0.9	0.002	0.007	0.004
0.95	0.004	0.009	0.005
1	0.001	0.007	0
1.05	0.004	0.009	0.005
1.1	0	0.009	0.005
1.15	0.004	0.009	0.009
1.2	0.002	0.007	0.007
1.25	0.004	0.009	0.011
1.3	0.001	0.007	0.006
1.35	0.004	0.009	0.009
1.4	0.002	0.007	0.006
1.45	0.004	0.01	0.009
1.5	0.002	0.006	0.006
1.55	0.004	0.009	0.007
1.6	0.001	0.007	0.006
1.65	0.004	0.009	0.009
1.7	0.002	0.007	0.006
1.75	0.004	0.009	0.009
1.8	0.002	0.007	0.006
1.85	0.004	0.009	0.007

US EPA ARCHIVE DOCUMENT

1.9	0.001	0.007	0.007
1.95	0.002	0.009	0.009
2	0.002	0.006	0.007
2.05	0.004	0.009	0.009
2.1	0.002	0.009	0.009
2.15	0.004	0.01	0.01
2.2	0.002	0.007	0.009
2.25	0.004	0.009	0.01
2.3	0.001	0.006	0.009
2.35	0.004	0.01	0.011
2.4	0.002	0.007	0.009
2.45	0.004	0.009	0.01
2.5	0.002	0.007	0.009
2.55	0.004	0.009	0.01
2.6	0.001	0.009	0.01
2.65	0.004	0.009	0.01
2.7	0.001	0.007	0.01
2.75	0.004	0.009	0.01
2.8	0.001	0.007	0.007
2.85	0.004	0.009	0.01
2.9	0.001	0.006	0.009
2.95	0.004	0.009	0.01
3	0.002	0.007	0.009
3.05	0.004	0.009	0.01
3.1	0.001	0.006	0.009
3.15	0.004	0.009	0.01
3.2	0.002	0.006	0.01
3.25	0.004	0.009	0.01
3.3	0.002	0.009	0.01
3.35	0.005	0.01	0.012
3.4	0.002	0.007	0.007
3.45	0.004	0.009	0.01
3.5	0.002	0.006	0.01
3.55	0.004	0.009	0.01
3.6	0.002	0.007	0.009
3.65	0.005	0.009	0.01
3.7	0.002	0.006	0.009
3.75	0.004	0.009	0.01
3.8	0.001	0.007	0.009
3.85	0.004	0.009	0.01
3.9	0.004	0.006	0.007
3.95	0.004	0.009	0.01
4	0.002	0.007	0.009
4.05	0.004	0.009	0.01
4.1	0.002	0.006	0.009
4.15	0.004	0.009	0.01
4.2	0.001	0.005	0.01

US EPA ARCHIVE DOCUMENT

4.25	0.005	0.009	0.011
4.3	0.004	0.007	0.01
4.35	0.004	0.009	0.011
4.4	0.004	0.007	0.011
4.45	0.005	0.009	0.011
4.5	0.002	0.006	0.011
4.55	0.004	0.009	0.011
4.6	0.004	0.006	0.01
4.65	0.004	0.009	0.011
4.7	0.002	0.007	0.011
4.75	0.004	0.009	0.011
4.8	0.002	0.006	0.01
4.85	0.004	0.009	0.011
4.9	0.002	0.007	0.01
4.95	0.004	0.009	0.012
5	0.002	0.007	0.01
5.05	0.004	0.009	0.011
5.1	0.004	0.007	0.01
5.15	0.004	0.009	0.011
5.2	0.002	0.006	0.01
5.25	0.004	0.009	0.012
5.3	0.002	0.007	0.01
5.35	0.005	0.009	0.011
5.4	0.004	0.007	0.009
5.45	0.004	0.009	0.01
5.5	0.004	0.006	0.007
5.55	0.004	0.009	0.01
5.6	0.002	0.006	0.006
5.65	0.005	0.009	0.01
5.7	0.002	0.007	0.007
5.75	0.005	0.009	0.01
5.8	0.002	0.007	0.006
5.85	0.005	0.009	0.01
5.9	0.002	0.006	0.009
5.95	0.005	0.007	0.01
6	0.002	0.006	0.01
6.05	0.005	0.009	0.011
6.1	0.004	0.006	0.007
6.15	0.004	0.007	0.012
6.2	0.004	0.007	0.01
6.25	0.004	0.009	0.012
6.3	0.004	0.007	0.011
6.35	0.005	0.01	0.013
6.4	0.004	0.006	0.011
6.45	0.005	0.007	0.012
6.5	0.004	0.006	0.011
6.55	0.005	0.009	0.012

US EPA ARCHIVE DOCUMENT

6.6	0.001	0.007	0.011
6.65	0.005	0.009	0.012
6.7	0.001	0.007	0.011
6.75	0.005	0.009	0.012
6.8	0.004	0.007	0.011
6.85	0.005	0.007	0.012
6.9	0.004	0.006	0.01
6.95	0.006	0.007	0.012
7	0.002	0.006	0.011
7.05	0.005	0.009	0.012
7.1	0.002	0.007	0.011
7.15	0.006	0.007	0.011
7.2	0.004	0.007	0.011
7.25	0.006	0.007	0.013
7.3	0.002	0.007	0.011
7.35	0.005	0.009	0.015
7.4	0.002	0.007	0.012
7.45	0.005	0.007	0.013
7.5	0.002	0.007	0.011
7.55	0.005	0.009	0.013
7.6	0.002	0.006	0.012
7.65	0.005	0.007	0.013
7.7	0.004	0.007	0.012
7.75	0.005	0.007	0.013
7.8	0.004	0.006	0.011
7.85	0.005	0.009	0.013
7.9	0.004	0.006	0.012
7.95	0.005	0.009	0.013
8	0.004	0.006	0.012
8.05	0.005	0.007	0.012
8.1	0.002	0.007	0.011
8.15	0.006	0.007	0.013
8.2	0.005	0.007	0.012
8.25	0.005	0.009	0.013
8.3	0.004	0.007	0.011
8.35	0.005	0.009	0.016
8.4	0.004	0.007	0.011
8.45	0.005	0.007	0.013
8.5	0.004	0.007	0.012
8.55	0.005	0.007	0.013
8.6	0.004	0.007	0.013
8.65	0.005	0.007	0.013
8.7	0.004	0.007	0.013
8.75	0.005	0.007	0.013
8.8	0.002	0.007	0.013
8.85	0.005	0.007	0.013
8.9	0.004	0.007	0.012

US EPA ARCHIVE DOCUMENT

8.95	0.005	0.007	0.013
9	0.004	0.007	0.011
9.05	0.005	0.007	0.013
9.1	0.002	0.007	0.011
9.15	0.005	0.007	0.013
9.2	0.004	0.006	0.013
9.25	0.005	0.007	0.013
9.3	0.004	0.007	0.012
9.35	0.006	0.009	0.015
9.4	0.002	0.006	0.012
9.45	0.005	0.007	0.015
9.5	0.004	0.007	0.012
9.55	0.005	0.007	0.015
9.6	0.004	0.006	0.011
9.65	0.005	0.007	0.015
9.7	0.005	0.006	0.011
9.75	0.005	0.007	0.013
9.8	0.004	0.006	0.013
9.85	0.005	0.007	0.015
9.9	0.002	0.006	0.012
9.95	0.005	0.007	0.013
10	0.004	0.006	0.012
10.05	0.005	0.009	0.015
10.1	0.005	0.006	0.012
10.15	0.005	0.007	0.015
10.2	0.004	0.006	0.013
10.25	0.005	0.007	0.015
10.3	0.004	0.007	0.013
10.35	0.005	0.007	0.015
10.4	0.004	0.006	0.013
10.45	0.006	0.009	0.016
10.5	0.004	0.007	0.013
10.55	0.005	0.007	0.015
10.6	0.004	0.007	0.013
10.65	0.006	0.009	0.015
10.7	0.004	0.006	0.015
10.75	0.006	0.009	0.016
10.8	0.004	0.007	0.012
10.85	0.006	0.007	0.016
10.9	0.004	0.006	0.015
10.95	0.005	0.007	0.016
11	0.005	0.006	0.013
11.05	0.005	0.007	0.015
11.1	0.004	0.006	0.015
11.15	0.005	0.007	0.016
11.2	0.004	0.007	0.013
11.25	0.005	0.007	0.016

US EPA ARCHIVE DOCUMENT

11.3	0.002	0.006	0.013
11.35	0.005	0.007	0.016
11.4	0.004	0.006	0.015
11.45	0.006	0.009	0.017
11.5	0.005	0.006	0.016
11.55	0.005	0.007	0.017
11.6	0.004	0.007	0.015
11.65	0.006	0.007	0.017
11.7	0.004	0.007	0.015
11.75	0.006	0.007	0.017
11.8	0.005	0.007	0.016
11.85	0.006	0.007	0.017
11.9	0.004	0.006	0.015
11.95	0.006	0.007	0.017
12	0.004	0.007	0.015
12.05	0.005	0.007	0.017
12.1	0.004	0.006	0.015
12.15	0.005	0.007	0.017
12.2	0.005	0.006	0.016
12.25	0.005	0.007	0.016
12.3	0.005	0.006	0.016
12.35	0.006	0.009	0.02
12.4	0.005	0.006	0.016
12.45	0.006	0.007	0.017
12.5	0.005	0.006	0.017
12.55	0.006	0.007	0.017
12.6	0.005	0.006	0.016
12.65	0.005	0.007	0.018
12.7	0.005	0.006	0.016
12.75	0.006	0.007	0.017
12.8	0.005	0.007	0.015
12.85	0.006	0.007	0.017
12.9	0.006	0.007	0.016
12.95	0.006	0.007	0.017
13	0.005	0.006	0.016
13.05	0.006	0.007	0.017
13.1	0.005	0.006	0.016
13.15	0.006	0.007	0.017
13.2	0.005	0.006	0.015
13.25	0.006	0.007	0.018
13.3	0.006	0.005	0.016
13.35	0.007	0.007	0.02
13.4	0.005	0.006	0.016
13.45	0.006	0.007	0.017
13.5	0.004	0.006	0.016
13.55	0.006	0.007	0.017
13.6	0.005	0.006	0.016

US EPA ARCHIVE DOCUMENT

13.65	0.007	0.007	0.017
13.7	0.007	0.006	0.015
13.75	0.007	0.007	0.017
13.8	0.006	0.007	0.016
13.85	0.006	0.007	0.017
13.9	0.005	0.007	0.016
13.95	0.006	0.007	0.017
14	0.005	0.005	0.017
14.05	0.006	0.007	0.017
14.1	0.006	0.007	0.016
14.15	0.006	0.007	0.017
14.2	0.005	0.007	0.016
14.25	0.006	0.007	0.017
14.3	0.005	0.006	0.016
14.35	0.007	0.009	0.018
14.4	0.006	0.006	0.015
14.45	0.007	0.007	0.016
14.5	0.005	0.006	0.015
14.55	0.007	0.007	0.016
14.6	0.005	0.006	0.015
14.65	0.007	0.007	0.017
14.7	0.006	0.006	0.015
14.75	0.006	0.007	0.017
14.8	0.005	0.007	0.015
14.85	0.007	0.007	0.017
14.9	0.006	0.006	0.016
14.95	0.007	0.007	0.016
15	0.005	0.006	0.015
15.05	0.007	0.007	0.017
15.1	0.006	0.006	0.016
15.15	0.007	0.007	0.017
15.2	0.006	0.006	0.015
15.25	0.007	0.007	0.017
15.3	0.005	0.006	0.017
15.35	0.009	0.007	0.018
15.4	0.005	0.006	0.017
15.45	0.007	0.007	0.018
15.5	0.006	0.006	0.018
15.55	0.007	0.007	0.018
15.6	0.005	0.006	0.017
15.65	0.007	0.007	0.018
15.7	0.006	0.006	0.017
15.75	0.007	0.007	0.018
15.8	0.007	0.006	0.017
15.85	0.007	0.007	0.018
15.9	0.006	0.005	0.016
15.95	0.009	0.007	0.018

US EPA ARCHIVE DOCUMENT

16	0.007	0.007	0.017
16.05	0.009	0.007	0.018
16.1	0.006	0.006	0.017
16.15	0.009	0.007	0.018
16.2	0.006	0.006	0.018
16.25	0.009	0.007	0.018
16.3	0.006	0.006	0.016
16.35	0.01	0.009	0.02
16.4	0.007	0.006	0.017
16.45	0.01	0.007	0.02
16.5	0.007	0.007	0.017
16.55	0.01	0.007	0.018
16.6	0.01	0.006	0.017
16.65	0.01	0.007	0.018
16.7	0.007	0.006	0.018
16.75	0.011	0.007	0.018
16.8	0.006	0.006	0.017
16.85	0.01	0.007	0.018
16.9	0.009	0.007	0.017
16.95	0.011	0.007	0.018
17	0.007	0.006	0.017
17.05	0.011	0.009	0.018
17.1	0.006	0.006	0.017
17.15	0.011	0.007	0.018
17.2	0.009	0.006	0.016
17.25	0.011	0.007	0.017
17.3	0.009	0.006	0.016
17.35	0.013	0.009	0.021
17.4	0.006	0.006	0.018
17.45	0.013	0.007	0.02
17.5	0.004	0.006	0.018
17.55	0.012	0.007	0.02
17.6	0.011	0.007	0.018
17.65	0.013	0.007	0.02
17.7	0.005	0.006	0.018
17.75	0.013	0.007	0.02
17.8	0.006	0.007	0.017
17.85	0.013	0.007	0.021
17.9	0.01	0.006	0.017
17.95	0.015	0.007	0.02
18	0.007	0.006	0.018
18.05	0.015	0.007	0.02
18.1	0.012	0.007	0.017
18.15	0.013	0.007	0.02
18.2	0.013	0.007	0.017
18.25	0.015	0.007	0.018
18.3	0.012	0.006	0.017

US EPA ARCHIVE DOCUMENT

18.35	0.015	0.009	0.023
18.4	0.006	0.007	0.02
18.45	0.013	0.007	0.021
18.5	0.009	0.006	0.018
18.55	0.013	0.007	0.021
18.6	0.009	0.006	0.018
18.65	0.012	0.007	0.021
18.7	0.01	0.006	0.02
18.75	0.013	0.009	0.021
18.8	0.006	0.005	0.02
18.85	0.012	0.007	0.021
18.9	0.006	0.006	0.018
18.95	0.012	0.007	0.021
19	0.006	0.006	0.02
19.05	0.013	0.007	0.021
19.1	0.006	0.006	0.018
19.15	0.012	0.007	0.021
19.2	0.009	0.006	0.02
19.25	0.012	0.007	0.02
19.3	0.006	0.006	0.02
19.35	0.013	0.007	0.024
19.4	0.006	0.007	0.023
19.45	0.01	0.007	0.024
19.5	0.007	0.007	0.024
19.55	0.009	0.007	0.024
19.6	0.006	0.005	0.023
19.65	0.009	0.007	0.024
19.7	0.007	0.006	0.023
19.75	0.01	0.007	0.024
19.8	0.007	0.006	0.023
19.85	0.009	0.007	0.024
19.9	0.006	0.006	0.022
19.95	0.01	0.007	0.024
20	0.007	0.006	0.023
20.05	0.01	0.007	0.024
20.1	0.009	0.006	0.023
20.15	0.01	0.007	0.024
20.2	0.007	0.006	0.023
20.25	0.01	0.007	0.024
20.3	0.007	0.007	0.023
20.35	0.01	0.007	0.028
20.4	0.007	0.006	0.026
20.45	0.009	0.007	0.028
20.5	0.007	0.006	0.027
20.55	0.009	0.006	0.027
20.6	0.006	0.006	0.026
20.65	0.009	0.007	0.028

US EPA ARCHIVE DOCUMENT

20.7	0.006	0.006	0.026
20.75	0.01	0.007	0.027
20.8	0.007	0.005	0.026
20.85	0.009	0.007	0.028
20.9	0.007	0.006	0.027
20.95	0.009	0.007	0.028
21	0.007	0.006	0.026
21.05	0.009	0.007	0.028
21.1	0.007	0.006	0.026
21.15	0.009	0.006	0.027
21.2	0.007	0.006	0.026
21.25	0.009	0.007	0.027
21.3	0.006	0.006	0.026
21.35	0.01	0.007	0.028
21.4	0.006	0.006	0.027
21.45	0.01	0.007	0.028
21.5	0.009	0.006	0.026
21.55	0.01	0.007	0.027
21.6	0.009	0.006	0.026
21.65	0.01	0.007	0.027
21.7	0.009	0.005	0.026
21.75	0.01	0.007	0.027
21.8	0.01	0.006	0.024
21.85	0.01	0.007	0.027
21.9	0.009	0.006	0.024
21.95	0.01	0.007	0.027
22	0.009	0.006	0.026
22.05	0.01	0.007	0.026
22.1	0.01	0.005	0.023
22.15	0.01	0.007	0.026
22.2	0.009	0.006	0.026
22.25	0.01	0.007	0.026
22.3	0.009	0.006	0.024
22.35	0.01	0.007	0.026
22.4	0.01	0.005	0.024
22.45	0.011	0.007	0.029
22.5	0.007	0.005	0.026
22.55	0.01	0.006	0.027
22.6	0.007	0.006	0.026
22.65	0.009	0.007	0.028
22.7	0.007	0.006	0.027
22.75	0.01	0.007	0.028
22.8	0.009	0.006	0.026
22.85	0.01	0.007	0.028
22.9	0.009	0.006	0.026
22.95	0.009	0.007	0.027
23	0.009	0.005	0.026

US EPA ARCHIVE DOCUMENT

23.05	0.01	0.006	0.027
23.1	0.009	0.005	0.024
23.15	0.01	0.007	0.027
23.2	0.009	0.005	0.026
23.25	0.01	0.007	0.027
23.3	0.009	0.006	0.024
23.35	0.01	0.007	0.027
23.4	0.009	0.006	0.024
23.45	0.011	0.007	0.029
23.5	0.009	0.006	0.026
23.55	0.01	0.007	0.027
23.6	0.009	0.006	0.027
23.65	0.01	0.006	0.027
23.7	0.009	0.005	0.026
23.75	0.011	0.006	0.027
23.8	0.009	0.005	0.024
23.85	0.01	0.007	0.027
23.9	0.01	0.006	0.026
23.95	0.011	0.007	0.027
24	0.011	0.006	0.026
24.05	0.011	0.006	0.027
24.1	0.009	0.006	0.024
24.15	0.011	0.006	0.027
24.2	0.009	0.006	0.026
24.25	0.01	0.007	0.026
24.3	0.009	0.006	0.024
24.35	0.011	0.009	0.032
24.4	0.009	0.006	0.028
24.45	0.01	0.009	0.032
24.5	0.009	0.006	0.029
24.55	0.01	0.007	0.032
24.6	0.007	0.006	0.028
24.65	0.01	0.007	0.031
24.7	0.009	0.005	0.029
24.75	0.01	0.007	0.031
24.8	0.009	0.006	0.028
24.85	0.01	0.007	0.032
24.9	0.009	0.005	0.028
24.95	0.01	0.007	0.031
25	0.009	0.006	0.031
25.05	0.01	0.007	0.032
25.1	0.009	0.006	0.029
25.15	0.01	0.007	0.031
25.2	0.009	0.006	0.031
25.25	0.01	0.007	0.031
25.3	0.009	0.007	0.027
25.35	0.01	0.009	0.039

US EPA ARCHIVE DOCUMENT

25.4	0.009	0.007	0.028
25.45	0.01	0.007	0.038
25.5	0.009	0.007	0.031
25.55	0.01	0.007	0.035
25.6	0.009	0.006	0.034
25.65	0.01	0.007	0.035
25.7	0.007	0.007	0.035
25.75	0.01	0.007	0.035
25.8	0.009	0.006	0.035
25.85	0.01	0.007	0.039
25.9	0.009	0.006	0.028
25.95	0.01	0.007	0.037
26	0.009	0.006	0.029
26.05	0.01	0.007	0.037
26.1	0.009	0.005	0.033
26.15	0.01	0.007	0.035
26.2	0.007	0.006	0.032
26.25	0.01	0.007	0.039
26.3	0.007	0.007	0.039
26.35	0.009	0.007	0.039
26.4	0.009	0.007	0.035
26.45	0.01	0.007	0.042
26.5	0.007	0.006	0.033
26.55	0.009	0.007	0.038
26.6	0.007	0.006	0.037
26.65	0.009	0.007	0.037
26.7	0.009	0.005	0.034
26.75	0.009	0.007	0.037
26.8	0.007	0.006	0.035
26.85	0.009	0.007	0.037
26.9	0.007	0.006	0.033
26.95	0.009	0.007	0.037
27	0.009	0.005	0.034
27.05	0.009	0.007	0.035
27.1	0.007	0.006	0.034
27.15	0.009	0.007	0.037
27.2	0.007	0.006	0.033
27.25	0.009	0.007	0.037
27.3	0.007	0.007	0.035
27.35	0.009	0.007	0.037
27.4	0.007	0.006	0.033
27.45	0.01	0.007	0.044
27.5	0.006	0.006	0.042
27.55	0.007	0.006	0.042
27.6	0.006	0.005	0.04
27.65	0.009	0.006	0.043
27.7	0.006	0.006	0.042

US EPA ARCHIVE DOCUMENT

27.75	0.007	0.006	0.042
27.8	0.006	0.005	0.04
27.85	0.007	0.006	0.043
27.9	0.007	0.005	0.042
27.95	0.007	0.006	0.042
28	0.007	0.005	0.042
28.05	0.007	0.006	0.042
28.1	0.006	0.006	0.04
28.15	0.007	0.006	0.043
28.2	0.006	0.005	0.04
28.25	0.007	0.006	0.042
28.3	0.006	0.005	0.042
28.35	0.007	0.006	0.043
28.4	0.006	0.005	0.04
28.45	0.009	0.007	0.043
28.5	0.006	0.005	0.037
28.55	0.009	0.007	0.038
28.6	0.006	0.005	0.037
28.65	0.007	0.007	0.038
28.7	0.006	0.005	0.035
28.75	0.007	0.006	0.039
28.8	0.006	0.005	0.037
28.85	0.009	0.006	0.038
28.9	0.009	0.005	0.037
28.95	0.009	0.006	0.038
29	0.006	0.005	0.038
29.05	0.007	0.006	0.038
29.1	0.006	0.006	0.037
29.15	0.009	0.007	0.038
29.2	0.006	0.006	0.035
29.25	0.009	0.006	0.038
29.3	0.006	0.005	0.037
29.35	0.007	0.007	0.037
29.4	0.007	0.005	0.037
29.45	0.009	0.007	0.043
29.5	0.006	0.005	0.037
29.55	0.009	0.006	0.039
29.6	0.009	0.005	0.038
29.65	0.009	0.006	0.04
29.7	0.007	0.006	0.038
29.75	0.009	0.007	0.039
29.8	0.005	0.006	0.037
29.85	0.009	0.006	0.039
29.9	0.006	0.005	0.038
29.95	0.007	0.006	0.039
30	0.006	0.005	0.038
30.05	0.007	0.006	0.039

US EPA ARCHIVE DOCUMENT

30.1	0.005	0.004	0.037
30.15	0.009	0.006	0.039
30.2	0.005	0.005	0.037
30.25	0.009	0.006	0.039
30.3	0.006	0.005	0.038
30.35	0.009	0.006	0.039
30.4	0.007	0.005	0.039
30.45	0.009	0.006	0.039
30.5	0.006	0.005	0.038
30.55	0.009	0.007	0.042
30.6	0.006	0.005	0.035
30.65	0.007	0.006	0.037
30.7	0.006	0.005	0.035
30.75	0.007	0.006	0.037
30.8	0.006	0.005	0.035
30.85	0.007	0.006	0.037
30.9	0.007	0.006	0.037
30.95	0.009	0.006	0.037
31	0.006	0.005	0.035
31.05	0.007	0.006	0.037
31.1	0.007	0.005	0.034
31.15	0.007	0.006	0.037
31.2	0.007	0.005	0.035
31.25	0.009	0.006	0.037
31.3	0.006	0.005	0.034
31.35	0.007	0.006	0.037
31.4	0.007	0.005	0.034
31.45	0.009	0.007	0.038
31.5	0.007	0.006	0.037
31.55	0.009	0.006	0.037
31.6	0.006	0.005	0.037
31.65	0.009	0.006	0.037
31.7	0.007	0.005	0.035
31.75	0.009	0.006	0.037
31.8	0.007	0.004	0.037
31.85	0.009	0.006	0.037
31.9	0.006	0.006	0.035
31.95	0.009	0.006	0.037
32	0.009	0.006	0.037
32.05	0.009	0.006	0.037
32.1	0.007	0.006	0.037
32.15	0.009	0.006	0.038
32.2	0.009	0.005	0.035
32.25	0.009	0.006	0.037
32.3	0.007	0.005	0.035
32.35	0.009	0.006	0.037
32.4	0.007	0.005	0.035

US EPA ARCHIVE DOCUMENT

32.45	0.009	0.006	0.039
32.5	0.007	0.005	0.038
32.55	0.009	0.006	0.038
32.6	0.007	0.006	0.037
32.65	0.009	0.006	0.038
32.7	0.007	0.005	0.037
32.75	0.009	0.006	0.039
32.8	0.007	0.005	0.038
32.85	0.009	0.006	0.039
32.9	0.007	0.005	0.037
32.95	0.009	0.006	0.038
33	0.007	0.005	0.037
33.05	0.009	0.006	0.038
33.1	0.007	0.005	0.038
33.15	0.009	0.006	0.038
33.2	0.007	0.005	0.037
33.25	0.009	0.006	0.038
33.3	0.007	0.005	0.038
33.35	0.01	0.006	0.038
33.4	0.007	0.005	0.037
33.45	0.01	0.007	0.04
33.5	0.009	0.007	0.038
33.55	0.01	0.007	0.039
33.6	0.007	0.005	0.038
33.65	0.01	0.006	0.039
33.7	0.007	0.006	0.038
33.75	0.01	0.006	0.039
33.8	0.009	0.005	0.038
33.85	0.01	0.006	0.039
33.9	0.009	0.005	0.038
33.95	0.009	0.006	0.039
34	0.009	0.005	0.038
34.05	0.01	0.006	0.039
34.1	0.007	0.005	0.038
34.15	0.01	0.006	0.039
34.2	0.007	0.006	0.038
34.25	0.01	0.006	0.039
34.3	0.01	0.005	0.037
34.35	0.01	0.006	0.039
34.4	0.007	0.005	0.037
34.45	0.01	0.006	0.039
34.5	0.009	0.005	0.037
34.55	0.011	0.01	0.042
34.6	0.009	0.005	0.039
34.65	0.01	0.006	0.04
34.7	0.009	0.006	0.039
34.75	0.009	0.006	0.04

US EPA ARCHIVE DOCUMENT

34.8	0.009	0.005	0.039
34.85	0.01	0.007	0.04
34.9	0.009	0.005	0.039
34.95	0.011	0.006	0.04
35	0.01	0.005	0.039
35.05	0.011	0.006	0.04
35.1	0.009	0.005	0.038
35.15	0.01	0.006	0.04
35.2	0.01	0.005	0.039
35.25	0.01	0.006	0.04
35.3	0.009	0.006	0.04
35.35	0.01	0.006	0.04
35.4	0.007	0.005	0.038
35.45	0.011	0.009	0.043
35.5	0.009	0.006	0.039
35.55	0.01	0.006	0.04
35.6	0.01	0.006	0.039
35.65	0.01	0.006	0.04
35.7	0.009	0.005	0.039
35.75	0.01	0.006	0.042
35.8	0.009	0.006	0.04
35.85	0.011	0.006	0.042
35.9	0.009	0.006	0.038
35.95	0.01	0.006	0.04
36	0.01	0.006	0.04
36.05	0.01	0.006	0.04
36.1	0.009	0.006	0.039
36.15	0.011	0.006	0.04
36.2	0.01	0.005	0.038
36.25	0.011	0.006	0.042
36.3	0.009	0.006	0.038
36.35	0.011	0.006	0.04
36.4	0.01	0.006	0.039
36.45	0.011	0.009	0.043
36.5	0.009	0.006	0.04
36.55	0.011	0.006	0.043
36.6	0.01	0.005	0.04
36.65	0.011	0.006	0.042
36.7	0.009	0.006	0.039
36.75	0.01	0.007	0.042
36.8	0.009	0.005	0.039
36.85	0.01	0.006	0.042
36.9	0.009	0.006	0.04
36.95	0.011	0.006	0.042
37	0.01	0.006	0.042
37.05	0.011	0.007	0.042
37.1	0.01	0.005	0.04

US EPA ARCHIVE DOCUMENT

37.15	0.011	0.006	0.042
37.2	0.01	0.006	0.039
37.25	0.011	0.006	0.04
37.3	0.01	0.005	0.039
37.35	0.011	0.007	0.042
37.4	0.01	0.005	0.04
37.45	0.011	0.007	0.044
37.5	0.01	0.005	0.042
37.55	0.01	0.006	0.043
37.6	0.01	0.005	0.042
37.65	0.01	0.006	0.043
37.7	0.01	0.006	0.042
37.75	0.01	0.006	0.042
37.8	0.009	0.005	0.04
37.85	0.01	0.006	0.042
37.9	0.009	0.006	0.042
37.95	0.011	0.006	0.043
38	0.01	0.006	0.04
38.05	0.011	0.006	0.042
38.1	0.01	0.004	0.042
38.15	0.011	0.006	0.042
38.2	0.009	0.005	0.042
38.25	0.011	0.006	0.043
38.3	0.01	0.005	0.039
38.35	0.011	0.006	0.042
38.4	0.009	0.005	0.04
38.45	0.011	0.006	0.044
38.5	0.01	0.006	0.043
38.55	0.01	0.006	0.045
38.6	0.009	0.006	0.043
38.65	0.01	0.006	0.044
38.7	0.009	0.005	0.043
38.75	0.01	0.006	0.044
38.8	0.01	0.006	0.043
38.85	0.011	0.006	0.045
38.9	0.009	0.006	0.043
38.95	0.01	0.006	0.044
39	0.009	0.005	0.043
39.05	0.01	0.006	0.044
39.1	0.01	0.006	0.044
39.15	0.011	0.006	0.044
39.2	0.01	0.006	0.043
39.25	0.011	0.006	0.045
39.3	0.011	0.005	0.043
39.35	0.011	0.006	0.045
39.4	0.009	0.005	0.043
39.45	0.01	0.006	0.045

US EPA ARCHIVE DOCUMENT

39.5	0.01	0.005	0.043
39.55	0.011	0.007	0.048
39.6	0.009	0.005	0.045
39.65	0.01	0.006	0.046
39.7	0.009	0.006	0.046
39.75	0.01	0.006	0.046
39.8	0.01	0.005	0.045
39.85	0.01	0.006	0.046
39.9	0.01	0.005	0.045
39.95	0.01	0.006	0.046
40	0.01	0.005	0.046
40.05	0.01	0.006	0.046
40.1	0.009	0.005	0.045
40.15	0.011	0.006	0.046
40.2	0.01	0.005	0.046
40.25	0.01	0.006	0.048
40.3	0.01	0.005	0.045
40.35	0.011	0.006	0.046
40.4	0.009	0.005	0.044
40.45	0.011	0.006	0.048
40.5	0.01	0.005	0.045
40.55	0.01	0.006	0.049
40.6	0.009	0.004	0.048
40.65	0.01	0.006	0.048
40.7	0.01	0.004	0.048
40.75	0.01	0.006	0.049
40.8	0.009	0.005	0.046
40.85	0.01	0.006	0.048
40.9	0.009	0.005	0.048
40.95	0.01	0.006	0.049
41	0.009	0.005	0.048
41.05	0.01	0.006	0.049
41.1	0.007	0.004	0.048
41.15	0.01	0.006	0.049
41.2	0.01	0.005	0.046
41.25	0.01	0.006	0.049
41.3	0.009	0.004	0.048
41.35	0.01	0.006	0.049
41.4	0.01	0.005	0.049
41.45	0.01	0.007	0.05
41.5	0.009	0.005	0.048
41.55	0.01	0.006	0.049
41.6	0.009	0.005	0.048
41.65	0.01	0.006	0.049
41.7	0.009	0.004	0.048
41.75	0.01	0.006	0.049
41.8	0.009	0.005	0.048

US EPA ARCHIVE DOCUMENT

41.85	0.01	0.006	0.049
41.9	0.009	0.005	0.048
41.95	0.01	0.006	0.05
42	0.009	0.005	0.048
42.05	0.01	0.006	0.05
42.1	0.01	0.004	0.048
42.15	0.011	0.006	0.049
42.2	0.01	0.006	0.048
42.25	0.011	0.006	0.05
42.3	0.009	0.004	0.046
42.35	0.011	0.006	0.05
42.4	0.009	0.005	0.048
42.45	0.011	0.006	0.051
42.5	0.009	0.005	0.05
42.55	0.01	0.006	0.051
42.6	0.007	0.005	0.05
42.65	0.01	0.006	0.05
42.7	0.009	0.004	0.05
42.75	0.01	0.006	0.051
42.8	0.009	0.005	0.049
42.85	0.01	0.006	0.051
42.9	0.01	0.004	0.051
42.95	0.011	0.006	0.051
43	0.009	0.005	0.05
43.05	0.01	0.006	0.051
43.1	0.009	0.005	0.05
43.15	0.01	0.006	0.051
43.2	0.009	0.005	0.049
43.25	0.01	0.006	0.051
43.3	0.009	0.004	0.049
43.35	0.011	0.006	0.051
43.4	0.01	0.005	0.05
43.45	0.01	0.006	0.051
43.5	0.01	0.005	0.05
43.55	0.011	0.006	0.053
43.6	0.01	0.005	0.05
43.65	0.01	0.006	0.051
43.7	0.009	0.006	0.049
43.75	0.011	0.006	0.053
43.8	0.009	0.006	0.05
43.85	0.01	0.006	0.053
43.9	0.01	0.005	0.05
43.95	0.011	0.006	0.053
44	0.01	0.006	0.051
44.05	0.01	0.006	0.053
44.1	0.007	0.005	0.05
44.15	0.01	0.006	0.051

US EPA ARCHIVE DOCUMENT

44.2	0.009	0.005	0.05
44.25	0.01	0.006	0.051
44.3	0.01	0.005	0.05
44.35	0.01	0.006	0.051
44.4	0.009	0.006	0.051
44.45	0.011	0.006	0.054
44.5	0.01	0.005	0.051
44.55	0.011	0.006	0.053
44.6	0.009	0.005	0.051
44.65	0.011	0.006	0.053
44.7	0.01	0.005	0.05
44.75	0.011	0.006	0.053
44.8	0.01	0.005	0.05
44.85	0.011	0.006	0.053
44.9	0.009	0.004	0.051
44.95	0.011	0.006	0.053
45	0.01	0.005	0.051
45.05	0.01	0.006	0.053
45.1	0.01	0.005	0.05
45.15	0.011	0.006	0.053
45.2	0.01	0.005	0.05
45.25	0.01	0.006	0.053
45.3	0.009	0.005	0.051
45.35	0.011	0.006	0.053
45.4	0.01	0.005	0.051
45.45	0.012	0.009	0.055
45.5	0.011	0.005	0.051
45.55	0.013	0.007	0.053
45.6	0.011	0.005	0.05
45.65	0.013	0.006	0.053
45.7	0.011	0.006	0.05
45.75	0.013	0.006	0.053
45.8	0.012	0.005	0.05
45.85	0.012	0.006	0.051
45.9	0.011	0.006	0.051
45.95	0.012	0.006	0.051
46	0.011	0.006	0.051
46.05	0.013	0.006	0.051
46.1	0.011	0.006	0.05
46.15	0.012	0.006	0.05
46.2	0.012	0.006	0.05
46.25	0.012	0.006	0.051
46.3	0.011	0.006	0.05
46.35	0.013	0.006	0.051
46.4	0.011	0.006	0.049
46.45	0.013	0.007	0.055
46.5	0.009	0.004	0.051

US EPA ARCHIVE DOCUMENT

46.55	0.01	0.005	0.054
46.6	0.009	0.005	0.051
46.65	0.01	0.005	0.054
46.7	0.009	0.004	0.054
46.75	0.011	0.005	0.054
46.8	0.01	0.004	0.053
46.85	0.011	0.005	0.054
46.9	0.009	0.004	0.051
46.95	0.01	0.005	0.054
47	0.009	0.005	0.053
47.05	0.01	0.005	0.054
47.1	0.009	0.005	0.051
47.15	0.01	0.005	0.054
47.2	0.009	0.004	0.053
47.25	0.01	0.005	0.054
47.3	0.009	0.004	0.053
47.35	0.01	0.005	0.054
47.4	0.009	0.004	0.051
47.45	0.01	0.005	0.054
47.5	0.01	0.004	0.051
47.55	0.012	0.006	0.057
47.6	0.011	0.004	0.054
47.65	0.012	0.005	0.054
47.7	0.01	0.004	0.051
47.75	0.012	0.005	0.054
47.8	0.011	0.004	0.051
47.85	0.012	0.005	0.054
47.9	0.011	0.004	0.053
47.95	0.012	0.005	0.054
48	0.011	0.004	0.053
48.05	0.012	0.005	0.054
48.1	0.011	0.005	0.053
48.15	0.011	0.005	0.054
48.2	0.011	0.004	0.051
48.25	0.012	0.005	0.054
48.3	0.011	0.004	0.051
48.35	0.012	0.005	0.054
48.4	0.012	0.004	0.053
48.45	0.012	0.005	0.059
48.5	0.009	0.002	0.056
48.55	0.01	0.005	0.057
48.6	0.007	0.004	0.056
48.65	0.01	0.005	0.057
48.7	0.007	0.004	0.056
48.75	0.01	0.005	0.057
48.8	0.009	0.004	0.056
48.85	0.01	0.005	0.057

US EPA ARCHIVE DOCUMENT

48.9	0.009	0.004	0.056
48.95	0.01	0.005	0.057
49	0.009	0.004	0.056
49.05	0.01	0.005	0.057
49.1	0.009	0.002	0.056
49.15	0.01	0.005	0.057
49.2	0.006	0.002	0.056
49.25	0.01	0.004	0.057
49.3	0.009	0.002	0.056
49.35	0.01	0.004	0.057
49.4	0.009	0.002	0.056
49.45	0.01	0.005	0.061
49.5	0.009	0.004	0.06
49.55	0.009	0.005	0.061
49.6	0.009	0.002	0.061
49.65	0.009	0.005	0.061
49.7	0.007	0.004	0.059
49.75	0.009	0.005	0.061
49.8	0.007	0.004	0.059
49.85	0.009	0.004	0.061
49.9	0.009	0.004	0.06
49.95	0.009	0.005	0.06
50	0.007	0.002	0.06
50.05	0.01	0.004	0.061
50.1	0.009	0.004	0.061
50.15	0.009	0.005	0.061
50.2	0.009	0.002	0.06
50.25	0.009	0.005	0.061
50.3	0.007	0.004	0.061
50.35	0.01	0.005	0.061
50.4	0.007	0.004	0.06
50.45	0.01	0.005	0.066
50.5	0.009	0.004	0.063
50.55	0.01	0.005	0.066
50.6	0.007	0.004	0.063
50.65	0.01	0.005	0.065
50.7	0.007	0.002	0.065
50.75	0.01	0.005	0.065
50.8	0.007	0.002	0.063
50.85	0.01	0.005	0.065
50.9	0.009	0.004	0.063
50.95	0.01	0.005	0.065
51	0.007	0.004	0.063
51.05	0.01	0.005	0.066
51.1	0.009	0.002	0.063
51.15	0.01	0.005	0.065
51.2	0.009	0.004	0.063

US EPA ARCHIVE DOCUMENT

51.25	0.01	0.005	0.066
51.3	0.009	0.004	0.063
51.35	0.01	0.005	0.066
51.4	0.007	0.002	0.066
51.45	0.01	0.005	0.066
51.5	0.009	0.004	0.065
51.55	0.01	0.005	0.065
51.6	0.007	0.004	0.065
51.65	0.01	0.005	0.066
51.7	0.009	0.004	0.065
51.75	0.01	0.005	0.066
51.8	0.007	0.002	0.063
51.85	0.01	0.004	0.066
51.9	0.009	0.004	0.065
51.95	0.011	0.004	0.065
52	0.009	0.004	0.065
52.05	0.01	0.005	0.066
52.1	0.01	0.002	0.063
52.15	0.01	0.004	0.066
52.2	0.01	0.004	0.066
52.25	0.01	0.005	0.066
52.3	0.007	0.004	0.065
52.35	0.01	0.005	0.066
52.4	0.007	0.004	0.063
52.45	0.011	0.006	0.067
52.5	0.01	0.004	0.06
52.55	0.011	0.005	0.062
52.6	0.01	0.004	0.061
52.65	0.011	0.004	0.062
52.7	0.01	0.004	0.061
52.75	0.011	0.005	0.062
52.8	0.009	0.004	0.062
52.85	0.011	0.005	0.062
52.9	0.01	0.004	0.061
52.95	0.011	0.005	0.062
53	0.01	0.002	0.06
53.05	0.011	0.004	0.062
53.1	0.01	0.004	0.061
53.15	0.011	0.005	0.062
53.2	0.009	0.004	0.061
53.25	0.011	0.005	0.062
53.3	0.011	0.002	0.06
53.35	0.011	0.005	0.062
53.4	0.01	0.002	0.06
53.45	0.012	0.005	0.062
53.5	0.01	0.004	0.061
53.55	0.01	0.004	0.062

US EPA ARCHIVE DOCUMENT

53.6	0.01	0.004	0.061
53.65	0.011	0.005	0.062
53.7	0.01	0.004	0.06
53.75	0.01	0.005	0.062
53.8	0.009	0.002	0.06
53.85	0.011	0.005	0.062
53.9	0.01	0.002	0.061
53.95	0.011	0.005	0.062
54	0.01	0.004	0.06
54.05	0.011	0.005	0.062
54.1	0.01	0.002	0.06
54.15	0.011	0.004	0.061
54.2	0.009	0.004	0.06
54.25	0.011	0.005	0.061
54.3	0.01	0.004	0.06
54.35	0.011	0.005	0.061
54.4	0.009	0.002	0.061
54.45	0.011	0.005	0.063
54.5	0.01	0.004	0.06
54.55	0.011	0.004	0.061
54.6	0.01	0.004	0.061
54.65	0.011	0.004	0.061
54.7	0.01	0.002	0.06
54.75	0.01	0.005	0.062
54.8	0.009	0.004	0.061
54.85	0.01	0.004	0.061
54.9	0.01	0.004	0.061
54.95	0.011	0.005	0.061
55	0.01	0.004	0.061
55.05	0.011	0.005	0.061
55.1	0.01	0.004	0.061
55.15	0.011	0.004	0.061
55.2	0.01	0.002	0.06
55.25	0.011	0.004	0.061
55.3	0.01	0.004	0.06
55.35	0.011	0.005	0.061
55.4	0.01	0.004	0.06
55.45	0.011	0.004	0.061
55.5	0.009	0.004	0.059
55.55	0.012	0.006	0.063
55.6	0.01	0.004	0.061
55.65	0.01	0.004	0.062
55.7	0.01	0.002	0.061
55.75	0.01	0.004	0.062
55.8	0.009	0.002	0.061
55.85	0.011	0.004	0.062
55.9	0.009	0.004	0.061

US EPA ARCHIVE DOCUMENT

55.95	0.011	0.005	0.062
56	0.01	0.002	0.061
56.05	0.01	0.005	0.061
56.1	0.009	0.002	0.06
56.15	0.01	0.004	0.061
56.2	0.01	0.004	0.061
56.25	0.011	0.005	0.061
56.3	0.01	0.004	0.061
56.35	0.011	0.004	0.062
56.4	0.01	0.004	0.061
56.45	0.011	0.005	0.063
56.5	0.01	0.004	0.062
56.55	0.011	0.005	0.062
56.6	0.009	0.004	0.061
56.65	0.011	0.004	0.062
56.7	0.01	0.002	0.061
56.75	0.011	0.005	0.063
56.8	0.009	0.004	0.061
56.85	0.01	0.004	0.062
56.9	0.01	0.004	0.061
56.95	0.01	0.004	0.062
57	0.009	0.002	0.061
57.05	0.01	0.004	0.062
57.1	0.01	0.002	0.062
57.15	0.01	0.005	0.062
57.2	0.009	0.004	0.061
57.25	0.011	0.005	0.062
57.3	0.01	0.002	0.06
57.35	0.011	0.005	0.062
57.4	0.01	0.005	0.06
57.45	0.011	0.005	0.068
57.5	0.009	0.004	0.066
57.55	0.011	0.005	0.067
57.6	0.01	0.002	0.057
57.65	0.011	0.005	0.068
57.7	0.01	0.002	0.067
57.75	0.011	0.005	0.068
57.8	0.011	0.002	0.067
57.85	0.011	0.005	0.067
57.9	0.01	0.004	0.061
57.95	0.011	0.005	0.067
58	0.009	0.002	0.066
58.05	0.01	0.004	0.067
58.1	0.01	0.002	0.061
58.15	0.011	0.004	0.068
58.2	0.011	0.004	0.067
58.25	0.011	0.005	0.068

US EPA ARCHIVE DOCUMENT

58.3	0.01	0.002	0.06
58.35	0.011	0.005	0.067
58.4	0.009	0.004	0.062
58.45	0.011	0.006	0.07
58.5	0.01	0.002	0.065
58.55	0.011	0.005	0.066
58.6	0.01	0.004	0.063
58.65	0.011	0.005	0.066
58.7	0.01	0.004	0.063
58.75	0.011	0.005	0.066
58.8	0.01	0.004	0.063
58.85	0.011	0.005	0.065
58.9	0.01	0.002	0.063
58.95	0.011	0.005	0.065
59	0.01	0.005	0.063
59.05	0.011	0.005	0.065
59.1	0.01	0.002	0.063
59.15	0.011	0.005	0.065
59.2	0.01	0.002	0.062
59.25	0.011	0.005	0.065
59.3	0.01	0.004	0.063
59.35	0.011	0.005	0.065
59.4	0.01	0.004	0.065
59.45	0.011	0.005	0.065
59.5	0.01	0.004	0.063
59.55	0.011	0.006	0.067
59.6	0.01	0.002	0.065
59.65	0.01	0.004	0.066
59.7	0.01	0.004	0.066
59.75	0.011	0.004	0.067
59.8	0.01	0.002	0.065
59.85	0.011	0.005	0.066
59.9	0.009	0.002	0.065
59.95	0.011	0.004	0.066
60	0.01	0.002	0.065
60.05	0.011	0.004	0.067
60.1	0.01	0.002	0.066
60.15	0.011	0.004	0.067
60.2	0.01	0.004	0.065
60.25	0.011	0.004	0.066
60.3	0.01	0.002	0.066
60.35	0.011	0.004	0.067
60.4	0.01	0.002	0.065
60.45	0.011	0.005	0.068
60.5	0.011	0.004	0.066
60.55	0.011	0.004	0.067
60.6	0.01	0.002	0.067

US EPA ARCHIVE DOCUMENT

60.65	0.011	0.004	0.067
60.7	0.01	0.002	0.066
60.75	0.01	0.004	0.067
60.8	0.009	0.004	0.066
60.85	0.011	0.004	0.067
60.9	0.01	0.002	0.065
60.95	0.011	0.004	0.067
61	0.009	0.002	0.066
61.05	0.011	0.004	0.067
61.1	0.009	0.002	0.066
61.15	0.011	0.004	0.066
61.2	0.01	0.002	0.066
61.25	0.011	0.004	0.067
61.3	0.01	0.002	0.066
61.35	0.011	0.004	0.067
61.4	0.011	0.002	0.065
61.45	0.011	0.005	0.068
61.5	0.01	0.002	0.065
61.55	0.011	0.004	0.068
61.6	0.009	0.004	0.066
61.65	0.011	0.004	0.067
61.7	0.01	0.004	0.066
61.75	0.011	0.004	0.067
61.8	0.01	0.004	0.066
61.85	0.011	0.004	0.067
61.9	0.009	0.004	0.065
61.95	0.011	0.004	0.067
62	0.009	0.004	0.067
62.05	0.01	0.004	0.067
62.1	0.009	0.002	0.066
62.15	0.01	0.004	0.067
62.2	0.009	0.002	0.066
62.25	0.011	0.004	0.067
62.3	0.01	0.004	0.066
62.35	0.011	0.005	0.067
62.4	0.011	0.002	0.066
62.45	0.012	0.005	0.07
62.5	0.01	0.001	0.066
62.55	0.01	0.004	0.067
62.6	0.009	0.002	0.066
62.65	0.01	0.004	0.067
62.7	0.009	0.002	0.065
62.75	0.01	0.004	0.067
62.8	0.007	0.002	0.066
62.85	0.01	0.004	0.067
62.9	0.009	0.002	0.066
62.95	0.01	0.004	0.067

US EPA ARCHIVE DOCUMENT

63	0.009	0.004	0.066
63.05	0.01	0.004	0.067
63.1	0.01	0.002	0.066
63.15	0.01	0.004	0.068
63.2	0.01	0.002	0.067
63.25	0.011	0.004	0.068
63.3	0.009	0.002	0.066
63.35	0.011	0.004	0.067
63.4	0.01	0.002	0.065
63.45	0.011	0.004	0.07
63.5	0.01	0.002	0.066
63.55	0.011	0.004	0.068
63.6	0.01	0.002	0.068
63.65	0.01	0.004	0.068
63.7	0.009	0.002	0.067
63.75	0.01	0.004	0.068
63.8	0.009	0.002	0.067
63.85	0.011	0.004	0.068
63.9	0.009	0.002	0.067
63.95	0.011	0.004	0.068
64	0.01	0.002	0.066
64.05	0.01	0.004	0.068
64.1	0.009	0.001	0.066
64.15	0.01	0.004	0.068
64.2	0.009	0.002	0.067
64.25	0.01	0.004	0.068
64.3	0.009	0.002	0.067
64.35	0.011	0.004	0.068
64.4	0.01	0.001	0.067
64.45	0.011	0.005	0.07
64.5	0.009	0.004	0.067
64.55	0.01	0.004	0.07
64.6	0.009	0.002	0.07
64.65	0.01	0.004	0.07
64.7	0.007	0.002	0.067
64.75	0.01	0.004	0.068
64.8	0.009	0.002	0.067
64.85	0.01	0.004	0.068
64.9	0.01	0.004	0.067
64.95	0.01	0.004	0.068
65	0.009	0.002	0.066
65.05	0.01	0.004	0.07
65.1	0.01	0.002	0.07
65.15	0.011	0.004	0.07
65.2	0.009	0.002	0.067
65.25	0.01	0.004	0.068
65.3	0.009	0.002	0.067

US EPA ARCHIVE DOCUMENT

65.35	0.011	0.004	0.068
65.4	0.009	0.002	0.067
65.45	0.012	0.004	0.074
65.5	0.01	0.002	0.068
65.55	0.011	0.004	0.07
65.6	0.01	0.002	0.068
65.65	0.011	0.004	0.07
65.7	0.01	0.001	0.067
65.75	0.012	0.004	0.07
65.8	0.011	0.002	0.068
65.85	0.012	0.004	0.07
65.9	0.011	0.002	0.068
65.95	0.011	0.004	0.07
66	0.01	0.004	0.068
66.05	0.011	0.004	0.07
66.1	0.01	0.002	0.067
66.15	0.012	0.004	0.07
66.2	0.01	0.002	0.068
66.25	0.012	0.004	0.07
66.3	0.011	0.002	0.068
66.35	0.012	0.004	0.07
66.4	0.011	0.002	0.07
66.45	0.012	0.004	0.07
66.5	0.011	0.002	0.068
66.55	0.012	0.005	0.073
66.6	0.009	0.001	0.071
66.65	0.01	0.004	0.072
66.7	0.009	0.001	0.071
66.75	0.01	0.004	0.072
66.8	0.009	0.002	0.071
66.85	0.01	0.004	0.072
66.9	0.009	0.001	0.07
66.95	0.01	0.004	0.072
67	0.009	0.002	0.071
67.05	0.01	0.004	0.072
67.1	0.007	0.001	0.071
67.15	0.01	0.004	0.072
67.2	0.007	0.002	0.071
67.25	0.01	0.004	0.072
67.3	0.009	0.002	0.071
67.35	0.01	0.002	0.072
67.4	0.009	0.001	0.071
67.45	0.01	0.004	0.077
67.5	0.009	0.002	0.073
67.55	0.01	0.002	0.076
67.6	0.007	0.001	0.074
67.65	0.01	0.004	0.076

US EPA ARCHIVE DOCUMENT

67.7	0.006	0.001	0.071
67.75	0.01	0.002	0.076
67.8	0.009	0.001	0.073
67.85	0.01	0.002	0.076
67.9	0.007	0.001	0.074
67.95	0.01	0.004	0.076
68	0.009	0.004	0.073
68.05	0.01	0.004	0.076
68.1	0.01	0.001	0.073
68.15	0.01	0.002	0.076
68.2	0.007	0.002	0.073
68.25	0.01	0.002	0.076
68.3	0.007	0.002	0.072
68.35	0.01	0.002	0.076
68.4	0.01	0.001	0.073
68.45	0.011	0.004	0.077
68.5	0.009	0.001	0.074
68.55	0.01	0.004	0.076
68.6	0.007	0.002	0.074
68.65	0.01	0.004	0.077
68.7	0.009	0.002	0.074
68.75	0.01	0.002	0.077
68.8	0.007	0.002	0.074
68.85	0.01	0.002	0.077
68.9	0.009	0.002	0.076
68.95	0.01	0.002	0.077
69	0.009	0.001	0.076
69.05	0.01	0.002	0.077
69.1	0.009	0.001	0.073
69.15	0.01	0.002	0.076
69.2	0.01	0.002	0.076
69.25	0.01	0.002	0.076
69.3	0.007	0.001	0.073
69.35	0.009	0.002	0.076
69.4	0.007	0.002	0.076
69.45	0.01	0.004	0.077
69.5	0.009	0.002	0.073
69.55	0.01	0.004	0.076
69.6	0.007	0.001	0.072
69.65	0.01	0.002	0.074
69.7	0.009	0.002	0.073
69.75	0.01	0.004	0.074
69.8	0.009	0.002	0.072
69.85	0.01	0.004	0.073
69.9	0.007	0.002	0.073
69.95	0.01	0.002	0.074
70	0.009	0.002	0.073

US EPA ARCHIVE DOCUMENT

70.05	0.01	0.004	0.074
70.1	0.009	0.001	0.072
70.15	0.011	0.004	0.074
70.2	0.009	0.001	0.073
70.25	0.011	0.004	0.074
70.3	0.009	0.002	0.073
70.35	0.011	0.004	0.076
70.4	0.009	0.001	0.073
70.45	0.01	0.004	0.081
70.5	0.009	0.001	0.077
70.55	0.01	0.002	0.078
70.6	0.01	0.002	0.076
70.65	0.01	0.002	0.077
70.7	0.009	0.002	0.077
70.75	0.01	0.004	0.077
70.8	0.007	0.001	0.077
70.85	0.01	0.002	0.078
70.9	0.007	0.002	0.077
70.95	0.01	0.002	0.078
71	0.009	0.002	0.076
71.05	0.01	0.002	0.078
71.1	0.009	0.002	0.077
71.15	0.01	0.002	0.078
71.2	0.009	0.001	0.076
71.25	0.01	0.002	0.078
71.3	0.007	0.001	0.076
71.35	0.01	0.002	0.077
71.4	0.009	0.001	0.077
71.45	0.01	0.004	0.081
71.5	0.009	0.002	0.078
71.55	0.009	0.002	0.079
71.6	0.007	0.001	0.078
71.65	0.01	0.002	0.079
71.7	0.007	0.001	0.079
71.75	0.009	0.002	0.079
71.8	0.007	0.001	0.077
71.85	0.009	0.004	0.079
71.9	0.007	0.001	0.077
71.95	0.009	0.002	0.079
72	0.009	0.001	0.078
72.05	0.009	0.002	0.078
72.1	0.007	0.002	0.077
72.15	0.01	0.004	0.079
72.2	0.007	0.002	0.072
72.25	0.009	0.002	0.073
72.3	0.007	0.002	0.072
72.35	0.01	0.004	0.074

US EPA ARCHIVE DOCUMENT

72.4	0.007	0.002	0.072
72.45	0.01	0.002	0.073
72.5	0.009	0.001	0.072
72.55	0.01	0.004	0.073
72.6	0.007	0.002	0.071
72.65	0.01	0.004	0.074
72.7	0.007	0.001	0.073
72.75	0.009	0.002	0.073
72.8	0.007	0.002	0.072
72.85	0.009	0.002	0.074
72.9	0.007	0.002	0.073
72.95	0.009	0.002	0.073
73	0.007	0.001	0.073
73.05	0.01	0.002	0.074
73.1	0.009	0.002	0.072
73.15	0.009	0.002	0.074
73.2	0.007	0.001	0.073
73.25	0.01	0.004	0.077
73.3	0.006	0.001	0.071
73.35	0.009	0.002	0.073
73.4	0.007	0.001	0.071
73.45	0.009	0.002	0.073
73.5	0.007	0.002	0.071
73.55	0.009	0.002	0.072
73.6	0.007	0.001	0.071
73.65	0.009	0.002	0.072
73.7	0.007	0.002	0.072
73.75	0.009	0.004	0.072
73.8	0.007	0.001	0.072
73.85	0.009	0.002	0.073
73.9	0.006	0.002	0.071
73.95	0.009	0.002	0.072
74	0.006	0.002	0.07
74.05	0.009	0.002	0.072
74.1	0.006	0.001	0.071
74.15	0.009	0.002	0.072
74.2	0.007	0.001	0.071
74.25	0.009	0.004	0.076
74.3	0.007	0.001	0.073
74.35	0.009	0.002	0.074
74.4	0.007	0.001	0.073
74.45	0.009	0.002	0.074
74.5	0.007	0	0.073
74.55	0.009	0.002	0.074
74.6	0.007	0.001	0.072
74.65	0.009	0.002	0.074
74.7	0.007	0.001	0.073

US EPA ARCHIVE DOCUMENT

74.75	0.009	0.002	0.074
74.8	0.007	0.002	0.073
74.85	0.009	0.002	0.076
74.9	0.007	0.002	0.074
74.95	0.009	0.002	0.074
75	0.007	0.001	0.072
75.05	0.009	0.002	0.074
75.1	0.007	0.002	0.073
75.15	0.009	0.002	0.074
75.2	0.007	0.001	0.072
75.25	0.009	0.002	0.074
75.3	0.007	0.001	0.073
75.35	0.01	0.004	0.078
75.4	0.006	0.001	0.076
75.45	0.009	0.002	0.077
75.5	0.009	0.001	0.076
75.55	0.009	0.002	0.077
75.6	0.009	0.001	0.077
75.65	0.009	0.002	0.078
75.7	0.007	0	0.076
75.75	0.009	0.002	0.077
75.8	0.007	0.001	0.077
75.85	0.009	0.002	0.077
75.9	0.007	0.002	0.076
75.95	0.009	0.002	0.077
76	0.006	0.001	0.074
76.05	0.009	0.002	0.077
76.1	0.007	0.001	0.077
76.15	0.009	0.002	0.077
76.2	0.009	0.001	0.076
76.25	0.009	0.002	0.077
76.3	0.007	0.001	0.076
76.35	0.01	0.004	0.081
76.4	0.007	0	0.079
76.45	0.009	0.002	0.079
76.5	0.007	0	0.078
76.55	0.009	0.002	0.079
76.6	0.009	0.001	0.078
76.65	0.01	0.002	0.079
76.7	0.007	0.001	0.078
76.75	0.009	0.002	0.079
76.8	0.007	0.001	0.078
76.85	0.01	0.002	0.081
76.9	0.009	0.001	0.078
76.95	0.009	0.002	0.079
77	0.007	0.001	0.078
77.05	0.01	0.002	0.079

US EPA ARCHIVE DOCUMENT

77.1	0.007	0.001	0.078
77.15	0.009	0.002	0.081
77.2	0.007	0	0.078
77.25	0.009	0.002	0.081
77.3	0.007	0.002	0.078
77.35	0.01	0.002	0.082
77.4	0.009	0.001	0.077
77.45	0.009	0.001	0.078
77.5	0.009	0.001	0.076
77.55	0.01	0.002	0.078
77.6	0.007	0.001	0.076
77.65	0.009	0.002	0.078
77.7	0.009	0.001	0.076
77.75	0.01	0.002	0.078
77.8	0.009	0	0.076
77.85	0.01	0.002	0.078
77.9	0.007	0.001	0.077
77.95	0.009	0.002	0.078
78	0.009	0.001	0.077
78.05	0.01	0.002	0.078
78.1	0.007	0	0.077
78.15	0.01	0.002	0.081
78.2	0.009	0.001	0.078
78.25	0.01	0.002	0.078
78.3	0.009	0.001	0.077
78.35	0.01	0.002	0.078
78.4	0.009	0.002	0.077
78.45	0.01	0.002	0.078
78.5	0.009	0.001	0.077
78.55	0.01	0.002	0.078
78.6	0.009	0.001	0.076
78.65	0.01	0.002	0.078
78.7	0.009	0.001	0.077
78.75	0.009	0.001	0.078
78.8	0.009	0	0.077
78.85	0.01	0.002	0.078
78.9	0.009	0.001	0.076
78.95	0.009	0.002	0.078
79	0.009	0.001	0.077
79.05	0.009	0.002	0.078
79.1	0.009	0.001	0.077
79.15	0.01	0.002	0.083
79.2	0.007	0.001	0.081
79.25	0.01	0.002	0.082
79.3	0.009	0.002	0.079
79.35	0.01	0.002	0.082
79.4	0.007	0.001	0.079

US EPA ARCHIVE DOCUMENT

79.45	0.009	0.002	0.083
79.5	0.007	0	0.081
79.55	0.01	0.001	0.082
79.6	0.01	0.001	0.081
79.65	0.01	0.001	0.082
79.7	0.01	0.001	0.079
79.75	0.01	0.001	0.082
79.8	0.007	0	0.079
79.85	0.01	0.002	0.082
79.9	0.009	0.001	0.079
79.95	0.01	0.001	0.082
80	0.007	0.001	0.079
80.05	0.01	0.001	0.082
80.1	0.009	0.001	0.081
80.15	0.01	0.001	0.082
80.2	0.009	0.001	0.079
80.25	0.01	0.002	0.084
80.3	0.007	0	0.082
80.35	0.01	0.002	0.083
80.4	0.009	0.002	0.082
80.45	0.01	0.002	0.083
80.5	0.009	0	0.081
80.55	0.01	0.002	0.083
80.6	0.009	0.001	0.082
80.65	0.01	0.001	0.083
80.7	0.01	0.001	0.083
80.75	0.01	0.002	0.084
80.8	0.009	0.001	0.083
80.85	0.01	0.002	0.084
80.9	0.007	0.001	0.083
80.95	0.01	0.002	0.084
81	0.009	0	0.083
81.05	0.01	0.002	0.084
81.1	0.01	0.001	0.083
81.15	0.01	0.002	0.084
81.2	0.009	0	0.083
81.25	0.01	0.002	0.084
81.3	0.009	0.002	0.083
81.35	0.011	0.002	0.088
81.4	0.009	0.001	0.084
81.45	0.01	0.002	0.085
81.5	0.009	0.001	0.083
81.55	0.01	0.001	0.085
81.6	0.01	0.001	0.084
81.65	0.01	0.002	0.087
81.7	0.009	0.001	0.084
81.75	0.01	0.002	0.085

US EPA ARCHIVE DOCUMENT

81.8	0.007	0.001	0.084
81.85	0.01	0.002	0.085
81.9	0.009	0	0.084
81.95	0.01	0.001	0.087
82	0.009	0.001	0.085
82.05	0.01	0.002	0.085
82.1	0.009	0.001	0.084
82.15	0.01	0.002	0.085
82.2	0.01	0.001	0.085
82.25	0.01	0.002	0.085
82.3	0.009	0.001	0.084
82.35	0.011	0.002	0.089
82.4	0.01	0.001	0.087
82.45	0.01	0.002	0.088
82.5	0.007	0.001	0.085
82.55	0.01	0.002	0.088
82.6	0.009	0.001	0.088
82.65	0.01	0.001	0.088
82.7	0.01	0	0.085
82.75	0.01	0.002	0.088
82.8	0.009	0.001	0.087
82.85	0.011	0.001	0.088
82.9	0.01	0.001	0.085
82.95	0.01	0.002	0.088
83	0.01	0	0.087
83.05	0.011	0.002	0.088
83.1	0.009	0.001	0.088
83.15	0.011	0.002	0.088
83.2	0.009	0.001	0.087
83.25	0.011	0.002	0.09
83.3	0.009	0.001	0.088
83.35	0.011	0.002	0.089
83.4	0.007	0.001	0.089
83.45	0.011	0.002	0.089
83.5	0.009	0.001	0.088
83.55	0.01	0.002	0.089
83.6	0.01	0	0.089
83.65	0.011	0.002	0.09
83.7	0.01	0.001	0.089
83.75	0.01	0.002	0.09
83.8	0.009	0.001	0.088
83.85	0.011	0.002	0.089
83.9	0.01	0.001	0.088
83.95	0.011	0.002	0.09
84	0.009	0	0.089
84.05	0.011	0.002	0.089
84.1	0.009	0.001	0.088

US EPA ARCHIVE DOCUMENT

84.15	0.011	0.002	0.09
84.2	0.01	0.001	0.089
84.25	0.011	0.002	0.09
84.3	0.009	0.001	0.089
84.35	0.011	0.002	0.092
84.4	0.01	0.001	0.092
84.45	0.01	0.002	0.092
84.5	0.01	0.001	0.09
84.55	0.01	0.002	0.092
84.6	0.009	0.001	0.09
84.65	0.01	0.001	0.092
84.7	0.009	0.001	0.09
84.75	0.01	0.001	0.092
84.8	0.009	0.001	0.09
84.85	0.01	0.001	0.092
84.9	0.01	0.001	0.089
84.95	0.011	0.002	0.092
85	0.009	0.001	0.088
85.05	0.01	0.002	0.09
85.1	0.009	0	0.087
85.15	0.01	0.002	0.088
85.2	0.009	0.001	0.085
85.25	0.01	0.002	0.088
85.3	0.009	0.002	0.087
85.35	0.011	0.002	0.088
85.4	0.009	0.002	0.085
85.45	0.011	0.002	0.087
85.5	0.01	0.001	0.084
85.55	0.011	0.002	0.085
85.6	0.009	0.001	0.084
85.65	0.011	0.002	0.087
85.7	0.009	0	0.085
85.75	0.011	0.002	0.087
85.8	0.009	0.001	0.083
85.85	0.01	0.002	0.084
85.9	0.01	0.001	0.082

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :MIP0007.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.006	0.013
0.1	0.001	0.006	0.012
0.15	0.004	0.006	0.013
0.2	0.001	0.005	0.011
0.25	0.002	0.006	0.013
0.3	0.001	0.004	0.013
0.35	0.002	0.006	0.013
0.4	0.001	0.006	0.011
0.45	0.002	0.007	0.013
0.5	0.001	0.005	0.012
0.55	0.002	0.006	0.013
0.6	0	0.004	0.012
0.65	0.002	0.006	0.013
0.7	0.001	0.006	0.009
0.75	0.002	0.006	0.01
0.8	0	0.005	0.006
0.85	0.002	0.006	0.007
0.9	0.001	0.006	0.006
0.95	0.002	0.006	0.009
1	0.001	0.005	0.007
1.05	0.002	0.007	0.009
1.1	0.002	0.005	0.006
1.15	0.002	0.006	0.009
1.2	0.002	0.004	0.006
1.25	0.004	0.007	0.009
1.3	0.002	0.005	0.007
1.35	0.002	0.007	0.009
1.4	0.001	0.007	0.007
1.45	0.002	0.007	0.009
1.5	0.001	0.006	0.009
1.55	0.002	0.006	0.009
1.6	0	0.005	0.007
1.65	0.002	0.006	0.009
1.7	0.001	0.006	0.007
1.75	0.004	0.006	0.009
1.8	0	0.005	0.006
1.85	0.004	0.006	0.009

US EPA ARCHIVE DOCUMENT

1.9	0.001	0.005	0.007
1.95	0.002	0.006	0.01
2	0.001	0.005	0.01
2.05	0.002	0.006	0.01
2.1	0	0.005	0.009
2.15	0.002	0.006	0.01
2.2	0.002	0.005	0.01
2.25	0.002	0.006	0.01
2.3	0.001	0.005	0.01
2.35	0.004	0.007	0.011
2.4	0.001	0.005	0.007
2.45	0.004	0.006	0.009
2.5	0.001	0.006	0.007
2.55	0.002	0.007	0.009
2.6	0.001	0.006	0.006
2.65	0.002	0.006	0.009
2.7	0.002	0.005	0.006
2.75	0.004	0.007	0.009
2.8	0.001	0.005	0.006
2.85	0.002	0.006	0.009
2.9	0.001	0.005	0.007
2.95	0.002	0.006	0.009
3	0.001	0.005	0.007
3.05	0.002	0.007	0.009
3.1	0.002	0.005	0.007
3.15	0.004	0.006	0.01
3.2	0.002	0.005	0.01
3.25	0.004	0.007	0.01
3.3	0.002	0.006	0.005
3.35	0.004	0.006	0.007
3.4	0.001	0.006	0.006
3.45	0.004	0.006	0.007
3.5	0.002	0.005	0.006
3.55	0.004	0.006	0.007
3.6	0.001	0.005	0.005
3.65	0.004	0.006	0.007
3.7	0.001	0.005	0.006
3.75	0.004	0.006	0.007
3.8	0.002	0.005	0.005
3.85	0.004	0.007	0.007
3.9	0.002	0.005	0.005
3.95	0.004	0.006	0.007
4	0.001	0.005	0.006
4.05	0.004	0.006	0.007
4.1	0.001	0.006	0.007
4.15	0.004	0.006	0.007
4.2	0.002	0.005	0.007

US EPA ARCHIVE DOCUMENT

4.25	0.004	0.007	0.009
4.3	0.002	0.006	0.005
4.35	0.004	0.006	0.007
4.4	0.002	0.006	0.004
4.45	0.004	0.006	0.006
4.5	0.004	0.006	0.005
4.55	0.004	0.006	0.006
4.6	0.001	0.005	0.006
4.65	0.004	0.006	0.007
4.7	0.002	0.005	0.006
4.75	0.004	0.007	0.007
4.8	0.002	0.005	0.006
4.85	0.004	0.006	0.007
4.9	0.002	0.005	0.005
4.95	0.004	0.007	0.006
5	0.002	0.005	0.006
5.05	0.004	0.006	0.007
5.1	0.002	0.005	0.006
5.15	0.004	0.006	0.007
5.2	0.002	0.006	0.006
5.25	0.005	0.007	0.009
5.3	0.004	0.006	0.006
5.35	0.004	0.006	0.006
5.4	0.002	0.006	0.005
5.45	0.004	0.007	0.007
5.5	0.002	0.006	0.005
5.55	0.004	0.006	0.006
5.6	0.004	0.005	0.006
5.65	0.005	0.006	0.006
5.7	0.002	0.005	0.005
5.75	0.005	0.006	0.006
5.8	0.004	0.006	0.004
5.85	0.004	0.006	0.006
5.9	0.002	0.004	0.005
5.95	0.005	0.007	0.006
6	0.004	0.005	0.005
6.05	0.005	0.007	0.006
6.1	0.004	0.005	0.004
6.15	0.005	0.006	0.007
6.2	0.002	0.005	0.005
6.25	0.005	0.006	0.007
6.3	0.004	0.005	0.005
6.35	0.006	0.007	0.007
6.4	0.004	0.006	0.001
6.45	0.005	0.006	0.004
6.5	0.004	0.006	0.002
6.55	0.005	0.006	0.004

US EPA ARCHIVE DOCUMENT

6.6	0.004	0.005	0.002
6.65	0.005	0.007	0.004
6.7	0.005	0.005	0.002
6.75	0.005	0.006	0.004
6.8	0.004	0.005	0.002
6.85	0.005	0.006	0.004
6.9	0.004	0.005	0.002
6.95	0.005	0.006	0.004
7	0.002	0.006	0.002
7.05	0.005	0.007	0.004
7.1	0.004	0.006	0.002
7.15	0.005	0.007	0.004
7.2	0.004	0.006	0.004
7.25	0.006	0.006	0.005
7.3	0.004	0.006	0.001
7.35	0.006	0.007	0.005
7.4	0.004	0.005	0.004
7.45	0.006	0.006	0.005
7.5	0.005	0.005	0.004
7.55	0.006	0.007	0.005
7.6	0.005	0.006	0.004
7.65	0.006	0.006	0.005
7.7	0.005	0.006	0.004
7.75	0.006	0.006	0.005
7.8	0.004	0.005	0.002
7.85	0.006	0.006	0.004
7.9	0.005	0.005	0.002
7.95	0.006	0.006	0.005
8	0.005	0.005	0.004
8.05	0.006	0.006	0.004
8.1	0.005	0.006	0.002
8.15	0.006	0.006	0.004
8.2	0.005	0.005	0.004
8.25	0.006	0.007	0.005
8.3	0.005	0.006	0.002
8.35	0.006	0.006	0.005
8.4	0.005	0.005	0.004
8.45	0.006	0.006	0.005
8.5	0.005	0.005	0.004
8.55	0.006	0.006	0.004
8.6	0.005	0.006	0.002
8.65	0.006	0.006	0.005
8.7	0.004	0.005	0.004
8.75	0.006	0.006	0.005
8.8	0.005	0.006	0.004
8.85	0.006	0.007	0.005
8.9	0.004	0.005	0.002

US EPA ARCHIVE DOCUMENT

8.95	0.006	0.006	0.004
9	0.005	0.005	0.002
9.05	0.006	0.007	0.005
9.1	0.006	0.005	0.002
9.15	0.007	0.007	0.005
9.2	0.005	0.006	0.002
9.25	0.007	0.007	0.005
9.3	0.005	0.005	0.001
9.35	0.006	0.006	0.002
9.4	0.006	0.005	0.001
9.45	0.006	0.006	0.002
9.5	0.006	0.006	0
9.55	0.006	0.006	0.002
9.6	0.006	0.006	0.001
9.65	0.006	0.006	0.002
9.7	0.006	0.005	0
9.75	0.007	0.006	0.002
9.8	0.004	0.006	0
9.85	0.007	0.006	0.002
9.9	0.006	0.006	0.002
9.95	0.007	0.006	0.002
10	0.006	0.006	0.001
10.05	0.006	0.006	0.002
10.1	0.004	0.005	0.002
10.15	0.006	0.006	0.004
10.2	0.006	0.006	0.001
10.25	0.007	0.007	0.005
10.3	0.005	0.006	0.001
10.35	0.006	0.007	0.005
10.4	0.005	0.006	0.002
10.45	0.007	0.007	0.004
10.5	0.006	0.005	0.002
10.55	0.007	0.006	0.005
10.6	0.006	0.005	0.002
10.65	0.007	0.006	0.004
10.7	0.006	0.006	0.002
10.75	0.007	0.006	0.005
10.8	0.007	0.006	0.002
10.85	0.007	0.007	0.005
10.9	0.006	0.005	0.002
10.95	0.006	0.006	0.004
11	0.006	0.006	0.002
11.05	0.007	0.006	0.005
11.1	0.006	0.006	0.004
11.15	0.007	0.006	0.005
11.2	0.007	0.005	0.004
11.25	0.009	0.007	0.006

US EPA ARCHIVE DOCUMENT

11.3	0.005	0.005	0.005
11.35	0.007	0.006	0.006
11.4	0.007	0.006	0.005
11.45	0.007	0.007	0.006
11.5	0.007	0.006	0.005
11.55	0.007	0.006	0.006
11.6	0.005	0.006	0.005
11.65	0.007	0.006	0.006
11.7	0.006	0.006	0.004
11.75	0.007	0.006	0.006
11.8	0.006	0.005	0.005
11.85	0.007	0.006	0.006
11.9	0.006	0.005	0.004
11.95	0.007	0.006	0.006
12	0.006	0.006	0.005
12.05	0.007	0.006	0.006
12.1	0.005	0.005	0.005
12.15	0.009	0.006	0.006
12.2	0.007	0.006	0.005
12.25	0.009	0.007	0.007
12.3	0.006	0.006	0.005
12.35	0.007	0.007	0.007
12.4	0.007	0.006	0.005
12.45	0.009	0.006	0.006
12.5	0.006	0.005	0.005
12.55	0.009	0.006	0.007
12.6	0.004	0.005	0.005
12.65	0.009	0.007	0.007
12.7	0.006	0.005	0.007
12.75	0.009	0.006	0.007
12.8	0.006	0.006	0.006
12.85	0.009	0.006	0.007
12.9	0.005	0.006	0.006
12.95	0.009	0.006	0.007
13	0.005	0.006	0.005
13.05	0.009	0.006	0.007
13.1	0.004	0.006	0.006
13.15	0.009	0.006	0.007
13.2	0.006	0.006	0.005
13.25	0.011	0.009	0.007
13.3	0.007	0.005	0.005
13.35	0.012	0.007	0.007
13.4	0.009	0.006	0.006
13.45	0.013	0.007	0.007
13.5	0.012	0.006	0.006
13.55	0.012	0.007	0.007
13.6	0.006	0.006	0.005

US EPA ARCHIVE DOCUMENT

13.65	0.011	0.006	0.007
13.7	0.01	0.006	0.005
13.75	0.012	0.007	0.007
13.8	0.004	0.006	0.005
13.85	0.012	0.006	0.009
13.9	0.006	0.005	0.009
13.95	0.013	0.006	0.009
14	0.013	0.005	0.006
14.05	0.013	0.006	0.007
14.1	0.01	0.006	0.007
14.15	0.011	0.007	0.007
14.2	0.011	0.005	0.006
14.25	0.013	0.006	0.007
14.3	0.007	0.006	0.005
14.35	0.013	0.007	0.009
14.4	0.005	0.006	0.007
14.45	0.011	0.006	0.009
14.5	0.005	0.006	0.006
14.55	0.011	0.007	0.01
14.6	0.006	0.006	0.01
14.65	0.011	0.006	0.01
14.7	0.004	0.004	0.007
14.75	0.011	0.007	0.009
14.8	0.007	0.006	0.007
14.85	0.011	0.007	0.01
14.9	0.006	0.006	0.007
14.95	0.011	0.007	0.01
15	0.01	0.006	0.006
15.05	0.011	0.006	0.009
15.1	0.009	0.005	0.009
15.15	0.011	0.006	0.009
15.2	0.009	0.005	0.009
15.25	0.012	0.007	0.011
15.3	0.007	0.005	0.009
15.35	0.009	0.006	0.01
15.4	0.007	0.005	0.007
15.45	0.009	0.006	0.01
15.5	0.007	0.005	0.007
15.55	0.009	0.006	0.01
15.6	0.007	0.005	0.009
15.65	0.009	0.006	0.01
15.7	0.006	0.005	0.009
15.75	0.009	0.006	0.01
15.8	0.007	0.006	0.009
15.85	0.01	0.006	0.01
15.9	0.006	0.006	0.007
15.95	0.009	0.006	0.01

US EPA ARCHIVE DOCUMENT

16	0.007	0.006	0.007
16.05	0.01	0.006	0.01
16.1	0.009	0.005	0.01
16.15	0.01	0.006	0.01
16.2	0.007	0.006	0.007
16.25	0.01	0.007	0.012
16.3	0.006	0.005	0.01
16.35	0.009	0.006	0.011
16.4	0.009	0.005	0.01
16.45	0.009	0.006	0.011
16.5	0.007	0.006	0.01
16.55	0.009	0.006	0.011
16.6	0.005	0.005	0.01
16.65	0.009	0.007	0.011
16.7	0.007	0.005	0.011
16.75	0.009	0.006	0.011
16.8	0.007	0.005	0.009
16.85	0.01	0.007	0.011
16.9	0.009	0.005	0.009
16.95	0.009	0.006	0.01
17	0.006	0.005	0.007
17.05	0.009	0.006	0.011
17.1	0.007	0.006	0.009
17.15	0.01	0.006	0.011
17.2	0.007	0.005	0.01
17.25	0.01	0.007	0.013
17.3	0.006	0.005	0.012
17.35	0.009	0.006	0.012
17.4	0.006	0.005	0.011
17.45	0.009	0.006	0.012
17.5	0.007	0.005	0.011
17.55	0.009	0.006	0.012
17.6	0.007	0.006	0.011
17.65	0.009	0.006	0.012
17.7	0.007	0.005	0.012
17.75	0.009	0.006	0.012
17.8	0.007	0.005	0.011
17.85	0.01	0.006	0.012
17.9	0.007	0.006	0.011
17.95	0.009	0.006	0.012
18	0.007	0.005	0.011
18.05	0.009	0.006	0.012
18.1	0.007	0.006	0.012
18.15	0.009	0.006	0.012
18.2	0.009	0.005	0.011
18.25	0.011	0.009	0.017
18.3	0.007	0.006	0.015

US EPA ARCHIVE DOCUMENT

18.35	0.009	0.006	0.017
18.4	0.007	0.006	0.015
18.45	0.009	0.006	0.016
18.5	0.007	0.006	0.016
18.55	0.009	0.006	0.016
18.6	0.006	0.006	0.013
18.65	0.009	0.006	0.016
18.7	0.007	0.005	0.013
18.75	0.009	0.006	0.016
18.8	0.007	0.005	0.015
18.85	0.009	0.006	0.016
18.9	0.007	0.005	0.013
18.95	0.009	0.006	0.016
19	0.009	0.006	0.015
19.05	0.01	0.007	0.017
19.1	0.009	0.005	0.016
19.15	0.01	0.006	0.016
19.2	0.009	0.006	0.016
19.25	0.01	0.009	0.02
19.3	0.007	0.005	0.016
19.35	0.009	0.007	0.018
19.4	0.007	0.005	0.017
19.45	0.009	0.006	0.02
19.5	0.007	0.005	0.017
19.55	0.009	0.007	0.018
19.6	0.007	0.006	0.017
19.65	0.009	0.006	0.018
19.7	0.007	0.006	0.016
19.75	0.009	0.006	0.018
19.8	0.007	0.006	0.016
19.85	0.009	0.006	0.018
19.9	0.007	0.005	0.017
19.95	0.009	0.006	0.018
20	0.007	0.006	0.016
20.05	0.01	0.006	0.018
20.1	0.007	0.005	0.017
20.15	0.01	0.006	0.018
20.2	0.007	0.006	0.017
20.25	0.01	0.007	0.022
20.3	0.009	0.006	0.018
20.35	0.009	0.006	0.022
20.4	0.007	0.005	0.021
20.45	0.009	0.006	0.021
20.5	0.007	0.006	0.02
20.55	0.009	0.006	0.022
20.6	0.007	0.006	0.021
20.65	0.009	0.006	0.021

US EPA ARCHIVE DOCUMENT

20.7	0.007	0.005	0.018
20.75	0.009	0.006	0.022
20.8	0.009	0.005	0.016
20.85	0.009	0.006	0.022
20.9	0.007	0.005	0.017
20.95	0.009	0.006	0.021
21	0.009	0.005	0.018
21.05	0.009	0.006	0.021
21.1	0.006	0.005	0.021
21.15	0.009	0.007	0.027
21.2	0.007	0.004	0.02
21.25	0.009	0.006	0.026
21.3	0.007	0.005	0.023
21.35	0.009	0.006	0.026
21.4	0.006	0.005	0.021
21.45	0.009	0.006	0.024
21.5	0.006	0.005	0.022
21.55	0.009	0.006	0.024
21.6	0.007	0.006	0.021
21.65	0.009	0.006	0.027
21.7	0.009	0.005	0.024
21.75	0.009	0.006	0.026
21.8	0.006	0.005	0.017
21.85	0.009	0.007	0.027
21.9	0.009	0.005	0.022
21.95	0.009	0.006	0.026
22	0.007	0.006	0.022
22.05	0.009	0.007	0.027
22.1	0.009	0.005	0.024
22.15	0.009	0.006	0.027
22.2	0.007	0.006	0.017
22.25	0.009	0.007	0.027
22.3	0.007	0.006	0.022
22.35	0.009	0.006	0.023
22.4	0.007	0.005	0.021
22.45	0.009	0.006	0.022
22.5	0.009	0.005	0.02
22.55	0.009	0.006	0.022
22.6	0.009	0.005	0.02
22.65	0.009	0.006	0.022
22.7	0.007	0.005	0.02
22.75	0.009	0.006	0.022
22.8	0.007	0.005	0.02
22.85	0.009	0.006	0.022
22.9	0.007	0.005	0.021
22.95	0.009	0.006	0.022
23	0.007	0.005	0.02

US EPA ARCHIVE DOCUMENT

23.05	0.009	0.006	0.022
23.1	0.007	0.006	0.022
23.15	0.009	0.006	0.022
23.2	0.009	0.005	0.021
23.25	0.01	0.007	0.023
23.3	0.006	0.005	0.021
23.35	0.009	0.007	0.022
23.4	0.007	0.004	0.022
23.45	0.009	0.006	0.022
23.5	0.007	0.005	0.022
23.55	0.009	0.006	0.022
23.6	0.007	0.005	0.021
23.65	0.009	0.006	0.022
23.7	0.007	0.005	0.021
23.75	0.009	0.006	0.022
23.8	0.007	0.006	0.021
23.85	0.009	0.006	0.022
23.9	0.006	0.005	0.022
23.95	0.009	0.006	0.023
24	0.009	0.005	0.021
24.05	0.009	0.006	0.022
24.1	0.007	0.005	0.021
24.15	0.009	0.007	0.022
24.2	0.007	0.005	0.021
24.25	0.01	0.007	0.024
24.3	0.009	0.005	0.021
24.35	0.009	0.006	0.023
24.4	0.007	0.005	0.021
24.45	0.009	0.007	0.023
24.5	0.007	0.005	0.021
24.55	0.009	0.006	0.023
24.6	0.007	0.005	0.023
24.65	0.009	0.006	0.023
24.7	0.006	0.004	0.021
24.75	0.009	0.006	0.023
24.8	0.007	0.005	0.022
24.85	0.009	0.007	0.023
24.9	0.007	0.005	0.021
24.95	0.009	0.006	0.023
25	0.007	0.005	0.022
25.05	0.009	0.006	0.023
25.1	0.006	0.006	0.022
25.15	0.009	0.006	0.023
25.2	0.007	0.004	0.022
25.25	0.01	0.007	0.024
25.3	0.006	0.005	0.022
25.35	0.009	0.006	0.023

US EPA ARCHIVE DOCUMENT

25.4	0.006	0.005	0.021
25.45	0.009	0.006	0.024
25.5	0.007	0.005	0.022
25.55	0.009	0.006	0.023
25.6	0.006	0.004	0.021
25.65	0.009	0.006	0.023
25.7	0.007	0.005	0.022
25.75	0.009	0.006	0.023
25.8	0.007	0.005	0.022
25.85	0.009	0.006	0.023
25.9	0.005	0.006	0.022
25.95	0.009	0.006	0.023
26	0.006	0.005	0.022
26.05	0.009	0.006	0.023
26.1	0.007	0.004	0.022
26.15	0.009	0.006	0.023
26.2	0.007	0.005	0.021
26.25	0.01	0.006	0.023
26.3	0.009	0.006	0.021
26.35	0.01	0.007	0.028
26.4	0.006	0.006	0.024
26.45	0.007	0.006	0.026
26.5	0.006	0.005	0.024
26.55	0.009	0.006	0.027
26.6	0.007	0.005	0.024
26.65	0.007	0.006	0.027
26.7	0.006	0.006	0.023
26.75	0.009	0.006	0.026
26.8	0.007	0.006	0.024
26.85	0.009	0.006	0.026
26.9	0.007	0.005	0.024
26.95	0.009	0.006	0.027
27	0.006	0.005	0.024
27.05	0.009	0.006	0.027
27.1	0.006	0.005	0.026
27.15	0.009	0.006	0.027
27.2	0.006	0.005	0.024
27.25	0.009	0.007	0.028
27.3	0.006	0.005	0.026
27.35	0.007	0.006	0.027
27.4	0.006	0.004	0.024
27.45	0.007	0.006	0.027
27.5	0.006	0.005	0.027
27.55	0.007	0.006	0.027
27.6	0.006	0.005	0.026
27.65	0.007	0.006	0.027
27.7	0.006	0.005	0.026

US EPA ARCHIVE DOCUMENT

27.75	0.007	0.006	0.027
27.8	0.006	0.005	0.027
27.85	0.007	0.006	0.027
27.9	0.007	0.005	0.026
27.95	0.007	0.006	0.027
28	0.006	0.005	0.026
28.05	0.007	0.006	0.027
28.1	0.006	0.005	0.026
28.15	0.007	0.006	0.027
28.2	0.005	0.005	0.026
28.25	0.009	0.007	0.028
28.3	0.006	0.005	0.026
28.35	0.007	0.006	0.028
28.4	0.006	0.005	0.026
28.45	0.007	0.006	0.027
28.5	0.006	0.005	0.026
28.55	0.007	0.006	0.027
28.6	0.006	0.006	0.027
28.65	0.007	0.006	0.028
28.7	0.006	0.005	0.027
28.75	0.007	0.006	0.028
28.8	0.006	0.005	0.026
28.85	0.007	0.006	0.028
28.9	0.007	0.005	0.026
28.95	0.007	0.006	0.028
29	0.006	0.005	0.026
29.05	0.007	0.006	0.027
29.1	0.007	0.005	0.026
29.15	0.007	0.006	0.028
29.2	0.006	0.005	0.026
29.25	0.007	0.006	0.028
29.3	0.005	0.005	0.026
29.35	0.007	0.006	0.028
29.4	0.005	0.005	0.027
29.45	0.007	0.006	0.028
29.5	0.006	0.005	0.028
29.55	0.007	0.006	0.028
29.6	0.007	0.005	0.026
29.65	0.007	0.006	0.027
29.7	0.006	0.006	0.027
29.75	0.007	0.006	0.028
29.8	0.006	0.005	0.027
29.85	0.007	0.006	0.028
29.9	0.006	0.005	0.027
29.95	0.007	0.006	0.027
30	0.006	0.005	0.027
30.05	0.007	0.006	0.028

US EPA ARCHIVE DOCUMENT

30.1	0.006	0.005	0.027
30.15	0.007	0.006	0.028
30.2	0.006	0.005	0.027
30.25	0.007	0.006	0.028
30.3	0.005	0.006	0.028
30.35	0.007	0.006	0.028
30.4	0.005	0.005	0.027
30.45	0.007	0.006	0.028
30.5	0.007	0.005	0.028
30.55	0.007	0.006	0.028
30.6	0.006	0.005	0.028
30.65	0.007	0.006	0.028
30.7	0.006	0.004	0.027
30.75	0.007	0.006	0.028
30.8	0.006	0.005	0.027
30.85	0.007	0.006	0.028
30.9	0.006	0.004	0.027
30.95	0.007	0.006	0.028
31	0.006	0.005	0.027
31.05	0.007	0.006	0.028
31.1	0.006	0.005	0.027
31.15	0.007	0.006	0.029
31.2	0.006	0.005	0.027
31.25	0.007	0.006	0.029
31.3	0.006	0.004	0.028
31.35	0.007	0.006	0.029
31.4	0.006	0.005	0.027
31.45	0.007	0.006	0.028
31.5	0.006	0.005	0.027
31.55	0.007	0.006	0.028
31.6	0.007	0.004	0.027
31.65	0.007	0.006	0.028
31.7	0.006	0.006	0.028
31.75	0.007	0.006	0.028
31.8	0.007	0.005	0.027
31.85	0.007	0.006	0.028
31.9	0.006	0.005	0.027
31.95	0.007	0.006	0.028
32	0.006	0.005	0.027
32.05	0.009	0.006	0.028
32.1	0.006	0.005	0.027
32.15	0.007	0.006	0.028
32.2	0.006	0.005	0.026
32.25	0.009	0.006	0.031
32.3	0.006	0.004	0.031
32.35	0.007	0.005	0.031
32.4	0.006	0.005	0.029

US EPA ARCHIVE DOCUMENT

32.45	0.007	0.005	0.032
32.5	0.005	0.004	0.032
32.55	0.007	0.005	0.032
32.6	0.007	0.004	0.029
32.65	0.007	0.006	0.032
32.7	0.006	0.004	0.031
32.75	0.007	0.005	0.031
32.8	0.006	0.004	0.029
32.85	0.006	0.006	0.031
32.9	0.005	0.005	0.031
32.95	0.007	0.005	0.031
33	0.006	0.004	0.029
33.05	0.007	0.005	0.032
33.1	0.006	0.005	0.032
33.15	0.007	0.005	0.032
33.2	0.005	0.005	0.029
33.25	0.007	0.006	0.034
33.3	0.007	0.004	0.031
33.35	0.007	0.005	0.033
33.4	0.005	0.005	0.032
33.45	0.007	0.005	0.034
33.5	0.005	0.005	0.032
33.55	0.007	0.006	0.033
33.6	0.004	0.005	0.033
33.65	0.007	0.005	0.033
33.7	0.006	0.004	0.032
33.75	0.007	0.005	0.034
33.8	0.006	0.005	0.034
33.85	0.007	0.006	0.034
33.9	0.006	0.005	0.033
33.95	0.006	0.005	0.033
34	0.006	0.005	0.033
34.05	0.007	0.006	0.033
34.1	0.006	0.005	0.032
34.15	0.007	0.005	0.033
34.2	0.005	0.004	0.033
34.25	0.007	0.005	0.033
34.3	0.005	0.005	0.032
34.35	0.007	0.006	0.035
34.4	0.006	0.004	0.033
34.45	0.006	0.005	0.034
34.5	0.006	0.004	0.033
34.55	0.007	0.006	0.034
34.6	0.006	0.005	0.033
34.65	0.007	0.005	0.034
34.7	0.005	0.004	0.034
34.75	0.007	0.005	0.035

US EPA ARCHIVE DOCUMENT

34.8	0.006	0.005	0.033
34.85	0.006	0.005	0.034
34.9	0.006	0.005	0.033
34.95	0.007	0.005	0.034
35	0.006	0.004	0.033
35.05	0.009	0.005	0.034
35.1	0.006	0.005	0.034
35.15	0.007	0.005	0.034
35.2	0.006	0.004	0.034
35.25	0.006	0.005	0.034
35.3	0.006	0.004	0.033
35.35	0.007	0.006	0.037
35.4	0.005	0.004	0.033
35.45	0.007	0.005	0.035
35.5	0.007	0.005	0.033
35.55	0.007	0.005	0.035
35.6	0.007	0.004	0.034
35.65	0.007	0.005	0.034
35.7	0.006	0.004	0.034
35.75	0.007	0.005	0.035
35.8	0.007	0.004	0.034
35.85	0.007	0.005	0.035
35.9	0.007	0.005	0.033
35.95	0.007	0.005	0.035
36	0.005	0.005	0.034
36.05	0.007	0.005	0.035
36.1	0.006	0.004	0.033
36.15	0.007	0.005	0.035
36.2	0.005	0.005	0.033
36.25	0.007	0.006	0.035
36.3	0.006	0.004	0.034
36.35	0.007	0.006	0.037
36.4	0.006	0.004	0.034
36.45	0.007	0.005	0.037
36.5	0.006	0.004	0.035
36.55	0.007	0.005	0.035
36.6	0.006	0.002	0.035
36.65	0.007	0.006	0.037
36.7	0.005	0.005	0.035
36.75	0.007	0.005	0.037
36.8	0.006	0.005	0.034
36.85	0.007	0.006	0.037
36.9	0.006	0.005	0.034
36.95	0.007	0.005	0.037
37	0.006	0.004	0.035
37.05	0.007	0.005	0.035
37.1	0.006	0.004	0.034

US EPA ARCHIVE DOCUMENT

37.15	0.007	0.005	0.035
37.2	0.006	0.005	0.035
37.25	0.009	0.006	0.038
37.3	0.006	0.002	0.037
37.35	0.007	0.005	0.038
37.4	0.005	0.004	0.035
37.45	0.007	0.005	0.038
37.5	0.005	0.005	0.035
37.55	0.007	0.005	0.038
37.6	0.006	0.004	0.035
37.65	0.007	0.005	0.038
37.7	0.006	0.004	0.035
37.75	0.009	0.005	0.037
37.8	0.005	0.004	0.034
37.85	0.007	0.005	0.037
37.9	0.006	0.005	0.037
37.95	0.007	0.005	0.038
38	0.005	0.004	0.035
38.05	0.007	0.005	0.037
38.1	0.005	0.005	0.037
38.15	0.007	0.005	0.037
38.2	0.007	0.004	0.035
38.25	0.007	0.006	0.042
38.3	0.007	0.004	0.04
38.35	0.007	0.006	0.04
38.4	0.006	0.004	0.039
38.45	0.007	0.005	0.04
38.5	0.005	0.005	0.039
38.55	0.007	0.005	0.04
38.6	0.005	0.005	0.039
38.65	0.007	0.005	0.04
38.7	0.006	0.004	0.039
38.75	0.007	0.005	0.04
38.8	0.006	0.004	0.039
38.85	0.007	0.005	0.04
38.9	0.006	0.005	0.039
38.95	0.007	0.005	0.04
39	0.006	0.004	0.04
39.05	0.007	0.005	0.04
39.1	0.006	0.005	0.04
39.15	0.007	0.005	0.042
39.2	0.006	0.005	0.039
39.25	0.009	0.006	0.043
39.3	0.007	0.005	0.04
39.35	0.007	0.005	0.04
39.4	0.006	0.004	0.039
39.45	0.007	0.005	0.04

US EPA ARCHIVE DOCUMENT

39.5	0.006	0.005	0.039
39.55	0.007	0.005	0.042
39.6	0.006	0.004	0.039
39.65	0.007	0.005	0.042
39.7	0.005	0.005	0.04
39.75	0.007	0.005	0.042
39.8	0.006	0.005	0.04
39.85	0.007	0.005	0.04
39.9	0.006	0.005	0.04
39.95	0.007	0.005	0.042
40	0.006	0.005	0.038
40.05	0.007	0.005	0.042
40.1	0.006	0.004	0.04
40.15	0.007	0.005	0.042
40.2	0.006	0.005	0.039
40.25	0.007	0.006	0.043
40.3	0.006	0.004	0.042
40.35	0.007	0.005	0.043
40.4	0.005	0.004	0.042
40.45	0.007	0.005	0.043
40.5	0.006	0.005	0.04
40.55	0.007	0.005	0.043
40.6	0.007	0.005	0.042
40.65	0.007	0.005	0.043
40.7	0.006	0.005	0.04
40.75	0.007	0.005	0.043
40.8	0.006	0.004	0.04
40.85	0.007	0.005	0.043
40.9	0.005	0.005	0.043
40.95	0.007	0.005	0.043
41	0.006	0.004	0.042
41.05	0.007	0.005	0.043
41.1	0.005	0.004	0.042
41.15	0.007	0.005	0.043
41.2	0.006	0.004	0.042
41.25	0.009	0.005	0.044
41.3	0.006	0.004	0.042
41.35	0.007	0.005	0.043
41.4	0.006	0.005	0.042
41.45	0.007	0.005	0.043
41.5	0.006	0.005	0.04
41.55	0.007	0.005	0.043
41.6	0.006	0.004	0.04
41.65	0.007	0.005	0.043
41.7	0.006	0.005	0.043
41.75	0.007	0.005	0.043
41.8	0.006	0.004	0.039

US EPA ARCHIVE DOCUMENT

41.85	0.007	0.005	0.043
41.9	0.005	0.005	0.039
41.95	0.007	0.005	0.043
42	0.006	0.004	0.04
42.05	0.007	0.006	0.043
42.1	0.006	0.004	0.039
42.15	0.007	0.005	0.043
42.2	0.005	0.004	0.043
42.25	0.009	0.006	0.046
42.3	0.007	0.004	0.043
42.35	0.007	0.005	0.045
42.4	0.006	0.004	0.043
42.45	0.007	0.005	0.045
42.5	0.006	0.004	0.037
42.55	0.007	0.005	0.045
42.6	0.005	0.005	0.043
42.65	0.007	0.005	0.045
42.7	0.006	0.004	0.042
42.75	0.007	0.005	0.045
42.8	0.007	0.005	0.042
42.85	0.007	0.005	0.046
42.9	0.007	0.002	0.039
42.95	0.007	0.005	0.045
43	0.006	0.005	0.037
43.05	0.007	0.005	0.045
43.1	0.007	0.005	0.043
43.15	0.007	0.005	0.045
43.2	0.006	0.004	0.04
43.25	0.009	0.006	0.045
43.3	0.007	0.004	0.042
43.35	0.007	0.005	0.043
43.4	0.007	0.004	0.042
43.45	0.009	0.005	0.043
43.5	0.007	0.004	0.04
43.55	0.009	0.005	0.043
43.6	0.006	0.004	0.042
43.65	0.007	0.005	0.043
43.7	0.005	0.004	0.04
43.75	0.007	0.005	0.043
43.8	0.006	0.004	0.04
43.85	0.009	0.005	0.043
43.9	0.007	0.004	0.04
43.95	0.009	0.005	0.043
44	0.007	0.004	0.04
44.05	0.009	0.005	0.043
44.1	0.006	0.005	0.042
44.15	0.007	0.005	0.043

US EPA ARCHIVE DOCUMENT

44.2	0.007	0.005	0.042
44.25	0.009	0.006	0.044
44.3	0.006	0.004	0.043
44.35	0.007	0.005	0.043
44.4	0.006	0.005	0.043
44.45	0.007	0.005	0.043
44.5	0.007	0.004	0.043
44.55	0.009	0.005	0.044
44.6	0.007	0.005	0.043
44.65	0.007	0.005	0.044
44.7	0.007	0.004	0.042
44.75	0.009	0.005	0.044
44.8	0.006	0.005	0.042
44.85	0.009	0.005	0.044
44.9	0.007	0.004	0.043
44.95	0.007	0.005	0.044
45	0.007	0.004	0.043
45.05	0.009	0.005	0.044
45.1	0.006	0.005	0.042
45.15	0.009	0.006	0.044
45.2	0.007	0.004	0.043
45.25	0.011	0.01	0.045
45.3	0.007	0.005	0.044
45.35	0.009	0.005	0.044
45.4	0.009	0.004	0.044
45.45	0.009	0.005	0.045
45.5	0.009	0.004	0.043
45.55	0.009	0.005	0.045
45.6	0.007	0.005	0.044
45.65	0.009	0.005	0.045
45.7	0.006	0.004	0.044
45.75	0.009	0.005	0.045
45.8	0.007	0.005	0.045
45.85	0.009	0.005	0.045
45.9	0.006	0.004	0.042
45.95	0.009	0.005	0.045
46	0.009	0.004	0.044
46.05	0.009	0.005	0.045
46.1	0.009	0.004	0.044
46.15	0.009	0.005	0.045
46.2	0.007	0.005	0.044
46.25	0.01	0.009	0.046
46.3	0.007	0.004	0.045
46.35	0.009	0.005	0.046
46.4	0.007	0.005	0.045
46.45	0.009	0.005	0.046
46.5	0.009	0.004	0.045

US EPA ARCHIVE DOCUMENT

46.55	0.009	0.005	0.046
46.6	0.007	0.002	0.046
46.65	0.007	0.005	0.046
46.7	0.007	0.005	0.045
46.75	0.007	0.005	0.046
46.8	0.007	0.005	0.046
46.85	0.009	0.005	0.046
46.9	0.007	0.004	0.044
46.95	0.009	0.005	0.046
47	0.007	0.004	0.045
47.05	0.007	0.005	0.046
47.1	0.007	0.004	0.046
47.15	0.009	0.005	0.046
47.2	0.007	0.005	0.044
47.25	0.009	0.006	0.048
47.3	0.006	0.004	0.046
47.35	0.007	0.005	0.048
47.4	0.006	0.004	0.045
47.45	0.007	0.005	0.046
47.5	0.007	0.004	0.045
47.55	0.009	0.005	0.046
47.6	0.006	0.004	0.045
47.65	0.007	0.005	0.046
47.7	0.007	0.004	0.045
47.75	0.009	0.005	0.046
47.8	0.007	0.004	0.045
47.85	0.009	0.005	0.046
47.9	0.007	0.004	0.045
47.95	0.009	0.005	0.048
48	0.006	0.004	0.046
48.05	0.009	0.005	0.046
48.1	0.006	0.004	0.045
48.15	0.009	0.005	0.046
48.2	0.006	0.002	0.046
48.25	0.009	0.005	0.049
48.3	0.006	0.004	0.048
48.35	0.009	0.005	0.048
48.4	0.006	0.004	0.048
48.45	0.009	0.005	0.048
48.5	0.007	0.004	0.048
48.55	0.007	0.005	0.049
48.6	0.007	0.004	0.046
48.65	0.009	0.005	0.049
48.7	0.006	0.004	0.048
48.75	0.009	0.005	0.049
48.8	0.007	0.005	0.048
48.85	0.009	0.005	0.049

US EPA ARCHIVE DOCUMENT

48.9	0.006	0.004	0.049
48.95	0.007	0.005	0.049
49	0.007	0.004	0.048
49.05	0.009	0.005	0.049
49.1	0.007	0.005	0.048
49.15	0.007	0.005	0.049
49.2	0.007	0.005	0.048
49.25	0.009	0.006	0.05
49.3	0.007	0.005	0.048
49.35	0.009	0.006	0.049
49.4	0.006	0.005	0.049
49.45	0.009	0.005	0.049
49.5	0.007	0.005	0.048
49.55	0.009	0.005	0.05
49.6	0.009	0.004	0.05
49.65	0.009	0.005	0.05
49.7	0.007	0.005	0.049
49.75	0.009	0.005	0.05
49.8	0.007	0.005	0.05
49.85	0.009	0.006	0.05
49.9	0.007	0.005	0.049
49.95	0.009	0.006	0.05
50	0.007	0.005	0.049
50.05	0.009	0.006	0.05
50.1	0.007	0.004	0.049
50.15	0.009	0.006	0.051
50.2	0.009	0.005	0.049
50.25	0.01	0.006	0.051
50.3	0.007	0.002	0.05
50.35	0.009	0.005	0.051
50.4	0.007	0.004	0.05
50.45	0.009	0.005	0.051
50.5	0.007	0.004	0.051
50.55	0.009	0.005	0.051
50.6	0.009	0.005	0.05
50.65	0.01	0.005	0.053
50.7	0.009	0.004	0.049
50.75	0.009	0.005	0.051
50.8	0.007	0.005	0.05
50.85	0.01	0.005	0.051
50.9	0.007	0.004	0.05
50.95	0.009	0.006	0.051
51	0.007	0.004	0.05
51.05	0.009	0.005	0.053
51.1	0.009	0.005	0.05
51.15	0.009	0.005	0.051
51.2	0.007	0.005	0.05

US EPA ARCHIVE DOCUMENT

51.25	0.01	0.006	0.053
51.3	0.009	0.004	0.051
51.35	0.009	0.005	0.053
51.4	0.009	0.005	0.051
51.45	0.009	0.005	0.053
51.5	0.007	0.004	0.053
51.55	0.01	0.006	0.053
51.6	0.006	0.005	0.051
51.65	0.01	0.006	0.053
51.7	0.009	0.005	0.05
51.75	0.009	0.005	0.054
51.8	0.007	0.004	0.051
51.85	0.01	0.005	0.054
51.9	0.009	0.005	0.053
51.95	0.009	0.005	0.053
52	0.007	0.004	0.051
52.05	0.01	0.005	0.053
52.1	0.009	0.004	0.05
52.15	0.009	0.005	0.053
52.2	0.007	0.004	0.051
52.25	0.01	0.006	0.054
52.3	0.009	0.004	0.054
52.35	0.009	0.005	0.054
52.4	0.007	0.004	0.053
52.45	0.009	0.005	0.054
52.5	0.007	0.005	0.053
52.55	0.009	0.005	0.054
52.6	0.007	0.005	0.054
52.65	0.009	0.005	0.054
52.7	0.009	0.004	0.053
52.75	0.01	0.005	0.054
52.8	0.007	0.005	0.054
52.85	0.009	0.005	0.054
52.9	0.007	0.002	0.053
52.95	0.009	0.005	0.054
53	0.009	0.004	0.051
53.05	0.009	0.005	0.054
53.1	0.007	0.004	0.051
53.15	0.009	0.005	0.054
53.2	0.007	0.004	0.051
53.25	0.01	0.006	0.056
53.3	0.01	0.004	0.054
53.35	0.01	0.005	0.056
53.4	0.009	0.004	0.055
53.45	0.009	0.005	0.056
53.5	0.009	0.004	0.055
53.55	0.009	0.005	0.056

US EPA ARCHIVE DOCUMENT

53.6	0.006	0.004	0.055
53.65	0.009	0.005	0.056
53.7	0.007	0.004	0.055
53.75	0.009	0.006	0.056
53.8	0.009	0.004	0.055
53.85	0.009	0.006	0.056
53.9	0.007	0.004	0.055
53.95	0.009	0.005	0.056
54	0.007	0.004	0.055
54.05	0.009	0.005	0.057
54.1	0.007	0.005	0.055
54.15	0.009	0.005	0.056
54.2	0.009	0.004	0.055
54.25	0.009	0.005	0.06
54.3	0.007	0.004	0.059
54.35	0.009	0.005	0.059
54.4	0.007	0.002	0.059
54.45	0.009	0.004	0.06
54.5	0.007	0.004	0.057
54.55	0.009	0.005	0.06
54.6	0.007	0.004	0.057
54.65	0.007	0.005	0.06
54.7	0.007	0.004	0.057
54.75	0.009	0.005	0.06
54.8	0.007	0.002	0.057
54.85	0.009	0.005	0.06
54.9	0.007	0.004	0.057
54.95	0.009	0.005	0.06
55	0.007	0.004	0.056
55.05	0.009	0.005	0.06
55.1	0.007	0.004	0.059
55.15	0.009	0.005	0.06
55.2	0.007	0.004	0.059
55.25	0.009	0.005	0.06
55.3	0.006	0.002	0.059
55.35	0.01	0.005	0.063
55.4	0.007	0.004	0.059
55.45	0.009	0.005	0.062
55.5	0.007	0.002	0.057
55.55	0.009	0.005	0.061
55.6	0.007	0.002	0.06
55.65	0.009	0.004	0.061
55.7	0.007	0.004	0.059
55.75	0.009	0.004	0.062
55.8	0.007	0.002	0.06
55.85	0.009	0.004	0.062
55.9	0.009	0.004	0.061

US EPA ARCHIVE DOCUMENT

55.95	0.01	0.005	0.062
56	0.007	0.002	0.057
56.05	0.01	0.004	0.061
56.1	0.007	0.002	0.06
56.15	0.009	0.004	0.061
56.2	0.009	0.002	0.059
56.25	0.01	0.005	0.062
56.3	0.007	0.004	0.061
56.35	0.009	0.004	0.062
56.4	0.007	0.004	0.06
56.45	0.009	0.005	0.062
56.5	0.007	0.002	0.06
56.55	0.009	0.004	0.062
56.6	0.007	0.004	0.061
56.65	0.009	0.005	0.062
56.7	0.007	0.004	0.061
56.75	0.009	0.005	0.062
56.8	0.007	0.004	0.061
56.85	0.009	0.005	0.062
56.9	0.009	0.004	0.06
56.95	0.009	0.005	0.062
57	0.007	0.002	0.061
57.05	0.009	0.005	0.062
57.1	0.007	0.004	0.061
57.15	0.009	0.004	0.062
57.2	0.007	0.004	0.061
57.25	0.01	0.005	0.065
57.3	0.007	0.004	0.062
57.35	0.009	0.005	0.063
57.4	0.006	0.004	0.062
57.45	0.009	0.005	0.063
57.5	0.009	0.004	0.062
57.55	0.01	0.005	0.065
57.6	0.009	0.004	0.062
57.65	0.009	0.004	0.063
57.7	0.007	0.004	0.062
57.75	0.009	0.004	0.063
57.8	0.009	0.002	0.063
57.85	0.01	0.005	0.063
57.9	0.007	0.004	0.063
57.95	0.009	0.005	0.063
58	0.007	0.004	0.063
58.05	0.009	0.005	0.063
58.1	0.007	0.004	0.062
58.15	0.009	0.005	0.063
58.2	0.009	0.004	0.063
58.25	0.009	0.005	0.071

US EPA ARCHIVE DOCUMENT

58.3	0.006	0.004	0.07
58.35	0.009	0.005	0.07
58.4	0.007	0.004	0.068
58.45	0.009	0.005	0.07
58.5	0.009	0.004	0.068
58.55	0.009	0.004	0.07
58.6	0.007	0.004	0.068
58.65	0.009	0.004	0.07
58.7	0.007	0.002	0.07
58.75	0.009	0.005	0.07
58.8	0.009	0.004	0.068
58.85	0.009	0.005	0.07
58.9	0.007	0.004	0.07
58.95	0.009	0.005	0.07
59	0.007	0.004	0.068
59.05	0.009	0.004	0.07
59.1	0.007	0.004	0.068
59.15	0.009	0.005	0.07
59.2	0.007	0.004	0.07
59.25	0.009	0.006	0.071
59.3	0.007	0.004	0.067
59.35	0.01	0.005	0.072
59.4	0.006	0.004	0.071
59.45	0.009	0.005	0.072
59.5	0.007	0.002	0.071
59.55	0.01	0.005	0.072
59.6	0.007	0.004	0.071
59.65	0.009	0.005	0.071
59.7	0.009	0.004	0.07
59.75	0.009	0.005	0.072
59.8	0.007	0.004	0.07
59.85	0.009	0.005	0.072
59.9	0.009	0.005	0.071
59.95	0.009	0.005	0.072
60	0.007	0.002	0.071
60.05	0.009	0.005	0.072
60.1	0.007	0.004	0.07
60.15	0.009	0.004	0.072
60.2	0.007	0.004	0.07
60.25	0.01	0.005	0.074
60.3	0.007	0.002	0.072
60.35	0.009	0.004	0.073
60.4	0.009	0.002	0.071
60.45	0.009	0.004	0.073
60.5	0.009	0.002	0.071
60.55	0.009	0.004	0.073
60.6	0.007	0.004	0.071

US EPA ARCHIVE DOCUMENT

60.65	0.009	0.005	0.073
60.7	0.007	0.004	0.072
60.75	0.009	0.004	0.073
60.8	0.006	0.002	0.072
60.85	0.009	0.004	0.073
60.9	0.009	0.002	0.072
60.95	0.009	0.004	0.073
61	0.007	0.004	0.073
61.05	0.009	0.004	0.073
61.1	0.007	0.002	0.072
61.15	0.009	0.004	0.073
61.2	0.007	0.002	0.071
61.25	0.01	0.005	0.074
61.3	0.007	0.004	0.072
61.35	0.009	0.004	0.073
61.4	0.007	0.002	0.072
61.45	0.009	0.004	0.073
61.5	0.007	0.004	0.072
61.55	0.009	0.004	0.073
61.6	0.006	0.002	0.073
61.65	0.007	0.004	0.073
61.7	0.006	0.002	0.072
61.75	0.009	0.005	0.073
61.8	0.007	0.004	0.072
61.85	0.009	0.005	0.074
61.9	0.007	0.002	0.072
61.95	0.009	0.004	0.073
62	0.007	0.004	0.071
62.05	0.009	0.004	0.073
62.1	0.007	0.002	0.072
62.15	0.009	0.004	0.073
62.2	0.007	0.004	0.072
62.25	0.009	0.005	0.076
62.3	0.006	0.002	0.073
62.35	0.009	0.004	0.074
62.4	0.007	0.004	0.072
62.45	0.009	0.004	0.074
62.5	0.007	0.002	0.072
62.55	0.009	0.004	0.074
62.6	0.007	0.002	0.072
62.65	0.009	0.004	0.074
62.7	0.007	0.004	0.072
62.75	0.009	0.004	0.074
62.8	0.007	0.002	0.073
62.85	0.009	0.004	0.074
62.9	0.007	0.002	0.072
62.95	0.009	0.004	0.074

US EPA ARCHIVE DOCUMENT

63	0.007	0.002	0.073
63.05	0.007	0.004	0.074
63.1	0.007	0.001	0.073
63.15	0.009	0.004	0.074
63.2	0.006	0.002	0.073
63.25	0.009	0.004	0.074
63.3	0.007	0.002	0.072
63.35	0.009	0.004	0.077
63.4	0.007	0.002	0.074
63.45	0.009	0.004	0.077
63.5	0.006	0.004	0.076
63.55	0.009	0.004	0.077
63.6	0.007	0.002	0.077
63.65	0.009	0.004	0.077
63.7	0.007	0.002	0.076
63.75	0.009	0.004	0.077
63.8	0.007	0.002	0.076
63.85	0.009	0.004	0.077
63.9	0.006	0.002	0.074
63.95	0.009	0.004	0.077
64	0.007	0.002	0.074
64.05	0.009	0.004	0.077
64.1	0.007	0.002	0.074
64.15	0.009	0.004	0.077
64.2	0.007	0.002	0.074
64.25	0.01	0.004	0.078
64.3	0.007	0.002	0.076
64.35	0.009	0.004	0.077
64.4	0.007	0.002	0.076
64.45	0.009	0.004	0.078
64.5	0.007	0.002	0.076
64.55	0.009	0.004	0.078
64.6	0.007	0.002	0.076
64.65	0.009	0.004	0.078
64.7	0.006	0.004	0.077
64.75	0.009	0.004	0.078
64.8	0.007	0.002	0.078
64.85	0.009	0.004	0.078
64.9	0.007	0.002	0.076
64.95	0.009	0.004	0.077
65	0.007	0.004	0.076
65.05	0.009	0.004	0.077
65.1	0.009	0.002	0.076
65.15	0.009	0.004	0.078
65.2	0.007	0.001	0.076
65.25	0.01	0.004	0.081
65.3	0.007	0.002	0.078

US EPA ARCHIVE DOCUMENT

65.35	0.01	0.004	0.079
65.4	0.007	0.002	0.077
65.45	0.009	0.004	0.079
65.5	0.007	0.002	0.077
65.55	0.009	0.004	0.078
65.6	0.005	0.002	0.077
65.65	0.009	0.004	0.079
65.7	0.006	0.002	0.077
65.75	0.009	0.004	0.079
65.8	0.007	0.002	0.079
65.85	0.009	0.004	0.079
65.9	0.007	0.002	0.078
65.95	0.009	0.004	0.079
66	0.006	0.004	0.078
66.05	0.009	0.004	0.079
66.1	0.009	0.002	0.078
66.15	0.009	0.004	0.079
66.2	0.007	0.002	0.077
66.25	0.01	0.004	0.082
66.3	0.007	0.004	0.082
66.35	0.01	0.004	0.082
66.4	0.007	0.002	0.078
66.45	0.009	0.004	0.082
66.5	0.009	0.002	0.079
66.55	0.009	0.004	0.082
66.6	0.006	0.002	0.082
66.65	0.01	0.004	0.082
66.7	0.009	0.004	0.081
66.75	0.009	0.004	0.083
66.8	0.009	0.002	0.081
66.85	0.009	0.004	0.082
66.9	0.006	0.002	0.081
66.95	0.01	0.004	0.083
67	0.007	0.002	0.083
67.05	0.009	0.004	0.083
67.1	0.005	0.002	0.082
67.15	0.01	0.004	0.083
67.2	0.007	0.002	0.082
67.25	0.01	0.004	0.087
67.3	0.007	0.002	0.082
67.35	0.01	0.004	0.084
67.4	0.007	0.001	0.083
67.45	0.01	0.004	0.084
67.5	0.009	0.001	0.083
67.55	0.01	0.004	0.084
67.6	0.009	0.002	0.083
67.65	0.009	0.004	0.084

US EPA ARCHIVE DOCUMENT

67.7	0.009	0.002	0.084
67.75	0.009	0.004	0.084
67.8	0.009	0.002	0.082
67.85	0.01	0.004	0.084
67.9	0.009	0.002	0.083
67.95	0.01	0.004	0.084
68	0.007	0.002	0.084
68.05	0.01	0.004	0.084
68.1	0.007	0.004	0.083
68.15	0.009	0.004	0.084
68.2	0.007	0.002	0.082
68.25	0.01	0.005	0.092
68.3	0.009	0.002	0.088
68.35	0.009	0.004	0.092
68.4	0.009	0.002	0.09
68.45	0.01	0.004	0.09
68.5	0.01	0.004	0.089
68.55	0.01	0.004	0.09
68.6	0.007	0.002	0.09
68.65	0.01	0.004	0.092
68.7	0.009	0.004	0.09
68.75	0.01	0.004	0.092
68.8	0.009	0.002	0.089
68.85	0.01	0.004	0.092
68.9	0.009	0.002	0.09
68.95	0.01	0.004	0.092
69	0.009	0.004	0.09
69.05	0.01	0.004	0.092
69.1	0.009	0.002	0.09
69.15	0.01	0.004	0.092
69.2	0.009	0.002	0.09
69.25	0.01	0.005	0.095
69.3	0.009	0.001	0.093
69.35	0.01	0.004	0.095
69.4	0.007	0.002	0.094
69.45	0.01	0.004	0.095
69.5	0.007	0.004	0.094
69.55	0.01	0.004	0.095
69.6	0.009	0.004	0.094
69.65	0.01	0.004	0.095
69.7	0.01	0.002	0.094
69.75	0.01	0.004	0.095
69.8	0.009	0.002	0.094
69.85	0.01	0.004	0.095
69.9	0.009	0.002	0.094
69.95	0.01	0.004	0.095
70	0.009	0.002	0.094

US EPA ARCHIVE DOCUMENT

70.05	0.01	0.004	0.094
70.1	0.009	0.002	0.094
70.15	0.01	0.005	0.095
70.2	0.007	0.002	0.093
70.25	0.01	0.004	0.094
70.3	0.007	0.004	0.093
70.35	0.009	0.004	0.094
70.4	0.007	0.002	0.092
70.45	0.009	0.004	0.094
70.5	0.009	0.002	0.093
70.55	0.009	0.004	0.094
70.6	0.009	0.004	0.093
70.65	0.01	0.004	0.094
70.7	0.007	0.002	0.092
70.75	0.009	0.004	0.094
70.8	0.009	0.002	0.092
70.85	0.01	0.004	0.094
70.9	0.007	0.002	0.093
70.95	0.009	0.004	0.094
71	0.009	0.002	0.092
71.05	0.009	0.004	0.094
71.1	0.007	0.001	0.092
71.15	0.01	0.004	0.094
71.2	0.009	0.002	0.092
71.25	0.01	0.004	0.095
71.3	0.009	0.004	0.093
71.35	0.009	0.004	0.095
71.4	0.007	0.002	0.093
71.45	0.009	0.004	0.095
71.5	0.007	0.002	0.093
71.55	0.009	0.004	0.094
71.6	0.009	0.004	0.093
71.65	0.009	0.004	0.094
71.7	0.009	0.002	0.094
71.75	0.009	0.004	0.094
71.8	0.007	0.002	0.093
71.85	0.009	0.004	0.095
71.9	0.007	0.002	0.093
71.95	0.009	0.004	0.094
72	0.009	0.002	0.093
72.05	0.009	0.004	0.095
72.1	0.009	0.002	0.093
72.15	0.01	0.004	0.096
72.2	0.009	0.001	0.092
72.25	0.009	0.002	0.094
72.3	0.007	0.001	0.092
72.35	0.01	0.004	0.094

US EPA ARCHIVE DOCUMENT

72.4	0.007	0.002	0.093
72.45	0.009	0.004	0.094
72.5	0.007	0.002	0.093
72.55	0.009	0.004	0.094
72.6	0.007	0.002	0.093
72.65	0.009	0.002	0.094
72.7	0.007	0.002	0.093
72.75	0.009	0.002	0.094
72.8	0.007	0.002	0.094
72.85	0.009	0.002	0.094
72.9	0.007	0.001	0.092
72.95	0.009	0.002	0.094
73	0.006	0.001	0.093
73.05	0.009	0.004	0.094
73.1	0.007	0.002	0.092
73.15	0.01	0.004	0.096
73.2	0.007	0.002	0.093
73.25	0.009	0.002	0.095
73.3	0.007	0.002	0.093
73.35	0.009	0.002	0.096
73.4	0.009	0.001	0.094
73.45	0.009	0.002	0.095
73.5	0.007	0.002	0.094
73.55	0.009	0.002	0.096
73.6	0.007	0.002	0.094
73.65	0.01	0.002	0.095
73.7	0.007	0.002	0.094
73.75	0.009	0.002	0.095
73.8	0.007	0.001	0.094
73.85	0.009	0.002	0.095
73.9	0.009	0.002	0.094
73.95	0.009	0.002	0.095
74	0.009	0	0.093
74.05	0.009	0.004	0.095
74.1	0.007	0.002	0.094
74.15	0.01	0.004	0.096
74.2	0.007	0.002	0.094
74.25	0.009	0.004	0.095
74.3	0.007	0.002	0.093
74.35	0.009	0.002	0.095
74.4	0.007	0.001	0.094
74.45	0.009	0.004	0.095
74.5	0.007	0.002	0.094
74.55	0.009	0.004	0.095
74.6	0.009	0.001	0.095
74.65	0.009	0.002	0.095
74.7	0.006	0.002	0.094

US EPA ARCHIVE DOCUMENT

74.75	0.009	0.002	0.095
74.8	0.007	0.001	0.094
74.85	0.009	0.002	0.095
74.9	0.009	0.001	0.094
74.95	0.009	0.002	0.095
75	0.007	0.002	0.095
75.05	0.009	0.002	0.095
75.1	0.006	0.001	0.093
75.15	0.01	0.002	0.095
75.2	0.007	0.001	0.094
75.25	0.01	0.004	0.098
75.3	0.007	0.002	0.094
75.35	0.009	0.002	0.095
75.4	0.007	0.002	0.093
75.45	0.009	0.002	0.095
75.5	0.007	0.002	0.094
75.55	0.009	0.002	0.094
75.6	0.007	0.002	0.094
75.65	0.009	0.002	0.095
75.7	0.007	0.002	0.094
75.75	0.009	0.002	0.094
75.8	0.007	0.001	0.093
75.85	0.01	0.002	0.095
75.9	0.009	0.001	0.094
75.95	0.01	0.004	0.095
76	0.007	0.001	0.094
76.05	0.01	0.004	0.094
76.1	0.007	0.001	0.094
76.15	0.01	0.004	0.098
76.2	0.007	0.001	0.095
76.25	0.009	0.002	0.098
76.3	0.007	0.001	0.098
76.35	0.009	0.002	0.098
76.4	0.007	0.001	0.096
76.45	0.01	0.002	0.098
76.5	0.01	0.001	0.095
76.55	0.01	0.002	0.098
76.6	0.009	0.002	0.096
76.65	0.009	0.002	0.098
76.7	0.009	0.001	0.096
76.75	0.01	0.004	0.098
76.8	0.009	0.002	0.095
76.85	0.01	0.002	0.098
76.9	0.009	0.001	0.095
76.95	0.01	0.002	0.098
77	0.009	0.002	0.095
77.05	0.01	0.002	0.099

US EPA ARCHIVE DOCUMENT

77.1	0.009	0.001	0.096
77.15	0.011	0.004	0.101
77.2	0.01	0.002	0.096
77.25	0.011	0.004	0.099
77.3	0.01	0.001	0.096
77.35	0.011	0.002	0.099
77.4	0.009	0.001	0.098
77.45	0.01	0.004	0.1
77.5	0.009	0.001	0.098
77.55	0.011	0.004	0.099
77.6	0.007	0.001	0.096
77.65	0.011	0.004	0.099
77.7	0.007	0.001	0.098
77.75	0.011	0.004	0.099
77.8	0.01	0.002	0.098
77.85	0.011	0.004	0.099
77.9	0.009	0.001	0.098
77.95	0.011	0.004	0.1
78	0.01	0.004	0.096
78.05	0.011	0.004	0.1
78.1	0.007	0.001	0.1
78.15	0.012	0.004	0.103
78.2	0.009	0.001	0.103
78.25	0.01	0.002	0.103
78.3	0.007	0.001	0.1
78.35	0.01	0.002	0.103
78.4	0.007	0.001	0.101
78.45	0.01	0.004	0.103
78.5	0.007	0.001	0.1
78.55	0.01	0.002	0.103
78.6	0.01	0.001	0.101
78.65	0.01	0.002	0.103
78.7	0.007	0.002	0.101
78.75	0.01	0.004	0.103
78.8	0.007	0.001	0.103
78.85	0.01	0.004	0.104
78.9	0.009	0.001	0.101
78.95	0.01	0.002	0.103
79	0.009	0.002	0.101
79.05	0.011	0.004	0.105
79.1	0.009	0.001	0.105
79.15	0.01	0.004	0.106
79.2	0.007	0	0.105
79.25	0.009	0.002	0.106
79.3	0.007	0.001	0.105
79.35	0.01	0.004	0.106
79.4	0.007	0.001	0.104

US EPA ARCHIVE DOCUMENT

79.45	0.01	0.004	0.106
79.5	0.009	0	0.104
79.55	0.01	0.002	0.106
79.6	0.009	0.001	0.105
79.65	0.01	0.002	0.105
79.7	0.007	0.001	0.105
79.75	0.01	0.002	0.106
79.8	0.009	0.001	0.105
79.85	0.01	0.004	0.106
79.9	0.009	0.002	0.105
79.95	0.01	0.002	0.106
80	0.007	0.001	0.106
80.05	0.01	0.004	0.106
80.1	0.009	0.002	0.104
80.15	0.01	0.004	0.109
80.2	0.009	0.002	0.105
80.25	0.01	0.004	0.107
80.3	0.009	0.001	0.106
80.35	0.01	0.002	0.107
80.4	0.01	0.001	0.106
80.45	0.01	0.002	0.107
80.5	0.009	0	0.107
80.55	0.009	0.002	0.107
80.6	0.007	0.001	0.107
80.65	0.01	0.004	0.109
80.7	0.009	0.004	0.107
80.75	0.01	0.004	0.107
80.8	0.009	0	0.107
80.85	0.01	0.002	0.107
80.9	0.006	0.001	0.106
80.95	0.01	0.002	0.107
81	0.009	0.001	0.105
81.05	0.01	0.002	0.107
81.1	0.007	0	0.106
81.15	0.011	0.004	0.11
81.2	0.01	0.001	0.107
81.25	0.01	0.002	0.109
81.3	0.007	0.001	0.107
81.35	0.01	0.002	0.107
81.4	0.007	0.002	0.106
81.45	0.009	0.002	0.107
81.5	0.009	0.002	0.105
81.55	0.01	0.002	0.106
81.6	0.007	0.001	0.106
81.65	0.01	0.004	0.106
81.7	0.007	0.001	0.1
81.75	0.01	0.004	0.103

US EPA ARCHIVE DOCUMENT

81.8	0.007	0	0.099
81.85	0.01	0.004	0.101
81.9	0.01	0.001	0.1
81.95	0.01	0.004	0.1
82	0.009	0.002	0.098

US EPA ARCHIVE DOCUMENT

MIP FILE NAME :887A.MIP

MIP TEST RESULTS

DEPTH (Ft)	PID (V)	FID (V)	ECD (V)
0.05	0.002	0.004	0.004
0.1	0.001	0.002	0.002
0.15	0.002	0.004	0.004
0.2	0.002	0.001	0.004
0.25	0.002	0.004	0.004
0.3	0.001	0.002	0.002
0.35	0.002	0.002	0.004
0.4	0.001	0.002	0.002
0.45	0.002	0.004	0.005
0.5	0	0.002	0.002
0.55	0.002	0.004	0.005
0.6	0.001	0.002	0.005
0.65	0.002	0.002	0.005
0.7	0.001	0.002	0.002
0.75	0.004	0.004	0.005
0.8	0	0.002	0.004
0.85	0.004	0.004	0.005
0.9	0.001	0.002	0.005
0.95	0.002	0.004	0.005
1	0.002	0.002	0.002
1.05	0.002	0.004	0.005
1.1	0.002	0.002	0.005
1.15	0.002	0.004	0.005
1.2	0.002	0.002	0.002
1.25	0.004	0.004	0.005
1.3	0.001	0.004	0
1.35	0.004	0.004	0.002
1.4	0.002	0.002	0
1.45	0.002	0.002	0.001
1.5	0.001	0.001	0.001
1.55	0.002	0.004	0.002
1.6	0.001	0.002	0
1.65	0.004	0.004	0.002
1.7	0.002	0.002	0
1.75	0.004	0.004	0.002
1.8	0.001	0.002	0.001
1.85	0.004	0.004	0.002
1.9	0.002	0.001	0.001
1.95	0.002	0.004	0.001
2	0.002	0.002	0
2.05	0.004	0.004	0.002

US EPA ARCHIVE DOCUMENT

2.1	0.002	0.002	0.001
2.15	0.004	0.004	0.002
2.2	0.002	0.002	0.001
2.25	0.002	0.002	0.001
2.3	0.002	0.001	0.001
2.35	0.004	0.004	0.006
2.4	0.002	0.001	0.004
2.45	0.002	0.004	0.005
2.5	0.001	0.002	0.004
2.55	0.004	0.002	0.006
2.6	0.001	0.002	0.005
2.65	0.004	0.002	0.005
2.7	0.002	0.002	0.004
2.75	0.004	0.002	0.005
2.8	0.001	0.002	0.005
2.85	0.004	0.004	0.006
2.9	0.001	0.002	0.004
2.95	0.004	0.004	0.005
3	0.002	0.002	0.004
3.05	0.002	0.002	0.005
3.1	0.001	0.002	0.005
3.15	0.004	0.004	0.005
3.2	0.002	0.002	0.002
3.25	0.004	0.002	0.005
3.3	0.001	0.002	0.004
3.35	0.004	0.004	0.007
3.4	0.002	0.001	0.006
3.45	0.004	0.004	0.006
3.5	0.002	0.002	0.005
3.55	0.004	0.004	0.007
3.6	0.002	0.002	0.006
3.65	0.004	0.002	0.006
3.7	0.002	0.002	0.005
3.75	0.004	0.002	0.006
3.8	0.002	0.001	0.006
3.85	0.004	0.002	0.007
3.9	0.001	0.002	0.006
3.95	0.004	0.002	0.006
4	0.002	0.002	0.005
4.05	0.004	0.004	0.006
4.1	0.001	0.002	0.005
4.15	0.002	0.002	0.006
4.2	0.002	0.001	0.006
4.25	0.004	0.004	0.007
4.3	0.001	0.002	0.006
4.35	0.005	0.004	0.01
4.4	0.002	0.002	0.009
4.45	0.004	0.004	0.009
4.5	0.002	0.001	0.007
4.55	0.004	0.002	0.01
4.6	0.002	0.002	0.009

US EPA ARCHIVE DOCUMENT

4.65	0.004	0.002	0.01
4.7	0.002	0.002	0.007
4.75	0.004	0.002	0.009
4.8	0.004	0.002	0.007
4.85	0.004	0.004	0.009
4.9	0.002	0.001	0.007
4.95	0.004	0.002	0.01
5	0.002	0.002	0.009
5.05	0.004	0.002	0.009
5.1	0.002	0.001	0.009
5.15	0.005	0.002	0.01
5.2	0.002	0.002	0.007
5.25	0.004	0.002	0.01
5.3	0.002	0.001	0.007
5.35	0.005	0.004	0.012
5.4	0.002	0.002	0.01
5.45	0.004	0.002	0.011
5.5	0.002	0.002	0.01
5.55	0.004	0.002	0.011
5.6	0.004	0.002	0.01
5.65	0.004	0.002	0.011
5.7	0.002	0.001	0.01
5.75	0.004	0.004	0.012
5.8	0.004	0.002	0.011
5.85	0.004	0.002	0.011
5.9	0.004	0.001	0.011
5.95	0.004	0.004	0.012
6	0.004	0.002	0.011
6.05	0.004	0.004	0.011
6.1	0.002	0.002	0.011
6.15	0.004	0.002	0.011
6.2	0.002	0.002	0.011
6.25	0.004	0.004	0.011
6.3	0.002	0.002	0.01
6.35	0.004	0.002	0.011
6.4	0.004	0.001	0.01
6.45	0.005	0.004	0.013
6.5	0.002	0.002	0.011
6.55	0.005	0.004	0.013
6.6	0.002	0.002	0.012
6.65	0.005	0.004	0.015
6.7	0.002	0.001	0.012
6.75	0.004	0.002	0.013
6.8	0.004	0.001	0.013
6.85	0.005	0.002	0.013
6.9	0.004	0.001	0.012
6.95	0.004	0.002	0.015
7	0.002	0.001	0.012
7.05	0.005	0.004	0.013
7.1	0.004	0.002	0.011
7.15	0.004	0.004	0.013

US EPA ARCHIVE DOCUMENT

7.2	0.004	0.002	0.012
7.25	0.004	0.002	0.013
7.3	0.004	0.002	0.013
7.35	0.004	0.004	0.013
7.4	0.002	0.002	0.011
7.45	0.005	0.004	0.015
7.5	0.004	0.001	0.013
7.55	0.005	0.002	0.013
7.6	0.004	0.001	0.011
7.65	0.005	0.002	0.013
7.7	0.004	0.001	0.012
7.75	0.005	0.004	0.013
7.8	0.002	0.002	0.011
7.85	0.005	0.002	0.013
7.9	0.004	0.001	0.012
7.95	0.005	0.002	0.013
8	0.004	0.001	0.011
8.05	0.005	0.002	0.013
8.1	0.004	0.002	0.013
8.15	0.004	0.002	0.013
8.2	0.002	0.002	0.012
8.25	0.005	0.002	0.013
8.3	0.002	0.001	0.012
8.35	0.005	0.004	0.017
8.4	0.004	0.002	0.016
8.45	0.005	0.002	0.016
8.5	0.004	0.002	0.015
8.55	0.005	0.002	0.016
8.6	0.004	0.001	0.015
8.65	0.005	0.004	0.017
8.7	0.005	0.001	0.015
8.75	0.005	0.002	0.016
8.8	0.002	0.002	0.016
8.85	0.005	0.002	0.016
8.9	0.004	0.002	0.015
8.95	0.005	0.002	0.017
9	0.004	0.002	0.015
9.05	0.005	0.002	0.016
9.1	0.004	0.002	0.015
9.15	0.005	0.004	0.017
9.2	0.004	0.001	0.015
9.25	0.005	0.004	0.017
9.3	0.004	0.002	0.015
9.35	0.006	0.004	0.021
9.4	0.004	0.002	0.018
9.45	0.006	0.002	0.02
9.5	0.004	0.002	0.018
9.55	0.006	0.002	0.02
9.6	0.004	0.002	0.017
9.65	0.005	0.002	0.02
9.7	0.004	0.001	0.017

US EPA ARCHIVE DOCUMENT

9.75	0.005	0.002	0.02
9.8	0.004	0.002	0.017
9.85	0.006	0.002	0.02
9.9	0.006	0.001	0.018
9.95	0.006	0.002	0.02
10	0.005	0.002	0.02
10.05	0.006	0.004	0.02
10.1	0.004	0.001	0.018
10.15	0.005	0.002	0.021
10.2	0.005	0.001	0.02
10.25	0.005	0.004	0.02
10.3	0.004	0.001	0.017
10.35	0.007	0.004	0.024
10.4	0.004	0.002	0.023
10.45	0.006	0.002	0.023
10.5	0.005	0.002	0.022
10.55	0.007	0.004	0.023
10.6	0.005	0.001	0.021
10.65	0.006	0.004	0.023
10.7	0.004	0.002	0.022
10.75	0.006	0.002	0.023
10.8	0.005	0.002	0.021
10.85	0.007	0.004	0.023
10.9	0.004	0.002	0.021
10.95	0.006	0.004	0.023
11	0.005	0.001	0.022
11.05	0.006	0.002	0.023
11.1	0.004	0.001	0.023
11.15	0.006	0.004	0.023
11.2	0.006	0.002	0.022
11.25	0.006	0.002	0.023
11.3	0.005	0.002	0.022
11.35	0.007	0.004	0.026
11.4	0.004	0.002	0.022
11.45	0.007	0.004	0.024
11.5	0.006	0.002	0.022
11.55	0.007	0.002	0.024
11.6	0.005	0.002	0.023
11.65	0.007	0.004	0.024
11.7	0.006	0.002	0.023
11.75	0.007	0.004	0.024
11.8	0.006	0.002	0.022
11.85	0.007	0.002	0.024
11.9	0.006	0.001	0.022
11.95	0.007	0.002	0.024
12	0.004	0.002	0.022
12.05	0.007	0.002	0.024
12.1	0.004	0.002	0.022
12.15	0.007	0.002	0.024
12.2	0.006	0.002	0.021
12.25	0.007	0.002	0.023

US EPA ARCHIVE DOCUMENT

12.3	0.006	0.002	0.022
12.35	0.009	0.004	0.029
12.4	0.006	0.002	0.027
12.45	0.007	0.004	0.028
12.5	0.006	0.002	0.028
12.55	0.007	0.004	0.029
12.6	0.007	0.002	0.027
12.65	0.007	0.004	0.029
12.7	0.006	0.002	0.028
12.75	0.007	0.004	0.029
12.8	0.006	0.002	0.029
12.85	0.007	0.004	0.029
12.9	0.007	0.002	0.027
12.95	0.007	0.002	0.029
13	0.007	0.002	0.028
13.05	0.007	0.004	0.029
13.1	0.007	0.001	0.027
13.15	0.007	0.004	0.029
13.2	0.006	0.002	0.028
13.25	0.007	0.004	0.029
13.3	0.007	0.002	0.027
13.35	0.009	0.004	0.032
13.4	0.007	0.002	0.028
13.45	0.007	0.004	0.031
13.5	0.006	0.001	0.029
13.55	0.007	0.004	0.031
13.6	0.007	0.002	0.028
13.65	0.007	0.002	0.029
13.7	0.006	0.002	0.028
13.75	0.007	0.002	0.031
13.8	0.005	0.002	0.029
13.85	0.007	0.004	0.029
13.9	0.006	0.002	0.028
13.95	0.007	0.004	0.029
14	0.006	0.002	0.029
14.05	0.007	0.004	0.029
14.1	0.006	0.001	0.029
14.15	0.007	0.002	0.029
14.2	0.006	0.002	0.029
14.25	0.007	0.004	0.031
14.3	0.006	0.002	0.029
14.35	0.009	0.004	0.033
14.4	0.006	0.002	0.032
14.45	0.009	0.002	0.033
14.5	0.006	0.001	0.031
14.55	0.007	0.002	0.034
14.6	0.006	0.002	0.031
14.65	0.007	0.004	0.033
14.7	0.007	0.002	0.032
14.75	0.007	0.004	0.033
14.8	0.006	0.002	0.031

US EPA ARCHIVE DOCUMENT

14.85	0.007	0.002	0.033
14.9	0.007	0.002	0.032
14.95	0.009	0.004	0.034
15	0.007	0.002	0.032
15.05	0.007	0.002	0.033
15.1	0.007	0.002	0.032
15.15	0.007	0.002	0.034
15.2	0.006	0.001	0.032
15.25	0.007	0.002	0.033
15.3	0.007	0.002	0.033
15.35	0.009	0.004	0.037
15.4	0.006	0.001	0.035
15.45	0.007	0.002	0.037
15.5	0.007	0.001	0.034
15.55	0.009	0.004	0.038
15.6	0.006	0.002	0.035
15.65	0.007	0.002	0.038
15.7	0.006	0.001	0.035
15.75	0.009	0.002	0.037
15.8	0.006	0.002	0.034
15.85	0.009	0.004	0.037
15.9	0.007	0.001	0.035
15.95	0.007	0.002	0.037
16	0.007	0.002	0.035
16.05	0.007	0.004	0.038
16.1	0.007	0.002	0.035
16.15	0.009	0.002	0.038
16.2	0.007	0.002	0.035
16.25	0.007	0.004	0.038
16.3	0.007	0.004	0.037
16.35	0.009	0.004	0.039
16.4	0.006	0.002	0.035
16.45	0.007	0.002	0.038
16.5	0.006	0.001	0.035
16.55	0.007	0.004	0.038
16.6	0.007	0.002	0.037
16.65	0.007	0.004	0.038
16.7	0.006	0.002	0.035
16.75	0.007	0.002	0.038
16.8	0.007	0.002	0.038
16.85	0.007	0.002	0.038
16.9	0.006	0.002	0.037
16.95	0.009	0.002	0.039
17	0.009	0.002	0.038
17.05	0.009	0.002	0.039
17.1	0.007	0.001	0.038
17.15	0.009	0.002	0.039
17.2	0.007	0.001	0.037
17.25	0.007	0.002	0.039
17.3	0.006	0.002	0.037
17.35	0.009	0.004	0.042

US EPA ARCHIVE DOCUMENT

17.4	0.006	0.001	0.039
17.45	0.009	0.002	0.042
17.5	0.007	0.002	0.04
17.55	0.009	0.004	0.04
17.6	0.007	0.002	0.04
17.65	0.009	0.002	0.042
17.7	0.007	0.002	0.04
17.75	0.007	0.004	0.042
17.8	0.007	0.002	0.04
17.85	0.009	0.002	0.042
17.9	0.007	0.002	0.04
17.95	0.009	0.002	0.043
18	0.006	0.001	0.039
18.05	0.007	0.002	0.042
18.1	0.006	0.001	0.042
18.15	0.007	0.002	0.042
18.2	0.007	0.002	0.042
18.25	0.009	0.002	0.042
18.3	0.006	0.002	0.042
18.35	0.01	0.004	0.046
18.4	0.007	0.001	0.045
18.45	0.007	0.002	0.046
18.5	0.007	0.002	0.045
18.55	0.009	0.002	0.046
18.6	0.007	0.001	0.045
18.65	0.007	0.002	0.048
18.7	0.007	0.002	0.046
18.75	0.009	0.002	0.048
18.8	0.006	0.002	0.045
18.85	0.009	0.002	0.048
18.9	0.007	0.001	0.048
18.95	0.009	0.004	0.048
19	0.006	0.002	0.046
19.05	0.007	0.002	0.048
19.1	0.006	0.001	0.045
19.15	0.009	0.002	0.048
19.2	0.007	0.002	0.046
19.25	0.007	0.002	0.048
19.3	0.007	0.001	0.046
19.35	0.009	0.004	0.05
19.4	0.007	0.002	0.049
19.45	0.009	0.004	0.051
19.5	0.007	0.001	0.05
19.55	0.009	0.004	0.051
19.6	0.006	0.002	0.05
19.65	0.009	0.002	0.05
19.7	0.007	0.002	0.048
19.75	0.009	0.002	0.05
19.8	0.007	0.002	0.049
19.85	0.009	0.002	0.051
19.9	0.007	0.001	0.049

US EPA ARCHIVE DOCUMENT

19.95	0.009	0.002	0.051
20	0.006	0.002	0.049
20.05	0.009	0.002	0.051
20.1	0.007	0.001	0.05
20.15	0.009	0.004	0.05
20.2	0.009	0.002	0.049
20.25	0.009	0.002	0.051
20.3	0.007	0.001	0.05
20.35	0.01	0.004	0.053
20.4	0.007	0.002	0.051
20.45	0.009	0.004	0.053
20.5	0.006	0.002	0.051
20.55	0.009	0.002	0.053
20.6	0.006	0.001	0.051
20.65	0.009	0.002	0.054
20.7	0.007	0.001	0.051
20.75	0.009	0.004	0.053
20.8	0.006	0.002	0.053
20.85	0.007	0.002	0.053
20.9	0.006	0.002	0.051
20.95	0.009	0.004	0.053
21	0.006	0.002	0.053
21.05	0.009	0.004	0.053
21.1	0.007	0.002	0.051
21.15	0.007	0.004	0.053
21.2	0.006	0.001	0.053
21.25	0.009	0.004	0.053
21.3	0.007	0.001	0.053
21.35	0.009	0.004	0.055
21.4	0.007	0.002	0.051
21.45	0.009	0.002	0.054
21.5	0.006	0.001	0.054
21.55	0.009	0.002	0.054
21.6	0.007	0.001	0.051
21.65	0.009	0.002	0.053
21.7	0.006	0.002	0.05
21.75	0.009	0.002	0.054
21.8	0.007	0.001	0.051
21.85	0.007	0.002	0.054
21.9	0.007	0.002	0.051
21.95	0.007	0.002	0.053
22	0.006	0.002	0.05
22.05	0.009	0.004	0.054
22.1	0.006	0.002	0.051
22.15	0.009	0.002	0.053
22.2	0.006	0.002	0.051
22.25	0.009	0.002	0.054
22.3	0.007	0.002	0.051
22.35	0.009	0.002	0.053
22.4	0.007	0.001	0.051
22.45	0.009	0.004	0.056

US EPA ARCHIVE DOCUMENT

22.5	0.006	0.001	0.055
22.55	0.007	0.002	0.056
22.6	0.006	0.001	0.053
22.65	0.007	0.002	0.056
22.7	0.007	0.002	0.055
22.75	0.007	0.002	0.057
22.8	0.006	0.002	0.055
22.85	0.009	0.002	0.057
22.9	0.007	0.001	0.055
22.95	0.009	0.002	0.057
23	0.007	0.001	0.054
23.05	0.007	0.002	0.055
23.1	0.007	0.001	0.054
23.15	0.009	0.004	0.056
23.2	0.007	0.002	0.055
23.25	0.009	0.004	0.056
23.3	0.005	0.002	0.055
23.35	0.009	0.004	0.057
23.4	0.005	0.001	0.055
23.45	0.007	0.002	0.057
23.5	0.006	0.001	0.056
23.55	0.007	0.002	0.057
23.6	0.006	0.001	0.056
23.65	0.007	0.002	0.057
23.7	0.006	0.001	0.056
23.75	0.007	0.002	0.057
23.8	0.006	0.002	0.056
23.85	0.007	0.002	0.057
23.9	0.006	0.001	0.056
23.95	0.007	0.002	0.057
24	0.006	0.001	0.055
24.05	0.007	0.002	0.057
24.1	0.006	0.001	0.056
24.15	0.007	0.002	0.057
24.2	0.006	0.001	0.057
24.25	0.007	0.004	0.057
24.3	0.006	0.002	0.056
24.35	0.009	0.004	0.059
24.4	0.007	0.001	0.056
24.45	0.007	0.002	0.057
24.5	0.006	0.001	0.055
24.55	0.007	0.002	0.057
24.6	0.006	0.001	0.056
24.65	0.007	0.002	0.057
24.7	0.006	0.001	0.056
24.75	0.007	0.002	0.057
24.8	0.006	0.001	0.055
24.85	0.007	0.002	0.057
24.9	0.007	0.001	0.055
24.95	0.007	0.002	0.057
25	0.007	0.001	0.055

US EPA ARCHIVE DOCUMENT

25.05	0.007	0.002	0.057
25.1	0.006	0.001	0.056
25.15	0.007	0.002	0.057
25.2	0.007	0.001	0.056
25.25	0.007	0.002	0.057
25.3	0.006	0.001	0.055
25.35	0.009	0.004	0.06
25.4	0.006	0.002	0.06
25.45	0.007	0.002	0.061
25.5	0.005	0.001	0.059
25.55	0.007	0.002	0.06
25.6	0.006	0.001	0.059
25.65	0.007	0.002	0.06
25.7	0.006	0.001	0.059
25.75	0.007	0.002	0.06
25.8	0.005	0.002	0.06
25.85	0.007	0.002	0.061
25.9	0.005	0.001	0.059
25.95	0.007	0.002	0.061
26	0.007	0.001	0.059
26.05	0.007	0.002	0.06
26.1	0.007	0.001	0.06
26.15	0.007	0.002	0.06
26.2	0.007	0.001	0.059
26.25	0.009	0.002	0.06
26.3	0.006	0.001	0.059
26.35	0.009	0.004	0.062
26.4	0.007	0.001	0.061
26.45	0.007	0.002	0.062
26.5	0.007	0.002	0.062
26.55	0.007	0.002	0.062
26.6	0.007	0.001	0.061
26.65	0.007	0.002	0.062
26.7	0.006	0.002	0.061
26.75	0.009	0.002	0.062
26.8	0.007	0.001	0.06
26.85	0.009	0.002	0.063
26.9	0.006	0.002	0.061
26.95	0.009	0.004	0.063
27	0.007	0.001	0.06
27.05	0.007	0.002	0.063
27.1	0.007	0.001	0.061
27.15	0.007	0.002	0.062
27.2	0.006	0.002	0.06
27.25	0.007	0.002	0.063
27.3	0.006	0	0.062
27.35	0.009	0.004	0.065
27.4	0.007	0.001	0.06
27.45	0.007	0.002	0.062
27.5	0.006	0.001	0.062
27.55	0.007	0.002	0.062

US EPA ARCHIVE DOCUMENT

27.6	0.006	0.002	0.057
27.65	0.007	0.002	0.063
27.7	0.006	0.001	0.059
27.75	0.007	0.002	0.062
27.8	0.005	0.001	0.059
27.85	0.007	0.002	0.062
27.9	0.006	0.001	0.061
27.95	0.007	0.002	0.062
28	0.006	0.002	0.06
28.05	0.007	0.002	0.062
28.1	0.007	0.001	0.061
28.15	0.007	0.002	0.062
28.2	0.006	0.002	0.06
28.25	0.007	0.002	0.062
28.3	0.007	0.002	0.06
28.35	0.009	0.004	0.067
28.4	0.007	0.002	0.062
28.45	0.007	0.002	0.065
28.5	0.006	0.001	0.062
28.55	0.009	0.002	0.066
28.6	0.006	0.001	0.065
28.65	0.007	0.002	0.066
28.7	0.006	0.001	0.063
28.75	0.007	0.002	0.065
28.8	0.006	0.001	0.063
28.85	0.007	0.002	0.066
28.9	0.006	0.002	0.062
28.95	0.007	0.002	0.066
29	0.006	0.001	0.061
29.05	0.007	0.002	0.065
29.1	0.007	0.002	0.063
29.15	0.007	0.004	0.066
29.2	0.006	0.001	0.065
29.25	0.007	0.002	0.065
29.3	0.006	0	0.063
29.35	0.009	0.004	0.067
29.4	0.005	0.002	0.063
29.45	0.007	0.002	0.065
29.5	0.006	0.001	0.062
29.55	0.007	0.002	0.065
29.6	0.006	0.002	0.062
29.65	0.007	0.002	0.063
29.7	0.006	0	0.063
29.75	0.007	0.002	0.063
29.8	0.006	0.002	0.062
29.85	0.007	0.002	0.063
29.9	0.005	0.001	0.062
29.95	0.007	0.002	0.063
30	0.006	0.001	0.061
30.05	0.007	0.002	0.063
30.1	0.007	0.001	0.062

US EPA ARCHIVE DOCUMENT

30.15	0.007	0.002	0.063
30.2	0.006	0.001	0.063
30.25	0.007	0.002	0.065
30.3	0.007	0	0.06
30.35	0.007	0.002	0.063
30.4	0.006	0.002	0.06
30.45	0.007	0.004	0.066
30.5	0.006	0.001	0.062
30.55	0.007	0.002	0.063
30.6	0.006	0.001	0.062
30.65	0.007	0.002	0.063
30.7	0.005	0.001	0.062
30.75	0.007	0.002	0.065
30.8	0.006	0	0.062
30.85	0.007	0.002	0.065
30.9	0.006	0.001	0.062
30.95	0.007	0.002	0.063
31	0.006	0.001	0.062
31.05	0.007	0.002	0.063
31.1	0.006	0.001	0.062
31.15	0.007	0.002	0.065
31.2	0.006	0.002	0.062
31.25	0.007	0.002	0.063
31.3	0.006	0.002	0.062
31.35	0.009	0.004	0.067
31.4	0.006	0.001	0.063
31.45	0.007	0.002	0.065
31.5	0.006	0.001	0.063
31.55	0.009	0.002	0.065
31.6	0.005	0.002	0.063
31.65	0.009	0.002	0.065
31.7	0.006	0.002	0.063
31.75	0.009	0.004	0.065
31.8	0.006	0.001	0.063
31.85	0.009	0.002	0.065
31.9	0.007	0.002	0.065
31.95	0.009	0.002	0.065
32	0.006	0.001	0.065
32.05	0.007	0.002	0.065
32.1	0.006	0.001	0.063
32.15	0.007	0.002	0.065
32.2	0.006	0.001	0.063
32.25	0.007	0.002	0.065
32.3	0.006	0.001	0.062
32.35	0.009	0.004	0.068
32.4	0.007	0.002	0.067
32.45	0.009	0.002	0.068
32.5	0.006	0.001	0.066
32.55	0.009	0.002	0.068
32.6	0.007	0.002	0.067
32.65	0.009	0.002	0.067

US EPA ARCHIVE DOCUMENT

32.7	0.006	0.001	0.067
32.75	0.009	0.004	0.067
32.8	0.006	0.001	0.067
32.85	0.009	0.002	0.068
32.9	0.007	0.001	0.066
32.95	0.009	0.002	0.068
33	0.005	0.001	0.066
33.05	0.01	0.002	0.068
33.1	0.006	0.001	0.066
33.15	0.009	0.002	0.067
33.2	0.007	0.002	0.066
33.25	0.009	0.002	0.067
33.3	0.006	0.001	0.066
33.35	0.01	0.004	0.07
33.4	0.006	0.001	0.066
33.45	0.009	0.004	0.067
33.5	0.006	0.002	0.066
33.55	0.009	0.002	0.067
33.6	0.007	0.001	0.066
33.65	0.009	0.002	0.067
33.7	0.007	0.001	0.066
33.75	0.009	0.002	0.067
33.8	0.007	0.001	0.067
33.85	0.009	0.002	0.067
33.9	0.007	0.001	0.066
33.95	0.009	0.002	0.067
34	0.006	0.001	0.066
34.05	0.009	0.002	0.067
34.1	0.006	0.001	0.067
34.15	0.009	0.002	0.068
34.2	0.006	0.001	0.066
34.25	0.009	0.002	0.067
34.3	0.007	0.001	0.065
34.35	0.01	0.004	0.07
34.4	0.009	0.002	0.066
34.45	0.009	0.002	0.068
34.5	0.007	0.001	0.067
34.55	0.009	0.002	0.068
34.6	0.007	0.001	0.068
34.65	0.009	0.002	0.068
34.7	0.007	0.001	0.067
34.75	0.009	0.002	0.068
34.8	0.007	0.002	0.067
34.85	0.009	0.004	0.068
34.9	0.009	0.001	0.067
34.95	0.009	0.002	0.068
35	0.006	0.001	0.067
35.05	0.009	0.002	0.068
35.1	0.009	0.002	0.067
35.15	0.009	0.002	0.068
35.2	0.007	0.001	0.068

US EPA ARCHIVE DOCUMENT

35.25	0.009	0.002	0.07
35.3	0.009	0.002	0.067
35.35	0.009	0.004	0.07
35.4	0.006	0.002	0.067
35.45	0.009	0.002	0.071
35.5	0.009	0.002	0.068
35.55	0.009	0.002	0.071
35.6	0.007	0.001	0.068
35.65	0.009	0.002	0.07
35.7	0.007	0.002	0.07
35.75	0.009	0.002	0.07
35.8	0.009	0	0.068
35.85	0.009	0.002	0.07
35.9	0.006	0.002	0.07
35.95	0.009	0.002	0.07
36	0.007	0.001	0.07
36.05	0.009	0.002	0.07
36.1	0.007	0.001	0.068
36.15	0.009	0.002	0.07
36.2	0.007	0.001	0.068
36.25	0.009	0.002	0.07
36.3	0.007	0.001	0.068
36.35	0.01	0.004	0.071
36.4	0.007	0.002	0.068
36.45	0.009	0.004	0.071
36.5	0.007	0.002	0.068
36.55	0.009	0.002	0.071
36.6	0.009	0.002	0.07
36.65	0.009	0.004	0.071
36.7	0.007	0.001	0.071
36.75	0.01	0.004	0.071
36.8	0.007	0.001	0.07
36.85	0.009	0.002	0.071
36.9	0.009	0.001	0.068
36.95	0.009	0.004	0.071
37	0.009	0.001	0.071
37.05	0.01	0.004	0.071
37.1	0.009	0.001	0.07
37.15	0.01	0.004	0.071
37.2	0.009	0.002	0.07
37.25	0.01	0.004	0.071
37.3	0.009	0.001	0.07
37.35	0.01	0.005	0.073
37.4	0.009	0.002	0.071
37.45	0.01	0.004	0.072
37.5	0.009	0.002	0.071
37.55	0.01	0.004	0.072
37.6	0.007	0.001	0.071
37.65	0.01	0.004	0.072
37.7	0.007	0.001	0.07
37.75	0.01	0.004	0.072

US EPA ARCHIVE DOCUMENT

37.8	0.007	0.004	0.07
37.85	0.009	0.004	0.072
37.9	0.007	0.002	0.07
37.95	0.01	0.004	0.072
38	0.009	0.001	0.071
38.05	0.01	0.004	0.072
38.1	0.009	0.002	0.071
38.15	0.009	0.004	0.072
38.2	0.009	0.001	0.07
38.25	0.01	0.004	0.071
38.3	0.007	0.002	0.071
38.35	0.01	0.004	0.073
38.4	0.009	0.001	0.072
38.45	0.009	0.004	0.072
38.5	0.009	0	0.071
38.55	0.009	0.002	0.072
38.6	0.007	0.002	0.072
38.65	0.01	0.004	0.073
38.7	0.007	0.001	0.072
38.75	0.009	0.004	0.073
38.8	0.009	0.001	0.071
38.85	0.009	0.004	0.073
38.9	0.009	0.001	0.071
38.95	0.009	0.004	0.073
39	0.009	0.001	0.072
39.05	0.01	0.002	0.073
39.1	0.007	0.001	0.071
39.15	0.01	0.004	0.073
39.2	0.009	0.002	0.071
39.25	0.009	0.004	0.072
39.3	0.007	0.002	0.072
39.35	0.01	0.004	0.076
39.4	0.009	0.001	0.074
39.45	0.01	0.002	0.076
39.5	0.007	0.001	0.074
39.55	0.009	0.002	0.076
39.6	0.007	0.002	0.076
39.65	0.01	0.002	0.076
39.7	0.009	0.001	0.074
39.75	0.009	0.004	0.076
39.8	0.009	0.002	0.074
39.85	0.01	0.004	0.076
39.9	0.007	0.002	0.074
39.95	0.009	0.002	0.077
40	0.009	0.002	0.074
40.05	0.01	0.004	0.076
40.1	0.009	0.001	0.074
40.15	0.01	0.002	0.076
40.2	0.01	0.001	0.074
40.25	0.01	0.002	0.076
40.3	0.009	0.002	0.076

US EPA ARCHIVE DOCUMENT

40.35	0.01	0.004	0.078
40.4	0.007	0.001	0.077
40.45	0.01	0.002	0.077
40.5	0.009	0.002	0.076
40.55	0.01	0.004	0.077
40.6	0.009	0.001	0.074
40.65	0.01	0.002	0.077
40.7	0.007	0.001	0.077
40.75	0.01	0.002	0.077
40.8	0.009	0.002	0.076
40.85	0.01	0.002	0.077
40.9	0.007	0.002	0.076
40.95	0.01	0.004	0.077
41	0.009	0.001	0.076
41.05	0.01	0.002	0.078
41.1	0.007	0	0.076
41.15	0.01	0.002	0.077
41.2	0.009	0.001	0.076
41.25	0.01	0.002	0.077
41.3	0.009	0.002	0.076
41.35	0.01	0.004	0.081
41.4	0.01	0.001	0.078
41.45	0.01	0.002	0.079
41.5	0.01	0.002	0.079
41.55	0.01	0.002	0.081
41.6	0.009	0	0.079
41.65	0.01	0.004	0.081
41.7	0.01	0.001	0.079
41.75	0.01	0.004	0.081
41.8	0.009	0.001	0.079
41.85	0.01	0.002	0.081
41.9	0.01	0.001	0.079
41.95	0.01	0.004	0.081
42	0.01	0.001	0.079
42.05	0.01	0.002	0.081
42.1	0.009	0.001	0.078
42.15	0.01	0.002	0.081
42.2	0.007	0.001	0.079
42.25	0.01	0.004	0.081
42.3	0.009	0.002	0.079
42.35	0.01	0.002	0.081
42.4	0.009	0.002	0.078
42.45	0.01	0.004	0.083
42.5	0.007	0.001	0.081
42.55	0.009	0.002	0.083
42.6	0.007	0.002	0.082
42.65	0.009	0.002	0.083
42.7	0.007	0.002	0.082
42.75	0.009	0.004	0.083
42.8	0.009	0.004	0.081
42.85	0.009	0.004	0.083

US EPA ARCHIVE DOCUMENT

42.9	0.009	0.001	0.082
42.95	0.009	0.002	0.082
43	0.007	0.001	0.081
43.05	0.01	0.002	0.083
43.1	0.009	0.001	0.082
43.15	0.01	0.002	0.083
43.2	0.009	0.001	0.082
43.25	0.009	0.004	0.083
43.3	0.007	0.001	0.081
43.35	0.01	0.004	0.085
43.4	0.009	0.002	0.083
43.45	0.01	0.002	0.085
43.5	0.009	0.001	0.084
43.55	0.01	0.004	0.087
43.6	0.009	0.002	0.084
43.65	0.009	0.004	0.085
43.7	0.007	0.001	0.084
43.75	0.01	0.002	0.087
43.8	0.009	0.001	0.084
43.85	0.009	0.002	0.085
43.9	0.009	0.001	0.085
43.95	0.01	0.002	0.085
44	0.009	0.002	0.083
44.05	0.01	0.002	0.085
44.1	0.009	0.001	0.084
44.15	0.01	0.002	0.085
44.2	0.007	0.001	0.084
44.25	0.01	0.002	0.087
44.3	0.009	0.002	0.084
44.35	0.01	0.004	0.087
44.4	0.009	0.001	0.085
44.45	0.009	0.004	0.087
44.5	0.007	0.002	0.084
44.55	0.01	0.004	0.087
44.6	0.009	0	0.085
44.65	0.01	0.002	0.087
44.7	0.007	0.002	0.084
44.75	0.01	0.002	0.087
44.8	0.009	0.001	0.084
44.85	0.01	0.002	0.087
44.9	0.009	0.001	0.084
44.95	0.01	0.002	0.087
45	0.007	0	0.085
45.05	0.009	0.002	0.087
45.1	0.007	0.001	0.085
45.15	0.01	0.002	0.087
45.2	0.009	0.002	0.087
45.25	0.01	0.002	0.087
45.3	0.009	0.001	0.084
45.35	0.01	0.004	0.088
45.4	0.007	0.002	0.087

US EPA ARCHIVE DOCUMENT

45.45	0.01	0.002	0.088
45.5	0.009	0.001	0.085
45.55	0.009	0.002	0.088
45.6	0.007	0.001	0.085
45.65	0.01	0.002	0.088
45.7	0.007	0.001	0.085
45.75	0.009	0.002	0.087
45.8	0.009	0.001	0.087
45.85	0.01	0.002	0.088
45.9	0.009	0.001	0.085
45.95	0.009	0.002	0.088
46	0.009	0.001	0.085
46.05	0.01	0.002	0.088
46.1	0.007	0.001	0.087
46.15	0.009	0.002	0.087
46.2	0.009	0.001	0.087
46.25	0.01	0.002	0.087
46.3	0.009	0.001	0.085
46.35	0.01	0.004	0.089
46.4	0.006	0.001	0.084
46.45	0.009	0.002	0.087
46.5	0.007	0.001	0.084
46.55	0.009	0.002	0.087
46.6	0.007	0	0.085
46.65	0.009	0.002	0.087
46.7	0.007	0.001	0.085
46.75	0.009	0.002	0.085
46.8	0.009	0.001	0.084
46.85	0.009	0.002	0.087
46.9	0.007	0.001	0.085
46.95	0.01	0.002	0.085
47	0.007	0.001	0.084
47.05	0.009	0.002	0.085
47.1	0.009	0.002	0.084
47.15	0.01	0.002	0.085
47.2	0.007	0.002	0.085
47.25	0.01	0.002	0.085
47.3	0.007	0.002	0.084
47.35	0.01	0.002	0.085
47.4	0.007	0.001	0.081
47.45	0.009	0.002	0.082
47.5	0.006	0.001	0.081
47.55	0.009	0.002	0.082
47.6	0.007	0.001	0.081
47.65	0.009	0.002	0.082
47.7	0.009	0.002	0.079
47.75	0.009	0.002	0.081
47.8	0.007	0.001	0.079
47.85	0.009	0.002	0.081
47.9	0.007	0	0.079
47.95	0.009	0.002	0.081

US EPA ARCHIVE DOCUMENT

48	0.009	0.001	0.079
48.05	0.009	0.002	0.082
48.1	0.009	0.001	0.081
48.15	0.009	0.002	0.082
48.2	0.009	0.001	0.081
48.25	0.009	0.002	0.081
48.3	0.007	0.001	0.081
48.35	0.01	0.002	0.082
48.4	0.007	0.002	0.076
48.45	0.009	0.002	0.077
48.5	0.007	0.001	0.074
48.55	0.009	0.002	0.077
48.6	0.007	0.002	0.076
48.65	0.009	0.002	0.077
48.7	0.007	0.001	0.076
48.75	0.009	0.002	0.077
48.8	0.009	0.001	0.074
48.85	0.009	0.002	0.077
48.9	0.007	0.001	0.076
48.95	0.009	0.002	0.077
49	0.007	0.002	0.074
49.05	0.009	0.002	0.077
49.1	0.007	0.002	0.074
49.15	0.01	0.002	0.076
49.2	0.009	0.001	0.074
49.25	0.009	0.002	0.076
49.3	0.007	0.001	0.076
49.35	0.01	0.004	0.079
49.4	0.007	0.001	0.073
49.45	0.009	0.002	0.074
49.5	0.007	0.001	0.073
49.55	0.009	0.002	0.074
49.6	0.009	0.002	0.072
49.65	0.01	0.002	0.074
49.7	0.01	0.001	0.073
49.75	0.01	0.004	0.073
49.8	0.007	0.001	0.073
49.85	0.009	0.002	0.073
49.9	0.009	0.001	0.072
49.95	0.009	0.002	0.073
50	0.007	0.001	0.073
50.05	0.009	0.002	0.073
50.1	0.007	0.001	0.073
50.15	0.01	0.002	0.073
50.2	0.009	0.001	0.072
50.25	0.01	0.002	0.073
50.3	0.007	0.001	0.071
50.35	0.01	0.004	0.073
50.4	0.006	0.001	0.068
50.45	0.009	0.002	0.07
50.5	0.006	0.001	0.068

US EPA ARCHIVE DOCUMENT

50.55	0.009	0.002	0.07
50.6	0.007	0.001	0.068
50.65	0.009	0.002	0.07
50.7	0.006	0.002	0.068
50.75	0.009	0.002	0.07
50.8	0.006	0.001	0.067
50.85	0.009	0.002	0.07
50.9	0.006	0.001	0.067
50.95	0.009	0.002	0.07
51	0.007	0.001	0.068
51.05	0.009	0.002	0.068
51.1	0.007	0.002	0.068
51.15	0.007	0.002	0.068
51.2	0.007	0.001	0.068
51.25	0.007	0.002	0.068
51.3	0.007	0	0.068
51.35	0.009	0.004	0.07
51.4	0.006	0.001	0.061
51.45	0.009	0.002	0.065
51.5	0.007	0.002	0.063
51.55	0.009	0.004	0.065
51.6	0.007	0.001	0.062
51.65	0.009	0.002	0.065
51.7	0.006	0.001	0.063
51.75	0.007	0.002	0.065
51.8	0.007	0.001	0.063
51.85	0.007	0.002	0.065
51.9	0.007	0.002	0.063
51.95	0.007	0.002	0.065
52	0.006	0.001	0.062
52.05	0.009	0.002	0.065
52.1	0.006	0.001	0.063
52.15	0.009	0.002	0.065
52.2	0.007	0.001	0.063
52.25	0.007	0.002	0.065
52.3	0.006	0.001	0.062
52.35	0.009	0.004	0.065
52.4	0.007	0.001	0.061
52.45	0.007	0.002	0.062
52.5	0.007	0.002	0.06
52.55	0.009	0.002	0.062
52.6	0.007	0.001	0.06
52.65	0.007	0.004	0.062
52.7	0.007	0.001	0.061
52.75	0.009	0.004	0.061
52.8	0.006	0.002	0.061
52.85	0.009	0.002	0.062
52.9	0.006	0.001	0.061
52.95	0.009	0.002	0.062
53	0.006	0.002	0.061
53.05	0.007	0.004	0.062

US EPA ARCHIVE DOCUMENT

53.1	0.006	0.002	0.061
53.15	0.007	0.002	0.062
53.2	0.006	0.002	0.061
53.25	0.009	0.002	0.062
53.3	0.007	0.001	0.061
53.35	0.009	0.004	0.062
53.4	0.007	0	0.057
53.45	0.007	0.002	0.06
53.5	0.006	0.002	0.059
53.55	0.007	0.002	0.06
53.6	0.006	0.001	0.059
53.65	0.007	0.002	0.06
53.7	0.006	0.001	0.059
53.75	0.007	0.002	0.06
53.8	0.007	0.001	0.059
53.85	0.009	0.002	0.06
53.9	0.007	0.001	0.059
53.95	0.009	0.004	0.06
54	0.007	0.001	0.059
54.05	0.009	0.004	0.06
54.1	0.006	0.002	0.057
54.15	0.009	0.004	0.06
54.2	0.006	0.002	0.06
54.25	0.009	0.004	0.06
54.3	0.007	0.002	0.059
54.35	0.009	0.005	0.061
54.4	0.007	0.001	0.056
54.45	0.007	0.004	0.059
54.5	0.007	0.001	0.056
54.55	0.007	0.004	0.059
54.6	0.006	0.001	0.055
54.65	0.007	0.004	0.057
54.7	0.006	0.002	0.057
54.75	0.007	0.002	0.059
54.8	0.006	0.001	0.056
54.85	0.009	0.004	0.059
54.9	0.006	0.001	0.057
54.95	0.007	0.004	0.057
55	0.007	0	0.057
55.05	0.009	0.002	0.057
55.1	0.009	0.001	0.057
55.15	0.009	0.002	0.059
55.2	0.006	0	0.057
55.25	0.007	0.002	0.059
55.3	0.006	0.001	0.056
55.35	0.009	0.004	0.057
55.4	0.007	0.001	0.057
55.45	0.009	0.004	0.059
55.5	0.007	0.002	0.055
55.55	0.009	0.004	0.056
55.6	0.006	0.002	0.055

US EPA ARCHIVE DOCUMENT

55.65	0.009	0.002	0.057
55.7	0.007	0.001	0.055
55.75	0.009	0.004	0.056
55.8	0.007	0.002	0.054
55.85	0.009	0.002	0.056
55.9	0.006	0.002	0.054
55.95	0.007	0.002	0.056
56	0.006	0.002	0.054
56.05	0.009	0.004	0.056
56.1	0.006	0.001	0.054
56.15	0.009	0.004	0.055
56.2	0.006	0.002	0.055
56.25	0.009	0.004	0.056
56.3	0.006	0.002	0.055
56.35	0.009	0.004	0.06
56.4	0.006	0.001	0.056
56.45	0.007	0.002	0.059
56.5	0.007	0.002	0.057
56.55	0.007	0.004	0.057
56.6	0.007	0.001	0.056
56.65	0.007	0.002	0.057
56.7	0.006	0.002	0.056
56.75	0.007	0.002	0.059
56.8	0.006	0.001	0.056
56.85	0.007	0.002	0.057
56.9	0.007	0.002	0.056
56.95	0.007	0.004	0.057
57	0.006	0.002	0.056
57.05	0.009	0.004	0.057
57.1	0.006	0.002	0.056
57.15	0.007	0.002	0.057
57.2	0.005	0.001	0.055
57.25	0.007	0.004	0.056
57.3	0.006	0.001	0.056
57.35	0.007	0.004	0.056
57.4	0.006	0.001	0.055
57.45	0.009	0.004	0.059
57.5	0.006	0	0.053
57.55	0.007	0.002	0.054
57.6	0.006	0.001	0.053
57.65	0.007	0.002	0.054
57.7	0.005	0.002	0.053
57.75	0.007	0.002	0.054
57.8	0.006	0.001	0.053
57.85	0.007	0.002	0.054
57.9	0.005	0.001	0.053
57.95	0.007	0.002	0.053
58	0.006	0.002	0.053
58.05	0.009	0.004	0.054
58.1	0.006	0.001	0.051
58.15	0.007	0.004	0.054

US EPA ARCHIVE DOCUMENT

58.2	0.007	0.002	0.053
58.25	0.007	0.004	0.054
58.3	0.006	0.002	0.053
58.35	0.007	0.004	0.054
58.4	0.006	0.001	0.053
58.45	0.007	0.004	0.055
58.5	0.006	0.001	0.051
58.55	0.007	0.002	0.053
58.6	0.006	0.001	0.05
58.65	0.007	0.002	0.053
58.7	0.006	0.002	0.05
58.75	0.007	0.002	0.053
58.8	0.006	0.002	0.05
58.85	0.007	0.002	0.053
58.9	0.005	0.002	0.051
58.95	0.006	0.002	0.053
59	0.006	0.001	0.049
59.05	0.007	0.002	0.053
59.1	0.006	0.001	0.051
59.15	0.007	0.002	0.053
59.2	0.006	0.001	0.05
59.25	0.007	0.002	0.053
59.3	0.006	0	0.05
59.35	0.007	0.002	0.051
59.4	0.006	0.001	0.05
59.45	0.007	0.004	0.054
59.5	0.006	0.001	0.048
59.55	0.007	0.002	0.049
59.6	0.006	0.002	0.048
59.65	0.007	0.004	0.049
59.7	0.006	0.001	0.049
59.75	0.007	0.002	0.049
59.8	0.005	0.001	0.048
59.85	0.007	0.002	0.049
59.9	0.006	0.001	0.048
59.95	0.007	0.004	0.049
60	0.006	0.002	0.049
60.05	0.007	0.002	0.049
60.1	0.006	0.001	0.049
60.15	0.007	0.004	0.05
60.2	0.005	0.002	0.049
60.25	0.007	0.004	0.049
60.3	0.005	0.002	0.046
60.35	0.007	0.004	0.05
60.4	0.006	0.001	0.048
60.45	0.009	0.004	0.05
60.5	0.005	0.001	0.045
60.55	0.007	0.002	0.046
60.6	0.005	0.001	0.046
60.65	0.007	0.004	0.048
60.7	0.005	0	0.046

US EPA ARCHIVE DOCUMENT

60.75	0.007	0.002	0.048
60.8	0.006	0.002	0.048
60.85	0.007	0.002	0.048
60.9	0.005	0.001	0.045
60.95	0.007	0.002	0.048
61	0.006	0.002	0.046
61.05	0.007	0.002	0.048
61.1	0.006	0.001	0.046
61.15	0.009	0.004	0.048
61.2	0.006	0	0.045
61.25	0.007	0.004	0.046
61.3	0.006	0.001	0.046
61.35	0.009	0.004	0.048
61.4	0.006	0.002	0.043
61.45	0.007	0.002	0.045
61.5	0.007	0.001	0.044
61.55	0.007	0.004	0.045
61.6	0.006	0.001	0.044
61.65	0.007	0.002	0.045
61.7	0.006	0.002	0.044
61.75	0.007	0.004	0.045
61.8	0.006	0.001	0.043
61.85	0.007	0.002	0.045
61.9	0.006	0.001	0.043
61.95	0.007	0.002	0.044
62	0.006	0.001	0.044
62.05	0.007	0.004	0.044
62.1	0.006	0.001	0.044
62.15	0.007	0.002	0.045
62.2	0.007	0.001	0.043
62.25	0.007	0.002	0.044
62.3	0.006	0.001	0.043
62.35	0.009	0.004	0.046
62.4	0.006	0	0.044
62.45	0.007	0.004	0.044
62.5	0.006	0.001	0.043
62.55	0.007	0.004	0.044
62.6	0.006	0.001	0.044
62.65	0.007	0.002	0.045
62.7	0.006	0.002	0.043
62.75	0.007	0.002	0.045
62.8	0.006	0.001	0.043
62.85	0.007	0.004	0.044
62.9	0.006	0.001	0.043
62.95	0.007	0.002	0.044
63	0.006	0.001	0.044
63.05	0.007	0.002	0.044
63.1	0.006	0.002	0.042
63.15	0.007	0.002	0.044
63.2	0.006	0	0.042
63.25	0.007	0.002	0.044

US EPA ARCHIVE DOCUMENT

63.3	0.006	0.001	0.043
63.35	0.009	0.004	0.045
63.4	0.006	0.001	0.043
63.45	0.009	0.004	0.046
63.5	0.005	0.001	0.042
63.55	0.007	0.004	0.044
63.6	0.006	0.002	0.043
63.65	0.007	0.004	0.044
63.7	0.006	0.001	0.043
63.75	0.007	0.004	0.044
63.8	0.005	0.001	0.044
63.85	0.007	0.004	0.044
63.9	0.006	0.002	0.043
63.95	0.007	0.004	0.044
64	0.005	0.002	0.043
64.05	0.007	0.004	0.044
64.1	0.007	0.004	0.043
64.15	0.007	0.004	0.045
64.2	0.006	0.002	0.043
64.25	0.007	0.004	0.044
64.3	0.006	0.001	0.043
64.35	0.007	0.004	0.045
64.4	0.007	0.002	0.043
64.45	0.007	0.005	0.045
64.5	0.006	0.002	0.04
64.55	0.007	0.002	0.043
64.6	0.007	0.001	0.042
64.65	0.007	0.004	0.042
64.7	0.006	0.001	0.042
64.75	0.009	0.002	0.042
64.8	0.007	0.001	0.042
64.85	0.009	0.004	0.043
64.9	0.006	0.001	0.04
64.95	0.007	0.004	0.043
65	0.007	0.002	0.04
65.05	0.009	0.004	0.043
65.1	0.005	0.002	0.04
65.15	0.007	0.004	0.043
65.2	0.007	0.001	0.04
65.25	0.007	0.002	0.043
65.3	0.006	0.001	0.043
65.35	0.009	0.004	0.043
65.4	0.006	0.002	0.042
65.45	0.009	0.004	0.045
65.5	0.006	0.001	0.042
65.55	0.007	0.004	0.043
65.6	0.007	0.002	0.042
65.65	0.007	0.004	0.043
65.7	0.006	0.001	0.04
65.75	0.007	0.004	0.042
65.8	0.006	0.002	0.042

US EPA ARCHIVE DOCUMENT

65.85	0.007	0.004	0.043
65.9	0.006	0.001	0.042
65.95	0.007	0.004	0.043
66	0.007	0.004	0.042
66.05	0.007	0.004	0.043
66.1	0.006	0.002	0.042
66.15	0.007	0.002	0.042
66.2	0.007	0	0.039
66.25	0.009	0.004	0.042
66.3	0.006	0.002	0.04
66.35	0.009	0.005	0.045
66.4	0.006	0.001	0.044
66.45	0.009	0.004	0.044
66.5	0.006	0.004	0.043
66.55	0.009	0.004	0.044
66.6	0.006	0.004	0.044
66.65	0.009	0.004	0.045
66.7	0.007	0.002	0.042
66.75	0.009	0.004	0.044
66.8	0.007	0.002	0.043
66.85	0.009	0.004	0.045
66.9	0.007	0.002	0.044
66.95	0.009	0.005	0.045
67	0.007	0.002	0.043
67.05	0.009	0.004	0.044
67.1	0.007	0.002	0.043
67.15	0.009	0.004	0.045
67.2	0.006	0.001	0.043
67.25	0.009	0.005	0.045
67.3	0.007	0.004	0.044
67.35	0.009	0.004	0.044
67.4	0.009	0.004	0.043
67.45	0.009	0.005	0.045
67.5	0.006	0.002	0.038
67.55	0.007	0.004	0.039
67.6	0.006	0.001	0.039
67.65	0.007	0.004	0.04
67.7	0.007	0.001	0.039
67.75	0.007	0.004	0.04
67.8	0.007	0.002	0.038
67.85	0.007	0.004	0.039
67.9	0.006	0.002	0.038
67.95	0.007	0.004	0.039
68	0.006	0.002	0.039
68.05	0.007	0.002	0.039
68.1	0.006	0.001	0.038
68.15	0.007	0.004	0.039
68.2	0.006	0.001	0.038
68.25	0.009	0.004	0.039
68.3	0.006	0.002	0.039
68.35	0.007	0.004	0.039

US EPA ARCHIVE DOCUMENT

68.4	0.007	0.001	0.038
68.45	0.009	0.004	0.04
68.5	0.007	0.004	0.037
68.55	0.007	0.004	0.039
68.6	0.007	0.001	0.037
68.65	0.009	0.004	0.038
68.7	0.007	0.002	0.037
68.75	0.009	0.004	0.038
68.8	0.007	0	0.035
68.85	0.009	0.004	0.039
68.9	0.006	0	0.038
68.95	0.009	0.004	0.038
69	0.006	0.002	0.038
69.05	0.007	0.004	0.038
69.1	0.006	0.002	0.037
69.15	0.007	0.004	0.038
69.2	0.007	0.002	0.035
69.25	0.007	0.002	0.038
69.3	0.007	0.002	0.035
69.35	0.007	0.004	0.038
69.4	0.006	0.001	0.037
69.45	0.009	0.005	0.039
69.5	0.006	0.001	0.034
69.55	0.007	0.004	0.037
69.6	0.006	0.002	0.034
69.65	0.007	0.004	0.037
69.7	0.007	0.001	0.034
69.75	0.007	0.005	0.035
69.8	0.006	0.004	0.034
69.85	0.007	0.004	0.035
69.9	0.007	0.002	0.035
69.95	0.009	0.005	0.037
70	0.007	0.004	0.035
70.05	0.007	0.004	0.035
70.1	0.006	0.004	0.035
70.15	0.007	0.004	0.035
70.2	0.006	0.002	0.034
70.25	0.007	0.004	0.035
70.3	0.006	0.002	0.034
70.35	0.009	0.005	0.035
70.4	0.007	0.002	0.031
70.45	0.009	0.004	0.033
70.5	0.006	0.004	0.031
70.55	0.007	0.004	0.033
70.6	0.006	0.001	0.032
70.65	0.007	0.004	0.033
70.7	0.007	0.001	0.031
70.75	0.007	0.004	0.033
70.8	0.006	0.001	0.031
70.85	0.007	0.004	0.033
70.9	0.006	0.002	0.032

US EPA ARCHIVE DOCUMENT

70.95	0.007	0.004	0.033
71	0.006	0.002	0.032
71.05	0.009	0.005	0.033
71.1	0.006	0.001	0.032
71.15	0.009	0.004	0.033
71.2	0.006	0.004	0.033
71.25	0.007	0.004	0.033
71.3	0.006	0.001	0.031
71.35	0.009	0.004	0.033
71.4	0.006	0.001	0.032
71.45	0.009	0.005	0.034
71.5	0.006	0.001	0.029
71.55	0.007	0.004	0.032
71.6	0.006	0.001	0.029
71.65	0.009	0.004	0.032
71.7	0.007	0.004	0.028
71.75	0.009	0.004	0.032
71.8	0.007	0.002	0.031
71.85	0.009	0.004	0.032
71.9	0.007	0.001	0.031
71.95	0.007	0.004	0.031
72	0.006	0.002	0.031
72.05	0.009	0.004	0.032
72.1	0.007	0.002	0.031
72.15	0.007	0.004	0.032
72.2	0.006	0.002	0.031
72.25	0.007	0.004	0.032
72.3	0.006	0.002	0.029
72.35	0.009	0.004	0.032
72.4	0.006	0.002	0.027
72.45	0.007	0.004	0.028
72.5	0.006	0.004	0.027
72.55	0.007	0.004	0.028
72.6	0.006	0.001	0.027
72.65	0.007	0.004	0.028
72.7	0.006	0.002	0.027
72.75	0.007	0.004	0.028
72.8	0.006	0.004	0.028
72.85	0.007	0.004	0.028
72.9	0.006	0.001	0.026
72.95	0.009	0.004	0.028
73	0.006	0.002	0.028
73.05	0.007	0.004	0.028
73.1	0.007	0.002	0.027
73.15	0.009	0.004	0.028
73.2	0.007	0.001	0.026
73.25	0.007	0.004	0.027
73.3	0.006	0.004	0.027
73.35	0.009	0.005	0.028
73.4	0.006	0.002	0.024
73.45	0.007	0.004	0.027

US EPA ARCHIVE DOCUMENT

73.5	0.007	0.002	0.026
73.55	0.007	0.004	0.027
73.6	0.006	0.004	0.026
73.65	0.007	0.004	0.026
73.7	0.006	0.002	0.024
73.75	0.007	0.004	0.027
73.8	0.006	0.002	0.027
73.85	0.007	0.004	0.027
73.9	0.006	0.001	0.026
73.95	0.007	0.004	0.027
74	0.007	0.004	0.026
74.05	0.007	0.004	0.027
74.1	0.006	0.002	0.024
74.15	0.007	0.004	0.027
74.2	0.006	0.002	0.027
74.25	0.009	0.005	0.028
74.3	0.006	0.001	0.024
74.35	0.007	0.004	0.024
74.4	0.006	0.001	0.022
74.45	0.007	0.004	0.024
74.5	0.006	0.002	0.023
74.55	0.007	0.004	0.024
74.6	0.006	0.002	0.023
74.65	0.007	0.004	0.024
74.7	0.006	0.002	0.023
74.75	0.007	0.004	0.024
74.8	0.005	0.002	0.023
74.85	0.007	0.004	0.024
74.9	0.006	0.002	0.022
74.95	0.007	0.004	0.024
75	0.006	0.001	0.022
75.05	0.007	0.004	0.024
75.1	0.007	0.002	0.023
75.15	0.007	0.004	0.026
75.2	0.007	0.001	0.023
75.25	0.009	0.005	0.024
75.3	0.005	0.001	0.021
75.35	0.009	0.005	0.023
75.4	0.007	0.002	0.018
75.45	0.007	0.004	0.018
75.5	0.006	0.001	0.016
75.55	0.007	0.004	0.018
75.6	0.007	0.002	0.017
75.65	0.007	0.004	0.02
75.7	0.006	0.002	0.017
75.75	0.007	0.004	0.02
75.8	0.006	0	0.018
75.85	0.007	0.004	0.02
75.9	0.006	0.001	0.017
75.95	0.007	0.004	0.02
76	0.006	0.002	0.017

US EPA ARCHIVE DOCUMENT

76.05	0.007	0.004	0.02
76.1	0.006	0.001	0.018
76.15	0.007	0.004	0.02
76.2	0.007	0.002	0.018
76.25	0.009	0.006	0.026
76.3	0.006	0.004	0.023
76.35	0.007	0.005	0.026
76.4	0.006	0.002	0.024
76.45	0.007	0.005	0.026
76.5	0.006	0.004	0.023
76.55	0.007	0.004	0.026
76.6	0.006	0.002	0.023
76.65	0.007	0.005	0.026
76.7	0.006	0.002	0.023
76.75	0.007	0.005	0.026
76.8	0.006	0.004	0.023
76.85	0.007	0.005	0.026
76.9	0.006	0.002	0.023
76.95	0.007	0.005	0.024
77	0.007	0.004	0.024
77.05	0.007	0.005	0.026
77.1	0.007	0.002	0.023
77.15	0.007	0.005	0.026
77.2	0.006	0.002	0.024
77.25	0.009	0.005	0.027
77.3	0.007	0.001	0.021
77.35	0.007	0.004	0.023
77.4	0.007	0.002	0.023
77.45	0.007	0.005	0.023
77.5	0.006	0.001	0.022
77.55	0.007	0.005	0.024
77.6	0.006	0.002	0.023
77.65	0.007	0.004	0.024
77.7	0.006	0.004	0.022
77.75	0.007	0.005	0.024
77.8	0.006	0.004	0.023
77.85	0.007	0.004	0.024
77.9	0.007	0.002	0.022
77.95	0.007	0.004	0.023
78	0.006	0.001	0.022
78.05	0.009	0.004	0.023
78.1	0.006	0.002	0.023
78.15	0.007	0.005	0.024
78.2	0.006	0.002	0.022
78.25	0.009	0.005	0.024
78.3	0.007	0.002	0.021
78.35	0.007	0.005	0.022
78.4	0.007	0.004	0.022
78.45	0.009	0.005	0.022
78.5	0.007	0.004	0.02
78.55	0.009	0.005	0.022

US EPA ARCHIVE DOCUMENT

78.6	0.006	0.002	0.021
78.65	0.009	0.005	0.022
78.7	0.007	0.004	0.02
78.75	0.009	0.005	0.022
78.8	0.007	0.004	0.021
78.85	0.009	0.005	0.022
78.9	0.006	0.002	0.021
78.95	0.009	0.005	0.022
79	0.007	0.005	0.021
79.05	0.009	0.005	0.022
79.1	0.007	0.002	0.02
79.15	0.009	0.006	0.022
79.2	0.007	0.004	0.021
79.25	0.009	0.005	0.022
79.3	0.006	0.004	0.021
79.35	0.009	0.004	0.022
79.4	0.007	0.004	0.021
79.45	0.007	0.004	0.022
79.5	0.007	0.002	0.02
79.55	0.009	0.004	0.022
79.6	0.006	0.002	0.022
79.65	0.009	0.005	0.022
79.7	0.007	0.004	0.021
79.75	0.009	0.005	0.022
79.8	0.006	0.002	0.02
79.85	0.009	0.005	0.022
79.9	0.006	0.004	0.022
79.95	0.009	0.005	0.022
80	0.006	0.002	0.021
80.05	0.009	0.005	0.022
80.1	0.007	0.002	0.021
80.15	0.007	0.005	0.022
80.2	0.007	0.002	0.02
80.25	0.009	0.005	0.022
80.3	0.007	0.001	0.017
80.35	0.009	0.005	0.02
80.4	0.007	0.004	0.018
80.45	0.009	0.005	0.02
80.5	0.006	0.001	0.018
80.55	0.009	0.005	0.02
80.6	0.006	0.002	0.018
80.65	0.009	0.005	0.02
80.7	0.006	0.002	0.018
80.75	0.009	0.005	0.02
80.8	0.007	0.004	0.017
80.85	0.009	0.005	0.02
80.9	0.006	0.005	0.017
80.95	0.009	0.005	0.02
81	0.009	0.004	0.018
81.05	0.009	0.005	0.02
81.1	0.006	0.002	0.02

US EPA ARCHIVE DOCUMENT

81.15	0.009	0.005	0.021
81.2	0.006	0.005	0.02
81.25	0.009	0.005	0.023
81.3	0.006	0.002	0.02
81.35	0.007	0.005	0.021
81.4	0.007	0.004	0.02
81.45	0.009	0.004	0.021
81.5	0.006	0.002	0.02
81.55	0.007	0.004	0.021
81.6	0.006	0.002	0.02
81.65	0.007	0.004	0.021
81.7	0.007	0.004	0.02
81.75	0.007	0.004	0.021
81.8	0.006	0.001	0.02
81.85	0.007	0.004	0.02
81.9	0.006	0.002	0.02
81.95	0.009	0.004	0.021
82	0.006	0.001	0.02
82.05	0.007	0.004	0.021
82.1	0.007	0.002	0.021
82.15	0.007	0.004	0.021
82.2	0.006	0.002	0.018
82.25	0.009	0.005	0.026
82.3	0.007	0.002	0.023
82.35	0.007	0.004	0.024
82.4	0.007	0.004	0.023
82.45	0.007	0.005	0.024
82.5	0.007	0.002	0.023
82.55	0.007	0.005	0.024
82.6	0.006	0.002	0.023
82.65	0.009	0.005	0.024
82.7	0.007	0.002	0.023
82.75	0.009	0.005	0.023
82.8	0.006	0.004	0.022
82.85	0.009	0.004	0.023
82.9	0.006	0.001	0.023
82.95	0.009	0.005	0.024
83	0.006	0.004	0.022
83.05	0.009	0.005	0.024
83.1	0.006	0.002	0.023
83.15	0.007	0.005	0.023
83.2	0.007	0.004	0.023
83.25	0.009	0.006	0.024
83.3	0.006	0.004	0.017
83.35	0.009	0.004	0.018
83.4	0.007	0.002	0.017
83.45	0.009	0.004	0.018
83.5	0.007	0.002	0.017
83.55	0.009	0.004	0.018
83.6	0.006	0.002	0.017
83.65	0.007	0.004	0.018

US EPA ARCHIVE DOCUMENT

83.7	0.007	0.001	0.017
83.75	0.007	0.004	0.018
83.8	0.006	0.004	0.017
83.85	0.009	0.004	0.018
83.9	0.006	0.001	0.017
83.95	0.007	0.004	0.018
84	0.006	0.004	0.016
84.05	0.009	0.004	0.018
84.1	0.006	0.001	0.016
84.15	0.009	0.004	0.018
84.2	0.006	0.001	0.017
84.25	0.007	0.005	0.018
84.3	0.007	0.005	0.017
84.35	0.009	0.006	0.021
84.4	0.006	0.004	0.016
84.45	0.009	0.004	0.018
84.5	0.007	0.002	0.016
84.55	0.007	0.004	0.018
84.6	0.006	0.002	0.017
84.65	0.007	0.004	0.018
84.7	0.006	0.004	0.016
84.75	0.009	0.004	0.018
84.8	0.007	0.002	0.016
84.85	0.007	0.004	0.018
84.9	0.007	0.002	0.016
84.95	0.009	0.004	0.017
85	0.005	0.001	0.016
85.05	0.009	0.005	0.018
85.1	0.006	0.002	0.016
85.15	0.009	0.005	0.018
85.2	0.006	0.001	0.017
85.25	0.007	0.005	0.02
85.3	0.006	0.002	0.018
85.35	0.009	0.005	0.021
85.4	0.007	0.002	0.015
85.45	0.007	0.005	0.015
85.5	0.006	0.002	0.012
85.55	0.007	0.004	0.015
85.6	0.006	0.004	0.013
85.65	0.009	0.005	0.015
85.7	0.006	0.001	0.012
85.75	0.007	0.005	0.013
85.8	0.006	0.002	0.012
85.85	0.007	0.004	0.015
85.9	0.006	0.002	0.012
85.95	0.009	0.005	0.013
86	0.006	0.004	0.011
86.05	0.009	0.005	0.013
86.1	0.007	0.004	0.011
86.15	0.007	0.005	0.012
86.2	0.006	0.002	0.01

US EPA ARCHIVE DOCUMENT

86.25	0.007	0.004	0.012
86.3	0.006	0.004	0.009

US EPA ARCHIVE DOCUMENT